

Job Name/Title: _____ Catalog Number _____
Contractor: _____ Notes: _____

LED Outdoor Lighting

Semi-Cutoff Wall Pack with Photocell

Features


- Die-cast housing with UV resistant powder coat finish
- Bronze finish
- Polycarbonate lens with UV stabilizers
- -40°C to 45°C ambient rating
- Photocell 120-277VAC

Specs

- 120-277V
- 116 LPW (Lumens per watt)
- THD%: <20%
- Power Factor: 0.9
- Input Current Amps:
585mA @ 120V
260mA @ 277V
- 70 CRI
- 50,000 Average rated life
- Type IV IES Distribution

Applications

- Parking lots, area lighting, illumination of areas of egress, security lighting

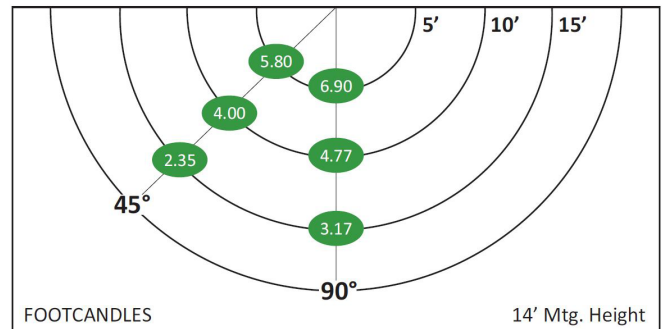

WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
14'	6.90	4.77	3.17	5.80	4.00	2.35	4.50
18'	4.20	3.60	2.57	3.75	2.88	2.00	3.17



Catalog Number	Product Code	UPC Code	Color Temp	Input Power Watts	Lumens	MH Equiv.*	Case Qty
F-WP-70LED/50K-80	74483	751338015623	5000K	70	8,100	250W	1

Specifications are subject to change without prior notice.

*Equivalent wattage shown depends on application and fixture