

LED T8 BYPASS SERIES

Work without ballast

Bypass Tube Description :

It is 3 foot all-plastic, shatterproof, light-weight LED T8 bypass tube 15W.
It can wire directly with 100-277V AC line voltage
It requires no ballast on the fixture.



Bypass Tube Feature :

Installation : Direct Wire(LED tube work without ballast)

Connection : One-End-Input or Two-End-Input

Tube Size : 3 foot (900mm)

Power : 15 watts

LED Type : 2835

Tube housing : Plastic

Lens : Frosted/Clear

Illumination Angle : 310°

Led Driver : Internal

Dimming : non-dimmable

End Caps : G13 bi-pins


Lifespan : 50000 hours

Warranty : 5 Years


Certification : UL, CE, ROHS

Bypass Tube Installation :

1.One-End-Input : directly wire LED Tube in a fixture without ballast

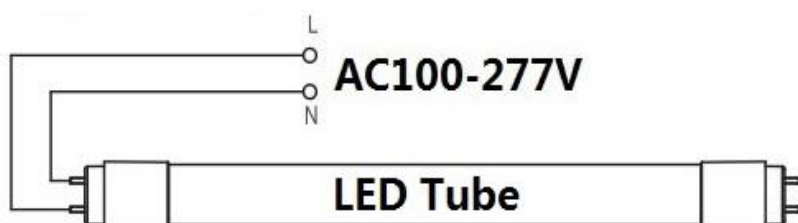

2.Two-End-Input : directly wire LED Tube in a fixture without ballast

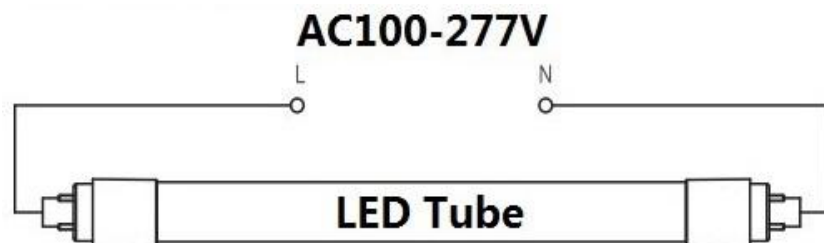

Bypass Tube Specification :

Model	CCT	Size	Watt	Lumen	End Cap	Connection	Input Voltage	PF	CRI
ORM-T8-3FT-15W-ID	5000K	3'	15W	1800	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-3FT-15W-ID	4000K	3'	15W	1800	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-3FT-15W-ID	3000K	3'	15W	1800	G13	1 End 2 End	AC100-277V	≥0.9	≥80