

DATE: 5/13/2015

Page: 5

BID NO.: 50-00113237

BID FORM
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO

MAXIMUM ESCALATION PERCENTAGE REQUESTED _____%

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF July 1 2015

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

30-90 Days APD

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: MIL Industries LLC

ADDRESS: 5201 Airline Hwy

CITY, STATE: Metairie LA ZIP: 70001

TELEPHONE: (800) 969 0068 FAX: (504) 889-1318

EMAIL ADDRESS: jbarretto@mlind.net

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____
NUMBER: _____
NUMBER: _____
NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 119,000

AUTHORIZED SIGNATURE: James A Barrett

TITLE: Municipal Sales

Doosan DL200
James G Barrett
Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113237

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	ONLY	<p>ONE-TIME PURCHASE OF A WHEELLOADER</p> <p>0010 CASE 621 F Wheel Loader 162 HP Case Diesel Engine 4F x 3R Transmission Cab with Heater and AC Z bar Linkage 20.5 x 25 2.5 Cu Yd. 4 in. 1 Bucket 60 inch H.D. Forks Hydraulic Quick Coupler Rotating Beacon All Standard , State and Federal Safety Equipment Operating Weight Approx. 26,000 Lbs.</p> <p>Unit is for W/B Drainage 1561 River Park Road Bridge City, La</p> <p>Superintendent Dominick Ditcharo 437-4941</p>	<p>\$119,000</p>	<p>\$119,000</p>

CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF

M&L Industries LLC

INCORPORATED.

AT THE MEETING OF DIRECTORS OF M&L Industries LLC
INCORPORATED, DULY NOTICED AND HELD ON _____,

A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT WAS:

RESOLVED THAT James G Barrett, BE AND IS HEREBY APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES, DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES, CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-FACT.

I HEREBY CERTIFY THE FOREGOING TO BE A TRUE AND CORRECT COPY OF AN EXCERPT OF THE MINUTES OF THE ABOVE DATED MEETING OF THE BOARD OF DIRECTORS OF SAID CORPORATION, AND THE SAME HAS NOT BEEN REVOKED OR RESCINDED.

SECRETARY-TREASURER

6-1-15

DATE

Non-Public Works Bid

AFFIDAVIT

STATE OF LA

PARISH/COUNTY OF Terrebonne

BEFORE ME, the undersigned authority, personally came and appeared: James G. Barrett, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized Agent of M&L Industries (Entity), the party who submitted a bid in response to Bid Number _____, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B there are **NO** campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B There are NO debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

James G. Barrett
Signature of Affiant

JAMES G. Barrett
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 6 DAY OF 1, 2015.

[Signature]
Notary Public

Tammy B. Bryant
Printed Name of Notary

87362
Notary/Bar Roll Number

My commission expires at death.



[Print](#)

Notary Search - Detail

Name: MS. TAMMY B. BRYANT
Address: 305 LAUREL DRIVE
HOUMA, LA 70360

Phone: (985) 868-9102
Phone 2: (985) 868-2353

Notary ID Number: 87362
Parish: TERREBONNE with STATEWIDE JURISDICTION
Agency: N/A
Notary Type: Non Attorney
Status: Active

Commission Date: 08/25/2008
Oath Date: 08/18/2008
Surety Expiration Date: 08/18/2018
Annual Report Current: Yes

[Back to Search Results](#)[New Search](#)

**Request for Taxpayer
 Identification Number and Certification**

Give Form to the
 requester. Do not
 send to the IRS.

29924

Name (as shown on your income tax return)
M&L Industries, LLC

Business name/disregarded entity name, if different from above

Check appropriate box for federal tax classification (required):
 Individual/sole proprietor C Corporation S Corporation Partnership Trust/estate
 Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=partnership) ▶ Exempt payee
 Other (see instructions) ▶

Address (number, street, and apt. or suite no.)
1210 St. Charles St.
 City, state, and ZIP code
Houma, LA 70360

Requester's name and address (optional)

List account number(s) here (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on the "Name" line to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note: If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Social security number								
Employer identification number								
12	-	0503	1710					

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
- I am a U.S. citizen or other U.S. person (defined below).

Certification Instructions. You must cross out Item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, Item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions on page 4.

Sign Here Signature of U.S. person ▶ **Pat Manner** Date ▶ **3/28/11**

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Purpose of Form

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued),
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note: If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

Definition of a U.S. person. For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

Special rules for partnerships. Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

Tom Schedler
Secretary of State

State of Louisiana
Secretary of State

COMMERCIAL DIVISION
225.925.4704



Fax Numbers
 225.932.5317 (Admin. Services)
 225.932.5314 (Corporations)
 225.932.5318 (UCC)

Name	Type	City	Status
M&L INDUSTRIES, L.L.C.	Limited Liability Company	HOUMA	Active

Business: M&L INDUSTRIES, L.L.C.

Charter Number: 35379519K

Registration Date: 11/26/2002

Domicile Address

1210 ST. CHARLES ST.
 HOUMA, LA 70360

Mailing Address

C/O STEVEN Y. MARMANDE
 1210 ST. CHARLES ST.
 HOUMA, LA 70360

Status

Status: Active
Annual Report Status: In Good Standing
File Date: 11/26/2002
Last Report Filed: 11/5/2014
Type: Limited Liability Company

Registered Agent(s)

Agent:	STEVEN Y. MARMANDE
Address 1:	1210 ST. CHARLES ST.
City, State, Zip:	HOUMA, LA 70360
Appointment Date:	11/9/2004

Officer(s)

Additional Officers: No

Officer:	MARVIN V. MARMANDE
Title:	Manager
Address 1:	1210 ST. CHARLES ST.
City, State, Zip:	HOUMA, LA 70360

Officer:	STEVEN Y. MARMANDE
Title:	Manager
Address 1:	1210 ST. CHARLES ST.

City, State, Zip: HOUMA, LA 70360

Mergers (1)

Filed Date	Effective Date:	Type	Charter#	Chater Name	Role
11/26/2002	11/26/2002	MERGE	35379519K	M&L INDUSTRIES, L.L.C.	SURVIVOR
			24101590D	M & L INDUSTRIES, INC.	NON-SURVIVOR

Amendments on File (1)

Description	Date
Merger	11/26/2002

Print

SPECIFICATIONS FOR WHEEL LOADER

Engine:

6 Cylinder Turbocharged Tier (ACR)
162 Peak Horsepower @1800 R.P.M.
411 Cubic Inch displacement
Peak Gross Torque 538 Ft. lbs. at 1600 R.P.M.
Two Stage Air Cleaner
Integral Oil Pump with Oil Cooler and Under Piston Nozzles
Integral Water Pump
One Piece Cast iron Parent Metal Bore Block
Engine to Meet North American Emission Regulations
Hydraulic Driven Fan Independent Of Engine
Air intake Pre-Cleaner
One Piece Electrically Raised engine Hood
Automatic Fan Belt Tensioner
Four Power Modes: Auto, Max, standard, Economy

Cooling System:

Mid-Mounted Cooling Module- Radiator, Hydraulic, Oil, Cooler, A.C. Condenser, Fuel Cooler, Transmission Cooler To have Maximum Access To Clean, Cool Air, Stacked Coolers Not Acceptable. Thus Eliminating Plugging Between Coolers and Ease of Cleaning.

Electronic Information Center:

Displays/Gauges

Analog
Fuel Level
Engine Coolant Temp
Transmission Oil Temperature
LCD Screen (Metric/English, Multiple Languages)
Hour Meter
Engine Speed
Travel Speed
Current Gear Selection
FNR Indication
Clock
Trip Computer
Fuel Consumption
Fuel Level Percentage
DEF (Diesel Exhaust Fluid) Gauge
Oil Pressure

- Coolant Temperature
- Engine Oil Temperatures
- Transmission Oil Temperature
- Transmission Sump Oil Temperature
- Hydraulic Oil Temperature
- Turbocharged Air Temperature
- Automatic Transmission Indicator
- De-Clutch Indicator
- Engine Mode Indicator
- Engine Diagnostics
- System Voltage
- Error Reporting

Indicator Lights:

- Low fuel
- Turn Signal
- Four Way Flashers
- High Beam Lights
- Brake Pressure
- Master Indicator
- Parking Break

Audible/Visible Alarms:

- Caution Alarm
- Parking Break
- Coolant Temperature
- Transmission Oil Temperature
- Air Filter
- Transmission Filter
- Hydraulic Filter
- Alternator
- Low Fuel

Critical Alarm:

- Engine Oil Pressure
- Break Pressure
- Coolant Temperature
- Hydraulic Temperature
- Transmission Oil Temperature

Backup Alarm

Electric System:

- 24- Volt System
- 2-12 volt 700 CCA Batteries
- 65 Amp Alternator
- Horn
- Back up Alarm
- Master Electrical Disconnect
- 2 Front 2 rear Top Mounted Flood Lights
- 2 Front Driver Hi-Lo Beam
- 2 Front Working, Stop, Tail and Back Up
- Front and Rear Turn Signals and Flashers

Hydraulic Cylinders:

- 2 Lift Cyl- 4.75 Inch Boar 2.5 Inch Rod
- 1 Dump Cyl – 5.0 Inch Boar

Driveline:

- 4 Forward, 3 Reverse Computer Controlled Full Power Shift Transmission
- Transmission Must be Capable of Being Custom Programmed to Shift Manually or Fully Automatic.
- On Board Diagnostics with Fault Code Storage and Retrieval
- Down Shift Button
- Fully Pressurized Lubrication
- Lift Time Lubricated u Joints
- Hydraulic activated Multi disk Clutches
- Electric Twist Grip Range Selector On Column
- Trans. Disconnect Either Break Pedal
- Single Stage Integral Torque Converter
- Outboard Mounted Planetary Drive Axles with Dipsticks
- Limited Slip Differentials non Both Axles
- Self-Adjusting Outboard Mounted Hydraulically Maintenance Free Multiple Hydraulic Wet Disc
- Breaks w/Accumulator to All Four Wheels
- Break Surface Area 480 Sq.In. per Hub

Travel Speed:

Forward 1st	4.3 M.P.H.	Reverse 1st.	4.5 M.P.H.
2nd	8.4 M.P.H.	2nd	8.8 M.P.H.
3rd	14.9 M.P.H.	3rd	15.6 M.P.H.
4th	24 M.P.H.		

Min. Rear Axle Oscillation 24 degrees
Transmission Oil sight Gauge

Steering:

Minimum 40 Degree Articulation Each Side.
Hydraulic Orbital Steering, Flow Amplified for Precise Low R.P.M. steering
Steering Wheel Required to Have No More Than 2 lbs. of Effort to Turn
Articulation Point to Have Double Tapered Roller Bearing Grease Able Every 1000 Hours
Two 3 In. Diameter Double Acting Cylinders
Max. Outside Turn Radius 17 ft.
Tilt steering Column

Loader:

Z-Bar Linkage With Self Aligning Hydraulic Quick Coupler 102 in. 4 In 1 Bucket
Bottom skid Pads
Bolt On Cutting edge, 3 Piece Reversible (Outer Side of Clam and Moleboard) Weld On Edge
On Inner Side of Clam
2.5 Cu.Yd. Heaped Capacity Bucket
Pilot Operated Single Lever For Lift and Tilt With Forward/Reverse Shuttle Switch On Top of
Lever
Separate Lever for 4 In 1 Control
Automatic Return to Dig
Automatic Return to Travel
Automatic Height Control
Single Piece Flame Cut Loader Arms
Bucket Position indicator
Automatic Self Leveling
Hinge Pin height 156 in.
Heavy Duty Forks with 60 in. Blades

Hydraulics:

Pressure Compensated Load Sensing
Micron Full Flow Replaceable Spin On cartridges On return Line
100 Mesh Line screen On Inlet Side
3 Spool, 3 Lever Valve, 2nd Lever for 4 In 1 Bucket
Sight Gauge on HYD . Reservoir
(8) Diagnostic Quick Couplers
Variable displacement 45.2 G.P.M. at 2000 R.P.M. Hydraulic Pump
O Ring Face Seal Hydraulic Couplings for 4 In 1 Bucket

Tires: 20.5 x 12 Ply L2

Operating Station:

OSHA Approved R.O.P.S. Cab with Sound Suppression, Safety Glass, Defroster, Air Conditioner, Heater, Suspension Seat, Dome Light, Air Pressurization with 3 Speed Blower C, Fresh Air Filters, Key Lock Doors, Rear view Mirrors, Rubber Floor Mats, Front Intermittent and Rear Windshield Wipers, Front and Rear Windshield Washers, Front Window Visor, Anti-Glare Window Strip, Partially/Fully Opening Cab Side Windows, Tilt steering Wheel, Steering Knob, Fully Adjustable Wrist Rest

Misc:

Serviceability Index SAE-J817 Not to Exceed 5800
Front and Rear Fenders
Draw Board Hitch
Amber Rotating Beacon
2 Exterior West Coast Mirrors
Remote Drainage for Engine Oil, Coolant and Hydraulic Oil, Banked In Single Location

Operating Weight:

26,000 Lbs. Minimum W/Standard Counter weight 175 Lbs. , Operator and Full Fuel Tank

Warranty:

3 Year/ 3000 Hour Full Machine Factory warranty
3 year/3000 Hour Planned Maintenance Including Filters, Oil and Labor
3 Year Advanced Site Watch Telematics

INSURANCE REQUIREMENTS - BIDS

All insurance requirements shall conform to Jefferson Parish Resolution No. 113646 or No. 113647. The contractor shall not commence work under this contract until he has obtained all insurance and complied with the requirements of the specifications and said Parish Resolutions. Except as otherwise provided by law, the Parish Attorney's Office with the concurrence of the Director of Risk Management is authorized to omit in whole or part the insurance requirements of this section in connection with contracts. Vendors inquiring about this shall submit his written request to the Purchasing Department prior to the due date of the bid. Contractor must deliver and maintain such insurances as provided; failure to do so shall be grounds for suspension, discontinuation or termination of the contract.

Successful bidder will be required to procure standard insurance policies evidencing Parish mandated insurance requirements indicated below. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected.

1. WORKER'S COMPENSATION INSURANCE

As required by Louisiana State Statute, exception; Employer's Liability, Section B shall be \$1,000,000 per occurrence when Work is to be over water and involves maritime exposures to cover all employees not covered under the State Worker's Compensation Act, otherwise this limit shall be no less than \$500,000 per occurrence.

2. COMMERCIAL GENERAL LIABILITY

Shall provide limits not less than the following: \$1,000,000.00 Combined Single Limit per Occurrence for bodily injury and property damage.

3. COMPREHENSIVE AUTOMOBILE LIABILITY

Bodily injury liability \$1,000,000.00 each person; \$1,000,000.00 each occurrence.
Property Damage Liability \$1,000,000.00 each occurrence.

DEDUCTIBLES

No insurance required shall include a deductible not greater than \$10,000.00. The cost of the deductible shall be borne by the contractor.

NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney's Office.

UMBRELLA LIABILITY COVERAGE

An umbrella policy or excess may be used to meet minimum requirements.

CONSTRUCTION AND RENOVATION PROJECTS:

Unless otherwise specified in the bid, these additional insurance is required. Such insurance is due upon contract execution.

OWNER'S PROTECTIVE LIABILITY

To be for the same limits of liability for bodily injury and property damage liability established for commercial general liability.

BUILDER'S RISK INSURANCE

The contractor shall maintain Builder's Risk Insurance at his own expense to insure both the owner (Parish of Jefferson) and contractor as their interest may appear.

NOTE for CERTIFICATE HOLDER:

All insurance certificates shall list the certificate holder as follows:

"The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and the Parish Council." Additionally, the address on the Certificates should reflect the department which is letting the bid and reference the respective bid number.

Revised 2.10.2014

Non-Public Works Bid Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit



Bid Number 50 - 00113237

One-time Purchase of a Wheel loader for the Jefferson Parish
Department of Fleet Management

JUNE 02, 2015 for 2:00pm

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received in the Purchasing Department by the bid due date and time.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Ms. Laniel L. Francis
lfrancis@jeffparish.net
504.364.2690**

DATE: 5/13/2015

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 1

BID NO.: 50-00113237

JEFFERSON PARISH
PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

BUYER: LFRANCIS@jeffparish.net

BIDS WILL BE RECEIVED IN THE PURCHASING DEPARTMENT, SUITE 4400, JEFFERSON PARISH GENERAL GOVERNMENT BUILDING, 200 DERBIGNY STREET, GRETNA, LA 70053 UNTIL 2:00 PM, 6/02/2015 AND PUBLICLY OPENED THEREAFTER.

LATE BIDS WILL NOT BE ACCEPTED

Unless submitting via online (see Page 3), each bid must be submitted in a sealed envelope bearing on the outside; the name of the Bidder, his address, and the name of the project for which the bid is submitted and the bid number.

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647.

All vendors submitting bids must register as a Jefferson Parish vendor if not already yet registered. Bidders may be required to furnish current W-9 Forms and respective Tax Identification Numbers within 10 days after bid opening if such information is not on file or not up to date. Forms to register may be downloaded from www.purchasing.jeffparish.net and clicking on Vendor Information.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing and fax them to the Purchasing Department at (504) 364-2693 no later than FIVE (5) working days prior to bid opening. Bid numbers should be mentioned in all requests. Questions may also be emailed to the buyer for this bid at the email address listed above. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications.

Visit our website at [HTTP://PURCHASING.JEFFPARISH.NET](http://PURCHASING.JEFFPARISH.NET)

DATE: 5/13/2015

BID NO.: 50-00113237

Page: 2

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated.

If the bid exceeds \$30,000.00 and the company is duly authorized to do business in the state of Louisiana, a corporate resolution must be submitted with the bid or the person signing the bid documents must be listed on the Louisiana Secretary of State's website as an officer of the corporation, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). If the bid is in excess of \$30,000 and bidder is registered out of the state of Louisiana, a corporate resolution must be submitted with the bid, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. Bids submitted by Owner or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. Sole proprietors submitting bids for public works projects shall within 10 days after bid opening submit sole proprietorship certification.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. IN THE EVENT OF SPLIT AWARD, THE PURCHASING DEPARTMENT MAY CONTACT VENDORS TO REQUEST REQUIRED AFFIDAVITS. THOSE VENDORS WILL HAVE 10 DAYS FROM THE DATE OF NOTICE TO SUBMIT COMPLETE, SIGNED AND NOTARIZED AFFIDAVITS IN ORIGINAL FORMATS.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

Preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA-R.S.38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and Parish taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's specifications (ANSI A17.1-1961).

E. RESPONSE TO INVITATION: If your company is unable to bid on this request, please state your reason on bid form, and return to this office before bid opening date. Failure to do so may result in the removal of your company from Jefferson Parish's vendors list.

F. POSTING OF BIDS: A listing of bids will be posted on bulletin board in Suite 4400, Jefferson Parish General Government Building, Gretna, LA and will remain posted until close of respective bids.

Advertised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This Electronic Procurement System allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Please note requirements contained in this bid package for electronic bid submission.

Please visit the Purchasing Department webpage at <http://purchasing.jeffparish.net> to register and review Jefferson Parish solicitations.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 dated 12/09/09. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.

10,13,15

1. All bidders must attend the pre-bid conference in relation to this bid; attendance is mandatory. Failure to attend will prohibit a company from submitting a bid. Vendors arriving after the mandatory pre-bid conference begins will not be allowed to sign in as evidence of attendance.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. Unless otherwise stated in the bid specifications, the successful bidder will be required to procure standard insurance policies evidencing Parish-mandated insurance requirements as indicted on the attached sheet. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected. JEFFERSON PARISH reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid Solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations or warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit and E-Verify Affidavit must be completed, signed, notarized and submitted by low bidder within 10 days after bid opening to the Purchasing Department on all solicitations for construction, alteration or demolition of public building or project, including but not limited to requirements found in LSA-RS 38:2212.9; LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1. Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, and Campaign Contribution Affidavit must be completed, signed, notarized and submitted by low bidder with bid submission within 10 days after bid opening to the Purchasing Department. See LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1 Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled NON-PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission; and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to Jefferson Parish Code of Ordinances Section 2-155.10(19). By submitting a bid, vendor acknowledges this and will abide by all provisions of the referenced Jefferson Parish Code of Ordinances.



WHEEL LOADERS

2.5 – 4.0 yd³

DL200	2.6 yd ³	26,810 lb.	160 hp (119 kW)
DL200TC	2.6 yd ³	26,830 lb.	160 hp (119 kW)
DL220	3.0 yd ³	28,350 lb.	160 hp (119 kW)
DL250	3.7 yd ³	31,900 lb.	172 hp (128 kW)
DL250TC	3.4 yd ³	31,770 lb.	172 hp (128 kW)



DOOSAN DELIVERS *Performance*



Optimized Engine Horsepower

A finely tuned horsepower curve and increased torque ensure you can move mountains of material fast. A high pressure common rail fuel injection system and Cooled Exhaust Gas Recirculation (CEGR) valve reduce emissions.



Outstanding Traction and Pushing Power

Doosan axles are carefully designed to maximize traction, provide easy maneuverability and generate excellent pushing power, making short work of even the biggest pile.

Limited Slip Differential allows the wheel with the most traction to receive the proper torque, providing superior tractive effort and maneuverability in tough terrain.



In your Doosan wheel loader cabin, even the most brutal workday looks better. That's because you have tremendous lift height and capacity, enough torque to bite into the toughest materials and power to spare to cut your toughest jobs down to size in a hurry. Scoop, carry material, load trucks... and even run attachments. Long days and tough jobs are easy – and profitable – in a Doosan wheel loader.

Lift Capacity

There's no secret to doing more work in less time. You have to quickly and efficiently handle the biggest, heaviest load that you can. With its load-sensing, closed center hydraulics, Doosan wheel loaders deliver superior lift capacities for every model size.

Self-Adjusting Brakes increase performance and minimize maintenance. If needed, a technician can easily check the brakes and adjust externally. The brake piping is safely integrated with the axle housing and protected from jobsite debris.

Optional Front-Locking Differential locks the front left and right wheels together, providing superior traction for driving over loose, slippery terrain or pushing into big, heavy piles.

Power Modes

Choose from three different power modes to change machine performance for job conditions or to reduce fuel consumption.

Power Mode delivers the highest level of performance for quick loading and fast travel. Finish more heavy-duty work in less time.

Normal Mode is ideal for general work conditions and optimal fuel consumption.

Economy Mode minimizes fuel consumption and reduces engine sound levels, providing for comfortable, economical light-duty work.

Planetary Final Drives

The planetary final drives transfer torque to the wheels through the transmission and differential. They enable higher travel speeds and great torque reduction. The outboard, hub mounted design makes maintenance easy.



DOOSAN DELIVERS *Productivity*

Productivity is what it's all about – and Doosan delivers. Whether you're loading a small truckload or moving a mountain of material, your Doosan wheel loader will leave you feeling good about the results at the end of the day.




Interim Tier 4 (iT4) Compliant

Optimized to provide the ultimate in power delivery and fuel economy, Doosan wheel loaders are designed with iT4 compliant engines to reduce air pollution.

Cooled Exhaust Gas Recirculation (CEGR)

CEGR recycles a portion of the engine exhaust to reduce oxygen and lower the temperature in the combustion chamber. This greatly reduces nitrogen oxide emissions (NOX).

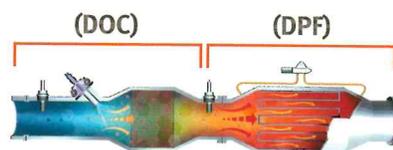


Diesel Oxidation Catalyst (DOC)

Using DOC technology, particulate matter (PM) emissions are transformed into harmless water and carbon dioxide.

Diesel Particulate Filter (DPF)

Exhaust enters the DPF where it's filtered further. The result is cleaner diesel exhaust and a healthier environment.

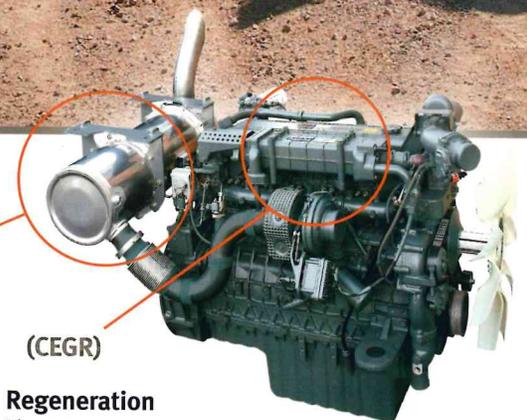

Regeneration

The DPF requires continuous regeneration to filter exhaust properly. Passive regeneration occurs with exhaust heat only. An active regeneration initiates automatically if the ECU detects certain levels of particulate matter in the DPF. It does not interfere with normal machine operation. If required, manual regeneration can be initiated by the operator.



Fast Cycle Times

Speed and control are the keys to optimal production. Doosan wheel loaders are engineered to perfectly balance both. Durable, low-maintenance vane pumps deliver the power you need to complete every job quickly.


FNR Joystick

Direction changes don't get any simpler. Just push the joystick buttons to switch between forward, neutral and reverse without even removing your hands from the controls.



Optional Load Isolation System

The load isolation system, sometimes referred to as "ride control," cushions the lift arm while traveling over rough terrain, minimizing the loss of material while carrying a load and reducing operator fatigue. It also comes in handy when your customers pay for material by the bucket.

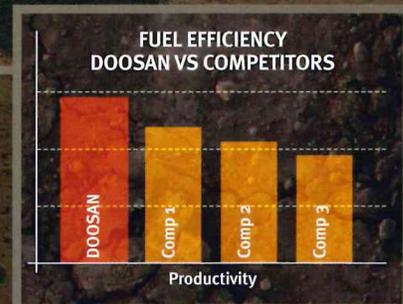

Fuel efficiency

Fuel use is a significant cost of operation, and Doosan efficiently delivers more work for the money. In our fuel efficiency tests against equivalent machines from other manufacturers, the Doosan wheel loader consistently moves more material per gallon of fuel.

DOOSAN DELIVERS *Productivity*



Whether you're loading a small truckload or moving a mountain of material, Doosan delivers amazing results in less time.

Return to Dig

Sensors on the lift arm and bucket linkage allow you to change your "return to dig" setting from inside the cab. The cylinders and cutting edge return to the same position every time, enabling more efficient, consistent work.


Lift Kickout

Set the maximum lift height for working inside buildings or other areas with height restrictions. Simply pull back on the control stick to override.



Z-Bar Lift Arm Linkage is designed for heavy lifting in loading applications, with geometry that enables rapid bucket movement and proper angle positioning in every situation.

Standard Z-Bar has excellent break-out forces for easier digging and penetration into tough materials. It increases the lifting capacity of every Doosan loader for best-in-class performance.

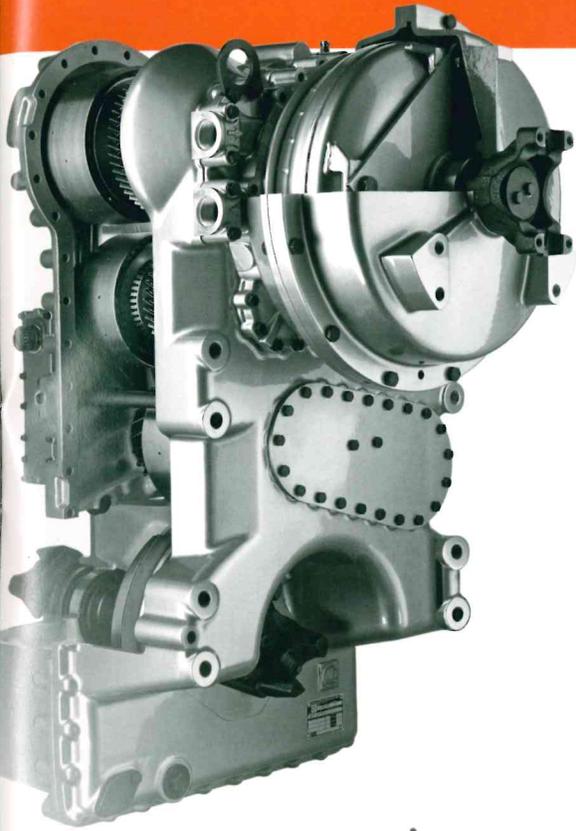

Transmission Modes

With three separate transmission modes, you can choose the transmission you want for the working conditions you face, making it easy to tailor performance for better productivity.

Transmission Optimization is a key feature of the automatic transmission modes. It calibrates different shift points to tailor the amount of power and engine torque per gear. When you engage either Auto 1-4 or Auto 2-4 in Power Mode or Normal Mode, the transmission shift point occurs 20% later—allowing more torque and power within each gear range. In Economy Mode, the automatic transmission shifts 20% earlier for increased fuel efficiency.

Manual is ideal when the job requires precise speed control.

Auto 1-4 automatically shifts up when you need more speed and downshifts when the job demands more power or torque. It's excellent for heavy-duty applications.



Auto 2-4 with Manual Kickdown gives you automatic shifting between gears 2 through 4, with a manual downshift into first gear when you need it. It provides the best performance for less demanding work conditions.

Transmission Cutout

Need more engine power for lift arm speed? In lower gears, simply depress the left brake pedal to disengage the transmission. Disengage transmission cutout with your switch panel to start moving on an incline with greater ease.

Torque Converter

The torque converters improve power train efficiency in load and carry operations, which contributes to improved fuel efficiency.

Auto idle

The standard auto idle feature automatically reduces the engine rpm to standby idle a few seconds after the steering wheel, gearshift control lever and accelerator cease movement. This reduces noise, improves jobsite communications and saves fuel. When you move the controls, the loader automatically returns to working idle.


An optional hydraulic coupler

increases your productivity with non-hydraulic attachments, such as the pallet fork, saving you time by enabling you to switch from one attachment to the next without even leaving the cab.



High Lift Z-Bar is optional and designed for applications requiring the highest possible dumping height and reach. It's ideal for cement plants, scrap, mulch or wastewater transfer stations.

Parallel Lift Linkage is designed to give you precise control over the movement of buckets, pallet forks and other attachments in applications other than loading. This design keeps the attachment level, allowing for faster lifting and placing of materials.

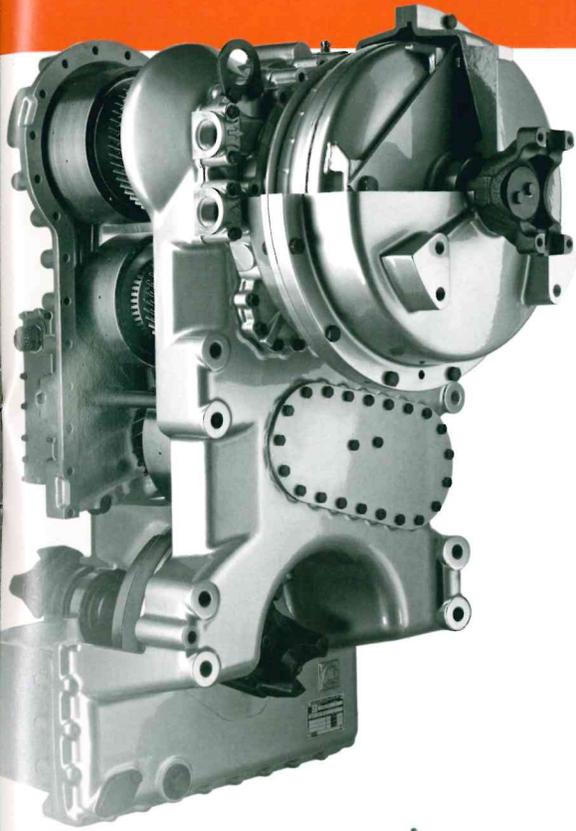

Transmission Modes

With three separate transmission modes, you can choose the transmission you want for the working conditions you face, making it easy to tailor performance for better productivity.

Transmission Optimization is a key feature of the automatic transmission modes. It calibrates different shift points to tailor the amount of power and engine torque per gear. When you engage either Auto 1-4 or Auto 2-4 in Power Mode or Normal Mode, the transmission shift point occurs 20% later—allowing more torque and power within each gear range. In Economy Mode, the automatic transmission shifts 20% earlier for increased fuel efficiency.

Manual is ideal when the job requires precise speed control.

Auto 1-4 automatically shifts up when you need more speed and downshifts when the job demands more power or torque. It's excellent for heavy-duty applications.



Auto 2-4 with Manual Kickdown gives you automatic shifting between gears 2 through 4, with a manual downshift into first gear when you need it. It provides the best performance for less demanding work conditions.

Transmission Cutout

Need more engine power for lift arm speed? In lower gears, simply depress the left brake pedal to disengage the transmission. Disengage transmission cutout with your switch panel to start moving on an incline with greater ease.

Torque Converter

The torque converters improve power train efficiency in load and carry operations, which contributes to improved fuel efficiency.

Auto idle

The standard auto idle feature automatically reduces the engine rpm to standby idle a few seconds after the steering wheel, gearshift control lever and accelerator cease movement. This reduces noise, improves jobsite communications and saves fuel. When you move the controls, the loader automatically returns to working idle.

An optional hydraulic coupler

increases your productivity with non-hydraulic attachments, such as the pallet fork, saving you time by enabling you to switch from one attachment to the next without even leaving the cab.




High Lift Z-Bar is optional and designed for applications requiring the highest possible dumping height and reach. It's ideal for cement plants, scrap, mulch or wastewater transfer stations.

Parallel Lift Linkage is designed to give you precise control over the movement of buckets, pallet forks and other attachments in applications other than loading. This design keeps the attachment level, allowing for faster lifting and placing of materials.

DOOSAN DELIVERS *Durability/Reliability*



When you get up close to a Doosan wheel loader, you can see that this machine is built to last. With heavy-duty parts, quality materials and superb construction, you can rely on performance, productivity and profit day after day. Plus, innovative designs keep you on the job with fewer service intervals – so you spend less time in the shop.

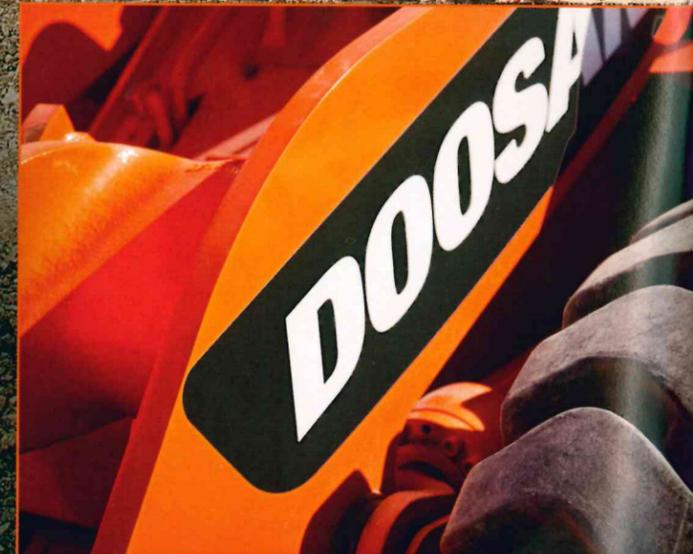

Tough, Rigid Frame

Each frame section is designed to maximize the life of the machine. Thick steel plates, cross members and gussets join to form a strong, durable articulation joint that stands up to years of difficult work.



Double Roller Articulation Joint Bearing

To create an articulation pivot point with superior strength, tough double roller bearings are used at both the top and bottom hinge points between the front and rear frames.



Large Center Driveline Bearing

An oversized bearing, that is vented to prevent over greasing, increases durability of the front drive shaft.



All-Steel Panels

Access panels on Doosan wheel loaders allow easy maintenance access and they're made of durable formed metal to protect critical engine, hydraulic and electrical components.



Lift Arm Pin Protection

Lift arm pins are protected with bushings and dust covers to increase pin life and reduce maintenance.

Variable Speed Cooling Fan


The variable speed fan slows and speeds up as required by the work demands of your loader. In lighter-duty conditions the coolant temperature is low and the fan slows – saving fuel and extending the life of your cooling system.

Reversible Cooling Fan

By pressing a console switch, the cooling fan can be reversed to assist in keeping the cooling system clean in extremely dusty applications. Press it to keep the machine running at optimal temperature. You can also set it to auto reverse for a few minutes at a time at different intervals – at 30, 60, 90 or 120 minutes depending on work conditions.

Separate Cooling and Engine Compartments

Doosan isolates the wheel loader engine from the cooling system. This design increases cooling capacity and extends the life of your engine components.

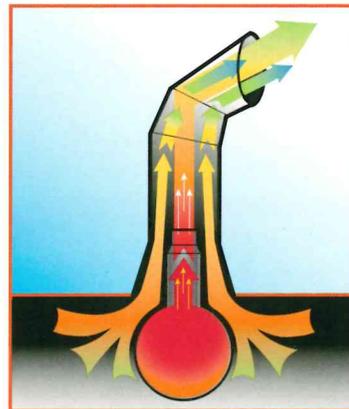

Exhaust heat exchanger

As exhaust leaves the muffler on your Doosan wheel loader, it enters a larger external riser pipe with rain shield. This design creates a vacuum that pulls hot air out of the engine compartment, making your engine run and cooling system run more efficiently.

Thick Lift Arm Plates

Thick, solid-steel lift arm plates provide maximum durability in harsh conditions – along with improved lift capacities. A narrower arm design overall increases your visibility.

DOOSAN DELIVERS *Comfort*

You can't overlook the relationship between comfort and productivity. That's why comfort is central to the Doosan cabin design. It's packed with high-end comfort that enables you to retain a team of productive, experienced and satisfied employees.

Quiet Operation

Operators stay relaxed and focused on the job with a quiet operating environment. Noise levels in the cabin stay below a comfortable 72 decibels, thanks to the variable speed cooling fan, double-walled muffler, soundproof materials throughout the engine compartment and tightly sealed & pressurized cabin.

Excellent Visibility

Large front and rear glass surface areas provide an excellent view to the loader workgroup and jobsite. Narrow corner pillars and small window joints increase visibility to the front of the machine. Heated mirrors provide visibility to the sides and rear of the machine, even in cold temperatures.



Easy Entry and Exit

Grab handles and offset steps with slip-resistant surfaces provide easy access to the cabin and easy exit when work is finished. A 180-degree swinging door that can lock to the open position provides a wide opening to move in and out of the machine. Inside, ample floor space gives you room to work and exceptional comfort.

Ergonomic Controls

All controls are located within easy reach for intuitive, easy operation, from the steering wheel and joystick to the switches for optional equipment.



Optional Rearview Camera

Provides the operator with an additional means to view the machine's surroundings, allowing for increased productivity.

Automotive-Style Heat and Air Conditioning

Stay comfortable all year with high capacity heating and cooling vents and an easy-to-control temperature. Automatic temperature control senses and adjusts to the temperature setting automatically. A memory function returns it to your preferred temperature if you shut the machine off and restart later.

Easy-to-Read LCD Display Panel

An easy-to-read LCD display panel is placed within easy view for monitoring critical machine data and receiving machine warnings.



Standard Radio with CD-player and MP3-player Input

Tune into your favorite over-the-air stations, or take your favorite digital music format with you to work, to make every hour on the job more enjoyable.

Adjustable Comfort

The standard air suspension seat has multiple adjustment points, allowing you to select the most comfortable position.

- A Seat Height
- B Seat Fore/Aft
- C Back Recline
- D Lumbar Support
- E Armrest Angle
- F Seat Heater (Opt.)
- G Headrest Up/Down




DOOSAN DELIVERS *Easy Maintenance*

If it's easy to do, regular maintenance gets done – and you'll get more production and efficiency from your loader. That's how Doosan approaches maintenance. First, we build the machine tough for long-lasting performance and longer service intervals. Next we make machine care second-nature to every operator with centrally located maintenance points, onboard diagnostic systems and easy component access. If you want durability and simple maintenance, Doosan delivers.



Doosan Telematics (GPS)

A simple user interface, accessible online via a web-enabled computer or cell phone, provides location information and a full range of machine operational information to you, your dealer and Doosan, allowing a complete machine maintenance management strategy to reduce operating costs.

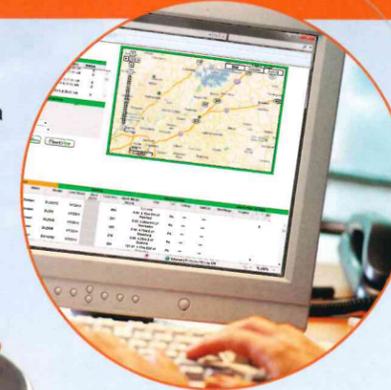

Sight Glass for Major Fluid Levels

Sight glasses on the machine provide quick, easy fluid-level checks. All it takes is a quick visual check to know if your fluid reservoirs are properly filled.



Centralized Remote Hydraulic Diagnostic Ports

You can review pressure and troubleshoot hydraulic issues from one check port bank. In minutes you can review pilot charge, brake system charge, load sensing, steering system, fan and steering pressures, along with the main relief setting.



Color-Coded, Labeled Wiring and Hydraulic Hoses

Strategically labeled wiring enables plug-and-play installation electrical accessories, such as the rotating beacon. It also allows quicker, easier electrical troubleshooting of the electrical and hydraulic systems.

Self-Diagnostics

The LCD monitor helps you monitor critical systems in real time. Plus, you can access historical machine alerts right from the screen in the cabin.



Doosan Monitoring System with Laptop Access

The Doosan Monitoring System is a diagnostic program that gives your dealer's technician a direct communications link with your wheel loader. During operation, it monitors all critical data and provides a complete history of operation and a real-time log of machine failures. Armed with information like this, your dealer service personnel can fix issues fast—and you can get back to work.

Remote Drain Ports

Easy-to-access remote drain valves make for fast, convenient exchanges of engine oil and cooling system coolant.



Remote Grease Points

For a long-lasting machine, daily maintenance is critical. Remote grease points make it easier to lubricate hard-to-reach pins on the lift arm and articulation system. Daily greasing happens on the ground – and it's more likely to get done.

DOOSAN DELIVERS *Versatility*

Do more with your machine. Doosan loaders are optimized for attachment versatility – bringing you more opportunities to utilize your equipment investment, and possibly enabling you to expand your business. Our tough attachments are matched to your machine’s operator weight and load settings – so you can rely on epic productivity with every job.



Normal

ECO

Power




Selectable Work Modes

The Doosan wheel loader has three engine working modes, ECO, Normal and Power, to further adapt your loader’s performance to the application and deliver the right balance of power and fuel economy.

Standard Attachment Hydraulics

For hydraulic attachments, like the multi-purpose bucket, an auxiliary spool for hydraulic attachments comes standard. No extra installation required. Hydraulic lines down the boom are optional.





Optional Quick Coupler
Quickly change many of your wheel loader's non-hydraulic attachments without leaving the seat. A four-point style pick-up means you can hook up attachments easily, even on irregular terrain.

Boom Float
The boom float allows your bucket to follow the ground contours, which saves you time and increases productivity when backdragging during snow removal.



DOOSAN DELIVERS Attachments

General Purpose Bucket




With a sloped bottom for maximum filling and material retention, this is the perfect bucket for day-to-day material handling. Capacities range from 4 to 6.5 yd³.

Available for DL200-3, DL200TC-3, DL220-3, DL250-3 and DL250TC-3 wheel loaders. All available with bolt-on cutting edge or teeth.

Pin-On



Quick Coupler



Light Material Bucket




When you need to move snow, mulch or other light material in a hurry, the light material bucket is the economical choice. Comes standard with bolt-on cutting edge.

Available for DL200-3, DL200TC-3, DL220-3, DL250-3, and DL250TC-3 wheel loaders. All available with bolt-on cutting edge.

Pin-On



Quick Coupler




Multi-Purpose Bucket




Leveling, dozing, digging, grappling, loading and dumping—this multi-purpose bucket is ready for whatever you've got. Capacities from 3.5 to 4 yd³.

Available for DL200-3, DL200TC-3, DL220-3, DL250-3 and DL250TC-3 wheel loaders. All available with bolt-on cutting edge or teeth.

Pin-On



Quick Coupler




Pallet Fork



Easily lift, carry and place materials. Pallet forks with 48" or 60" forks available for DL200-3, DL200TC-3, DL220-3, DL250-3 and DL250TC-3 wheel loaders.

Quick Coupler

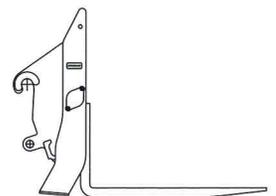

Quick couplers are available in two designs – JRB and ISO style.

For more information on Doosan attachments, refer to the Doosan Wheel Loader Attachment literature.

Specifications

General Specs

			DL200-3	DL200TC-3	DL220-3	DL250-3	DL250TC-3
ENGINE							
Model			Doosan DL06	Doosan DL06	Doosan DL06	Doosan DL06	Doosan DL06
NUMBER OF CYLINDERS	INLINE		6	6	6	6	6
RATED POWER, GROSS <i>(per SAE J1995)</i>	hp (kW) @ rpm		160 (119) @2100	160 (119) @2100	160 (119) @ 2100	172 (128) @ 2100	172 (128) @ 2100
MAXIMUM TORQUE, GROSS <i>(per SAE J1995)</i>	ft.-lb. (Nm) @ RPM		542 (735) @ 1400	542 (735) @ 1400	542 (735) @ 1400	593 (804) 1400	593 (804) 1400
PISTON DISPLACEMENT	in ³ (L)		360 (5.9)	360 (5.9)	360 (5.9)	360 (5.9)	360 (5.9)
BORE AND STROKE	in. x in. (mm x mm)		3.9 x 4.9 (100 x 125)	3.9 x 4.9 (100 x 125)	3.9 x 4.9 (100 x 125)	3.9 x 4.9 (100 x 125)	3.9 x 4.9 (100 x 125)
STARTER	V, hp (Kw)		24, 6	24, 6	24, 6	24, 6	24, 6
BATTERY	V, AH, CCA		24, 100, 1050	24, 100, 1050	24, 100, 1050	24, 100, 1050	24, 100, 1050
ALTERNATOR	V, amp		24, 60	24, 60	24, 60	24, 60	24, 60
AIR CLEANER			Double Element	Double Element	Double Element	Double Element	Double Element
HYDRAULICS							
SYSTEM PRESSURE (WORK)	psi (bar)		3626 (250)	3626 (250)	3626 (250)	3626 (250)	3626 (250)
SYSTEM PRESSURE (STEER)	psi (bar)		3626 (250)	3626 (250)	3626 (250)	3626 (250)	3626 (250)
BOOM SPEED	UP (UNLOADED)	sec.	5.6	5.7	6.0	6.0	5.8
	DOWN	sec.	3.5	3.7	3.5	2.7	2.9
BUCKET SPEED	CROWD (UNLOADED)	sec.	1.7	2.2	1.9	1.9	2.1
	DUMP	sec.	1.1	3.4	1.3	1.3	2.9
ENVIRONMENT							
SOUND LEVEL <i>(per ISO 6394)</i>	dB(A)		103	103	103	104	104
CABIN SOUND LEVEL <i>(per ISO 6394)</i>	dB(A)		72	72	72	72	72
TRANSMISSION SPEEDS							
TRAVEL SPEED - FORWARD (4)	mph (km/h)		4.4 / 8.0 / 15.1 / 23.6 (7.1 / 12.8 / 24.3 / 38.0)	4.4 / 8.0 / 15.1 / 23.6 (7.1 / 12.8 / 24.3 / 38.0)	4.4 / 8.0 / 15.1 / 23.6 (7.1 / 12.8 / 24.3 / 38.0)	5.0 / 8.5 / 16.5 / 23.6 (8.1 / 13.7 / 26.5 / 38)	5.0 / 8.5 / 16.5 / 23.6 (8.1 / 13.7 / 26.5 / 38)
TRAVEL SPEED - REVERSE (3)	mph (km/h)		4.7 / 8.4 / 15.8 (7.5 / 13.5 / 25.5)	4.7 / 8.4 / 15.8 (7.5 / 13.5 / 25.5)	4.7 / 8.4 / 15.8 (7.5 / 13.5 / 25.5)	5.3 / 8.9 / 17.2 (8.5 / 14.4 / 27.7)	5.3 / 8.9 / 17.2 (8.5 / 14.4 / 27.7)
MAXIMUM GRADE	% (°)		58 (30)	58 (30)	58 (30)	58 (30)	58 (30)
REFILL CAPACITIES							
FUEL TANK	gal. (L)		62 (235)	62 (235)	62 (235)	67 (255)	67 (255)
COOLING SYSTEM (RADIATOR)	gal. (L)		11 (40)	11 (40)	11 (40)	11 (40)	11 (40)
ENGINE OIL	gal. (L)		7.1 (27)	7.1 (27)	7.1 (27)	7.1 (27)	7.1 (27)
TRANSMISSION	gal. (L)		7.9 (30)	7.9 (30)	7.9 (30)	12 (45)	12 (45)
FRONT AXLE	gal. (L)		5.7 (21.5)	5.7 (21.5)	5.7 (21.5)	9.3 (35)	9.3 (35)
REAR AXLE	gal. (L)		5.7 (21.5)	5.7 (21.5)	5.7 (21.5)	5.7 (21.5)	5.7 (21.5)
HYDRAULIC SYSTEM	gal. (L)		38 (142)	38 (142)	38 (142)	47 (176)	47 (176)
Hydraulic Cylinders							
STEERING (2)	BORE	in. (mm)	2.75 (70)	2.75 (70)	2.75 (70)	2.8 (70)	2.8 (70)
	ROD	in. (mm)	1.4 (35)	1.4 (35)	1.4 (35)	1.8 (45)	1.8 (45)
	STROKE	in. (mm)	14.6 (370)	14.6 (370)	14.6 (370)	18.3 (466)	18.3 (466)
LIFT (2)	BORE	in. (mm)	4.3 (110)	4.3 (110)	4.5 (115)	5.1 (130)	5.1 (130)
	ROD	in. (mm)	3 (75)	3 (75)	3 (75)	3.1 (80)	3.1 (80)
	STROKE	in. (mm)	31.1 (790)	31.1 (790)	31.1 (790)	31.0 (785)	31.0 (785)
BUCKET (1) *	BORE	in. (mm)	4.7 (120)	4.1 (105)	5.1 (130)	5.7 (145)	4.3 (110)
	ROD	in. (mm)	3 (75)	2.6 (65)	3 (75)	3.1 (80)	2.6 (65)
	STROKE	in. (mm)	20.3 (515)	33.2 (843)*	20.3 (515)	20.1 (510)	34.7(881)*


* The DL200TC-3 and DL250TC-3 have 2 bucket cylinders.

NOTE — Where applicable, dimensions are in accordance with Society of Automotive Engineers (SAE) and ISO standards. Specifications and design are subject to change without notice. Pictures of Doosan wheel loaders may show other than standard equipment. All dimensions are shown in inches. Respective metric dimensions are enclosed by parentheses. Doosan Construction Equipment is manufactured with a Quality Management System that is in compliance with ISO 9001:2008.

All Dimensions are given for Doosan wheel loaders equipped with standard tires.


Operational Data

		DL200-3	DL200-3 HL	DL200TC-3
BUCKET TYPE: General Purpose	BUCKET MOUNT: Pin On	BUCKET CONFIGURATION: Bolt-On Edge		
CAPACITY HEAPED ISO / SAE		yd3 (m3)	2.6 (2.0)	2.6 (2.0)
BUCKET WIDTH	A	ft. in. (mm)	8'4" (2550)	8'4" (2550)
HINGE PIN HEIGHT, MAXIMUM	B	ft. in. (mm)	12'8" (3860)	13' 11" (4240)
DUMP HEIGHT (45 °) - FULLY RAISED	C	ft. in. (mm)	9'6" (2890)	10' 9" (3270)
DUMP REACH (45 °) - FULLY RAISED	D	ft. in. (mm)	3'3" (1000)	3' 5" (1040)
DIGGING DEPTH	E	ft. in. (mm)	4" (90)	8" (200)
OVERALL HEIGHT, ROPS CABIN	F	ft. in. (mm)	10'9" (3280)	10'9" (3280)
OVERALL LENGTH	G	ft. in. (mm)	23'9" (7245)	25' 7" (7795)
WHEEL BASE	H	ft. in. (mm)	9'6" (2900)	9'6" (2900)
WIDTH AT TIRES	I	ft. in. (mm)	8'4" (2530)	8'4" (2530)
TREAD WIDTH	J	ft. in. (mm)	6'4" (1930)	6'4" (1930)
GROUND CLEARANCE	K	ft. in. (mm)	1'5" (435)	1'5" (435)
MAX. TILT ANGLE ON GROUND		°	42	43
MAX. TILT ANGLE AT CARRY POSITION	L	°	48	51
MAX. TILT ANGLE AT FULLY RAISED	M	°	59	61
MAX. DUMP ANGLE (FULLY RAISED)	N	°	48	46
STEERING ANGLE, MAXIMUM	O	°	40	40
EXTERNAL RADIUS, BUCKET EDGE	P	ft. in. (mm)	19'0" (5785)	19'7" (5969)
EXTERNAL RADIUS, OUTSIDE TIRE	Q	ft. in. (mm)	17'2" (5245)	17'2" (5245)
TIRE SIZE			20.5-25	20.5-25
OPERATING WEIGHT		lb. (kg)	26,810 (12 160)	28,000 (12 720)
STATIC TIPPING LOAD (STRAIGHT)		lb. (kg)	19,750 (8960)	17,920 (8130)
STATIC TIPPING LOAD (AT FULL TURN)		lb. (kg)	17,110 (7760)	15,520 (7040)
BREAKOUT FORCE		lbf. (kg)	22,230 (10 083)	22,030 (9993)

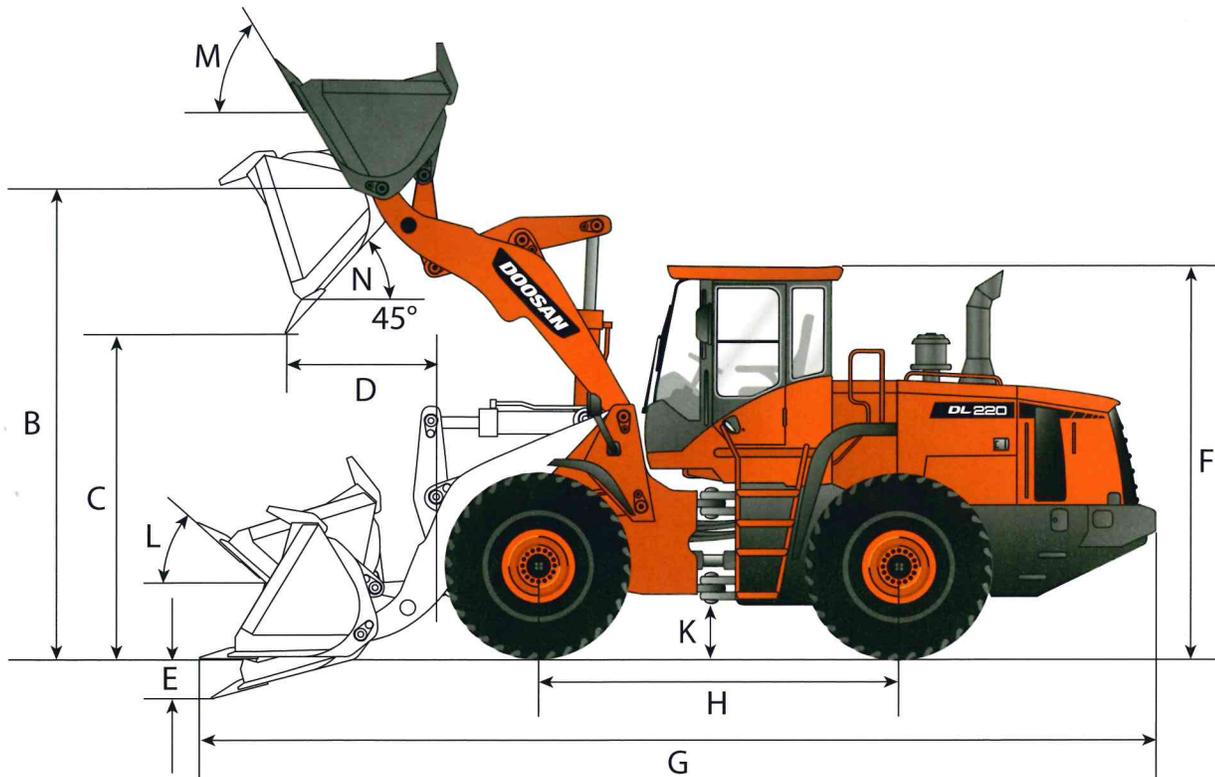

Operational Data *Continued*

		DL220-3	DL250-3	DL250-3 HL	DL250TC-3	
BUCKET TYPE: General Purpose		BUCKET MOUNT: Pin On		BUCKET CONFIGURATION: Bolt-On Edge		
CAPACITY HEAPED ISO / SAE		yd3 (m3)	3.0 (2.3)	3.7 (2.8)	3.4 (2.6)	3.4 (2.6)
BUCKET WIDTH	A	ft. in. (mm)	8'4" (2550)	9'0" (2740)	9'0" (2740)	9'0" (2740)
HINGE PIN HEIGHT, MAXIMUM	B	ft. in. (mm)	12'8" (3860)	12'10" (3900)	14'2" (4325)	12'11" (3935)
DUMP HEIGHT (45 °) - FULLY RAISED	C	ft. in. (mm)	9'3" (2825)	9'2" (2785)	10'8" (3250)	9'0" (2740)
DUMP REACH (45 °) - FULLY RAISED	D	ft. in. (mm)	3'6" (1065)	3'11" (1190)	3'10" (1175)	4'3" (1300)
DIGGING DEPTH	E	ft. in. (mm)	3" (88)	5" (115)	8" (215)	3" (85)
OVERALL HEIGHT, ROPS CABIN	F	ft. in. (mm)	10'9" (3280)	10'9" (3280)	10'9" (3280)	10'9" (3280)
OVERALL LENGTH	G	ft. in. (mm)	24'7" (7485)	25'2" (7665)	26'10" (8180)	25'9" (7840)
WHEEL BASE	H	ft. in. (mm)	9'6" (2900)	9'11" (3020)	9'11" (3020)	9'11" (3020)
WIDTH AT TIRES	I	ft. in. (mm)	8'4" (2530)	8'8" (2640)	8'8" (2640)	8'8" (2640)
TREAD WIDTH	J	ft. in. (mm)	6'4" (1930)	6'8" (2040)	6'8" (2040)	6'8" (2040)
GROUND CLEARANCE	K	ft. in. (mm)	1'5" (435)	1'4" (415)	1'4" (415)	1'4" (415)
MAX. TILT ANGLE ON GROUND		°	42	43	40	43
MAX. TILT ANGLE AT CARRY POSITION	L	°	48	49	48	48
MAX. TILT ANGLE AT FULLY RAISED	M	°	59	61	58	51
MAX. DUMP ANGLE (FULLY RAISED)	N	°	48	47	46	50
STEERING ANGLE, MAXIMUM	O	°	40	40	40	40
EXTERNAL RADIUS, BUCKET EDGE	P	ft. in. (mm)	19'1" (5815)	20'0" (6085)	20'7" (6285)	19'1" (5815)
EXTERNAL RADIUS, OUTSIDE TIRE	Q	ft. in. (mm)	17'2" (5245)	18'0" (5475)	18'0" (5475)	18'0" (5475)
TIRE SIZE			20.5-25	20.5-25	20.5-25	20.5-25
OPERATING WEIGHT		lb. (kg)	28,350 (12 860)	31,900 (14 470)	32,780 (14 870)	31,770 (14 410)
STATIC TIPPING LOAD (STRAIGHT)		lb. (kg)	21,340 (9680)	23,810 (10 800)	20,920 (9490)	19,690 (8930)
STATIC TIPPING LOAD (AT FULL TURN)		lb. (kg)	18,480 (8380)	20,680 (9380)	18,170 (8240)	17,130 (7770)
BREAKOUT FORCE		lbf. (kgf)	23,650 (10 727)	27,120 (12 380)	25,680 (11 645)	25,980 (11 784)

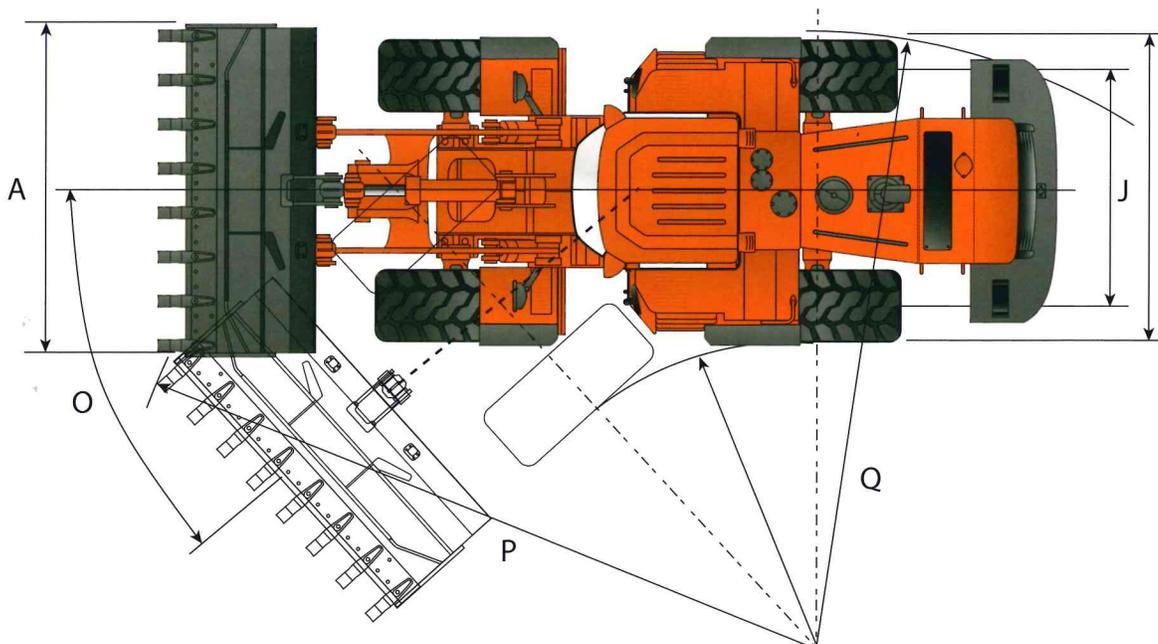

Specifications

Standard/Optional Equipment

	DL200-3	DL200TC-3	DL220-3	DL250-3	DL250TC-3
ENGINE					
Emissions (EPA)	iT4	iT4	iT4	iT4	iT4
Cooled Exhaust Gas Recirculation (CEGR)	•	•	•	•	•
Diesel Particulate Filter (DPF)	•	•	•	•	•
High Pressure Common Rail (HPCR)	•	•	•	•	•
Fuel Filter with Water Separator	•	•	•	•	•
Coolant Recovery tank	•	•	•	•	•
Dual Element dry-type air filter with Evacuator	•	•	•	•	•
Pre Cleaner	•	•	•	•	•
Electronic Engine Control	•	•	•	•	•
Auto-Idle (Working to Standby)	•	•	•	•	•
Overheat & Low Oil Pressure Engine Protection	•	•	•	•	•
Cooling Fan, Variable Speed	•	•	•	•	•
Cooling Fan, Automatic Reversible	•	•	•	•	•
Block Heater	•	•	•	•	•
HYDRAULIC					
Variable Displacement Axial Piston Pump	•	•	•	•	•
Closed-Center System	•	•	•	•	•
Pilot Operated Control Valves	•	•	•	•	•
Remote Test Ports	•	•	•	•	•
Spring Applied Hydraulic Release Brake	•	•	•	•	•
Auxiliary Hydraulics (3rd Valve)	•	•	•	•	•
Auxiliary Hydraulics (4th Valve)	•	•	•	•	•
Automatic Boom/Lift Kick-Out, Adjustable (in cab)	•	•	•	•	•
Automatic Return-to-Dig Position, Adjustable	•	•	•	•	•
Boom Float	•	•	•	•	•
Load Isolation System	•	•	•	•	•
ELECTRICAL					
Alternator - 12V, 80 Amp	•	•	•	•	•
2 x 12V Batteries, 100 AH Reserve Capacity	•	•	•	•	•
Blade Type Fuse Panel	•	•	•	•	•
Main Circuit Breaker	•	•	•	•	•
Light, Work (Halogen): Front (2), Rear (2)	•	•	•	•	•
Light, Headlights (High/Low Beams) (2)	•	•	•	•	•
Light, Stop, Tail & Direction Indicators	•	•	•	•	•
Rotating Beacon	•	•	•	•	•
Hour Meter	•	•	•	•	•
Rear View Camera	•	•	•	•	•
Laptop Service Port	•	•	•	•	•
Self-Diagnostics System	•	•	•	•	•
Telematics	•	•	•	•	•

	DL200-3	DL200TC-3	DL220-3	DL250-3	DL250TC-3
CABIN					
Steel, All-Weather & Sound Suppressed	•	•	•	•	•
ROPS (ISO 3471)	•	•	•	•	•
Front & Rear Window with Wiper/Washer	•	•	•	•	•
Tinted Safety Glass	•	•	•	•	•
Lockable Doors	•	•	•	•	•
Seat - Air Suspension - 2" (51 mm) Seat Belt - Adjustable Height & Recline - Adjustable Arm Rests"	•	•	•	•	•
Seat - Heated	•	•	•	•	•
3" (76 mm) Seat Belt	•	•	•	•	•
Control Stand - Sliding (Fore/Aft)	•	•	•	•	•
Storage	•	•	•	•	•
Mirrors, Rear View (2)	•	•	•	•	•
Mirrors, Exterior (2) Heated	•	•	•	•	•
Fully Automatic HVAC w/ ambient temperature sensor	•	•	•	•	•
Multi-Function LCD	•	•	•	•	•
Cigarette Lighter	•	•	•	•	•
AM/FM Stereo with CD Player & MP3 port	•	•	•	•	•
Speakers (2)	•	•	•	•	•
Antenna, Roof Mounted	•	•	•	•	•
Power Socket, 12V	•	•	•	•	•
Beverage Holder	•	•	•	•	•
Hot/Cold Compartment	•	•	•	•	•
Interior Light	•	•	•	•	•
Sun Visor	•	•	•	•	•
CONTROLS					
Adjustable steering column - Tilting - Telescoping	•	•	•	•	•
Throttle pedal (accelerator)	•	•	•	•	•
Brake Pedal, Right	•	•	•	•	•
Brake Pedal, Left (Transmission Kick out)	•	•	•	•	•
Gear Selector (FnR)	•	•	•	•	•
Joystick Control	•	•	•	•	•
Finger Tip Control (3 Lever)	•	•	•	•	•
Switches, Console mounted - Starter (Key) - Parking Brake - Pilot Cutoff - Transmission Cutoff - Work Light - DPF Regeneration - Reversible Cooling Fan	•	•	•	•	•
Power Mode (P, S, E)	•	•	•	•	•
Transmission Mode	•	•	•	•	•
Wiper Control Panel	•	•	•	•	•
Audio Control Panel	•	•	•	•	•

- Standard Equipment
- Optional Equipment
- N/A

Standard/Optional Equipment *Continued*

	DL200-3	DL200TC-3	DL220-3	DL250-3	DL250TC-3
DRIVELINE					
Transmission, Auto Power Shift (4F / 3R Speed)	•	•	•	•	•
Torque Converter	•	•	•	•	•
Limit Slip Differentials	•	•	•	•	•
Locking Front Differential	•	•	•	•	•
Hydraulic Power Steering	•	•	•	•	•
Tires, 20.5R25 Bias	•	•	•	•	•
Tires, 20.5R25 Radial	•	•	•	•	•
DISPLAY MONITOR & WARNINGS					
Buzzer - Engine Oil Pressure - Coolant Temperature - Transmission Overheat	•	•	•	•	•
Gauges - Engine Coolant Temperature - Fuel Level - Transmission Oil Temperature - Engine RPM - Speedometer - Battery Voltage - ECO - Digital Clock - Trip Meter - Hour Meter - Total Operation Time	•	•	•	•	•
Warning & Indicator Lights - Engine Oil Pressure - Check Engine - Engine Pre-Heat Engaged - Air Filter - Transmission Mode - Emergency Steering - Battery Charge - Error Code - Direction Signal - Lights (High, Main, Work, Beacon) - Water in Fuel - DPF Regeneration - DPF High Temperature Exhaust - Transmission Warning - Hydraulic Charge Pressure Warning - Brake Fluid Pressure Warning - Transmission Gear & F-N-R - Reverse Fan Indicator - Mirror Heat Indicator - Parking Brake Indicator	•	•	•	•	•
Backup Alarm	•	•	•	•	•

	DL200-3	DL200TC-3	DL220-3	DL250-3	DL250TC-3
OTHER					
Centralized Lubrication	•	•	•	•	•
Handrails & Service Platforms	•	•	•	•	•
Skid-Resistant Steps	•	•	•	•	•
Drawbar and Pin	•	•	•	•	•
Wheel Chocks	•	•	•	•	•
Rear Fender, Full	•	•	•	•	•
Additional Counterweight - Additional counterweight is standard on all High Lift machines.	•	•	-	•	•
Manuals - Operation & Maintenance - Parts - AEM Safety Manual	•	•	•	•	•
Telematics, 1 Year Subscription	•	•	•	•	•
Vandalism Protection - Lockable Panels - Lockable Fluid Fill Points	•	•	•	•	•
Anti-Theft Protection (Password)	•	•	•	•	•
48-Hour Parts Guarantee	•	•	•	•	•

- Standard Equipment
- Optional Equipment
- N/A



WHO IS DOOSAN?

Doosan is the fifth largest construction equipment manufacturer in the world with a heritage that goes back more than 115 years. We deliver solid machines, unsurpassed customer service and an expanding dealer network plus our unrivaled 48-hour parts guarantee.

Doosan Delivers

www.doosanequipment.com/WL

1.877.613.7970



Printed on 10% recycled paper

Doosan and the Doosan logo are registered trademarks of Doosan Corp. in the United States and various other countries around the world. ©2013 Doosan Infracore Construction Equipment America. All rights reserved.

BID FORM
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO X

MAXIMUM ESCALATION PERCENTAGE REQUESTED _____%

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 120 days

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

90 days

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: Lee Tractor Co Inc

ADDRESS: Po Box 939

CITY, STATE: Kenner, La ZIP: 70063

TELEPHONE: (504) 467 6794 FAX: (504) 467 6799

EMAIL ADDRESS: angela@leetractor.net

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 146,999.00

AUTHORIZED SIGNATURE: [Signature]

Bryan Giacone

Printed Name

TITLE: Sales manager

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113237

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	ONLY	<p>ONE-TIME PURCHASE OF A WHEELOADER</p> <p>0010 CASE 621 F Wheel Loader 162 HP Case Diesel Engine 4F x 3R Transmission Cab with Heater and AC Z bar Linkage 20.5 x 25 2.5 Cu Yd. 4 in. 1 Bucket 60 inch H.D. Forks Hydraulic Quick Coupler Rotating Beacon All Standard , State and Federal Safety Equipment Operating Weight Approx. 26,000 Lbs.</p> <p>Unit is for W/B Drainage 1561 River Park Road Bridge City, La</p> <p>Superintendent Dominick Ditcharo 437-4941</p>	146,999.00	146,999.00

**MEETING OF THE
BOARD OF DIRECTORS
OF
LEE TRACTOR CO., INC.**

A MEETING OF THE BOARD OF DIRECTORS OF **LEE TRACTOR CO, INC.** WAS HELD ON MARCH 24, 2015, WHEREBY A RESOLUTION WAS PASSED AUTHORIZING **BRYAN GIACONE**, BY HIS SIGNATURE, AS **SALES MANAGER** OF LEE TRACTOR CO, INC. TO ENTER INTO ANY AND ALL CONTRACTUAL OBLIGATIONS ON BEHALF OF **LEE TRACTOR CO., INC.**



NANCY BRAY, SECRETARY



DATE

Tom Schedler
Secretary of State

**State of
Louisiana
Secretary of
State**



COMMERCIAL DIVISION
225.925.4704

Fax Numbers
225.932.5317 (Admin. Services)
225.932.5314 (Corporations)
225.932.5318 (UCC)

Name	Type	City	Status
LEE TRACTOR CO., INC.	Business Corporation	ST. ROSE	Active

Business: LEE TRACTOR CO., INC.

Charter Number: 22500820D

Registration Date: 1/7/1954

Domicile Address

10203 W. AIRLINE HWY.
ST. ROSE, LA 70087

Mailing Address

P. O. BOX 939
KENNER, LA 70063

Principal Office Address

10203 W. AIRLINE HWY.
ST. ROSE, LA 70087

Status

Status: Active

Annual Report Status: In Good Standing

File Date: 1/7/1954

Last Report Filed: 12/24/2014

Type: Business Corporation

Registered Agent(s)

Agent:	NANCY L. BRAY
Address 1:	1116 HESPER AVE.
City, State, Zip:	METAIRIE, LA 70005
Appointment Date:	12/19/2005
Agent:	JAMES MILEY
Address 1:	38335 WELSH DRIVE
City, State, Zip:	PRAIRIEVILLE, LA 70769
Appointment Date:	1/23/2014

Officer(s)

Additional Officers: No

Officer:	C. L. EVANS
Title:	Director
Address 1:	132 SHANNON ROAD
City, State, Zip:	LAFAYETTE, LA 70503
Officer:	NANCY BRAY
Title:	Secretary/Treasurer
Address 1:	1116 HESPER AVE
City, State, Zip:	METAIRIE, LA 70005
Officer:	JAMES MILEY
Title:	President
Address 1:	38335 WELSH DRIVE
City, State, Zip:	PRAIRIEVILLE, LA 70769

Amendments on File (1)

Description	Date
Domicile, Agent Change or Resign of Agent	2/18/2005

[Print](#)

Non-Public Works Bid

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF Jefferson

BEFORE ME, the undersigned authority, personally came and appeared: Bryan
Giacone, (Affiant) who after being by me duly sworn, deposed and said that
he/she is the fully authorized sales manager of Lee tractor CO (Entity),
the party who submitted a bid in response to Bid Number 5000113237, to the Parish of
Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B there are NO campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.


[Handwritten Signature]
Signature of Affiant

Bryan Giacomin
Printed Name of Affiant

Witness Kevin Kyle

SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 2nd DAY OF May, 2015

[Handwritten Signature]
Notary Public
By witness
Kevin G. Kyle
Printed Name of Notary
La Bar #2037
Notary/Bar Roll Number

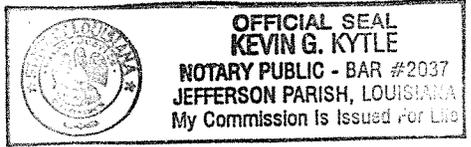

My commission expires lifetime.

Print

Notary Search - Detail

Name: MR. KEVIN G. KYTLE
Address: 914 WILLIAMS BLVD.
 KENNER, LA 70062

Phone: (504) 469-1200

Notary ID Number: 37011
Parish: ST. CHARLES with STATEWIDE JURISDICTION
Agency: N/A
Notary Type: Attorney
Bar Roll #: 2037

Status: Active

Commission Date: 08/21/2008
Oath Date: 08/20/2008
Surety Expiration Date: Not Required
Annual Report Current: Not Applicable

Notary Events

Parish Change Previous Parish: JEFFERSON Previous Commission Date: 10/28/1983

Deceased, Inactivated, Leave of Absence, Pre-Assessment Registration, Pre-Assessment Taken, Resigned, Retirement, and Revoked events are not available prior to February 11, 2012.

[Back to Search Results](#) [New Search](#)

Form **W-9**
(Rev. November 2005)
Department of the Treasury
Internal Revenue Service

Request for Taxpayer Identification Number and Certification

Give form to the requester. Do not send to the IRS.

Name (as shown on your income tax return)
Lee Tractor Co., Inc.
Business name, if different from above

Check appropriate box: Individual/sole proprietor Corporation Partnership Other

Address (number, street, and apt. or suite no.)
10203 Airline Hwy

City, state, and ZIP code
St. Rose, LA 70087

Requester's name and address (optional)

List account number(s) here (optional)

Exempt from backup withholding

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I Instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note: If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Social security number

or

Employer identification number
71203017405

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
- I am a U.S. person (including a U.S. resident alien).

Certification Instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. (See the instructions on page 4.)

Sign Here Signature of U.S. person [Signature] Date 12-5-07

Purpose of Form

A person who is required to file an information return with the IRS, must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

U.S. person. Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued).
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee.

In 3 above, if applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

For federal tax purposes, you are considered a person if you are:

- An individual who is a citizen or resident of the United States,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States, or
- Any estate (other than a foreign estate) or trust. See Regulations sections 301.7701-5(a) and 7(a) for additional information.

Special rules for partnerships. Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity.



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
5/8/2014

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Eagan Insurance Agency, LLC 2629 N. Causeway Blvd. P. O. Box 8590 Metairie LA 70002		CONTACT NAME: Mercy Perez PHONE (A/C No. Ext.): (504) 836-9600 FAX (A/C. No): (504) 836-9621 E-MAIL ADDRESS: perezm@eaganins.com	
INSURED Lee Tractor Company Inc, et al 10203 Airline Highway St Rose LA 70087		INSURER(S) AFFORDING COVERAGE INSURER A: Travelers Insurance Company INSURER B: INSURER C: INSURER D: INSURER E: INSURER F:	

COVERAGES CERTIFICATE NUMBER: 2014-2014 LIAB COI REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	GENERAL LIABILITY						EACH OCCURRENCE \$ 1,000,000
	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY						DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000
	<input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR	X	Y	Y-660-7B042931-TIL-14	5/1/2014	5/1/2015	MED EXP (Any one person) \$ 5,000
							PERSONAL & ADV INJURY \$ 1,000,000
							GENERAL AGGREGATE \$ 2,000,000
							PRODUCTS - COM/PO/AGG \$ 2,000,000
GENL AGGREGATE LIMIT APPLIES PER: <input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC							
A	AUTOMOBILE LIABILITY						COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000
	<input checked="" type="checkbox"/> ANY AUTO						BODILY INJURY (Per person) \$
	<input type="checkbox"/> ALL OWNED AUTOS						BODILY INJURY (Per accident) \$
	<input type="checkbox"/> HIRED AUTOS						PROPERTY DAMAGE (Per accident) \$
							Uninsured motorist combined \$ 1,000,000
A	<input checked="" type="checkbox"/> UMBRELLA LIAB						EACH OCCURRENCE \$ 3,000,000
	<input type="checkbox"/> EXCESS LIAB						AGGREGATE \$ 3,000,000
	<input checked="" type="checkbox"/> RETENTION \$ 10,000			YSM-CUP-7B042931-TIL-14	5/1/2014	5/1/2015	
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY		Y				<input checked="" type="checkbox"/> WC STATU-TORY LIMITS <input type="checkbox"/> OTH-ER
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NJ)	Y/N	N/A	YK-UB-7B042931-14	5/1/2014	5/1/2015	E.L. EACH ACCIDENT \$ 1,000,000
	If yes, describe under DESCRIPTION OF OPERATIONS below						E.L. DISEASE - EA EMPLOYEE \$ 1,000,000
							E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)
Blanket Additional Insured and Waiver of Subrogation if required by written contract on General Liability and Auto Liability Policies. Waiver of Subrogation if required by written contract as respects to Workers Compensation. All coverage is afforded as required by written contract per policy provisions.
Certificate Holder Continued: The Parish of Jefferson, its Districts, Departments and Agencies under the direction of and the Parish Council.

CERTIFICATE HOLDER Jefferson Parish Department of Fleet Management 4901 Jefferson Hwy, Ste A Jefferson, LA 70121	CANCELLATION SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE Beth Carter/MERCYP
---	--

ENGINE

Make	FPT
Model	F4HFE613W
Emissions Certification	Tier 4 Final
Type	4-stroke, turbocharged and air-to-air-cooled
Cylinders	6-cylinder in-line
Bore/Stroke	4.09 x 5.20 in (104 x 132 mm)
Displacement	411 in ³ (6.7 L)
Fuel	#2 Diesel, #1 and #2 mixture permitted for cold temperatures
Fuel injection	Direct injection – electronic
Fuel filter	Replaceable
Fuel pump	Bosch
Gradeability:	
Side-to-side	35°
Fore and aft	35°
Air filter	Dry type elements w/ warning restriction indicator
Mid-mount cooling module:	Mid-mount air/water
Fan – hydraulic driven:	
Style	8 blade puller
Diameter	32 in (813 mm)
Water pump	Integral
Engine oil pump operating angles ratings:	
Side-to-side	35°
Fore and aft	35°
Oil filtration	Replaceable
Engine speeds	RPM
Rated – full load	2000
Horsepower:	
Maximum Power Mode:	
Peak gross @ 1800 RPM	172 hp (128 kW)
Net rated @ 2000 RPM	152 hp (113 kW)
Peak net @ 1800 RPM	162 hp (121 kW)
Standard Power Mode:	
Peak gross @ 1800 RPM	156 hp (116 kW)
Net rated @ 2000 RPM	138 hp (103 kW)
Peak net @ 1800 RPM	146 hp (109 kW)
Economy Power Mode:	
Peak gross @ 1500 RPM	133 hp (99 kW)
Net rated @ 2000 RPM	101 hp (75 kW)
Peak net @ 1500 RPM	125 hp (93 kW)

NOTE: Gross horsepower and torque per SAE J1995.
Net horsepower and torque per SAE J1349.

ENGINE (cont.)

Torque – peak:	
Maximum Power Mode:	
Gross @ 1600 RPM	538 lb-ft (730 N-m)
Net @ 1600 RPM	510 lb-ft (692 N-m)
Standard Power Mode:	
Gross @ 1300 RPM	530 lb-ft (719 N-m)
Net @ 1300 RPM	508 lb-ft (689 N-m)
Economy Power Mode:	
Gross @ 1200 RPM	527 lb-ft (715 N-m)
Net @ 1200 RPM	508 lb-ft (689 N-m)

Torque rise:	
Maximum power range	33%

NOTE: Gross horsepower and torque per SAE J1995.
Net horsepower and torque per SAE J1349.

DRIVETRAIN

Transmission:	
4F/3R proportional w/ Electronic Control Module torque sensing autoshift/manual shift and modulation	
Gears	Helical cut
Torque converter:	
Stall ratio – 4-speed	2.66:1
Differential:	
Limited slip w/ 30% transfer on front and rear axles	
Rear axle oscillation	24° total
Front and rear axles:	
Differential ratio	3.18
Planetary ratio	6.40
Front axle ratio	20.34
Heavy-duty axles – optional:	
Front axle equipped w/ locking differential	
Rear axle equipped w/ open differential	
Planetaries	Outboard
Service brakes:	
Hydraulically actuated, maintenance-free, multiple wet disc w/ accumulator to all four wheels	
Brake surface area:	
Front hub – each	481 in ² (0.31 m ²)
Rear hub – each	481 in ² (0.31 m ²)

Parking brakes:		
Spring-applied hydraulic release disc on transmission output shaft neutralizes power flow to wheels when engaged		
Travel speeds – 4-speed transmission:		
	Forward	Reverse
	mph (kph)	mph (kph)
1st	4.3 (6.9)	4.5 (7.3)
2nd	8.4 (13.5)	8.8 (14.2)
3rd	14.8 (23.9)	15.5 (25.0)
4th	24.0 (38.6)	–

NOTE: Travel speeds at full engine throttle w/ 20.5 x 25 L3 tires.

ELECTRICAL

Voltage	24 Volts, negative ground
Alternator	120 amp
Batteries (2)	12-volt

OPERATOR ENVIRONMENT

ROPS/FOPS cab w/ heat and AC; Key start; Articulated power steering w/ tilt column; Fully adjustable, suspension seat; Foot throttle; 1-Lever loader control w/ wrist rest; Cup holder; Coat hook; 1 Interior rearview mirror; 2 in (51 mm) retractable seat belt; Storage tray behind seat; Lunch box compartment; Single brake pedal; F/N/R shuttle switch; Glove box; Pressurized air filtering; Anti-glare window strip; Defroster; Side window, partial/fully open; Dome light; Wipers, rear and intermittent front; Windshield washers, front and rear; Rubber floor mat; Horn.

Displays/Gauges:

Analog:
Transmission oil temperature; Hydraulic oil temperature; Fuel level; Engine coolant temperature.

LCD screen:

Hour meter; Engine speed; Travel speed; Time; Automatic transmission indication; Current gear selection; FNR indication; DeClutch indication; Engine mode indication; Trip computer; Fuel consumption; Multiple languages, Metric/English; Engine diagnostics; Transmission diagnostics; Warning prompts; Error reporting; DEF gauge; Diff. lock*.

Audible/Visual alarms:

Warning lights:

Four-way flashers and turn signals; Brake pressure; Lamp/high beam indication; Grid heater*.

Caution alarm:


Parking brake; Coolant temperature; Hydraulic oil temperature; Transmission oil temperature; Air filter; Transmission filter; Hydraulic filter; Alternator; Low fuel.

Critical alarm:

Engine oil pressure; Brake pressure; Steering pressure – w/ aux. steering*; Coolant temperature; Hydraulic oil temperature; Transmission oil temperature.

Backup alarm

NOTE: *If equipped w/ option.

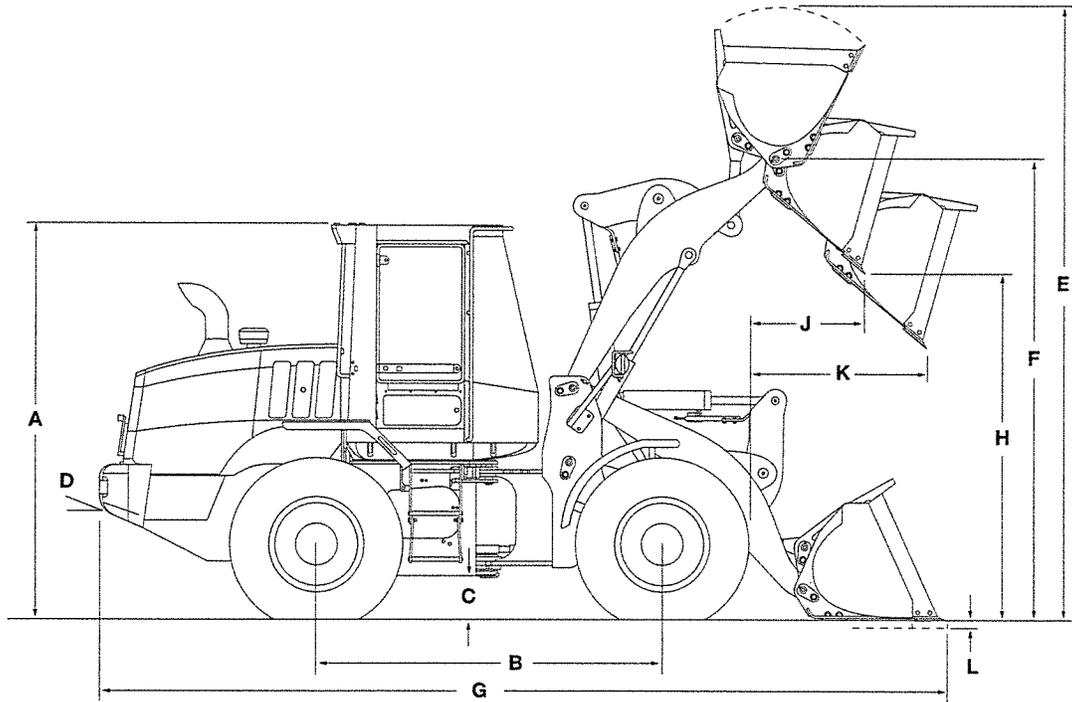

Line drawings are for illustrative purpose only and may not be exact representation of unit.

DIMENSIONS

A. Height to top of ROPS cab	133.7 in (3 395 mm)
Height to drawbar	42.6 in (1 081 mm)
B. Wheelbase	114.2 in (2 900 mm)
C. Ground clearance	14.6 in (370 mm)
D. Angle of departure	27°
Width:	
Overall* without bucket	99.3 in (2 523 mm)
Centerline tread	76.8 in (1 950 mm)
Turning radius* – outside	206.5 in (5 245 mm)
Turning angle:	
From center	40°
Total angle	80°
Rear axle oscillation, total	24°

NOTE: *Dimensions taken with 20.5R25 Michelin XTLA tires. For transport dimensions, refer to specific bucket width and overall length on pages 4 through 8.

WEIGHT ADJUSTMENTS

Select Options	Weight Adjustment	Tipping Load Adjustment Straight	Tipping Load Adjustment 40° Turn
20.5 x 25 12 ply L2 tires	-99 lb (-45 kg)	-73 lb (-33 kg)	-64 lb (-29 kg)
20.5 x 25 16 ply L2 tires	-44 lb (-20 kg)	-31 lb (-14 kg)	-29 lb (-13 kg)
20.5 x 25 12 ply L3 tires	+229 lb (+104 kg)	+165 lb (+75 kg)	+146 lb (+66 kg)
20.5 R25 XHA TL tires	+381 lb (+173 kg)	+276 lb (+125 kg)	+245 lb (+111 kg)
Standard counterweight	-853 lb (-387 kg)	-2,022 lb (-917 kg)	-1,693 lb (-768 kg)

NOTE: Unit equipped with Z-Bar loader arms, 2.5 yd³ (1.9 m³) general purpose pin on bucket with bolt-on edge, 20.5R25 XTLA Michelin tires, ROPS cab with heater and air conditioner, full counterweight, standard batteries, front and rear fenders, full fuel and 175 lb (79 kg) operator. Adjust select options from rated weight.

PERFORMANCE DATA

621F Z-Bar*	2.75 yd³ GP Pin On (2.1 m³) Bucket with Teeth Only	3.0 yd³ LM Pin On (2.3 m³) Bucket with Bolt-on Edge	3.0 yd³ (2.3 m³) Bucket with Grapple with Bolt-on Edge
SAE bucket capacity – struck	2.2 yd ³ (1.70 m ³)	2.6 yd ³ (1.96 m ³)	2.6 yd ³ (1.96 m ³)
Heaped	2.6 yd ³ (1.98 m ³)	3.0 yd ³ (2.29 m ³)	3.0 yd ³ (2.29 m ³)
Bucket width – outside	102.4 in (2 602 mm)	102.4 in (2 602 mm)	102.4 in (2 602 mm)
Bucket weight	1,903 lb (863 kg)	2,090 lb (948 kg)	3,554 lb (1 612 kg)
E. Operating height – fully raised with spillguard	195.1 in (4 956 mm)	198.1 in (5 033 mm)	198.1 in (5 031 mm)
F. Hinge pin height – fully raised	150.8 in (3 831 mm)	150.8 in (3 831 mm)	150.7 in (3 829 mm)
G. Overall length – bucket level on ground	293.7 in (7 461 mm)	290.7 in (7 383 mm)	290.7 in (7 385 mm)
Dump angle – fully raised	52°	52°	51°
H. Dump height – fully raised, 45° dump	108.3 in (2 751 mm)	110.3 in (2 802 mm)	110.2 in (2 799 mm)
J. Bucket reach – fully raised, 45° dump	42.2 in (1 072 mm)	39.9 in (1 013 mm)	39.9 in (1 013 mm)
K. Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	60.9 in (1 547 mm)	59.6 in (1 515 mm)	59.6 in (1 514 mm)
Operating load – ISO	9,912 lb (4 496 kg)	9,650 lb (4 377 kg)	8,876 lb (4 026 kg)
Operating load – SAE	8,946 lb (4 508 kg)	8,697 lb (3 945 kg)	7,879 lb (3 574 kg)
Maximum material density – ISO	3,828 lb/yd ³ (2 271 kg/m ³)	3,218 lb/yd ³ (1 909 kg/m ³)	2,960 lb/yd ³ (1 756 kg/m ³)
Maximum material density – SAE	3,455 lb/yd ³ (2 050 kg/m ³)	2,899 lb/yd ³ (1 720 kg/m ³)	2,628 lb/yd ³ (1 559 kg/m ³)
Tipping load – ISO:			
Straight	22,566 lb (10 236 kg)	22,000 lb (9 979 kg)	20,443 lb (9 273 kg)
40° turn	19,824 lb (8 992 kg)	19,299 lb (8 754 kg)	17,752 lb (8 052 kg)
Tipping load – SAE:			
Straight	21,081 lb (9 562 kg)	20,536 lb (9 315 kg)	18,909 lb (8 577 kg)
40° turn	17,895 lb (8 117 kg)	17,394 lb (7 890 kg)	15,761 lb (7 149 kg)
Lift capacity:			
Full height	16,332 lb (7 408 kg)	16,129 lb (7 316 kg)	14,709 lb (6 672 kg)
Maximum reach	23,036 lb (10 449 kg)	22,818 lb (10 350 kg)	21,438 lb (9 724 kg)
Ground	26,081 lb (11 830 kg)	23,226 lb (10 535 kg)	19,048 lb (8 640 kg)
Breakout force with tilt cylinder	22,635 lb (10 267 kg)	23,966 lb (10 871 kg)	21,599 lb (9 797 kg)
Maximum rollback:			
Ground	40°	40°	41°
Carry position	43°	43°	44°
@ Maximum reach	52°	52°	53°
@ Full height	55°	55°	55°
L. Dig depth	3.4 in (86 mm)	3.4 in (86 mm)	3.5 in (88 mm)
Maximum grading angle with bucket – back dragging	60°	59°	61°
Loader clearance circle with bucket	456.7 in (11 599 mm)	454.8 in (11 552 mm)	454.6 in (11 548 mm)

621F XR	2.75 yd³ GP Pin On (2.1 m³) Bucket with Teeth Only	3.0 yd³ LM Pin On (2.3 m³) Bucket with Bolt-on Edge	3.0 yd³ (2.3 m³) Bucket with Grapple with Bolt-on Edge
E. Operating height – fully raised with spillguard	211.4 in (5 369 mm)	214.4 in (5 446 mm)	198.1 in (5 031 mm)
F. Hinge pin height – fully raised	167.1 in (4 244 mm)	167.1 in (4 244 mm)	150.7 in (3 829 mm)
G. Overall length – bucket level on ground	309.8 in (7 870 mm)	306.7 in (7 791 mm)	290.7 in (7 385 mm)
Dump angle – fully raised	46°	46°	51°
H. Dump height – fully raised, 45° dump	124.6 in (3 164 mm)	126.6 in (3 215 mm)	110.2 in (2 799 mm)
J. Bucket reach – fully raised, 45° dump	42.8 in (1 088 mm)	40.5 in (1 029 mm)	39.9 in (1 013 mm)
K. Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	75.2 in (1 909 mm)	73.7 in (1 873 mm)	59.6 in (1 514 mm)
Operating load – ISO	8,230 lb (3 733 kg)	8,014 lb (3 635 kg)	8,876 lb (4 026 kg)
Operating load – SAE	7,520 lb (3 411 kg)	7,315 lb (3 318 kg)	7,879 lb (3 574 kg)
Maximum material density – ISO	3,177 lb/yd ³ (1 885 kg/m ³)	2,672 lb/yd ³ (1 585 kg/m ³)	2,960 lb/yd ³ (1 756 kg/m ³)
Maximum material density – SAE	2,904 lb/yd ³ (1 723 kg/m ³)	2,439 lb/yd ³ (1 447 kg/m ³)	2,628 lb/yd ³ (1 559 kg/m ³)
Tipping load – ISO:			
Straight	18,834 lb (8 543 kg)	18,376 lb (8 335 kg)	20,443 lb (9 273 kg)
40° turn	15,040 lb (6 822 kg)	16,030 lb (7 271 kg)	17,752 lb (8 052 kg)
Tipping load – SAE:			
Straight	17,771 lb (8 061 kg)	17,326 lb (7 859 kg)	18,909 lb (8 577 kg)
40° turn	15,040 lb (6 822 kg)	14,630 lb (6 636 kg)	15,761 lb (7 149 kg)
Lift capacity:			
Full height	15,856 lb (7 192 kg)	15,662 lb (7 104 kg)	14,709 lb (6 672 kg)
Maximum reach	20,479 lb (9 289 kg)	20,241 lb (9 181 kg)	21,438 lb (9 724 kg)
Ground	25,415 lb (11 528 kg)	24,903 lb (11 296 kg)	19,048 lb (8 640 kg)
Breakout force with tilt cylinder	23,307 lb (10 572 kg)	24,685 lb (11 197 kg)	21,599 lb (9 797 kg)
Loader clearance circle with bucket	472.0 in (11 990 mm)	470.0 in (11 938 mm)	456.1 in (11 585 mm)

PERFORMANCE DATA

621F Z-Bar*	2.5 yd³ GP Pin On (1.9 m³) Bucket on Z-Bar Coupler (ACS-Compatible) with Bolt-on Edge	2.5 yd³ GP Pin On (1.9 m³) Bucket on Z-Bar Coupler (ACS-Compatible) with Teeth Only
SAE bucket capacity – struck	2.1 yd ³ (1.64 m ³)	2.1 yd ³ (1.57 m ³)
Heaped	2.5 yd ³ (1.91 m ³)	2.4 yd ³ (1.83 m ³)
Bucket width – outside	102.4 in (2 602 mm)	102.6 in (2 605 mm)
Bucket weight	3,007 lb (1 364 kg)	2,930 lb (1 329 kg)
E. Operating height – fully raised with spillguard	199.2 in (5 059 mm)	199.2 in (5 060 mm)
F. Hinge pin height – fully raised	150.7 in (3 829 mm)	150.8 in (3 830 mm)
G. Overall length – bucket level on ground	292.1 in (7 419 mm)	297.8 in (7 563 mm)
Dump angle – fully raised	52°	52°
H. Dump height – fully raised, 45° dump	109.5 in (2 781 mm)	105.8 in (2 687 mm)
J. Bucket reach – fully raised, 45° dump	41.7 in (1 059 mm)	45.7 in (1 162 mm)
K. Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	61.0 in (1 550 mm)	63.0 in (1 600 mm)
Operating load – ISO	8,889 lb (4 032 kg)	9,004 lb (4 084 kg)
Operating load – SAE	7,981 lb (3 620 kg)	8,087 lb (3 668 kg)
Maximum material density – ISO	3,556 lb/yd ³ (2 110 kg/m ³)	3,762 lb/yd ³ (2 232 kg/m ³)
Maximum material density – SAE	3,192 lb/yd ³ (1 894 kg/m ³)	3,379 lb/yd ³ (2 005 kg/m ³)
Tipping load – ISO:		
Straight	20,382 lb (9 245 kg)	20,633 lb (9 359 kg)
40° turn	17,776 lb (8 063 kg)	18,010 lb (8 169 kg)
Tipping load SAE:		
Straight	18,988 lb (8 613 kg)	19,224 lb (8 720 kg)
40° turn	15,959 lb (7 239 kg)	16,171 lb (7 335 kg)
Lift capacity:		
Full height	15,194 lb (6 892 kg)	15,278 lb (6 930 kg)
Maximum reach	21,868 lb (9 919 kg)	21,958 lb (9 960 kg)
Ground	18,684 lb (8 475 kg)	19,535 lb (8 861 kg)
Breakout force with tilt cylinder	22,527 lb (10 218 kg)	23,885 lb (10 834 kg)
Maximum rollback:		
Ground	40°	40°
Carry position	43°	43°
@ Maximum reach	52°	52°
@ Full height	55°	55°
L. Dig depth	2.9 in (73 mm)	3.1 in (79 mm)
Maximum grading angle with bucket – back dragging	60°	61°
Loader clearance circle with bucket	455.6 in (11 573 mm)	459.2 in (11 663 mm)
621F XR	2.5 yd³ GP Pin On (1.9 m³) Bucket on Z-Bar Coupler (ACS-Compatible) with Bolt-on Edge	2.5 yd³ GP Pin On (1.9 m³) Bucket on Z-Bar Coupler (ACS-Compatible) with Teeth Only
E. Operating height – fully raised with spillguard	215.4 in (5 472 mm)	215.5 in (5 473 mm)
F. Hinge pin height – fully raised	167.0 in (4 242 mm)	167.0 in (4 243 mm)
G. Overall length – bucket level on ground	308.2 in (7 829 mm)	313.9 in (7 973 mm)
Dump angle – fully raised	46°	46°
H. Dump height – fully raised, 45° dump	125.7 in (3 194 mm)	122.0 in (3 100 mm)
J. Bucket reach – fully raised, 45° dump	42.3 in (1 074 mm)	46.3 in (1 177 mm)
K. Bucket reach – 7 ft 0 in (2.13 m) height, 45° dump	75.2 in (1 909 mm)	77.4 in (1 966 mm)
Operating load – ISO	7,348 lb (3 333 kg)	7,443 lb (3 376 kg)
Operating load – SAE	6,673 lb (3 027 kg)	6,764 lb (3 068 kg)
Maximum material density – ISO	2,940 lb/yd ³ (1 744 kg/m ³)	3,110 lb/yd ³ (1 845 kg/m ³)
Maximum material density – SAE	2,670 lb/yd ³ (1 584 kg/m ³)	2,827 lb/yd ³ (1 677 kg/m ³)
Tipping load – ISO:		
Straight	16,969 lb (7 697 kg)	17,176 lb (7 791 kg)
40° turn	14,696 lb (6 666 kg)	14,888 lb (6 753 kg)
Tipping load – SAE:		
Straight	15,964 lb (7 241 kg)	16,160 lb (7 330 kg)
40° turn	13,349 lb (6 055 kg)	13,528 lb (6 136 kg)
Lift capacity:		
Full height	14,733 lb (6 683 kg)	14,817 lb (6 721 kg)
Maximum reach	19,246 lb (8 730 kg)	19,348 lb (8 776 kg)
Ground	23,442 lb (10 633 kg)	23,651 lb (10 728 kg)
Breakout force with tilt cylinder	23,259 lb (10 550 kg)	24,641 lb (11 177 kg)
Loader clearance circle with bucket	470.8 in (11 958 mm)	474.7 in (12 058 mm)

STANDARD EQUIPMENT

OPERATOR ENVIRONMENT

See page 1

ENGINE

Case/FPT F4HFE613W

Tier 4 Final Certified

Selectable work modes:

- Maximum Power
- Standard Power
- Economy Power
- Auto Power

Turbocharger

Charge air cooling

Automatic belt tensioner

Integral engine oil cooling

Fuel filter with water trap

Dual-element dry-type air cleaner

Hydraulic-driven cooling fan

Air-cooled radiator

Mid-mounted cooling module

Common rail electronic fuel injection

DRIVETRAIN

4-wheel drive

4F/3R Selectable autoshift/manual shift transmission

Electronic Control Module – programmable, computer controlled proportional shifting with programmable gear selection

Onboard diagnostics

Single lever electronic shift control

F/N/R switch in loader control handle

Downshift button

DRIVETRAIN (continued)

Torque converter

Limited-slip differentials – Z-Bar

Heavy-duty axles – XT/XR:
with auto-locking front differential,
rear conventional differential and
with bronze sintered brake pads

Outboard planetary axles

Transmission oil cooler

Brake pedal transmission disconnect (declutch)

Hydraulic wet disc brakes

Spring-applied hydraulic release parking brake

Limp-Home Mode

Greasable rear axle trunnion

3-piece rims

HYDRAULICS

2-function loader valve
with joystick control

Low-effort steering

Hydraulic driven cooling fan

Diagnostic quick couplers

Split flange hydraulic connections –
1 in or greater

LOADER

See page 2 – Operating weight, Other specifications

ELECTRICAL

Alternator and voltage regulator

Electrical disconnect

120 amp alternator

(2) 700 CCA 12-volt batteries

ELECTRICAL (continued)

Electric starter

Lights:

- 2 Front and 2 rear halogen flood lights
- 2 Front driving headlights – high/low beam with integrated turn signals
- 2 LED stop/tail lights with integrated turn signals

Key start/stop switch

Backup alarm

Centrally located fuse box
with all electrical circuits protected

Remote jump start receptacle

TELEMATICS

CASE SiteWatch™ Telematics – includes hardware and a 3-yr Advanced data subscription

OTHER

Electric hood lift

Front and rear fenders, partial coverage

Heavy counterweight

Drawbar hitch

Articulation locking bar

Lift arm locking bar

Lift and tie-down points – front/rear

Remote drain points

Grouped remote-mounted ecology drains:
Engine oil
Engine coolant
Hydraulic oil

OPTIONAL EQUIPMENT

OPERATOR ENVIRONMENT

Heated cloth-covered air suspension seat

Cloth mechanical suspension seat

Headrest

3 in (76 mm) retractable seat belt

Sound Shield noise suppression package

Cab with heater only – no AC

Radio-ready – 12 or 24-volt
with auxiliary power – 12-volt

AM/FM stereo radio

Cab convenience package: ashtray, 24V cigar lighter and cell phone holder

Rotating beacon

Right hand brake pedal

External rearview mirrors

External rearview mirrors, heated

In-cab accessory mount – no rear view camera

Rear view camera with accessory mount

Extra front-facing work lights

HYDRAULICS

Auxiliary hydraulics

Ride Control

Secondary steering

Joystick steering with and without secondary steering

2-function loader valve with single access control

3-function loader valve with 3 lever control or with joystick plus lever

DRIVETRAIN

Heavy-duty axles – Z-Bar:
with auto-locking front differential,
rear conventional differential and
with bronze sintered brake pads

Cold weather package:

- Heavy-duty (2) 950 CCA 12V batteries
- Grid heater
- Fuel heater
- Hydraulic oil cooler bypass
- Low temperature hydraulic oil
- Fast-warm hydraulic valve

TIRES

20.5-25 12 PR L2 bias – dirt/traction

20.5-25 12 PR L3 bias – rock

20.5 R25 L2 radial – dirt/traction

20.5 R25 L3 radial – rock

20.5 R25 radial Michelin SnoPlus

20.5 R25 radial Bridgestone Snow Wedge

SolidFlex HD solid tires on adapter rims

Spare wheels and tires

Axle oscillation stops

LOADER

XR extended reach version

XT tool carrier version

Attachment auxiliary hydraulics

Coupler systems – JRB or ACS compatible

Buckets – see pages 4 through 7

4 – 1 clamp buckets

Forks

ADVANCED ENGINE AIR FILTRATION

Heavy Debris cooling system:

- Slanted cooling module cover
- Auto reversing fan
- Sy-Klone® ejective air pre-cleaner
- Increased cooling fin spacing
- Added cooling module sealing

Variable speed hydraulic reversing fan

Full view air pre-cleaner

Sy-Klone® ejective air pre-cleaner

OTHER

Additional RH steps and platform with standard or wide fenders

Side guards for rear frame

Tool box – ground level access

Light counterweight – Z-Bar

Fire extinguisher

License plate bracket

12.4 mph (20 kph) maximum speed control

Special paint

GUARDING

Skid plate, transmission and front chassis bottom guards

Windscreen guard

Specialized guarding package:

- Windscreen, articulation, front cover, chassis bottom, skid plate, transmission, lift cylinder, front lights, fuel tank, metal wrapped hoses and cylinder debris ejectors

CASE
CONSTRUCTION

F SERIES
WHEEL LOADERS

521F | 621F | 721F | 821F | 921F | 1021F | 1121F | 1221F



MORE TONS PER HOUR. MORE MODELS THAN EVER.

Whether it's the best-in-class bucket breakout force of the 721F, the best-in-class full-turn tipping load of the 921F or the innovative controls of the 1221F, CASE has a full range of wheel loaders built to be fast, fuel-efficient and full of helpful features. Utility work? Check. High-production jobs? No problem. The F Series is here.



SCR Technology*

(Selective Catalytic Reduction)
*Excludes 1221F



4* Power Modes

*3 available on 1221F



5-Speed Transmission*

*Optional on 721F, 821F,
921F and 1221F



Attachment Versatility



★ Maximum Visibility

★ Protected by ProCare

Models Available




LOCKED AND LOADED.

SAVING FUEL WITHOUT SACRIFICING STRENGTH

Because of their variety of applications and varying engine loads, SCR (Selective Catalytic Reduction) technology is the obvious choice for most F Series wheel loaders. Rather than compromise power, SCR lets the engine do what it does best – run at peak performance. This gives the faster throttle response operators want while also maintaining lower temperatures and improving fuel economy by as much as 20%. Plus, SCR is simple. No regeneration. No downtime. Just pour and go.

NOTE: Tier 4 Final engines use SCR ONLY technology and will be available in 2014 on 821F and 921F models

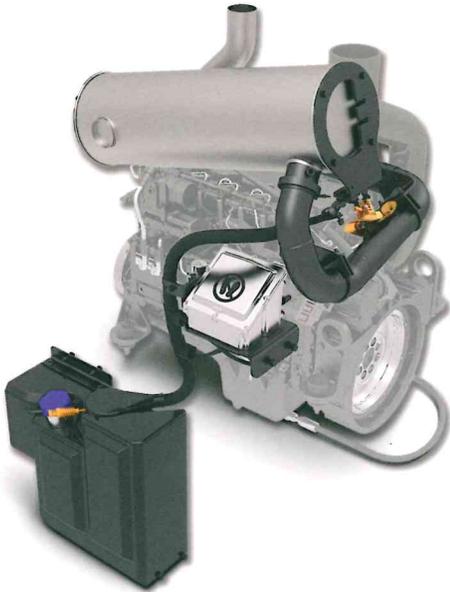

PERFECT POWER 4 THE JOB

Only CASE F Series wheel loaders let you match engine output to the task at hand with four* programmable power modes: ECO for maximum fuel efficiency, STANDARD for quick loading, MAX for aggressive digging and AUTO for engine output that responds on the fly.



*Three power modes available on 1221F (ECO, STANDARD and AUTO)



POWERINCH™ MEANS PRECISION


By helping to maintain high RPMs and maximizing hydraulic power to the loader arms and bucket cylinder, POWERINCH provides incredible accuracy and control in tight loading areas, regardless of engine speed or grade. Included with the optional five-speed transmission, it's ideal for short-cycle loading of trucks, hoppers or heavy materials in tight spots – and it's only from CASE.



THE FASTER, FUEL-SAVING FIVE-SPEED*

F Series wheel loaders offer a five-speed transmission with lockup torque converter and computer-controlled clutch modulation. Not only does this efficient transmission improve acceleration, travel speeds and climbing power, by eliminating power loss, the five-speed setup can increase fuel savings by up to 8%.

*Available on 721F, 821F, 921F and 1221F

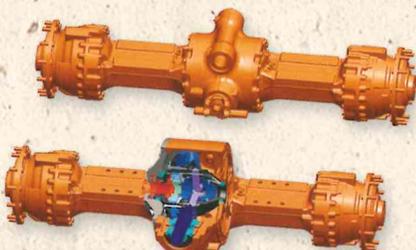


AXLES FOR ANYWHERE



F Series wheel loaders offer two axle choices: a standard limited slip that works great with non-compacted and slippery surfaces, and optional heavy-duty axles that are perfect for compacted, paved surfaces. Need to use solid tires? No problem. These heavy-duty axles will do the job.



Front view

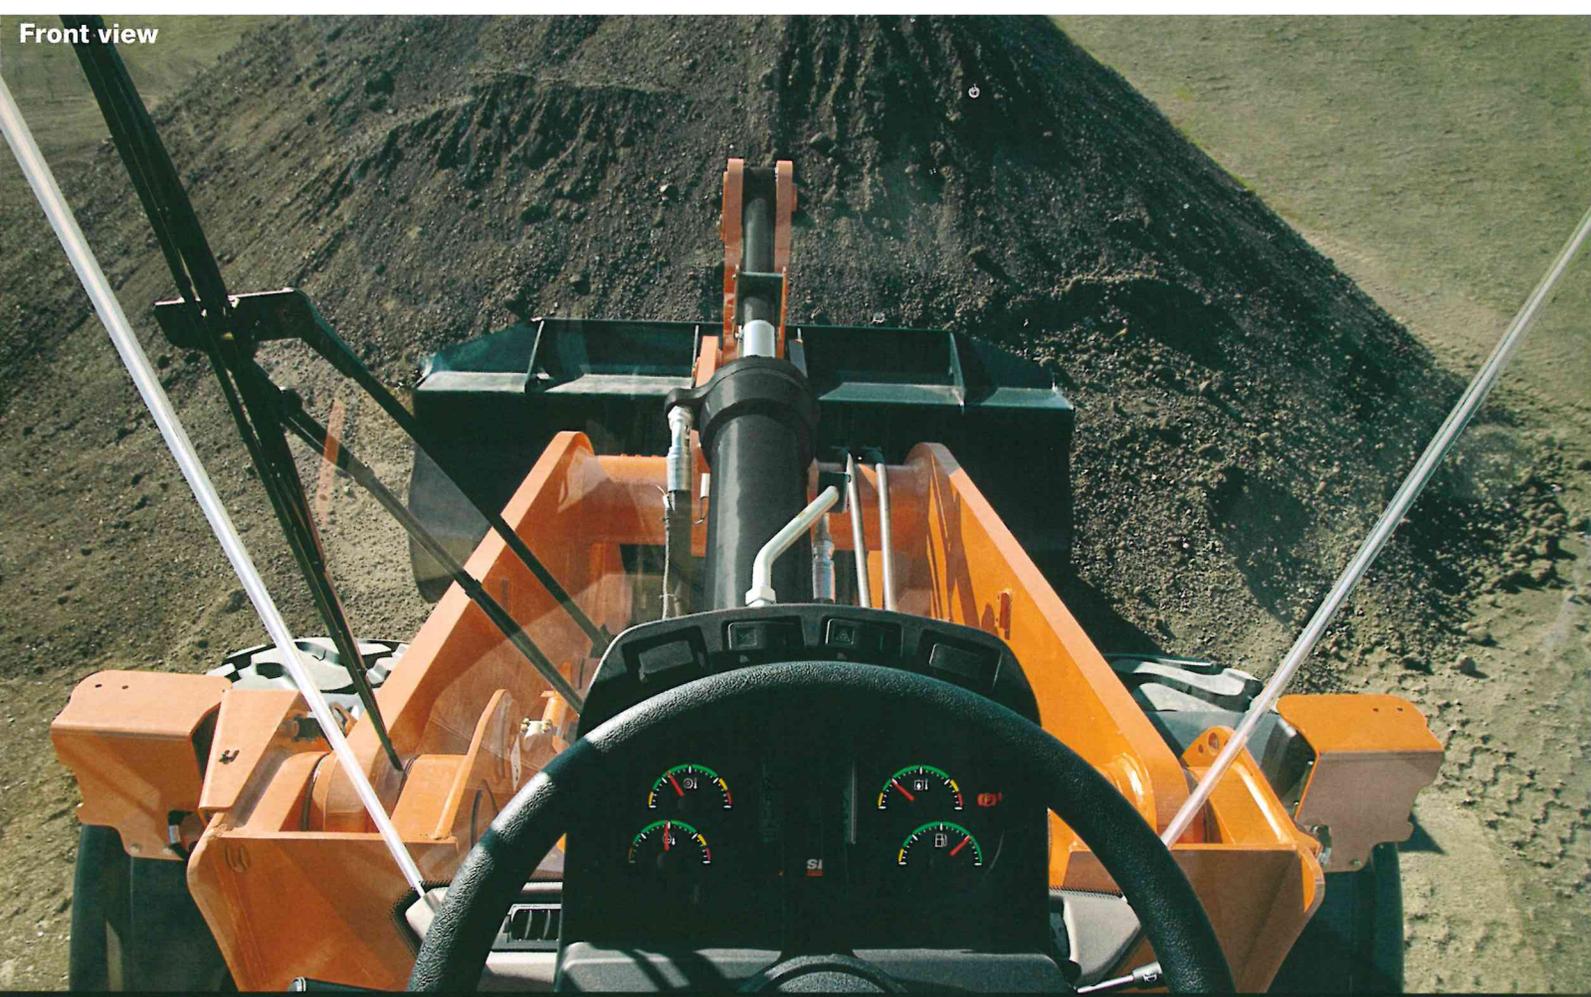

Rear view

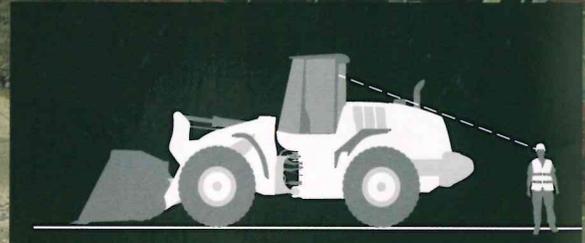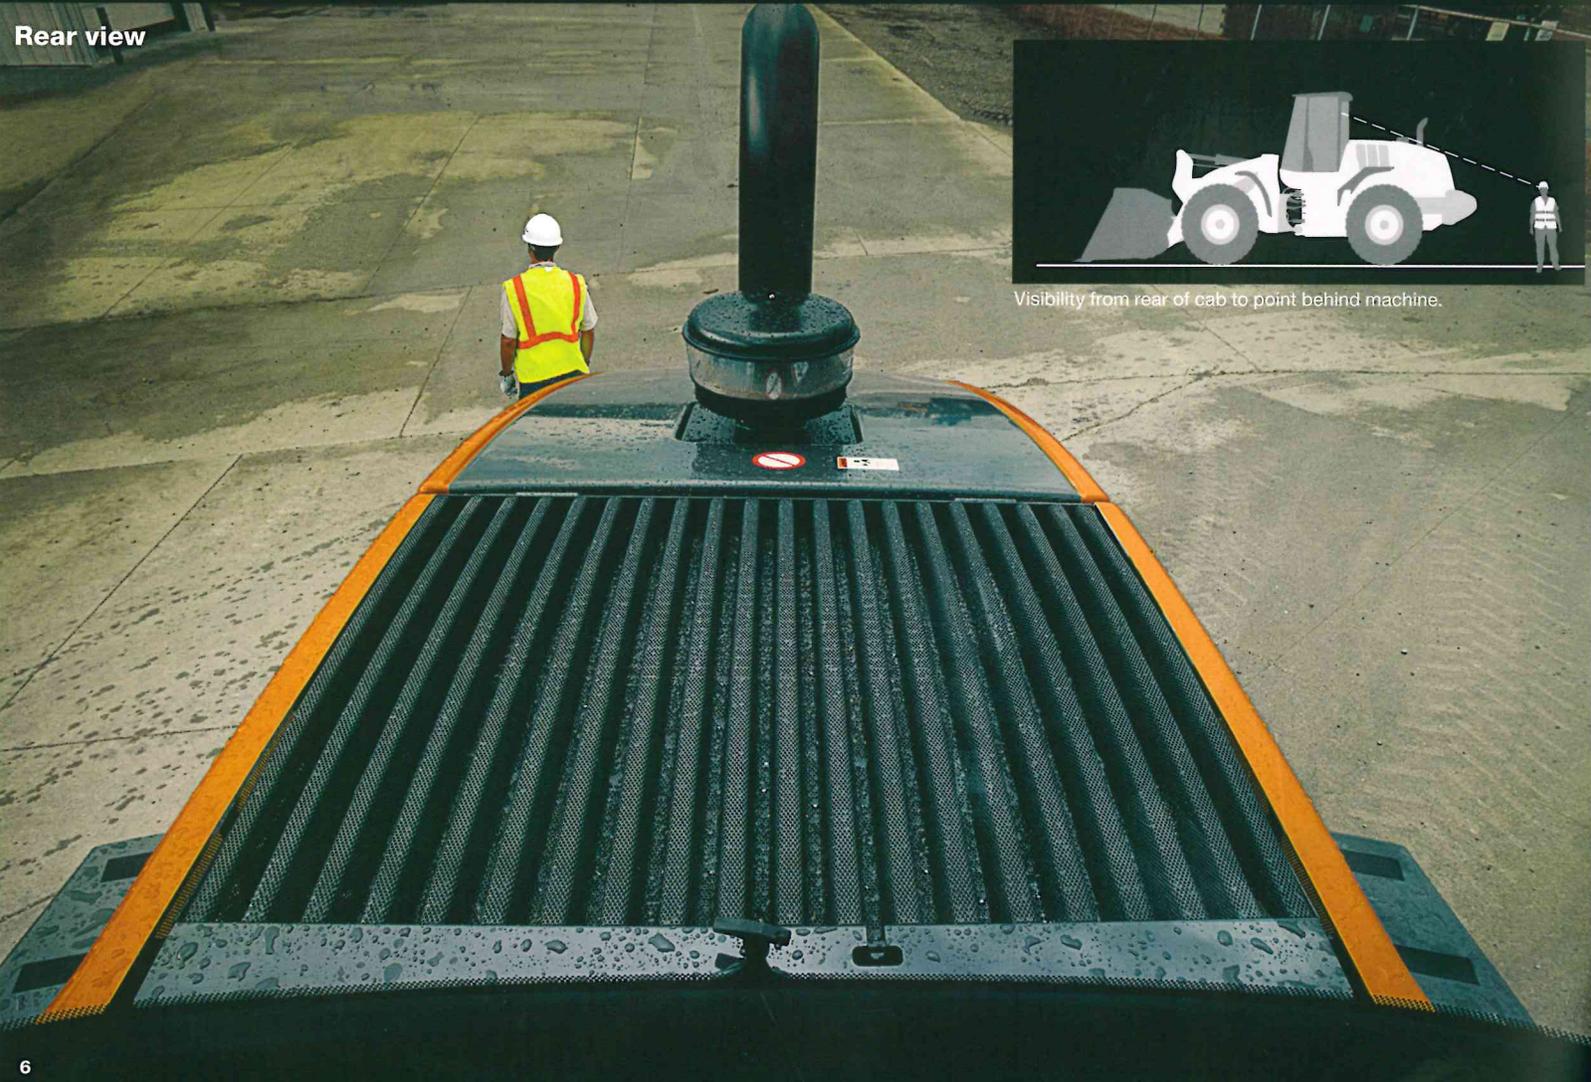

Visibility from rear of cab to point behind machine.

LOVE WHERE YOU WORK.

A QUIET, COMFORTABLE CAB

As the largest cab in the industry, the ROPS/FOPS-certified CASE Quiet Cab is a spacious example of our continued commitment to comfort. A dual air filtration system and iso-mount cab design with strategic hydraulic routing reduce external noise and vibration to create a clean, quiet operating environment. All while the 1221F's fully adjustable operator station lets you tilt, telescope and tweak the steering column, wrist rests and suspension seat to your liking.



AWARD-WINNING JOYSTICK STEERING*

This exclusive feature allows operators to seamlessly move between the joystick and steering wheel. Its ergonomic design and responsive control reduce operator fatigue and greatly help to improve cycle times – especially during repetitive, high-production applications.



*Recognized by *Construction Equipment Magazine*



GET ON BOARD WITH THE AIC

With a cleaner layout of primary instrument dials, the AIC (Advanced Instrument Cluster) is easier than ever to use. Operators have full visibility of basic job functions and service diagnostics such as fluid levels and fuel efficiency – no technician needed.



THE 1221F AT THE CONTROLS


The 1221F takes intuitive controls to the next level with an industry-exclusive 5.7-inch touchscreen. This full-color monitor lets operators easily access the load tracking system, as well as set automatic bucket and loader return function.

MAINTENANCE MADE EASY.

SERVICEABILITY IS IN OUR DNA

When you invest in CASE equipment, you need it to last. We make it simple. The F Series is no exception. From easy-to-read site gauges, a standard power-tilt hood* and ground-level access to most service points, you can do daily maintenance in a matter of minutes. It's the easiest way to help you get the most performance and longest life out of your machine.

*Manual-tilt hood on 521F

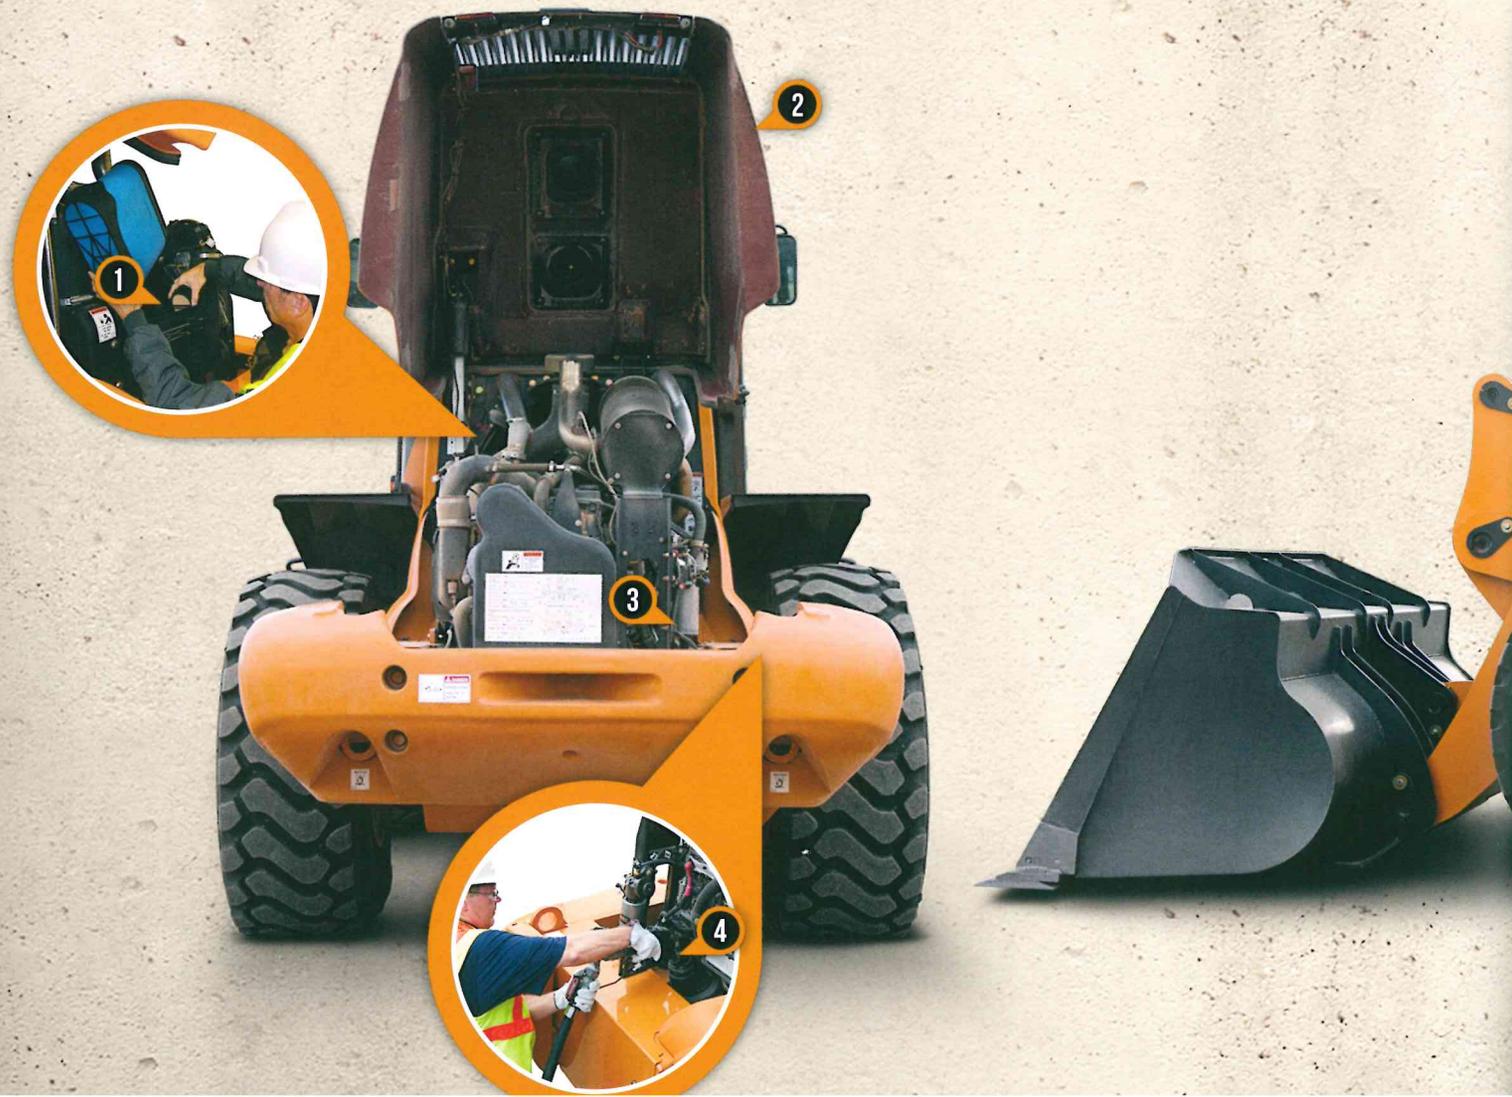

SEE A 360° VIEW



CaseCE.com/360

Mid-mounted cooling module

The cooling module position limits debris buildup and provides easy access for routine cleaning.



SPECIALTY MODELS AVAILABLE

Select CASE F Series wheel loaders are available with application-specific features such as the 621F and 721F Waste Handler or Commodity King packages. These packages include factory-installed features like protective guards (Waste Handler), heavy-duty axles, solid tires (Waste Handler), and a Heavy Debris cooling system which decreases radiator clogging and maintains its cooling capacity, as well as other specially configured options.



ProCare

GO BIG. WE'VE GOT YOU COVERED.

CASE ProCare is the first all-in-one heavy machine support program that's as powerful as the equipment it protects. Best of all, ProCare comes standard on F Series wheel loaders and keeps you covered for up to three full years. It's the assurance growing businesses need to stay competitive, productive and profitable.

Breakdown Assistance

Standard on all CASE equipment.

3K



**3-year/3000-hr.
Full-Machine
Factory Limited
Warranty***

We've got your back —
for up to three full years!

**3-year/3000-hr.
Planned
Maintenance**

Don't spend a dime for
CASE-certified scheduled
care — fluids, filters and
labor included.

**3-year Advanced
SiteWatch™
Subscription**

Telematics isn't a
luxury; it's a necessity
— and we've made it
accessible to all.



STRONGER PRODUCT SUPPORT SOLUTIONS

Your CASE dealer knows best how you can maximize your equipment investment and uptime, with genuine CASE parts, expert service and a complete range of product support solutions — including CASE remanufactured and all-makes parts. CASE supports better parts availability and faster deliveries, through nine parts distribution centers in North America and a forecasting system to ensure that the right parts will be there when you need them. And only CASE dealers have exclusive access to the Electronic Service Tool that quickly pinpoints machine issues to help maximize uptime.



“Running the two loaders side by side in the pit, this CASE loader was getting ahead by six or seven truckloads a day, with the same size bucket. We even swapped operators and had the same outcome, so it’s a no-brainer . . . it’s in the machine.”

— **CHAD KING**, JD King Corporation



ATTACHED TO VERSATILITY.

INTEGRATED HYDRAULIC QUICK-COUPLER


CASE offers an integrated hydraulic quick-coupler on our wheel loaders that lets operators conveniently switch out attachments from the comfort of the cab. Its factory-built design offers improved visibility and won't alter the physics or breakout force of the machine like after-market options will.

140 ATTACHMENTS AND THEN SOME

F Series wheel loaders work with more than 140 CASE attachments, including buckets, forks, brooms and more. CASE also has partnerships with numerous attachment manufacturers for even greater versatility. Consult your dealer for details.

SMARTFIT™ BUCKET TEETH

F Series buckets come standard with the innovative SmartFit bucket tooth system. These heavy-duty, self-sharpening teeth combine exceptional strength and unmatched ease of installation, thanks to a hammerless fastener system with reusable locking pins. Available in a full range of styles.

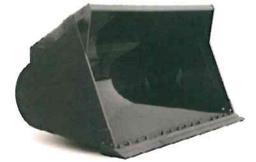

THE F SERIES WHEEL LOADERS



SPECIFICATIONS – USING Z-BAR

	521F	621F	721F	821F	921F	1021F	1121F	1221F
Engine	FPT F4HFE413J	FPT F4HFE613Z	FPT F4HFE613Y	FPT F4HFE613X	FPT F4HFE613	FPT F2CFE614C	FPT F2CFE614B	Cummins QSX 11.9
Emissions certification	Tier 4 Interim	Tier 4 Interim	Tier 4 Interim	Tier 4 Final	Tier 4 Final	Tier 4 Interim	Tier 4 Interim	Tier 4 Interim
Net peak hp. (kW)	131 (98)	162 (121)	178 (133)	212 (158)	241 (180)	296 (221)	321 (239)	351 (262)
Net peak torque – lb./ft. (Nm)	424 (575)	510 (692)	674 (914)	844 (1 145)	930 (1 261)	1,064 (1 442)	1,154 (1 564)	1,250 (1 695)*
Displacement – in³. (L)	275 (4.5)	411 (6.7)	411 (6.7)	411 (6.7)	411 (6.7)	531 (8.7)	531 (8.7)	726 (11.9)
Cylinders	4	6	6	6	6	6	6	6
Operating weight – lb. (kg)	22,873 (10 375)	26,641 (12 084)	31,400 (14 243)	38,541 (17 482)	43,777 (19 857)	53,513 (24 273)	59,578 (27 024)	66,800 (30 300)
Transmission gears	4F/3R	4F/3R	4 or 5F/3R	4 or 5F/3R	4 or 5F/3R	4F/3R	4F/3R	4 or 5F/3R
Bucket capacity range – yd³. (m³)**	2.0 - 2.6 (1.5 - 2.0)	2.4 - 4.5 (1.8 - 3.4)	3.0 - 5.5 (2.3 - 4.2)	3.2 - 4.5 (2.4 - 3.4)	3.8 - 4.8 (2.9 - 3.6)	4.6 - 5.5 (3.5 - 4.2)	5.1 - 6.3 (3.9 - 4.8)	6.3 - 9.2 (4.8 - 7.0)
Breakout force – lb. (kg)**	18,118 (8 218)	27,223 (12 348)	32,906 (14 926)	40,658 (18 442)	37,553 (17 034)	49,860 (22 616)	49,959 (22 661)	52,360 (23 750)
Full turn tipping load – lb. (kg)	15,668 (7 107)	19,811 (8 986)	23,371 (10 601)	27,741 (12 583)	31,405 (14 245)	35,320 (16 021)	39,050 (17 713)	45,944 (20 840)

DIMENSIONS – USING Z-BAR

Height to top of ROPS cab	129.0 in. (3 277 mm)	133.3 in. (3 385 mm)	133.3 in. (3 385 mm)	135.8 in. (3 450 mm)	135.8 in. (3 450 mm)	140.7 in. (3 573 mm)	140.7 in. (3 573 mm)	152.2 in. (3 865 mm)
Wheelbase	108.3 in. (2 750 mm)	114.2 in. (2 900 mm)	128.1 in. (3 253 mm)	131.5 in. (3 340 mm)	131.5 in. (3 340 mm)	139.8 in. (3 550 mm)	139.8 in. (3 550 mm)	145.7 in. (3 700 mm)
Ground clearance	14.8 in. (377 mm)	14.6 in. (370 mm)	14.4 in. (365 mm)	16.4 in. (416 mm)	16.4 in. (416 mm)	17.1 in. (435 mm)	16.9 in. (430 mm)	19.5 in. (495 mm)
Angle of departure	34°	27°	32°	32°	30°	26°	26°	23°
Hinge pin height – full height	142.1 in. (3 609 mm)	150.8 in. (3 831 mm)	156.7 in. (3 979 mm)	162.3 in. (4 123 mm)	162.1 in. (4 118 mm)	167.0 in. (4 243 mm)	174.9 in. (4 442 mm)	179.5 in. (4 560 mm)



BUILDING A STRONG CASE

Already in high gear with the arrival of founder J.I. Case's portable steam engine in 1869, we found ourselves at the heart of the road construction boom of the early 1900s. The path was set. Today, CASE is a game changer in construction equipment, financing, parts and service.

Revolutionary is nothing new to CASE, as innovations like the integrated backhoe loader (1957), Ride Control™, over-center boom design and ProCare have shown. It's this ingenuity and spirit that fuels our ongoing pursuit of building industry-leading performance and productivity into every machine throughout our full-line of light to heavy equipment.

All of this is backed by a portfolio of more than 10,000 OEM, REMAN and Gold Value parts, more than 350 North American dealer locations, and unmatched financial and insurance services that ensure the best support is always within reach. When all is said and done, our strength is only as solid as the machines we engineer, the support and service we give, and most importantly, the vote of confidence CASE customers have with every bit of it.



Specialized finance programs and flexible leasing packages put you in the driver's seat of industry-leading CASE equipment, while no-nonsense warranties and comprehensive protection plans ensure that your equipment is protected. As the only finance company dedicated to CASE, we offer strong products and services designed around your unique needs and are the only ones supported by the helpful service professionals at your CASE dealer.

To learn more about CASE or for attentive customer service, visit your nearest dealer, call 1-866-54-CASE6 or visit us online at CaseCE.com.

CASE
CONSTRUCTION

Engine:

6 Cylinder Turbocharged Tier (ACR)

162 Peak Horsepower @1800 R.P.M.

411 Cubic Inch displacement

Peak Gross Torque 538 Ft. lbs. at 1600 R.P.M.

Two Stage Air Cleaner

Integral Oil Pump with Oil Cooler and Under Piston Nozzles

Integral Water Pump

One Piece Cast iron Parent Metal Bore Block

Engine to Meet North American Emission Regulations

Hydraulic Driven Fan Independent Of Engine

Air intake Pre-Cleaner

One Piece Electrically Raised engine Hood

Automatic Fan Belt Tensioner

Four Power Modes: Auto, Max, standard, Economy

Cooling System:

Mid-Mounted Cooling Module- Radiator, Hydraulic, Oil, Cooler, A.C. Condenser, Fuel Cooler, Transmission Cooler To have Maximum Access To Clean, Cool Air, Stacked Coolers Not Acceptable. Thus Eliminating Plugging Between Coolers and Ease of Cleaning.

Electronic Information Center:

Displays/Gauges

Analog

Fuel Level

Engine Coolant Temp

Transmission Oil Temperature

LCD Screen (Metric/English, Multiple Languages)

Hour Meter

Engine Speed

Travel Speed

Current Gear Selection

FNR Indication

Clock

Trip Computer

Fuel Consumption

Fuel Level Percentage

DEF (Diesel Exhaust Fluid) Gauge

Oil Pressure

Engine Oil Temperature
Transmission Oil Temperature
Transmission Sump Oil Temperature
Hydraulic Oil Temperature
Turbocharged Air Temperature
Automatic Transmission Indicator
De-Clutch Indicator
Engine Mode Indicator
Engine Diagnostics
System Voltage
Error Reporting

Indicator Lights:

Low fuel
Turn Signal
Four Way Flashers
High Beam Lights
Brake Pressure
Master Indicator
Parking Break

Audible/Visible Alarms:

Caution Alarm
Parking Break
Coolant Temperature
Transmission Oil Temperature
Air Filter
Transmission Filter
Hydraulic Filter
Alternator
Low Fuel

Critical Alarm:

Engine Oil Pressure
Brake Pressure
Coolant Temperature
Hydraulic Temperature
Transmission Oil Temperature

Electric System:

24- Volt System
2-12 volt 700 CCA Batteries
65 Amp Alternator
Horn
Back up Alarm
Master Electrical Disconnect
2 Front 2 rear Top Mounted Flood Lights
2 Front Driver Hi-Lo Beam
2 Front Working, Stop, Tail and Back Up
Front and Rear Turn Signals and Flashers

Hydraulic Cylinders:

2 Lift Cyl- 4.75 Inch Boar 2.5 Inch Rod
1 Dump Cyl – 5.0 Inch Boar

Driveline:

4 Forward, 3 Reverse Computer Controlled Full Power Shift Transmission
Transmission Must be Capable of Being Custom Programmed to Shift Manually or Fully Automatic.
On Board Diagnostics with Fault Code Storage and Retrieval
Down Shift Button
Fully Pressurized Lubrication
Lift Time Lubricated u Joints
Hydraulic activated Multi disk Clutches
Electric Twist Grip Range Selector On Column
Trans. Disconnect Either Break Pedal
Single Stage Integral Torque Converter
Outboard Mounted Planetary Drive Axles with Dipsticks
Limited Slip Differentials non Both Axles
Self-Adjusting Outboard Mounted Hydraulically Maintenance Free Multiple Hydraulic Wet Disc
Breaks w/Accumulator to All Four Wheels
Break Surface Area 480 Sq.In. per Hub

Travel Speed:

Forward 1st	4.3 M.P.H.	Reverse 1st.	4.5 M.P.H.
2nd	8.4 M.P.H.	2nd	8.8 M.P.H.
3rd	14.9 M.P.H.	3rd	15.6 M.P.H.
4th	24 M.P.H.		

TRANSMISSION OIL SIGHT GAUGE

Steering:

Minimum 40 Degree Articulation Each Side.

Hydraulic Orbital Steering, Flow Amplified for Precise Low R.P.M. steering

Steering Wheel Required to Have No More Than 2 lbs. of Effort to Turn

Articulation Point to Have Double Tapered Roller Bearing Grease Able Every 1000 Hours

Two 3 In. Diameter Double Acting Cylinders

Max. Outside Turn Radius 17 ft.

Tilt steering Column

Loader:

Z-Bar Linkage With Self Aligning Hydraulic Quick Coupler 102 in. 4 In 1 Bucket

Bottom skid Pads

Bolt On Cutting edge, 3 Piece Reversible (Outer Side of Clam and Moleboard) Weld On Edge
On Inner Side of Clam

2.5 Cu.Yd. Heaped Capacity Bucket

Pilot Operated Single Lever For Lift and Tilt With Forward/Reverse Shuttle Switch On Top of
Lever

Separate Lever for 4 In 1 Control

Automatic Return to Dig

Automatic Return to Travel

Automatic Height Control

Single Piece Flame Cut Loader Arms

Bucket Position indicator

Automatic Self Leveling

Hinge Pin height 156 in.

Heavy Duty Forks with 60 in. Blades

Hydraulics:

Pressure Compensated Load Sensing

Micron Full Flow Replaceable Spin On cartridges On return Line

100 Mesh Line screen On Inlet Side

3 Spool, 3 Lever Valve, 2nd Lever for 4 In 1 Bucket

Sight Gauge on HYD . Reservoir

(8) Diagnostic Quick Couplers

Variable displacement 45.2 G.P.M. at 2000 R.P.M. Hydraulic Pump

O Ring Face Seal Hydraulic Couplings for 4 In 1 Bucket

Tires: 20.5 x 12 Ply L2

Operating Station:

OSHA Approved R.O.P.S. Cab with Sound Suppression, Safety Glass, Defroster, Air Conditioner, Heater, Suspension Seat, Dome Light, Air Pressurization with 3 Speed Blower C, Fresh Air Filters, Key Lock Doors, Rear view Mirrors, Rubber Floor Mats, Front Intermittent and Rear Windshield Wipers, Front and Rear Windshield Washers, Front Window Visor, Anti-Glare Window Strip, Partially/Fully Opening Cab Side Windows, Tilt steering Wheel, Steering Knob, Fully Adjustable Wrist Rest

Misc:

Serviceability Index SAE-J817 Not to Exceed 5800

Front and Rear Fenders

Draw Board Hitch

Amber Rotating Beacon

2 Exterior West Coast Mirrors

Remote Drainage for Engine Oil, Coolant and Hydraulic Oil, Banked In Single Location

Operating Weight:

26,000 Lbs. Minimum W/Standard Counter weight 175 Lbs. , Operator and Full Fuel Tank

Warranty:

3 Year/ 3000 Hour Full Machine Factory warranty

3 year/3000 Hour Planned Maintenance Including Filters, Oil and Labor

3 Year Advanced Site Watch Telematics

113047. THE CONTRACTOR SHALL NOT COMMENCE WORK UNDER THIS CONTRACT UNTIL HE HAS OBTAINED ALL INSURANCE AND COMPLIED WITH THE REQUIREMENTS OF THE SPECIFICATIONS AND SAID PARISH RESOLUTIONS. EXCEPT AS OTHERWISE PROVIDED BY LAW, THE PARISH ATTORNEY'S OFFICE WITH THE CONCURRENCE OF THE DIRECTOR OF RISK MANAGEMENT IS AUTHORIZED TO OMIT IN WHOLE OR PART THE INSURANCE REQUIREMENTS OF THIS SECTION IN CONNECTION WITH CONTRACTS. VENDORS INQUIRING ABOUT THIS SHALL SUBMIT HIS WRITTEN REQUEST TO THE PURCHASING DEPARTMENT PRIOR TO THE DUE DATE OF THE BID. CONTRACTOR MUST DELIVER AND MAINTAIN SUCH INSURANCES AS PROVIDED; FAILURE TO DO SO SHALL BE GROUNDS FOR SUSPENSION, DISCONTINUATION OR TERMINATION OF THE CONTRACT.

Successful bidder will be required to procure standard insurance policies evidencing Parish mandated insurance requirements indicated below. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected.

1. WORKER'S COMPENSATION INSURANCE

As required by Louisiana State Statute, exception; Employer's Liability, Section B shall be \$1,000,000 per occurrence when Work is to be over water and involves maritime exposures to cover all employees not covered under the State Worker's Compensation Act, otherwise this limit shall be no less than \$500,000 per occurrence.

2. COMMERCIAL GENERAL LIABILITY

Shall provide limits not less than the following: \$1,000,000.00 Combined Single Limit per Occurrence for bodily injury and property damage.

3. COMPREHENSIVE AUTOMOBILE LIABILITY

Bodily injury liability \$1,000,000.00 each person; \$1,000,000.00 each occurrence.
Property Damage Liability \$1,000,000.00 each occurrence.

DEDUCTIBLES

No insurance required shall include a deductible not greater than \$10,000.00. The cost of the deductible shall be borne by the contractor.

NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney's Office.

UMBRELLA LIABILITY COVERAGE

An umbrella policy or excess may be used to meet minimum requirements.

unless otherwise specified in the bid, these additional insurance is required. Such insurance is due upon contract execution.

OWNER'S PROTECTIVE LIABILITY

To be for the same limits of liability for bodily injury and property damage liability established for commercial general liability.

BUILDER'S RISK INSURANCE

The contractor shall maintain Builder's Risk Insurance at his own expense to insure both the owner (Parish of Jefferson) and contractor as their interest may appear.

NOTE for CERTIFICATE HOLDER:

All insurance certificates shall list the certificate holder as follows:

"The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and the Parish Council." Additionally, the address on the Certificates should reflect the department which is letting the bid and reference the respective bid number.

Revised 2.10.2014

**NON-PUBLIC WORKS BID
Affidavit Instructions**

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit



CENTRALBIDDING
FROM CENTRAL AUCTION HOUSE

5000113237 - One-time Purchase of a Wheeloader
Jefferson Parish Government

Project documents obtained from www.CentralBidding.com

15-May-2015 09:05:20 AM



Bid Number 50 - 00113237

One-time Purchase of a Wheelloader for the Jefferson Parish
Department of Fleet Management

JUNE 02, 2015 for 2:00pm

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received in the Purchasing Department by the bid due date and time.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Ms. Laniel L. Francis
lfrancis@jeffparish.net
504.364.2690**

BUYER: LFRANCIS@jeffparish.net

BIDS WILL BE RECEIVED IN THE PURCHASING DEPARTMENT, SUITE 4400, JEFFERSON PARISH GENERAL GOVERNMENT BUILDING, 200 DERBIGNY STREET, GRETNA, LA 70053 UNTIL 2:00 PM, 6/02/2015 AND PUBLICLY OPENED THEREAFTER.

LATE BIDS WILL NOT BE ACCEPTED

Unless submitting via online (see Page 3), each bid must be submitted in a sealed envelope bearing on the outside; the name of the Bidder, his address, and the name of the project for which the bid is submitted and the bid number.

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647.

All vendors submitting bids must register as a Jefferson Parish vendor if not already yet registered. Bidders may be required to furnish current W-9 Forms and respective Tax Identification Numbers within 10 days after bid opening if such information is not on file or not up to date. Forms to register may be downloaded from www.purchasing.jeffparish.net and clicking on Vendor Information.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing and fax them to the Purchasing Department at (504) 364-2693 no later than FIVE (5) working days prior to bid opening. Bid numbers should be mentioned in all requests. Questions may also be emailed to the buyer for this bid at the email address listed above. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications.

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated.

If the bid exceeds \$30,000.00 and the company is duly authorized to do business in the state of Louisiana, a corporate resolution must be submitted with the bid or the person signing the bid documents must be listed on the Louisiana Secretary of State's website as an officer of the corporation, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). If the bid is in excess of \$30,000 and bidder is registered out of the state of Louisiana, a corporate resolution must be submitted with the bid, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. Bids submitted by Owner or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. Sole proprietors submitting bids for public works projects shall within 10 days after bid opening submit sole proprietorship certification.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. IN THE EVENT OF SPLIT AWARD, THE PURCHASING DEPARTMENT MAY CONTACT VENDORS TO REQUEST REQUIRED AFFIDAVITS. THOSE VENDORS WILL HAVE 10 DAYS FROM THE DATE OF NOTICE TO SUBMIT COMPLETE, SIGNED AND NOTARIZED AFFIDAVITS IN ORIGINAL FORMATS.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

Preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA-R.S.38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and Parish taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's

E. RESPONSE TO INVITATION: If your company is unable to bid on this request, please state your reason on bid form, and return to this office before bid opening date. Failure to do so may result in the removal of your company from Jefferson Parish's vendors list.

F. POSTING OF BIDS: A listing of bids will be posted on bulletin board in Suite 4400, Jefferson Parish General Government Building, Gretna, LA and will remain posted until close of respective bids.

Advertised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This Electronic Procurement System allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Please note requirements contained in this bid package for electronic bid submission.

Please visit the Purchasing Department webpage at <http://purchasing.jeffparish.net> to register and review Jefferson Parish solicitations.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 dated 12/09/09. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.
10,13,15

1. All bidders must attend the pre-bid conference in relation to this bid; attendance is mandatory. Failure to attend will prohibit a company from submitting a bid. Vendors arriving after the mandatory pre-bid conference begins will not be allowed to sign in as evidence of attendance.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.

4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. Unless otherwise stated in the bid specifications, the successful bidder will be required to procure standard insurance policies evidencing Parish-mandated insurance requirements as indicted on the attached sheet. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected. JEFFERSON PARISH reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid Solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations or warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit and E-Verify Affidavit must be completed, signed, notarized and submitted by low bidder within 10 days after bid opening to the Purchasing Department on all solicitations for construction, alteration or demolition of public building or project, including but not limited to requirements found in LSA-RS 38:2212.9; LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1. Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, and Campaign Contribution Affidavit must be completed, signed, notarized and submitted by low bidder with bid submission within 10 days after bid opening to the Purchasing Department. See LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1 Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled NON-PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission; and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to Jefferson Parish Code of Ordinances, Louisiana, Sec 2-155 (2)(A) D.

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO

MAXIMUM ESCALATION PERCENTAGE REQUESTED 0 %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 8/2/2015

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES 30-60 DAYS

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) N/A

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: SCOTT EQUIPMENT COMPANY CO L L C

ADDRESS 10176 AIRLINE HIGHWAY

CITY, STATE. ST ROSE, LA ZIP 70087


TELEPHONE (504) 461-0961 FAX (504) 461-0970

EMAIL ADDRESS. DHALL@SCOTTCOMPANIES.COM

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda NUMBER _____
NUMBER _____
NUMBER _____
NUMBER _____

TOTAL PRICE OF ALL BID ITEMS \$ 157,000.00

AUTHORIZED SIGNATURE  Jim Bershen

TITLE C.E.O. Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO 50-00113237

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1 00	ONLY	<p>ONE-TIME PURCHASE OF A WHEELLOADER</p> <p>0010 CASE 621 F Wheel Loader 162 HP Case Diesel Engine 4F x 3R Transmission Cab with Heater and AC Z bar Linkage 20.5 x 25 2.5 Cu Yd 4 in 1 Bucket 60 inch H.D Forks Hydraulic Quick Coupler Rotating Beacon All Standard , State and Federal Safety Equipment Operating Weight Approx 26,000 Lbs</p> <p>Unit Is for W/B Drainage 1561 River Park Road Bridge City, La</p> <p>Superintendent Dominick Ditcharo 437-4941</p>	\$157,000 00	\$157,000 00

CORPORATE RESOLUTION


EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF
Scott Equipment Company L.L.C.

INCORPORATED.

AT THE MEETING OF DIRECTORS OF Scott Equipment Company L.L.C.
INCORPORATED, DULY NOTICED AND HELD ON 5-20-2015,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED IT
WAS

RESOLVED THAT Jim Bershner, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO. THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.



SECRETARY-TREASURER

5-20-2015

DATE

Non-Public Works Bid

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF Jefferson

BEFORE ME, the undersigned authority, personally came and appeared. _____

Jim Bershen, (Affiant) who after being by me duly sworn, deposed and said that

he/she is the fully authorized Agent of Scott Equipment Company L.L.C. (Entity)

the party who submitted a bid in response to Bid Number 50-00113237, to the Parish of

Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B X there are **NO** campaign contributions made which would require disclosure under Choice A of this section

Debt Disclosures

(Choose A or B, if option A is indicated please include the required

attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant

Choice B X There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant, and

[The remainder of this page is intestinally left blank]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant



Signature of Affiant

Jim Bershen
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 20TH DAY OF MAY, 2015



Dorothy L. Key
Notary Public

DOROTHY L. Key
Printed Name of Notary

16495
Notary/Bar Roll Number

My commission expires AT DEATH

Address: 102 BARKLEY
MONROE, LA 71203

Phone: (318) 345-0030

Phone 2: (318) 348-8030

Notary ID Number: 16495

Parish: OUACHITA with authority in the following parishes:
BIENVILLE, CALDWELL, EAST CARROLL, FRANKLIN, JACKSON, LINCOLN, MADISON, MOREHOUSE, RICHLAND, UNION, WEST CARROLL

Agency: N/A

Notary Type: Non Attorney

Status: Active

Commission Date: 08/05/1987

Oath Date: 07/31/1987

**Surety Expiration
Date:** 07/31/2017

**Annual Report
Current:** Yes

[Back to Search Results](#)

[New Search](#)



Fax Numbers
225.932.5317 (Admin. Services)
225.932.5314 (Corporations)
225.932.5318 (UCC)

Name	Type	City	Status
SCOTT EQUIPMENT COMPANY, L.L.C.	Limited Liability Company	MONROE	Active

Business: SCOTT EQUIPMENT COMPANY, L.L.C.

Charter Number: 34723499K

Registration Date: 12/30/1998

Domicile Address

1000 MARTIN LUTHER KING, JR. DR.
MONROE, LA 71203

Mailing Address

C/O GEORGE J. BERSHEN, SR.
1000 MARTIN LUTHER KING, JR. DR.
MONROE, LA 71203

Status

Status: Active

Annual Report Status: In Good Standing

File Date: 12/30/1998

Last Report Filed: 12/18/2014

Type: Limited Liability Company

Registered Agent(s)

Agent: GEORGE J. BERSHEN, SR.
Address 1: 1000 MARTIN LUTHER KING, JR. DR.
City, State, Zip: MONROE, LA 71203
Appointment Date: 12/30/1998

Agent: SCOTT CUMMINS
Address 1: 1000 MARTIN LUTHER KING, JR. DR.
City, State, Zip: MONROE, LA 71203
Appointment Date: 3/26/2015

Agent: BOBBIE BORDELON

Officer: GEORGE J. BERSHEN, SR.
Title: Manager
Address 1: 1000 MARTIN LUTHER KING, JR. DR.
City, State, Zip: MONROE, LA 71203

Officer: SCOTT CUMMINS
Title: Manager
Address 1: 1000 MARTIN LUTHER KING, JR. DR.
City, State, Zip: MONROE, LA 71203

Officer: GEORGE J. BERSHEN, JR.
Title: Member
Address 1: 1000 MARTIN LUTHER KING, JR. DR.
City, State, Zip: MONROE, LA 71203

Mergers (1)

Filed Date	Effective Date:	Type	Charter#	Chater Name	Role
6/29/2007	6/29/2007	MERGE	34723499K	SCOTT EQUIPMENT COMPANY, L.L.C.	SURVIVOR
			34603301K	SCOTT TRACTOR COMPANY, L.L.C.	NON-SURVIVOR
			34603302K	SCOTT CONSTRUCTION EQUIPMENT COMPANY OF LOUISIANA, L.L.C.	NON-SURVIVOR
			34603451K	SCOTT CONSTRUCTION EQUIPMENT COMPANY, L.L.C.	NON-SURVIVOR

Amendments on File (3)

Description	Date
Merger	6/29/2007
Appointing, Change, or Resign of Officer	5/11/2012
Domestic LLC Agent/Domicile Change	3/26/2015

Print

9701

Request for Taxpayer Identification Number and Certification

Give form to the
requester. Do not
send to the IRS.

Name (as shown on your income tax return)
Scott Equipment Company

Business name, if different from above

Check appropriate box: Individual/sole proprietor Corporation Partnership
 Limited liability company. Enter the tax classification (disregarded entity, C-corporation, P-partnership) ▶ Exempt payee
 Other (see instructions) ▶

Address (number, street, and apt. or suite no.)
10176 Airline Hwy

City, state, and ZIP code
St. Rose, LA 70087

List account number(s) here (optional)

Requester's name and address (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3. Note, if the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Social security number

or

Employer identification number
72 : 1436980

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
- I am a U.S. citizen or other U.S. person (defined below).

Certification instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. See the instructions on page 4.

Sign Here: Signature of U.S. person ▶ *[Signature]* Date ▶ **5/6/09**

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Purpose of Form

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued).
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

Definition of a U.S. person. For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

Special rules for partnerships. Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity,

SCHEDULE OF NAMED INSURED: Scott Equipment Company, LLC Scott Equipment Company, LLC DBA Scott Companies Scott Equipment Company, LLC DBA Scott Truck and Tractor Scott Equipment Company, LLC DBA Scott Rentals Scott Equipment Company, LLC DBA Scott Toyota Lift Scott Equipment Company, LLC DBA Scott/Toyota Lift of Louisiana Scott Equipment Company, LLC DBA Scott Machinery and Rentals Scott Equipment Company, LLC DBA Scott Construction Equipment Scott Equipment Company, LLC DBA Scott Tractor Scott Equipment Company, LLC DBA Scott Cummins Salvage Scott Irrigation, LLC Scott Powerline and Utility Equipment LLC Scott Financial Services, LLC.

General Liability Policy Includes: Additional Insured (Ongoing & Completed Operations) on a Primary Basis and Waiver of Subrogation where required by written contract, Non-Owned Watercraft up to 500', Gulf of Mexico, In Rem, Time Element Pollution Liability Coverage \$1,000,000 Per Incident and Aggregate.

Automobile Policy Includes: Blanket Additional Insured on a Primary Basis and Waiver of Subrogation where required by written contract.

Workers' Compensation Policy Includes: USL&H, OCS, Gulf of Mexico, Blanket Alternate Employer, Waiver of Subrogation where required by written contract.

Umbrella Policy: Following Form Underlying.

Property/Equipment: Coverage includes Buildings, Personal Property of the Insured and Rented/Leased Equipment. Loss Limit \$30,000,000 per Occurrence subject to the following sublimits:
Flood: \$10,000,000 per occurrence and annual aggregate except \$5,000,000 Flood Zones A & V;
Earthquake: \$10,000,000 per occurrence and annual aggregate.

Rented/Leased Equipment covered without limitation or exclusion of Boom Collapse or Boom Overload.
Blanket Loss Payee/Mortgagee as required by written contract.

Property Primary Layers \$15,000,000
50% Alterra America Insurance Co. Policy #MAXA6IM0049751
50% Starr Surplus Lines Insurance Co. Policy #MASSINY00004114

Property Excess Layer \$15,000,000
100% Scottsdale Insurance Co. Policy #FXS0000133

To: Jefferson Parish

Quotation No.: DH-2409

Purchasing Dept

Date: May 27, 2015

Gretna, La

Please refer to our quotation number in all correspondence.

Attention: Ms. Laniel Francis Page 1 of 1 pages

Gentlemen:

In reply to your Inquiry # 50-0013237 dated 5/13/2015 we are pleased to quote you as follows:

DESCRIPTION:

**RE: ONE NEW 2015 VOLVO L60H WHEEL LOADERS,
EQUIPPED AS FOLLOWS:**

- | | |
|---|---|
| Single Lever Control | 3 rd Function Auxiliary Hydraulics |
| TIER 4F Volvo 165 HP net | Radio /CD Player |
| Contronics (monitoring system) | Enclosed Cab A/C, Heater, Defroster |
| Operating Weight 26,370 | TP (Torque Parallel) Linkage |
| Turbo 2 Pre-cleaner | Digital Display Screen |
| Outboard Mounted Brakes | 20.5 R25 Tires |
| Load Sensing Steering | Countershaft Transmission |
| Load Sensing Hydraulics | Air Suspension Seat |
| Rear view camera | 57" Forks |
| Rotating Beacon | Caretrack: Six year free subscription |
| Rockland Bucket 2.25 cubic yard, 100"Hook on type Multi-purpose | |

Warranty: 3 years / 3,000 Hours Full machine warranty EPG Premier


Maintenance: 3 years or 3,000 Hours Full Preventive maintenance

Sales Price: F.O.B. Gretna, LA.....\$157,000.00

(Plus Applicable Sales Taxes)

Price Firm 60 Days

Sincerely,

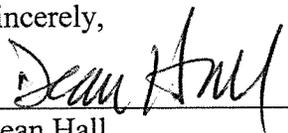

Dean Hall

L60H, L70H, L90H

Volvo Wheel Loaders



Main Features and Benefits

- Tier 4 final compliant Volvo D6J Engine
- Centralized service points and optional central lubrication
- Excellent access to service points, thanks to the fully opening engine hood
- Maintenance free batteries and axle cradles/trunnions
- In-house developed Volvo powertrain and hydraulics
- Outboard planetary, brakes and axle oil circulation for better cooling
- Service parts and customer support
- Volvo Care cab with best in class cab air filtration
- Remote door opener, LED lights, New Volvo seat (Options)
- Eco-pedal
- Intelligent hydraulic system - Load sensing
- Boom Suspension System/ride control (Option)
- Volvo in-house attachments design and most versatile loader linkage in the industry with double sealed pins and bushings
- **Lifetime Frame Warranty**

	L60H	L70H	L90H
Engine	D6J	D6J	D6J
Max. power at	23.3-30.0 r/s (1,400 – 1,800 r/min)	23.3-28.3 r/s (1,400 – 1,700 r/min)	23.3-31.7 r/s (1,400 – 1,900 r/min)
ISO 9249, SAEJ1349 net	123 kW (165 hp)	127 kW (170 hp)	137 Kw (184 hp)
Breakout force	84.9 kN* (19,090 lb _f)	96.5 kN** (21,700 lb _f)	137.7 kN*** (30,960 lb _f)
Static tipping load (full turn)	7 630 kg* (16 820 lb)	8 500 kg** (18 740 lb)	9 700 kg*** (21 400 lb)

AVAILABLE EQUIPMENT (not all equipment listed)

Service and Maintenance
Engine oil remote drain and fill
Transmission oil remote drain and fill
Lubrication manifolds, ground accessible
Pressure test ports: transmission and hydraulic, quick connects
Service platforms with anti-slip surfaces
CareTrack, 6 -Year Subscription
Toolbox, lockable
Engine
Exhaust after-treatment system
Automatic reversible fan
Three stage air cleaner, pre-cleaner, primary and secondary filter
Preheating of induction air
Crank case breather oil trap
Exhaust heat ventilation
Electrical system
Alternator 80A/3135W
Battery disconnect switch
Maintenance free batteries
Instrument cluster (Fuel level, DEF level, etc.)
Lighting (Twin halogen, Parking lights, etc.)
Contronic monitoring system
Fuel / DEF consumption
Ambient temperature
Test function for warning and indicator lights
Brake test

Warning and indicator lights (Battery charging and Parking brake)
Warning and display messages (Regen., Charge air temp., etc.)
Level warnings (Fuel, DEF, etc.)
Engine torque reduction in case of malfunction indication (High engine coolant temp., etc.)
Engine shutdown to idle in case of malfunction indication (High transmission oil temp., etc.)
Drivetrain
Automatic Power Shift
Fully automatic gear shifting, 1-4
PWM-controlled gear shifting
Forward and reverse switch by hydraulic lever console
Differentials: Front, 100% hydraulic diff lock. Rear, conventional
Tires
17.5R25 / 20.5R25
Brake system
Dual brake circuits / pedals
Secondary brake system
Brake wear indicators
Outboard mounted circulating oil cooled wet disc brakes on all four wheels
Cab
ROPS (ISO 3471), FOPS (ISO 3449)
Single key kit door/start
Acoustic inner lining
Fresh air inlet with two filters

Automatic heat control
Retractable seatbelt (SAE J386)
Adjustable steering wheel
Tinted safety glass
Document pocket
Beverage holder
Interval function for front and rear wipers
Hydraulic system
Main valve, double acting 2-spool with hydraulic pilots
Variable displacement axial piston pumps (2) for:
Working hydraulics, pilot hydraulics, steering system, brakes
Cooling fan, brakes
Hydraulic control levers
Mechanical hydraulic lever lock
Automatic boom kick-out
Automatic bucket positioner
Double acting hydraulic cylinders
Hydraulic oil cooler
External equipment
Viscous cab mounts
Rubber engine and transmission mounts
Engine hood, electronically openable
Frame, joint lock
Vandalism lock for engine compartment

Supporting your success the Volvo Way

Volvo Certified Technicians care about your uptime.

Genuine Volvo Parts are designed for your machine and delivers premium quality and long life.

Volvo Customer Support Agreements ensure top performance: increase your production time, lower your maintenance costs, and help you get expert advice.



Equipment financing that works for you

As part of the Volvo Group, Volvo Financial Services understands your industry and Volvo products better than anyone else.

Whether you need to finance your next purchase or lease it, we'll make it easy to get your equipment working for you.

For more information contact your local Volvo dealer or visit www.vfsc.com.





Bid Number 50 - 00113237

One-time Purchase of a Wheelloader for the Jefferson Parish
Department of Fleet Management

JUNE 02, 2015 for 2:00pm

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received in the Purchasing Department by the bid due date and time.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Ms. Laniel L. Francis
lfrancis@jeffparish.net
504.364.2690**

BUYER: LFRANCIS@jeffparish.net

BIDS WILL BE RECEIVED IN THE PURCHASING DEPARTMENT, SUITE 4400, JEFFERSON PARISH GENERAL GOVERNMENT BUILDING, 200 DERBIGNY STREET, GRETNA, LA 70053 UNTIL 2:00 PM, 6/02/2015 AND PUBLICLY OPENED THEREAFTER.

LATE BIDS WILL NOT BE ACCEPTED

Unless submitting via online (see Page 3), each bid must be submitted in a sealed envelope bearing on the outside; the name of the Bidder, his address, and the name of the project for which the bid is submitted and the bid number.

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647.

All vendors submitting bids must register as a Jefferson Parish vendor if not already yet registered. Bidders may be required to furnish current W-9 Forms and respective Tax Identification Numbers within 10 days after bid opening if such information is not on file or not up to date. Forms to register may be downloaded from www.purchasing.jeffparish.net and clicking on Vendor Information.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing and fax them to the Purchasing Department at (504) 364-2693 no later than FIVE (5) working days prior to bid opening. Bid numbers should be mentioned in all requests. Questions may also be emailed to the buyer for this bid at the email address listed above. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications.

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated.

If the bid exceeds \$30,000.00 and the company is duly authorized to do business in the state of Louisiana, a corporate resolution must be submitted with the bid or the person signing the bid documents must be listed on the Louisiana Secretary of State's website as an officer of the corporation, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). If the bid is in excess of \$30,000 and bidder is registered out of the state of Louisiana, a corporate resolution must be submitted with the bid, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. Bids submitted by Owner or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. Sole proprietors submitting bids for public works projects shall within 10 days after bid opening submit sole proprietorship certification.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. IN THE EVENT OF SPLIT AWARD, THE PURCHASING DEPARTMENT MAY CONTACT VENDORS TO REQUEST REQUIRED AFFIDAVITS. THOSE VENDORS WILL HAVE 10 DAYS FROM THE DATE OF NOTICE TO SUBMIT COMPLETE, SIGNED AND NOTARIZED AFFIDAVITS IN ORIGINAL FORMATS.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

Preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA-R.S.38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and Parish taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must

E. RESPONSE TO INVITATION: If your company is unable to bid on this request, please state your reason on bid form, and return to this office before bid opening date. Failure to do so may result in the removal of your company from Jefferson Parish's vendors list.

F. POSTING OF BIDS: A listing of bids will be posted on bulletin board in Suite 4400, Jefferson Parish General Government Building, Gretna, LA and will remain posted until close of respective bids.

Advertised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This Electronic Procurement System allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Please note requirements contained in this bid package for electronic bid submission.

Please visit the Purchasing Department webpage at <http://purchasing.jeffparish.net> to register and review Jefferson Parish solicitations.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 dated 12/09/09. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.
10,13,15

1. All bidders must attend the pre-bid conference in relation to this bid; attendance is mandatory. Failure to attend will prohibit a company from submitting a bid. Vendors arriving after the mandatory pre-bid conference begins will not be allowed to sign in as evidence of attendance.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.

4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. Unless otherwise stated in the bid specifications, the successful bidder will be required to procure standard insurance policies evidencing Parish-mandated insurance requirements as indicted on the attached sheet. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected. JEFFERSON PARISH reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid Solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations or warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit and E-Verify Affidavit must be completed, signed, notarized and submitted by low bidder within 10 days after bid opening to the Purchasing Department on all solicitations for construction, alteration or demolition of public building or project, including but not limited to requirements found in LSA-RS 38:2212.9; LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1. Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, and Campaign Contribution Affidavit must be completed, signed, notarized and submitted by low bidder with bid submission within 10 days after bid opening to the Purchasing Department. See LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1 Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled NON-PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission; and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection,

Engine:

6 Cylinder Turbocharged Tier (ACR)
162 Peak Horsepower @1800 R.P.M.
411 Cubic Inch displacement
Peak Gross Torque 538 Ft. lbs. at 1600 R.P.M.
Two Stage Air Cleaner
Integral Oil Pump with Oil Cooler and Under Piston Nozzles
Integral Water Pump
One Piece Cast iron Parent Metal Bore Block
Engine to Meet North American Emission Regulations
Hydraulic Driven Fan Independent Of Engine
Air intake Pre-Cleaner
One Piece Electrically Raised engine Hood
Automatic Fan Belt Tensioner
Four Power Modes: Auto, Max, standard, Economy

Cooling System:

Mid-Mounted Cooling Module- Radiator, Hydraulic, Oil, Cooler, A.C. Condenser, Fuel Cooler,
Transmission Cooler To have Maximum Access To Clean, Cool Air, Stacked Coolers Not
Acceptable. Thus Eliminating Plugging Between Coolers and Ease of Cleaning.

Electronic Information Center:

Displays/Gauges

Analog
Fuel Level
Engine Coolant Temp
Transmission Oil Temperature
LCD Screen (Metric/English, Multiple Languages)
Hour Meter
Engine Speed
Travel Speed
Current Gear Selection
FNR Indication
Clock
Trip Computer
Fuel Consumption
Fuel Level Percentage
DEF (Diesel Exhaust Fluid) Gauge
Oil Pressure

- Engine Oil Temperatures
- Transmission Oil Temperature
- Transmission Sump Oil Temperature
- Hydraulic Oil Temperature
- Turbocharged Air Temperature
- Automatic Transmission Indicator
- De-Clutch Indicator
- Engine Mode Indicator
- Engine Diagnostics
- System Voltage
- Error Reporting

Indicator Lights:

- Low fuel
- Turn Signal
- Four Way Flashers
- High Beam Lights
- Brake Pressure
- Master Indicator
- Parking Break

Audible/Visible Alarms:

- Caution Alarm
- Parking Break
- Coolant Temperature
- Transmission Oil Temperature
- Air Filter
- Transmission Filter
- Hydraulic Filter
- Alternator
- Low Fuel

Critical Alarm:

- Engine Oil Pressure
- Break Pressure
- Coolant Temperature
- Hydraulic Temperature
- Transmission Oil Temperature

Electric System:

24- Volt System

2-12 volt 700 CCA Batteries

65 Amp Alternator

Horn

Back up Alarm

Master Electrical Disconnect

2 Front 2 rear Top Mounted Flood Lights

2 Front Driver Hi-Lo Beam

2 Front Working, Stop, Tail and Back Up

Front and Rear Turn Signals and Flashers

Hydraulic Cylinders:

2 Lift Cyl- 4.75 Inch Boar 2.5 Inch Rod

1 Dump Cyl – 5.0 Inch Boar

Driveline:

4 Forward, 3 Reverse Computer Controlled Full Power Shift Transmission

Transmission Must be Capable of Being Custom Programmed to Shift Manually or Fully Automatic.

On Board Diagnostics with Fault Code Storage and Retrieval

Down Shift Button

Fully Pressurized Lubrication

Lift Time Lubricated u Joints

Hydraulic activated Multi disk Clutches

Electric Twist Grip Range Selector On Column

Trans. Disconnect Either Break Pedal

Single Stage Integral Torque Converter

Outboard Mounted Planetary Drive Axles with Dipsticks

Limited Slip Differentials non Both Axles

Self-Adjusting Outboard Mounted Hydraulically Maintenance Free Multiple Hydraulic Wet Disc

Breaks w/Accumulator to All Four Wheels

Break Surface Area 480 Sq.in. per Hub

Travel Speed:

Forward 1st 4.3 M.P.H.

2nd 8.4 M.P.H.

3rd 14.9 M.P.H.

4th 24 M.P.H.

Reverse 1st. 4.5 M.P.H.

2nd 8.8 M.P.H.

3rd 15.6 M.P.H.

Transmission Oil sight Gauge

Steering:

Minimum 40 Degree Articulation Each Side.

Hydraulic Orbital Steering, Flow Amplified for Precise Low R.P.M. steering

Steering Wheel Required to Have No More Than 2 lbs. of Effort to Turn

Articulation Point to Have Double Tapered Roller Bearing Grease Able Every 1000 Hours

Two 3 In. Diameter Double Acting Cylinders

Max. Outside Turn Radius 17 ft.

Tilt steering Column

Loader:

Z-Bar Linkage With Self Aligning Hydraulic Quick Coupler 102 in. 4 In 1 Bucket

Bottom skid Pads

Bolt On Cutting edge, 3 Piece Reversible (Outer Side of Clam and Moleboard) Weld On Edge
On Inner Side of Clam

2.5 Cu.Yd. Heaped Capacity Bucket

Pilot Operated Single Lever For Lift and Tilt With Forward/Reverse Shuttle Switch On Top of
Lever

Separate Lever for 4 In 1 Control

Automatic Return to Dig

Automatic Return to Travel

Automatic Height Control

Single Piece Flame Cut Loader Arms

Bucket Position indicator

Automatic Self Leveling

Hinge Pin height 156 in.

Heavy Duty Forks with 60 in. Blades

Hydraulics:

Pressure Compensated Load Sensing

Micron Full Flow Replaceable Spin On cartridges On return Line

100 Mesh Line screen On Inlet Side

3 Spool, 3 Lever Valve, 2nd Lever for 4 In 1 Bucket

Sight Gauge on HYD . Reservoir

(8) Diagnostic Quick Couplers

Variable displacement 45.2 G.P.M. at 2000 R.P.M. Hydraulic Pump

O Ring Face Seal Hydraulic Couplings for 4 In 1 Bucket

Tires: 20.5 x 12 Ply L2

Operating Station:

OSHA Approved R.O.P.S. Cab with Sound Suppression, Safety Glass, Defroster, Air Conditioner, Heater, Suspension Seat, Dome Light, Air Pressurization with 3 Speed Blower C, Fresh Air Filters, Key Lock Doors, Rear view Mirrors, Rubber Floor Mats, Front Intermittent and Rear Windshield Wipers, Front and Rear Windshield Washers, Front Window Visor, Anti-Glare Window Strip, Partially/Fully Opening Cab Side Windows, Tilt steering Wheel, Steering Knob, Fully Adjustable Wrist Rest

Misc:

Serviceability Index SAE-J817 Not to Exceed 5800

Front and Rear Fenders

Draw Board Hitch

Amber Rotating Beacon

2 Exterior West Coast Mirrors

Remote Drainage for Engine Oil, Coolant and Hydraulic Oil, Banked In Single Location

Operating Weight:

26,000 Lbs. Minimum W/Standard Counter weight 175 Lbs. , Operator and Full Fuel Tank

Warranty:

3 Year/ 3000 Hour Full Machine Factory warranty

3 year/3000 Hour Planned Maintenance Including Filters, Oil and Labor

3 Year Advanced Site Watch Telematics

113647. The contractor shall not commence work under this contract until he has obtained all insurance and complied with the requirements of the specifications and said Parish Resolutions. Except as otherwise provided by law, the Parish Attorney's Office with the concurrence of the Director of Risk Management is authorized to omit in whole or part the insurance requirements of this section in connection with contracts. Vendors inquiring about this shall submit his written request to the Purchasing Department prior to the due date of the bid. Contractor must deliver and maintain such insurances as provided; failure to do so shall be grounds for suspension, discontinuation or termination of the contract.

Successful bidder will be required to procure standard insurance policies evidencing Parish mandated insurance requirements indicated below. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected.

1. **WORKER'S COMPENSATION INSURANCE**

As required by Louisiana State Statute, exception; Employer's Liability, Section B shall be \$1,000,000 per occurrence when Work is to be over water and involves maritime exposures to cover all employees not covered under the State Worker's Compensation Act, otherwise this limit shall be no less than \$500,000 per occurrence.

2. **COMMERCIAL GENERAL LIABILITY**

Shall provide limits not less than the following: \$1,000,000.00 Combined Single Limit per Occurrence for bodily injury and property damage.

3. **COMPREHENSIVE AUTOMOBILE LIABILITY**

Bodily injury liability \$1,000,000.00 each person; \$1,000,000.00 each occurrence.
Property Damage Liability \$1,000,000.00 each occurrence.

DEDUCTIBLES

No insurance required shall include a deductible not greater than \$10,000.00. The cost of the deductible shall be borne by the contractor.

NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney's Office.

UMBRELLA LIABILITY COVERAGE

An umbrella policy or excess may be used to meet minimum requirements.

Unless otherwise specified in the bid, these additional insurance is required. Such insurance is due upon contract execution.

OWNER'S PROTECTIVE LIABILITY

To be for the same limits of liability for bodily injury and property damage liability established for commercial general liability.

BUILDER'S RISK INSURANCE

The contractor shall maintain Builder's Risk Insurance at his own expense to insure both the owner (Parish of Jefferson) and contractor as their interest may appear.

NOTE for CERTIFICATE HOLDER:

All insurance certificates shall list the certificate holder as follows:

"The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and the Parish Council." Additionally, the address on the Certificates should reflect the department which is letting the bid and reference the respective bid number.

Revised 2.10.2014

Non-Public Works Bid Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit

Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO

MAXIMUM ESCALATION PERCENTAGE REQUESTED 0 %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 12-31-15

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

7-15-15

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)

N/A

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: State Machinery & Equipment Sales Inc

ADDRESS: 160 West Airline Drive

CITY, STATE: Kenner, LA ZIP: 70062

TELEPHONE: (504) 464-0431 FAX: (504) 469-3351

EMAIL ADDRESS: ed.renton@statemachineryeq.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 139,475.00

AUTHORIZED SIGNATURE: [Signature]

Edward L. Renton Jr.

Printed Name

TITLE: President

NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	ONLY	<p>ONE-TIME PURCHASE OF A WHEELLOADER</p> <p>0010 CASE 621 F Wheel Loader 162 HP Case Diesel Engine 4F x 3R Transmission Cab with Heater and AC Z bar Linkage 20.5 x 25 2.5 Cu Yd. 4 in. 1 Bucket 60 inch H.D. Forks Hydraulic Quick Coupler Rotating Beacon All Standard , State and Federal Safety Equipment Operating Weight Approx. 26,000 Lbs.</p> <p>Unit is for W/B Drainage 1561 River Park Road Bridge City, La</p> <p>Superintendent Dominick Ditcharo 437-4941</p>	<p>139,475⁰⁰</p>	<p>139,475⁰⁰</p>

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF
State Machinery & Equipment Sales Inc
INCORPORATED.

AT THE MEETING OF DIRECTORS OF State Machinery & Equipment Sales
INCORPORATED, DULY NOTICED AND HELD ON 6/1/15,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT
WAS:

RESOLVED THAT Edward L. Renton Jr, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.



SECRETARY-TREASURER
Edward L. Renton Jr

6/1/15
DATE



Fax Numbers
225.932.5317 (Admin. Services)
225.932.5314 (Corporations)
225.932.5318 (UCC)

Name	Type	City	Status
STATE MACHINERY AND EQUIPMENT SALES, INC.	Business Corporation	KENNER	Active

Business: STATE MACHINERY AND EQUIPMENT SALES, INC.

Charter Number: 34476007D

Registration Date: 10/14/1994

Domicile Address

160 W. AIRLINE HWY.

KENNER, LA 70062

Mailing Address

160 W. AIRLINE HWY.

KENNER, LA 70062

Principal Office Address

160 W. AIRLINE HWY.

KENNER, LA 70062

Status

Status: Active

Annual Report Status: In Good Standing

File Date: 10/14/1994

Last Report Filed: 9/29/2014

Type: Business Corporation

Registered Agent(s)

Agent: TERRENCE C. FORSTALL
Address 1: 72 N. WREN ST.
City, State, Zip: NEW ORLEANS, LA 70124
Appointment Date: 9/29/2004

Officer(s)

Additional Officers: No

Officer: EDWARD L. RENTON, JR.
Title: President, Secretary/Treasurer, Director

City, State, Zip: KENNER, LA 70062

Amendments on File

No Amendments on file

Print

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF Jefferson

BEFORE ME, the undersigned authority, personally came and appeared: Edward L. Rendon Jr., (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized President of State Mgmt Equip Sales, Inc (Entity), the party who submitted a bid in response to Bid Number 50-00113237, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B there are NO campaign contributions made which would require disclosure under Choice A of this section.

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.


Choice B _____ There are NO debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.




Signature of Affiant

Edmund L. Renford Jr

Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME

ON THE 20 DAY OF May, 2015.

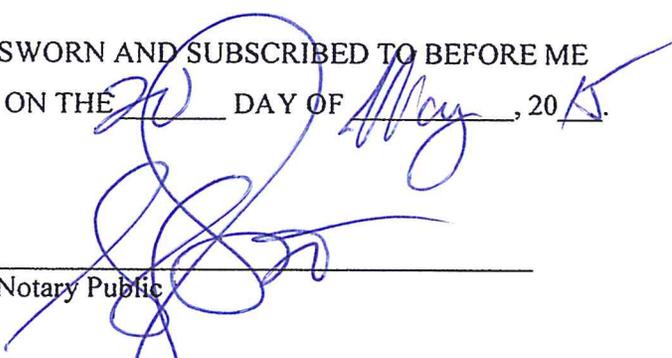

Notary Public

Printed Name of Notary

Notary/Bar Roll Number

My commission expires _____.

Stephen J. Simone
Notary Public
Parish of Jefferson
State of Louisiana
LA Bar No. 12291
Commission Expires at death

Address: **1824 WILLIAMS BLVD.,STE.C
KENNER, LA 70062**

Phone: **(504) 834-8478**

Notary ID Number: **37301**

Parish: **JEFFERSON with STATEWIDE JURISDICTION**

Agency: **N/A**

Notary Type: **Attorney**

Bar Roll #: 12291

Status: **Active**

Commission Date: **10/15/1974**

Oath Date: **Unknown**

Surety Expiration
Date: **Not Required**

Annual Report
Current: **Not Applicable**

[Back to Search Results](#)

[New Search](#)

**Request for Taxpayer
Identification Number and Certification**

Give form to the
requester. Do not
send to the IRS.

Name (as shown on your income tax return)
STATE MACHINERY AND EQUIPMENT SALES, INC.

Business name, if different from above

Check appropriate box: Individual/Sole proprietor Corporation Partnership
 Limited liability company. Enter the tax classification (D=disregarded entity, C=corporation, P=partnership) ▶ Exempt payee
 Other (see instructions) ▶

Address (number, street, and apt. or suite no.)
160 WEST AIRLINE DR.

City, state, and ZIP code
KENNER, LA 70063

Requester's name and address (optional)
Jefferson Parish Purchasing Dept.

List account number(s) here (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on Line 1 to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Social security number
OR
Employer identification number
72 : 1275116

Note. If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
- I am a U.S. citizen or other U.S. person (defined below).

Certification instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the Certification, but you must provide your correct TIN. See the instructions on page 4.

Sign Here Signature of U.S. person ▶ *Edna...* Date ▶ 5/27/15

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Purpose of Form

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued),
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income.

Note. If a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

Definition of a U.S. person. For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

Special rules for partnerships. Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax on any foreign partners' share of income from such business. Further, in certain cases where a Form W-9 has not been received, a partnership is required to presume that a partner is a foreign person, and pay the withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid withholding on your share of partnership income.

The person who gives Form W-9 to the partnership for purposes of establishing its U.S. status and avoiding withholding on its allocable share of net income from the partnership conducting a trade or business in the United States is in the following cases:

- The U.S. owner of a disregarded entity and not the entity,



CERTIFICATE OF INSURANCE

ACCOUNT NUMBER 49-70242

This certificate is issued as a matter of information only and confers no rights upon the certificate holder. This certificate does not amend, extend or alter the coverage afforded by the policies below.

Name and Address of Certificate Holder

JEFFERSON PARRISH
PURCHASING DEPT
PO BOX 9
GRETNA, LA 70054

Name and Address of the Insured

STATE MACHINERY AND EQUIPMENT
SALES INC
160 W AIRLINE HWY
PO BOX 1789
KENNER, LA 70063

This certificate is issued on 08-07-2014 and is effective until 08-07-2015. It certifies that policies of insurance listed below have been issued to the insured named above. Notwithstanding any requirement, term or condition of any contract or other document with respect to which this certificate may be issued or may pertain, the insurance afforded by the policies described herein is subject to all the terms, exclusions, and conditions of such policies. Limits shown may have been reduced by paid claims.

<u>Coverage Provided</u>	<u>Policy Number</u>	<u>Coverage Limits</u>
<u>General Liability</u>	49-70242-09	General Aggregate \$ 1,500,000 Products Aggregate \$ 1,500,000
<u>Bodily Injury and Property Damage Combined</u>	OCCURRENCE	Pers/Adv Injury \$ 500,000 Each Occurrence \$ 500,000 Premises Damage \$ 100,000 Medical Expense \$ 5,000
<u>Automobile Liability</u>	49-70242-09	Each Accident \$ 500,000
Includes: Bodily Injury and Property Damage Combined -Any Auto		
<u>Umbrella Liability</u>	49-70242-09	Each Occurrence \$ 4,000,000
Does Not Include:		
-Excess Employers Liab		General Aggregate \$ 12,000,000 Products Aggregate \$ 12,000,000

Should any of the above described policies be cancelled before the expiration date thereof, notice will be delivered in accordance with the policy provisions.

80-C1035 (MECH)

STA 49-70242 01-115417
07-03-2014
PAGE 1
(0058)

LDI COI 269628-1 02 11



Bid Number 50 - 00113237

One-time Purchase of a Wheelloader for the Jefferson Parish
Department of Fleet Management

JUNE 02, 2015 for 2:00pm

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received in the Purchasing Department by the bid due date and time.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Ms. Laniel L. Francis
lfrancis@jeffparish.net
504.364.2690**

BUYER: LFRANCIS@jeffparish.net

BIDS WILL BE RECEIVED IN THE PURCHASING DEPARTMENT, SUITE 4400, JEFFERSON PARISH GENERAL GOVERNMENT BUILDING, 200 DERBIGNY STREET, GRETNA, LA 70053 UNTIL 2:00 PM, 6/02/2015 AND PUBLICLY OPENED THEREAFTER.

LATE BIDS WILL NOT BE ACCEPTED

Unless submitting via online (see Page 3), each bid must be submitted in a sealed envelope bearing on the outside; the name of the Bidder, his address, and the name of the project for which the bid is submitted and the bid number.

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS**THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS**

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647.

All vendors submitting bids must register as a Jefferson Parish vendor if not already yet registered. Bidders may be required to furnish current W-9 Forms and respective Tax Identification Numbers within 10 days after bid opening if such information is not on file or not up to date. Forms to register may be downloaded from www.purchasing.jeffparish.net and clicking on Vendor Information.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing and fax them to the Purchasing Department at (504) 364-2693 no later than FIVE (5) working days prior to bid opening. Bid numbers should be mentioned in all requests. Questions may also be emailed to the buyer for this bid at the email address listed above. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications.

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated.

If the bid exceeds \$30,000.00 and the company is duly authorized to do business in the state of Louisiana, a corporate resolution must be submitted with the bid or the person signing the bid documents must be listed on the Louisiana Secretary of State's website as an officer of the corporation, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). If the bid is in excess of \$30,000 and bidder is registered out of the state of Louisiana, a corporate resolution must be submitted with the bid, unless bidder has otherwise complied with LSA-R.S. 38:2212(A)(1)(c) or LSA-R.S. 38:2212 (O). Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. Bids submitted by Owner or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. Sole proprietors submitting bids for public works projects shall within 10 days after bid opening submit sole proprietorship certification.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. IN THE EVENT OF SPLIT AWARD, THE PURCHASING DEPARTMENT MAY CONTACT VENDORS TO REQUEST REQUIRED AFFIDAVITS. THOSE VENDORS WILL HAVE 10 DAYS FROM THE DATE OF NOTICE TO SUBMIT COMPLETE, SIGNED AND NOTARIZED AFFIDAVITS IN ORIGINAL FORMATS.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

Preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA-R.S.38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and Parish taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination

E. RESPONSE TO INVITATION: If your company is unable to bid on this request, please state your reason on bid form, and return to this office before bid opening date. Failure to do so may result in the removal of your company from Jefferson Parish's vendors list.

F. POSTING OF BIDS: A listing of bids will be posted on bulletin board in Suite 4400, Jefferson Parish General Government Building, Gretna, LA and will remain posted until close of respective bids.

Advertised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This Electronic Procurement System allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Please note requirements contained in this bid package for electronic bid submission.

Please visit the Purchasing Department webpage at <http://purchasing.jeffparish.net> to register and review Jefferson Parish solicitations.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 dated 12/09/09. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.

10,13,15

1. All bidders must attend the pre-bid conference in relation to this bid; attendance is mandatory. Failure to attend will prohibit a company from submitting a bid. Vendors arriving after the mandatory pre-bid conference begins will not be allowed to sign in as evidence of attendance.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.

4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. Unless otherwise stated in the bid specifications, the successful bidder will be required to procure standard insurance policies evidencing Parish-mandated insurance requirements as indicted on the attached sheet. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected. JEFFERSON PARISH reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid Solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations or warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit and E-Verify Affidavit must be completed, signed, notarized and submitted by low bidder within 10 days after bid opening to the Purchasing Department on all solicitations for construction, alteration or demolition of public building or project, including but not limited to requirements found in LSA-RS 38:2212.9; LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1. Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, and Campaign Contribution Affidavit must be completed, signed, notarized and submitted by low bidder with bid submission within 10 days after bid opening to the Purchasing Department. See LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1 Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled NON-PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission: and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every consultant, architect, engineer, and

AFFIDAVIT INSTRUCTIONS
Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit

Engine:

6 Cylinder Turbocharged Tier (ACR)
162 Peak Horsepower @1800 R.P.M.
411 Cubic Inch displacement
Peak Gross Torque 538 Ft. lbs. at 1600 R.P.M.
Two Stage Air Cleaner
Integral Oil Pump with Oil Cooler and Under Piston Nozzles
Integral Water Pump
One Piece Cast iron Parent Metal Bore Block
Engine to Meet North American Emission Regulations
Hydraulic Driven Fan Independent Of Engine
Air intake Pre-Cleaner
One Piece Electrically Raised engine Hood
Automatic Fan Belt Tensioner
Four Power Modes: Auto, Max, standard, Economy

Cooling System:

Mid-Mounted Cooling Module- Radiator, Hydraulic, Oil, Cooler, A.C. Condenser, Fuel Cooler,
Transmission Cooler To have Maximum Access To Clean, Cool Air, Stacked Coolers Not
Acceptable. Thus Eliminating Plugging Between Coolers and Ease of Cleaning.

Electronic Information Center:

Displays/Gauges

Analog

Fuel Level

Engine Coolant Temp

Transmission Oil Temperature

LCD Screen (Metric/English, Multiple Languages)

Hour Meter

Engine Speed

Travel Speed

Current Gear Selection

FNR Indication

Clock

Trip Computer

Fuel Consumption

Fuel Level Percentage

DEF (Diesel Exhaust Fluid) Gauge

Oil Pressure

Transmission Oil Temperature
Transmission Sump Oil Temperature
Hydraulic Oil Temperature
Turbocharged Air Temperature
Automatic Transmission Indicator
De-Clutch Indicator
Engine Mode Indicator
Engine Diagnostics
System Voltage
Error Reporting

Indicator Lights:

Low fuel
Turn Signal
Four Way Flashers
High Beam Lights
Brake Pressure
Master Indicator
Parking Break

Audible/Visible Alarms:

Caution Alarm
Parking Break
Coolant Temperature
Transmission Oil Temperature
Air Filter
Transmission Filter
Hydraulic Filter
Alternator
Low Fuel

Critical Alarm:

Engine Oil Pressure
Break Pressure
Coolant Temperature
Hydraulic Temperature
Transmission Oil Temperature

Electric System:

24- Volt System

2-12 volt 700 CCA Batteries

65 Amp Alternator

Horn

Back up Alarm

Master Electrical Disconnect

2 Front 2 rear Top Mounted Flood Lights

2 Front Driver Hi-Lo Beam

2 Front Working, Stop, Tail and Back Up

Front and Rear Turn Signals and Flashers

Hydraulic Cylinders:

2 Lift Cyl- 4.75 Inch Boar 2.5 Inch Rod

1 Dump Cyl – 5.0 Inch Boar

Driveline:

4 Forward, 3 Reverse Computer Controlled Full Power Shift Transmission

Transmission Must be Capable of Being Custom Programmed to Shift Manually or Fully Automatic.

On Board Diagnostics with Fault Code Storage and Retrieval

Down Shift Button

Fully Pressurized Lubrication

Lift Time Lubricated u Joints

Hydraulic activated Multi disk Clutches

Electric Twist Grip Range Selector On Column

Trans. Disconnect Either Break Pedal

Single Stage Integral Torque Converter

Outboard Mounted Planetary Drive Axles with Dipsticks

Limited Slip Differentials non Both Axles

Self-Adjusting Outboard Mounted Hydraulically Maintenance Free Multiple Hydraulic Wet Disc

Breaks w/Accumulator to All Four Wheels

Break Surface Area 480 Sq.In. per Hub

Travel Speed:

Forward 1st 4.3 M.P.H.

2nd 8.4 M.P.H.

3rd 14.9 M.P.H.

4th 24 M.P.H.

Reverse 1st. 4.5 M.P.H.

2nd 8.8 M.P.H.

3rd 15.6 M.P.H.

Steering:

Minimum 40 Degree Articulation Each Side.

Hydraulic Orbital Steering, Flow Amplified for Precise Low R.P.M. steering

Steering Wheel Required to Have No More Than 2 lbs. of Effort to Turn

Articulation Point to Have Double Tapered Roller Bearing Grease Able Every 1000 Hours

Two 3 In. Diameter Double Acting Cylinders

Max. Outside Turn Radius 17 ft.

Tilt steering Column

Loader:

Z-Bar Linkage With Self Aligning Hydraulic Quick Coupler 102 in. 4 In 1 Bucket

Bottom skid Pads

Bolt On Cutting edge, 3 Piece Reversible (Outer Side of Clam and Moleboard) Weld On Edge
On Inner Side of Clam

2.5 Cu.Yd. Heaped Capacity Bucket

Pilot Operated Single Lever For Lift and Tilt With Forward/Reverse Shuttle Switch On Top of
Lever

Separate Lever for 4 In 1 Control

Automatic Return to Dig

Automatic Return to Travel

Automatic Height Control

Single Piece Flame Cut Loader Arms

Bucket Position indicator

Automatic Self Leveling

Hinge Pin height 156 in.

Heavy Duty Forks with 60 in. Blades

Hydraulics:

Pressure Compensated Load Sensing

Micron Full Flow Replaceable Spin On cartridges On return Line

100 Mesh Line screen On Inlet Side

3 Spool, 3 Lever Valve, 2nd Lever for 4 In 1 Bucket

Sight Gauge on HYD . Reservoir

(8) Diagnostic Quick Couplers

Variable displacement 45.2 G.P.M. at 2000 R.P.M. Hydraulic Pump

O Ring Face Seal Hydraulic Couplings for 4 In 1 Bucket

Tires: 20.5 x 12 Ply L2

Operating Station:

OSHA Approved R.O.P.S. Cab with Sound Suppression, Safety Glass, Defroster, Air Conditioner, Heater, Suspension Seat, Dome Light, Air Pressurization with 3 Speed Blower C, Fresh Air Filters, Key Lock Doors, Rear view Mirrors, Rubber Floor Mats, Front Intermittent and Rear Windshield Wipers, Front and Rear Windshield Washers, Front Window Visor, Anti-Glare Window Strip, Partially/Fully Opening Cab Side Windows, Tilt steering Wheel, Steering Knob, Fully Adjustable Wrist Rest

Misc:

Serviceability Index SAE-J817 Not to Exceed 5800

Front and Rear Fenders

Draw Board Hitch

Amber Rotating Beacon

2 Exterior West Coast Mirrors

Remote Drainage for Engine Oil, Coolant and Hydraulic Oil, Banked In Single Location

Operating Weight:

26,000 Lbs. Minimum W/Standard Counter weight 175 Lbs. , Operator and Full Fuel Tank

Warranty:

3 Year/ 3000 Hour Full Machine Factory warranty

3 year/3000 Hour Planned Maintenance Including Filters, Oil and Labor

3 Year Advanced Site Watch Telematics

insurance and complied with the requirements of the specifications and said Parish Resolutions. Except as otherwise provided by law, the Parish Attorney's Office with the concurrence of the Director of Risk Management is authorized to omit in whole or part the insurance requirements of this section in connection with contracts. Vendors inquiring about this shall submit his written request to the Purchasing Department prior to the due date of the bid. Contractor must deliver and maintain such insurances as provided; failure to do so shall be grounds for suspension, discontinuation or termination of the contract.

Successful bidder will be required to procure standard insurance policies evidencing Parish mandated insurance requirements indicated below. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected.

1. **WORKER'S COMPENSATION INSURANCE**

As required by Louisiana State Statute, exception; Employer's Liability, Section B shall be \$1,000,000 per occurrence when Work is to be over water and involves maritime exposures to cover all employees not covered under the State Worker's Compensation Act, otherwise this limit shall be no less than \$500,000 per occurrence.

2. **COMMERCIAL GENERAL LIABILITY**

Shall provide limits not less than the following: \$1,000,000.00 Combined Single Limit per Occurrence for bodily injury and property damage.

3. **COMPREHENSIVE AUTOMOBILE LIABILITY**

Bodily injury liability \$1,000,000.00 each person; \$1,000,000.00 each occurrence.
Property Damage Liability \$1,000,000.00 each occurrence.

DEDUCTIBLES

No insurance required shall include a deductible not greater than \$10,000.00. The cost of the deductible shall be borne by the contractor.

NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney's Office.

UMBRELLA LIABILITY COVERAGE

An umbrella policy or excess may be used to meet minimum requirements.

is due upon contract execution.

OWNER'S PROTECTIVE LIABILITY

To be for the same limits of liability for bodily injury and property damage liability established for commercial general liability.

BUILDER'S RISK INSURANCE

The contractor shall maintain Builder's Risk Insurance at his own expense to insure both the owner (Parish of Jefferson) and contractor as their interest may appear.

NOTE for CERTIFICATE HOLDER:

All insurance certificates shall list the certificate holder as follows:

"The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and the Parish Council." Additionally, the address on the Certificates should reflect the department which is letting the bid and reference the respective bid number.

Revised 2.10.2014

HL740-9A

With Tier 4 Interim Engine installed

MOVING YOU FURTHER

HYUNDAI HEAVY INDUSTRIES



PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality.

Take pride in your work with Hyundai!



HL740-9A

Machine Walk-Around

Reliable Main Components

Engine Technology

Proven, reliable, fuel efficient, low emission, low noise Cummins Tier 4 Interim & EU Stage IIIB QSB6.7 engine

Electronically controlled for optimum fuel to air ratio and clean, efficient combustion

HPCR (High Pressure Common Rail) fuel system / Self-diagnostic system

DOC - Clean emission aftertreatment module

3 engine modes, P (Power), S (Standard), E (Economy) for full power or reduced fuel consumption according to operator preference

Fully Automatic Transmission

4 step shift modes (Manual / Light / Normal / Heavy) for different working conditions

Protective transmission at low temperature (Automatic warm-up system)

Self-diagnostic & memory of malfunction history

Minimum travel shift shock by applying proportional controlling modulation valve / Self adjusting Clutch gap

Kick-down button & FNR switch for operating comfort

Axle

Self-adjusting & wheel speed wet disc brake

Improved Durability

Load sensing hydraulic system with variable displacement piston pump and closed-center MCV (Main Control Valve)

Long-life cooling system with relocated cooling fan & radiator, designed for additional durability, resistant to thermal shock, impulse and vibration

Redesigned steering cylinder lug and bucket link, now cast steel for additional strength and reliability

Enhanced Operator Comfort

Improved Visibility

Larger operator's cab for additional comfort

Redesigned cab with rounded front glass and larger door glass for a larger field of view

Improved Convenience

Increased cooling & heating capacity with fully automatic climate control system

Tilting & telescopic steering column

Adjustable wrist rest for reduced operating stress

Multiple storage compartments

AM/FM Radio with MP3 interface and USB input and bluetooth hands-free

Improved ladder with 20 degree incline and large, deep tread, aluminum cast steps for safer access and exit from the cab

Advanced 5.7" Color Monitor with Touch Screen



PRECISION & PERFORMANCE

Innovative hydraulic system technologies make the 9A series wheel loaders fast, smooth and easy to control. 9A series is designed for maximum performance to keep the operator working productively.



Improved Durability & Reliability



An enhanced axle improves driving over variable ground conditions. Self-adjusting brakes that automatically regulate disc clearance, reduce service time and improve brake reliability and performance. The new load sensing hydraulic system with a variable displacement piston pump and closed center main control valve provide efficient hydraulic power and additional energy savings.

Variable Operating Modes



9A series wheel loaders are designed to allow the operator to customize the machine's engine power, automatic transmission shift timing and clutch cut-off activation based on the job condition and personal operator preference. Convenient rotary type switches allow for easy adjustment of engine power mode, transmission power shift mode, and clutch cut-off mode. Additionally, the optional ride control system has shock absorbing accumulators that cushion the boom, improve operator comfort and reduce material loss. The versatility of the 9A series operating modes contributes to improved productivity, enhanced operator comfort and reduced fuel consumption.



3 Mode Engine Power Selection

P (Power) Mode: Heavy duty work
S (Standard) Mode: General work
E (Economy) Mode: Light duty work

4 Mode Transmission Power Shift System

M (Manual) Mode
Auto L (Light) Mode: Light duty & long distance carry
Auto N (Normal) Mode: General excavating & loading
Auto H (Heavy) Mode: Heavy duty excavating & loading

3 Mode Clutch Cut-Off System

L (Low) Mode: Short distance & faster loading
M (Medium) Mode: General loading
H (High) Mode: Less power loss in torque converter and lower temperature on brake side



Eco-friendly Cummins QSB 6.7 Engine

The CUMMINS QSB6.7 engine combines advanced electronic controls and a self-diagnostic system with reliable performance. The combination of a high pressure common rail system and an advanced in-cylinder combustion technology results in increased power, improved transient response and reduced fuel consumption. The QSB6.7 Cummins engine complies with current emissions standards including EPA Tier 4 interim and EU Stage III-B.

DOC - Clean Emission Aftertreatment Module

Reduces Particulate Matter (PM) through a chemical reaction with no cleaning or maintenance required. A DOC (Diesel Oxidation Catalyst) consists of a catalytic coating on a cordierite or metallic substrate for oxidizing exhaust particulate matter. It operates in a passive-only mode and can act as a stand alone aftertreatment solution for those engines requiring a moderate PM reduction.

VGT (Variable Geometry Turbocharger)

Newly designed VGT with electric actuator delivers optimum air flow resulting in cleaner exhaust gas, quick transient acceleration and improved fuel economy by combining the benefits at low & high engine speed.

OPERATOR COMFORT

Operating a 9A series wheel loader is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.

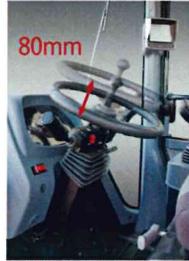


*Photo may include optional equipment.

Operator Comfort

In the 9A series cabin you can easily adjust the steering column and wrist rest to best suit your preferred comfort level. Pilot-operated joystick controls are easy and comfortable to operate. An FNR (Forward/Neutral/Reverse) switch on the control lever facilitates easy selection of travel direction.

Roller type sunshades on the front and rear windows allow the operator to reduce glare and improve visibility. Heated side mirrors feature built-in hot wires for quick defrosting in cold weather conditions.



Wrist rest



FNR switch
(Option)



Rear sunshade
(Option)



Heated
side mirrors
(Option)



AM/FM Radio with
MP3 and Bluetooth
Hands-free
/ AC control

Tilting / telescopic steering column

Reduced Stress

Hyundai's 9A series cabin offers many amenities, additional space and a comfortable seat to minimize stress of the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with AM/FM stereo with MP3 interface and USB input, plus remotely located controls, is perfect for listening to your favorite music.

Smart Key System (Option)




User authentication and anti-theft system are reinforced with smart key system (optional).

Advanced Color Monitor



The advanced new monitor with 5.7-inch wide color LCD touch screen allows the operator to easily and efficiently control the machine. The operator can adjust boom kick-out and bucket position via overhead switches while monitoring the adjustment settings through the monitor. An integrated load weighing system that contributes to improved work efficiency can also be viewed through the monitor. Self-diagnostics, color rear-view camera, maintenance check lists and start-up machine security are integrated into the monitor to make the machine more versatile and the operator more productive. The new monitor display unit is mounted on an adjustable swivel to reduce glare and position according to operator preference. The newly designed multimedia menu provides a music & video player function for an enjoyable work experience.

Monitor Tilt Range



Specifications & Dimensions

ENGINE

Maker/Model	CUMMINS QSB6.7
Type	Watercooled, 4-cycle, turbocharged, charge aircooled direct injection, electronic controlled diesel engine
Gross power	158 HP (118 kW) / 2,100rpm
Net power	156 HP (116 kW) / 2,100rpm
Maximum torque	82 kg·m (591 lb·ft) / 1,500rpm
No. of cylinders	6

Bore x Stroke	107 mm (4.21") x 124 mm (4.88")
Displacement	6.7ℓ (409 cu in)
Compression ratio	17.3 : 1
Air cleaner	Dry, Two stages dual elements
Alternator	24V, 70 Amp
Battery	2 x 12V, 92 Ah.
Starting motor	24V, 7.8 kW

※ No derating for continuous operating required up to 3,658m (12,000ft). This engine meets the EPA(Tier III) / EU(Stage III-A) Emission regulation.

TRANSMISSION

Torque converter type	3-elements, single-stage single-phase
Tire	20.5-25, L3

※Full automatic power shift, countershaft type with soft-shift in range and direction. Properly matched torque converter to engine and transmission for excellent working ability.

Travel speed		km/h (mph)
Forward	1st	6.9 (4.3)
	2nd	12.5 (7.8)
	3rd	24.1 (15.0)
	4th	39.5 (24.5)
Reverse	1st	7.2 (4.5)
	2nd	13.1 (8.1)
	3rd	25.3 (15.7)

AXLES

Drive system	Four-wheel drive system
Mount	Rigid front axle and oscillating rear axle
Rear axle oscillation	±12° (total 24°)

Hub reduction	Planetary reduction at wheel end
Differential	Conventional
Reduction ratio	21.53

HYDRAULIC SYSTEM

Type	Load-sensing hydraulic system
Pump	Variable axial piston type, 155 lpm (40.9 gal/min) @governed rpm
Control valve	2spool (Bucket, Boom) 3spool (Bucket, Boom, Aux) Pilot pressure controlled type System pressure : 280 kgf/cm ² (3.982PSI)

Bucket Controls	Type	Pilot operated lift and tilt circuit, single-lever(joystick) control standard.
	Lift Circuit	The valve has four functions ; raise, hold, lower and float. Can adjust automatic kickout from horizontal to full lift.
	Tilt Circuit	The valve has three functions ; tilt back, hold and dump.

BRAKES

Service Brakes	Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system Self adjusting & wheel speed brake
Parking Brake	Spring-applied, hydraulically released brake
Emergency Brake	When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.

STEERING SYSTEM

Type	Load-sensing hydrostatic articulated steering	
Pump	Piston pump, 155 lpm (40.9 gal/min) @governed rpm	
Relief Valve Setting	210 kg/cm (2,986 psi)	
Cylinder	Type	Double acting
	Bore x Stroke	65mm x 429mm (2.6" x 16.9")
Steering Angle	40° (each direction)	

Features

- Center-point frame articulation. - Tilt and telescopic steering column.

SERVICE REFILL CAPACITIES

Fuel tank	220 liters (58.1 USgal)
Cooling system	34 liters (9.0 USgal)
Crankcase	18 liters (4.8 USgal)
Transmission	25 liters (6.6 USgal)

Front axle	24 liters (6.3 USgal)
Rear axle	23 liters (6.1 USgal)
Hydraulic tank	142 liters (37.5 USgal)
Hydraulic system (including tank)	175 liters (46.2 USgal)


OVERVIEW

Description	UNIT	HL740-9A	HL740XTD-9A	HL740TM-9A
Operating weight	kg (lb)	12,700 (28,000)	13,000 (28,660)	13,300 (29,320)
Bucket capacity	Heaped	m ³ (yd ³)	2.3 (3.0)	2.3 (3.0)
	Struck	m ³ (yd ³)	2.0 (2.6)	2.0 (2.6)
Breakout force-bucket	kg (lb)	11,250 (24,800)	11,090 (24,450)	10,830 (23,880)
Tipping load	Straight	kg (lb)	9,870 (21,760)	8,810 (19,420)
	Full turn	kg (lb)	8,490 (18,720)	7,640 (16,840)


TIRES

Type	Tubeless, loader design tires
Standard	20.5-25, 16 PR, L3
Options include	17.5-25, 12 PR, L3 20.5-25, 16 PR, L2 20.5 R25 XHA* 20.5-25, 16 PR, L5 23.1-26, 16 PR, LS2

DIMENSIONS

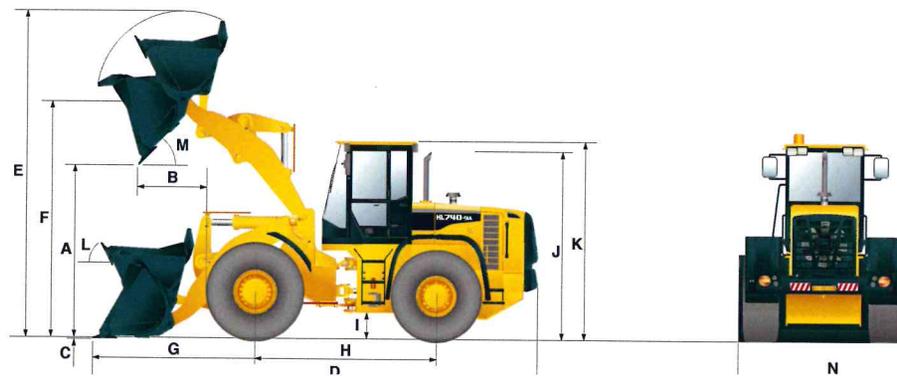

BUCKET SELECTION GUIDE

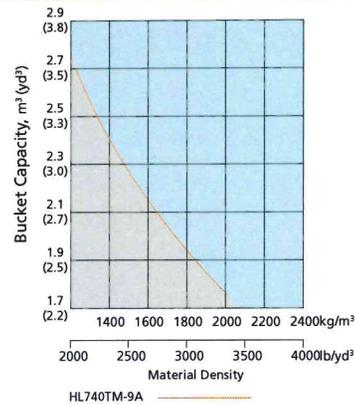

SUPPLEMENTAL SPECIFICATIONS

Description	Change in operating weight kg (lb)	Change in static tipping load-straight kg (lb)	Change in static tipping load-40° turn kg (lb)
17.5-25 12PR L2	-308 (-679)	-220 (-480)	-190 (-420)
17.5-25 12PR L3	-248 (-547)	-170 (-375)	-150 (-330)
20.5-25 16PR L2	-64 (-141)	-45 (-100)	-40 (-90)
17.5 R25 XHA*	-160 (-353)	-110 (-240)	-100 (-220)
20.5 R25 XHA*	+507 (+1,118)	+360 (+790)	+310 (+680)

STANDARD EQUIPMENT

Electrical system

Alternator, 70A

Alarms, audible and visual

- air filter clogging
- transmission error
- alternator voltage
- brake oil pressure
- engine oil pressure
- parking brake
- fuel level
- hydraulic oil temperature
- coolant temperature
- service brake oil pressure

Alarm, back-up

Batteries, 820 CCA, 12V, (2)

Gauges

- engine coolant temperature
- fuel level
- hydraulic oil temperature
- speedometer
- transmission oil temperature
- voltmeter

Horn, electric

Indicator lights

- clutch cut-off
- high beam
- turn signal

LCD Display

- clock and fault code
- operating hour counter
- engine rpm

- transmission gear range indicator
- job time and distance

- temperature (coolant, hydraulic oil, T/M oil)

Lighting system

- 1 LED dome lights
- 2 stop and tail lights
- 4 turn signals
- brake lights (counterweight)
- 2 head lights on front tower
- 2 working lights on front roof
- 2 working lights on rear roof

Switches

- work load
- clutch cut-off
- hazard
- Ignition key, start/stop switch
- main light (illumination and head light)
- parking
- rear wiper & washer
- work light
- battery mater switch
- pilot cut-off

Starter, electric

Starting and charging system (24-volt)

Cab

Cab, ROPS(ISO3471)/FOPS(ISO3449) (sound suppressed and

pressurized) with :

- cigar lighter & ashtray
- coat hook

Automatic climate control

- air conditioner & heater
- defroster
- intermittent wiper and washer, front and rear
- personal storage space: holder, can and cup
- rear view mirrors (1 inside)
- Rear view mirrors (2 outside)
- 2" retractable seat belt & adjustable suspension seat with armrests

- tilt / telescopic steering column

- steering wheel with knob

- roller type sunshade (front window)

- tinted safety glass

Magazine pocket

Pedals

- one accelerator pedal
- one brake pedal

Rubber floor mat

Wrist rest

Radio/USB player

Engine

Antifreeze

Engine, Cummins QSB6.7

- low Emission Diesel, Tier4 Interim, EU Stage IIIB

3 operating mode

- power/standard/economy

Engine enclosure, lockable

Engine fuel priming pump

Fan guard

Fuel/water separator

Fuel warmer

DOC

Rain cap, engine air intake

Radiator (deaeration type)

Starting aid (air intake heater)

Water sensor on fuel filter

Power Train

Brakes : Service, enclosed wet-disc

Parking brake

Torque converter

Transmission, computer-controlled, electronic soft shift, auto-shift and kick down-shift features included

Transmission oil cooler

Hydraulics

Boom kickout, automatic

Bucket positioner, automatic

Diagnostic pressure taps

Hydraulic system

-2 spool, single leverm pilot control

for boom and bucket actvation

Steering, load-sensing

Remote cooling fan, hydraulically-driven, temperature sensing type

Others

- Articulation locking bar
- Coolant level sight gauge
- Counterweight
- Door and cab locks, one key
- Doors, service access (locking)
- Drawbar with pin
- Engine oil level dipstick gauge
- Ergonomically located and slip resistant, left & right
- handrails
- ladders
- platforms
- steps

Fenders (front/rear)

Guard, bucket cylinder rod

Hydraulic oil level sight gauge

License plate bracket

Lift and tie-down hooks

Steering stops, cushioned

Tires (20.5-25, 16PR,L3)

Transmission oil level sight gauge

Vandalism protection caplocks

OPTIONAL EQUIPMENT

24-volt to 12-volt DC converter

Climate control:

- air conditioner only
- heater only

Beacon light, rotating

Auxiliary, 2 working lights on front roof

(Xenon working lights)

Auxiliary, 2 working lights on rear roof

3 piece cutting edge, bolt-on type

Secondary steering system

Fire extinguisher

High lift arrangement with optional counterweight, 600 kg (1,320 lb)

Hydraulic control Fingertip

(2spool & 3spool)

3rd spool for aux function joystick

with travel switch (FJR)

Mud guard

Operator suit

Ride control system

Heated rear view mirrors (2 outside)

Seat

- 2" static seat belt & adjustable mechanical suspension(vinyl)

- 3" static seat belt & adjustable mechanical suspension

- 2" retractable seat belt & adjustable air suspension (heated)

Tires:

- 17.5 - 25, 12PR, L2

- 17.5 - 25, 12PR, L3

- 20.5 - 25, 16PR, L2

- 17.5 R25 XHA

- 20.5 R25 XHA

- 23.1 - 26, 16PR, LS2

Tool kit

Tooth, 1 piece, bolt-on type

Tooth, 2 piece, bolt-on type

Guards

- crankcase

- transmission

Wheel chock

HI-Mate

(Remote Management System)

Rear view camera

Dual-brake pedal

Roller type sunshade (rear window)

License plate & lamp

Pre-cleaner engine air intake

Limited slip differential

HL740-9A

With Tier 4 Interim Engine installed

MOVING YOU FURTHER

HYUNDAI HEAVY INDUSTRIES



PRIDE AT WORK

Hyundai Heavy Industries strives to build state-of-the-art earthmoving equipment to give every operator maximum performance, more precision, versatile machine preferences, and proven quality.

Take pride in your work with Hyundai!



HL740-9A

Machine Walk-Around



Reliable Main Components

Engine Technology

Proven, reliable, fuel efficient, low emission, low noise Cummins Tier 4 Interim & EU Stage IIIB QSB6.7 engine

Electronically controlled for optimum fuel to air ratio and clean, efficient combustion

HPCR (High Pressure Common Rail) fuel system / Self-diagnostic system

DOC - Clean emission aftertreatment module

3 engine modes, P (Power), S (Standard), E (Economy) for full power or reduced fuel consumption according to operator preference

Fully Automatic Transmission

4 step shift modes (Manual / Light / Normal / Heavy) for different working conditions

Protective transmission at low temperature (Automatic warm-up system)

Self-diagnostic & memory of malfunction history

Minimum travel shift shock by applying proportional controlling modulation valve / Self adjusting Clutch gap

Kick-down button & FNR switch for operating comfort

Axle

Self-adjusting & wheel speed wet disc brake

Improved Durability

Load sensing hydraulic system with variable displacement piston pump and closed-center MCV (Main Control Valve)

Long-life cooling system with relocated cooling fan & radiator, designed for additional durability, resistant to thermal shock, impulse and vibration

Redesigned steering cylinder lug and bucket link, now cast steel for additional strength and reliability

Enhanced Operator Comfort

Improved Visibility

Larger operator's cab for additional comfort

Redesigned cab with rounded front glass and larger door glass for a larger field of view

Improved Convenience

Increased cooling & heating capacity with fully automatic climate control system

Tilting & telescopic steering column

Adjustable wrist rest for reduced operating stress

Multiple storage compartments

AM/FM Radio with MP3 interface and USB input and bluetooth hands-free

Improved ladder with 20 degree incline and large, deep tread, aluminum cast steps for safer access and exit from the cab

Advanced 5.7" Color Monitor with Touch Screen

PRECISION & PERFORMANCE

Innovative hydraulic system technologies make the 9A series wheel loaders fast, smooth and easy to control. 9A series is designed for maximum performance to keep the operator working productively.



Improved Durability & Reliability



An enhanced axle improves driving over variable ground conditions. Self-adjusting brakes that automatically regulate disc clearance, reduce service time and improve brake reliability and performance. The new load sensing hydraulic system with a variable displacement piston pump and closed center main control valve provide efficient hydraulic power and additional energy savings.

Variable Operating Modes



9A series wheel loaders are designed to allow the operator to customize the machine's engine power, automatic transmission shift timing and clutch cut-off activation based on the job condition and personal operator preference. Convenient rotary type switches allow for easy adjustment of engine power mode, transmission power shift mode, and clutch cut-off mode. Additionally, the optional ride control system has shock absorbing accumulators that cushion the boom, improve operator comfort and reduce material loss. The versatility of the 9A series operating modes contributes to improved productivity, enhanced operator comfort and reduced fuel consumption.



3 Mode Engine Power Selection

P (Power) Mode: Heavy duty work
S (Standard) Mode: General work
E (Economy) Mode: Light duty work

4 Mode Transmission Power Shift System

M (Manual) Mode
Auto L (Light) Mode: Light duty & long distance carry
Auto N (Normal) Mode: General excavating & loading
Auto H (Heavy) Mode: Heavy duty excavating & loading

3 Mode Clutch Cut-Off System

L (Low) Mode: Short distance & faster loading
M (Medium) Mode: General loading
H (High) Mode: Less power loss in torque converter and lower temperature on brake side



Eco-friendly Cummins QSB 6.7 Engine

The CUMMINS QSB6.7 engine combines advanced electronic controls and a self-diagnostic system with reliable performance. The combination of a high pressure common rail system and an advanced in-cylinder combustion technology results in increased power, improved transient response and reduced fuel consumption. The QSB6.7 Cummins engine complies with current emissions standards including EPA Tier 4 interim and EU Stage III-B.

DOC - Clean Emission Aftertreatment Module

Reduces Particulate Matter (PM) through a chemical reaction with no cleaning or maintenance required. A DOC (Diesel Oxidation Catalyst) consists of a catalytic coating on a cordierite or metallic substrate for oxidizing exhaust particulate matter. It operates in a passive-only mode and can act as a stand alone aftertreatment solution for those engines requiring a moderate PM reduction.

VGT (Variable Geometry Turbocharger)

Newly designed VGT with electric actuator delivers optimum air flow resulting in cleaner exhaust gas, quick transient acceleration and improved fuel economy by combining the benefits at low & high engine speed.

OPERATOR COMFORT

Operating a 9A series wheel loader is unique to every operator. Operators can fully customize their work environment and operating preferences to fit their individual needs.



*Photo may include optional equipment.

Operator Comfort

In the 9A series cabin you can easily adjust the steering column and wrist rest to best suit your preferred comfort level. Pilot-operated joystick controls are easy and comfortable to operate. An FNR (Forward/Neutral/Reverse) switch on the control lever facilitates easy selection of travel direction.

Roller type sunshades on the front and rear windows allow the operator to reduce glare and improve visibility. Heated side mirrors feature built-in hot wires for quick defrosting in cold weather conditions.



Wrist rest



FNR switch (Option)



Rear sunshade (Option)



Heated side mirrors (Option)



AM/FM Radio with MP3 and Bluetooth Hands-free / AC control

Tilting / telescopic steering column

Reduced Stress

Hyundai's 9A series cabin offers many amenities, additional space and a comfortable seat to minimize stress of the operator. A powerful climate control system provides the operator with optimum air temperature. An advanced audio system with AM/FM stereo with MP3 interface and USB input, plus remotely located controls, is perfect for listening to your favorite music.

Smart Key System (Option)




User authentication and anti-theft system are reinforced with smart key system (optional).

Advanced Color Monitor



The advanced new monitor with 5.7-inch wide color LCD touch screen allows the operator to easily and efficiently control the machine. The operator can adjust boom kick-out and bucket position via overhead switches while monitoring the adjustment settings through the monitor. An integrated load weighing system that contributes to improved work efficiency can also be viewed through the monitor. Self-diagnostics, color rear-view camera, maintenance check lists and start-up machine security are integrated into the monitor to make the machine more versatile and the operator more productive. The new monitor display unit is mounted on an adjustable swivel to reduce glare and position according to operator preference. The newly designed multimedia menu provides a music & video player function for an enjoyable work experience.

Monitor Tilt Range

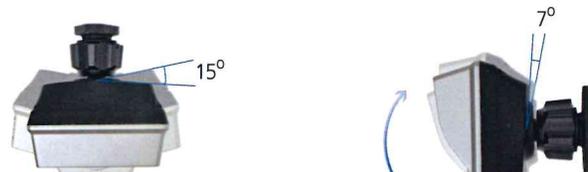

Specifications & Dimensions

ENGINE

Maker/Model	CUMMINS QSB6.7	Bore x Stroke	107 mm (4.21") x 124 mm (4.88")
Type	Watercooled, 4-cycle, turbocharged, charge aircooled direct injection, electronic controlled diesel engine	Displacement	6.7ℓ (409 cu in)
Gross power	158 HP (118 kW) / 2,100rpm	Compression ratio	17.3 : 1
Net power	156 HP (116 kW) / 2,100rpm	Air cleaner	Dry, Two stages dual elements
Maximum torque	82 kg·m (591 lb·ft) / 1,500rpm	Alternator	24V, 70 Amp
No. of cylinders	6	Battery	2 x 12V, 92 Ah.
		Starting motor	24V, 7.8 kW

※ No derating for continuous operating required up to 3,658m (12,000ft). This engine meets the EPA(Tier III) / EU(Stage III-A) Emission regulation.

TRANSMISSION

Torque converter type	3-elements, single-stage single-phase	Travel speed	km/h (mph)
Tire	20.5-25, L3	Forward	
		1st	6.9 (4.3)
		2nd	12.5 (7.8)
		3rd	24.1 (15.0)
		4th	39.5 (24.5)
		Reverse	
		1st	7.2 (4.5)
		2nd	13.1 (8.1)
		3rd	25.3 (15.7)

※Full automatic power shift, countershaft type with soft-shift in range and direction. Properly matched torque converter to engine and transmission for excellent working ability.

AXLES

Drive system	Four-wheel drive system	Hub reduction	Planetary reduction at wheel end
Mount	Rigid front axle and oscillating rear axle	Differential	Conventional
Rear axle oscillation	± 12° (total 24°)	Reduction ratio	21.53

HYDRAULIC SYSTEM

Type	Load-sensing hydraulic system	Bucket Controls	Type	Pilot operated lift and tilt circuit, single-lever(joystick) control standard.
Pump	Variable axial piston type, 155 lpm (40.9 gal/min) @governed rpm		Lift Circuit	The valve has four functions ; raise, hold, lower and float. Can adjust automatic kickout from horizontal to full lift.
Control valve	2spool (Bucket, Boom) 3spool (Bucket, Boom, Aux) Pilot pressure controlled type System pressure : 280 kgf/cm ² (3.982PSI)		Tilt Circuit	The valve has three functions ; tilt back, hold and dump.

BRAKES

Service Brakes	Hydraulically actuated, wet disc brakes actuate all 4 wheels independent axle-by-axle system Self adjusting & wheel speed brake
Parking Brake	Spring-applied, hydraulically released brake
Emergency Brake	When brake oil pressure drops, indicator light alerts operator and parking brake automatically applies.


SERVICE REFILL CAPACITIES

Fuel tank	220 liters (58.1 USgal)
Cooling system	34 liters (9.0 USgal)
Crankcase	18 liters (4.8 USgal)
Transmission	25 liters (6.6 USgal)

OVERVIEW

Description	UNIT	HL740-9A	HL740XTD-9A	HL740TM-9A	
Operating weight	kg (lb)	12,700 (28,000)	13,000 (28,660)	13,300 (29,320)	
Bucket capacity	Heaped	m ³ (yd ³)	2.3 (3.0)	2.3 (3.0)	2.3 (3.0)
	Struck	m ³ (yd ³)	2.0 (2.6)	2.0 (2.6)	2.0 (2.6)
Breakout force-bucket	kg (lb)	11,250 (24,800)	11,090 (24,450)	10,830 (23,880)	
Tipping load	Straight	kg (lb)	9,870 (21,760)	8,810 (19,420)	8,150 (17,970)
	Full turn	kg (lb)	8,490 (18,720)	7,640 (16,840)	7,000 (15,430)

DIMENSIONS

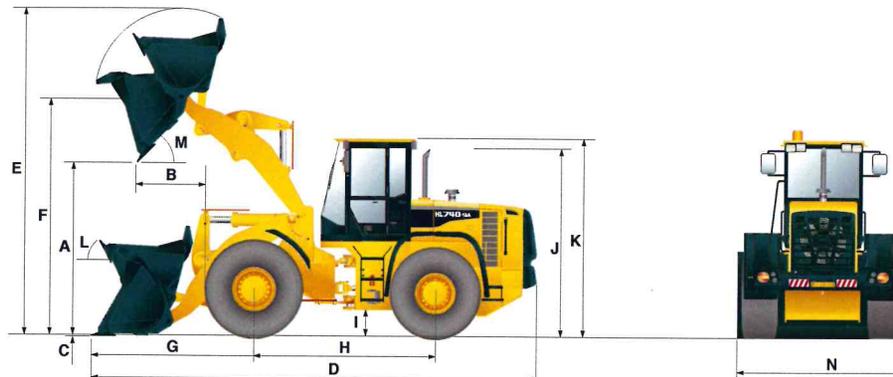

STEERING SYSTEM

Type	Load-sensing hydrostatic articulated steering	
Pump	Piston pump, 155 lpm (40.9 gal/min) @governed rpm	
Relief Valve Setting	210 kg/cm (2,986 psi)	
Cylinder	Type	Double acting
	Bore x Stroke	65mm x 429mm (2.6" x 16.9")
Steering Angle	40° (each direction)	

Features


- Center-point frame articulation. - Tilt and telescopic steering column.

Front axle	24 liters (6.3 USgal)
Rear axle	23 liters (6.1 USgal)
Hydraulic tank	142 liters (37.5 USgal)
Hydraulic system (including tank)	175 liters (46.2 USgal)

TIRES

Type	Tubeless, loader design tires
Standard	20.5-25, 16 PR, L3
Options include	17.5-25, 12 PR, L3
	20.5-25, 16 PR, L2
	20.5 R25 XHA*
	20.5-25, 16 PR, L5
	23.1-26, 16.PR, LS2

BUCKET SELECTION GUIDE

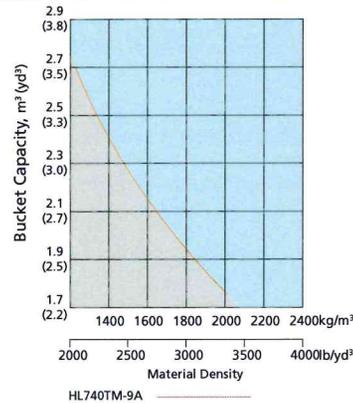

SUPPLEMENTAL SPECIFICATIONS

Description	Change in operating weight kg (lb)	Change in static tipping load-straight kg (lb)	Change in static tipping load-40° turn kg (lb)
17.5-25 12PR L2	-308 (-679)	-220 (-480)	-190 (-420)
17.5-25 12PR L3	-248 (-547)	-170 (-375)	-150 (-330)
20.5-25 16PR L2	-64 (-141)	-45 (-100)	-40 (-90)
17.5 R25 XHA*	-160 (-353)	-110 (-240)	-100 (-220)
20.5 R25 XHA*	+507 (+1,118)	+360 (+790)	+310 (+680)

STANDARD EQUIPMENT

Electrical system

Alternator, 70A

Alarms, audible and visual

- air filter clogging
- transmission error
- alternator voltage
- brake oil pressure
- engine oil pressure
- parking brake
- fuel level
- hydraulic oil temperature
- coolant temperature
- service brake oil pressure

Alarm, back-up

Batteries, 820 CCA, 12V, (2)

Gauges

- engine coolant temperature
- fuel level
- hydraulic oil temperature
- speedometer
- transmission oil temperature
- voltmeter

Horn, electric

Indicator lights

- clutch cut-off
- high beam
- turn signal

LCD Display

- clock and fault code
- operating hour counter
- engine rpm

- transmission gear range indicator
- job time and distance

- temperature (coolant, hydraulic oil, T/M oil)

Lighting system

- 1 LED dome lights
- 2 stop and tail lights
- 4 turn signals
- brake lights (counterweight)
- 2 head lights on front tower
- 2 working lights on front roof
- 2 working lights on rear roof

Switches

- work load
- clutch cut-off
- hazard
- Ignition key, start/stop switch
- main light (illumination and head light)
- parking
- rear wiper & washer
- work light
- battery mater switch
- pilot cut-off

Starter, electric

- Starting and charging system (24-volt)

Cab

Cab, ROPS (ISO3471)/FOPS (ISO3449) (sound suppressed and

pressurized) with :

- cigar lighter & ashtray
- coat hook

Automatic climate control

- air conditioner & heater
- defroster
- intermittent wiper and washer, front and rear
- personal storage space: holder, can and cup
- rear view mirrors (1 inside)
- Rear view mirrors (2 outside)
- 2" retractable seat belt & adjustable suspension seat with armrests

Magazine pocket

- tilt / telescopic steering column
- steering wheel with knob
- roller type sunshade (front window)
- tinted safety glass

Magazine pocket

Pedals

- one accelerator pedal
- one brake pedal
- Rubber floor mat
- Wrist rest
- Radio/USB player

Engine

Antifreeze
Engine, Cummins QSB6.7

- low Emission Diesel, Tier4 Interim,

EU Stage III B

3 operating mode

- power/standard/economy

Engine enclosure, lockable

Engine fuel priming pump

Fan guard

Fuel/water separator

Fuel warmer

DOC

Rain cap, engine air intake

Radiator (deaeration type)

Starting aid (air intake heater)

Water sensor on fuel filter

Power Train

Brakes : Service, enclosed wet-disc

Parking brake

Torque converter

Transmission, computer-controlled,

electronic soft shift, auto-shift and

kick down-shift features included

Transmission oil cooler

Hydraulics

Boom kickout, automatic

Bucket positioner, automatic

Diagnostic pressure taps

Hydraulic system

-2 spool, single lever pilot control

for boom and bucket activation

Steering, load-sensing

Remote cooling fan, hydraulically-driven, temperature sensing type

Others

Articulation locking bar

Coolant level sight gauge

Counterweight

Door and cab locks, one key

Doors, service access (locking)

Drawbar with pin

Engine oil level dipstick gauge

Ergonomically located and slip

resistant, left & right

- handrails

- ladders

- platforms

- steps

Fenders (front/rear)

Guard, bucket cylinder rod

Hydraulic oil level sight gauge

License plate bracket

Lift and tie-down hooks

Steering stops, cushioned

Tires (20.5-25, 16PR,L3)

Transmission oil level sight gauge

Vandalism protection caplocks

OPTIONAL EQUIPMENT

24-volt to 12-volt DC converter

Climate control:

- air conditioner only
- heater only

Beacon light, rotating

Auxiliary, 2 working lights

on front roof

(Xenon working lights)

Auxiliary, 2 working lights

on rear roof

3 piece cutting edge, bolt-on type

Secondary steering system

Fire extinguisher

High lift arrangement with

optional counterweight,

600 kg (1,320 lb)

Hydraulic control Fingertip

(2spool & 3spool)

3rd spool for aux function joystick

with travel switch (FJR)

Mud guard

Operator suit

Ride control system

Heated rear view mirrors (2 outside)

Seat

- 2" static seat belt &

adjustable mechanical

suspension(vinyl)

- 3" static seat belt &

adjustable mechanical

suspension

- 2" retractable seat belt &

adjustable air suspension (heated)

Tires:

- 17.5 - 25, 12PR, L2

- 17.5 - 25, 12PR, L3

- 20.5 - 25, 16PR, L2

- 17.5 R25 XHA

- 20.5 R25 XHA

- 23.1 - 26, 16PR, LS2

Tool kit

Tooth, 1 piece, bolt-on type

Tooth, 2 piece, bolt-on type

Guards

- crankcase

- transmission

Wheel chock

HI-Mate

(Remote Management System)

Rear view camera

Dual-brake pedal

Roller type sunshade (rear window)

License plate & lamp

Pre-cleaner engine air intake

Limited slip differential