

DATE: 3/11/2019

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00125773

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR:

BUYER: SFOLSE

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

2-3 weeks

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

N/A

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

N/A

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____
NUMBER: _____
NUMBER: _____
NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME:

LED Supply Plus, LLC

SIGNATURE:

(Must be signed here)

Chad Clark

TITLE:

President

PRINT OR TYPE NAME:

Chad Clark

ADDRESS:

2801 Athania Pkwy

CITY, STATE:

Metairie

LA

ZIP:

70002

TELEPHONE:

() 504-881-1311

FAX:

() 504-881-1312

EMAIL ADDRESS:

chad@ledsupplyplus.com

TOTAL PRICE OF ALL BID ITEMS: \$ 4,638.74

DATE: 3/11/2019

Page: 5

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00125773

SEALED BID


ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			ONE TIME PURCHASE OF LIGHT FIXTURES AND ACCESSORIES FOR THE JEFFERSON PARISH WESTBANK PARKS & RECREATION DEPARTMENT		
1	28.00	EA	0010 Morris LED Classic Hi-Bay 150 Watts item number 71510 or equal <i>Quoted Spec'd</i>	130.44	3,652.32
2	28.00	EA	0020 Morris LED Classic Hi-Bay 16 inch Polycarbonate Reflector for 150 watt <i>Quoted Spec'd</i> fixtures, item number 71508, or equal	28.75	805. ⁰⁰
3	28.00	EA	0030 Morris malleable fixture hook, item number 18092 or equal <i>Quoted Spec'd</i>	5.89	164.92
4	1.00	EA	0040 Locktite liquid 29021 Green 290, item number 29021 or equal <i>Quoted Spec'd</i> TO BE DELIVERED TO: PARKS & RECREATION 7437 LAPALCO BLVD MARRERO, LA 70072	16.50	16.50



UFO High Bay Gen 3


150 Watt 5000K

120-277V

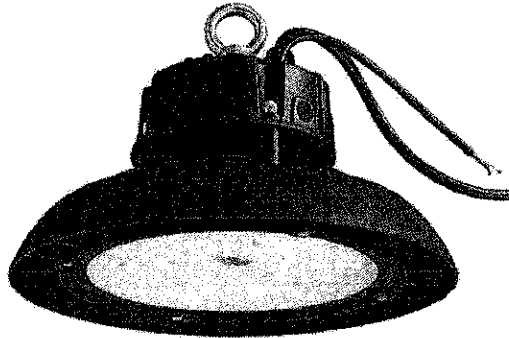


Features:

- Diecast Aluminum Housing
- Heat Resistant Directed Optics
- Frosted Polycarbonate Lens
- Excellent Heat Dissipation
- Maximum Life Expectancy Samsung LEDs
- 50,000+ Hour Life Expectancy

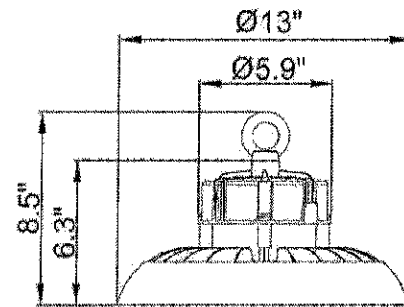


Part#	Housing Color	Wattage	Lumens	CCT	Voltage	Light Pattern	Input Current @ 120V	Lumens/Watt	DLC Prod ID
74102	Black	150	19665	5000K	120-277	112°	1.2658A	130	PLW4LOIF7OOI

PHOTOMETRY

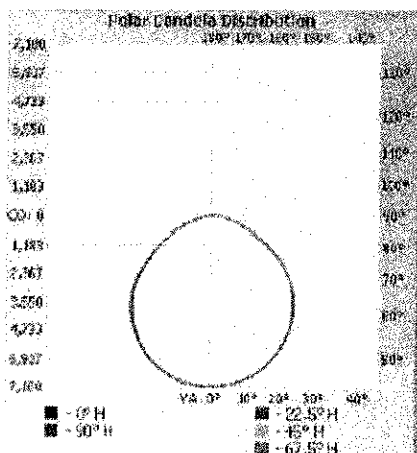

Illuminance at a Distance			
	Center Beam	Beam Width	
33.0ft	24.4 fc	50.3 ft	51.3 ft
34.0ft	5.09 fc	100.6 ft	102.6 ft
35.0ft	2.71 fc	150.9 ft	153.9 ft
36.0ft	1.52 fc	201.2 ft	205.2 ft
37.0ft	0.97 fc	251.5 ft	256.5 ft
38.0ft	0.68 fc	301.8 ft	307.8 ft

Vert. Spread: 111.5°
Horiz. Spread: 112.5°

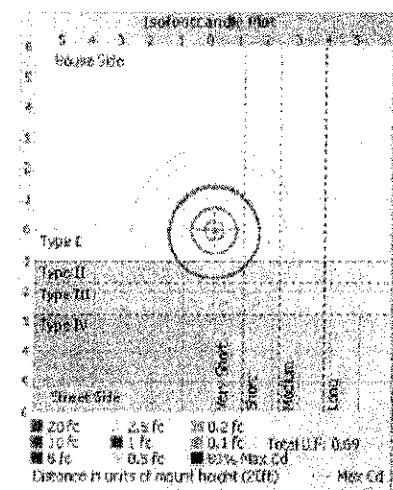



UFO High Bay Gen 3

150 Watt 5000K

120-277V

Technical Specifications:

Electrical:

Input Voltage: 120-277
Current: 1.2602A @ 120V; .5764A @ 277V
Frequency: 60Hz
Power Factor: $\geq .95$
THD: 7.79@ 120V; 12.24 @ 277V

Product Parameters:

Watts: 150
Lumens: 19,665
Efficacy: 130 lumens per watt
50,000+ Hour Lifespan
CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 112°
BUG Rating: B4-U3-G1
CRI: >84
R9: 9
DUV: .0011
Chromaticity (x,y): x=.3255; y=.3371
Chromaticity (u,v): u=.2036; v=.4745

Component Specifications:

LED: Samsung 2835
Driver: 100-277V 50-60HZ
Driver Output Volts: 41.5
Driver Output Amps: 3.25
4000V Surge Protection

Dimming: 1-10V

Operating Temperature:

Minimum Starting -4°F - 122°F

Construction:

Housing: Pure Aluminum Shell
Black Powder Coat Finish
IP Rating: IP65 suitable for wet locations

Lens Material: Tempered Glass

Mounting: Eye Hook Mount (included)

Bracket Mount (optional)
6-1/2 Foot Wire Whip

Listings: UL Listed: E474299

DLC Product ID: PLW4LOIF7OOI

Carton Qty: 1

Weight: 11.8 lb

Accessories (Sold Separately):

Aluminum Reflector 120°	Cat# 74116
Aluminum Reflector 60°	Cat# 74120
Polycarbonate Reflector	Cat# 74123
PC Cover	Cat# 74128
90° Medium Distribution Lens	Cat# 74132
Mounting Bracket:	Cat# 74111
Safety Tether:	Cat# 74113
Wire Guard:	Cat# 74136
Motion Sensor Kit:	Cat# 74139
Emergency Battery Back-Up	Cat# 74141

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).

www.morrisproducts.com

UFO High Bay - Gen 3

Available 6/30



NEW!

Dimmable
0-10V

DLC

UL LISTED


HIGH BAY LIGHTING

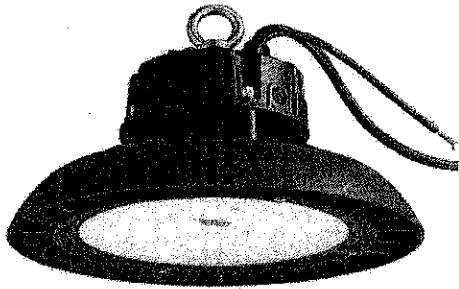

Polycarbonate Lens & Cover
Sold Separately




60° & 120° Aluminum Reflectors
Sold Separately



100 Watts

90° Directed Optics Lens
Sold Separately





150 Watts

- Samsung 2835 LEDs
- Integral Cooling Fin Releases Heat Efficiently to Maintain the Life of LEDs/Driver
- Corrosion Resistant Die Cast Aluminum Housing
- Superior Architectural Bronze Powder Coat Finish
- Stainless Steel Hardware
- Eye-Hook Mount - M10 Thread
- Operation Temp: -40°F - 131°F
- 50,000+ Hour LED Life Expectancy
- 0-10V Dimmable

- Input Voltage: 120/208/240/277 VAC & 347-480V
- Color Temp: 5000K Cool White
- CRI: 84
- Light Pattern: 60° - 120° Beam Spread
- Power Factor: 0.97
- 78" Wire Whip for Easy Install
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC Listed
- 5 Year Warranty

Cat. No.	Description	Volts	Lumens	Weight (lbs)	Case Qty
100 Watt (Replaces 250W Metal Halide)					
74100	100 Watt High Bay	120-277V	13,392	9	1
74101	100 Watt High Bay	347-480V	14,311	9	1
74115	120° Aluminum Reflector			2	10
74119	60° Aluminum Reflector			2	10
74123	16" Polycarbonate Prismatic Reflector			3	5
74127	PC Reflector Cover			2	10
74131	90° Medium Distribution Lens			1	40
74110	Mounting Bracket			1.5	10
74113	Safety Tether			5	100
74135	Wire Guard			2	10
150 Watt (Replaces 400W Metal Halide)					
74102	150 Watt High Bay	120-277V	19,665	9	1
74103	150 Watt High Bay	347-480V	20,444	9	1
74116	120° Aluminum Reflector			2	10
74120	60° Aluminum Reflector			2	10
74124	16" Polycarbonate Prismatic Reflector			3	5
74128	PC Reflector Cover			2	10
74132	90° Medium Distribution Lens			1	40
74111	Mounting Bracket			1.5	10
74113	Safety Tether			5	100
74136	Wire Guard			2	10

Malleable Crows Foot Fixture Hanger





- Crows Foot Fixture Hanger
- Malleable Iron

Dimensions = Inches

Cat. No.	Thread Size	Dimensions		Inner Box	Outer Box
		A	B		
18096	1/4"-20	1.00	1.10	25	250

Fixture Hook





- High bay fixture hooks are used to hang light fixtures from multiple structural members -1/2" Long
- Preinstalled set screw helps prevent vibratory loosening in high-abuse areas
- 3/4" NPT Threads
- Malleable Iron

Dimensions = Inches

Cat. No.	Dimensions		Box Qty
	A	B	
18092	3.40	.95	50

Swivel Pendant - Malleable Round Fixture Hanger





- Swivel pendant mount allows high bays and other hanging fixtures to be mounted on a sloped ceiling
- Pivot ball that allows the installed fixture and pipe stem to swing 20 degrees from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Octagon electrical boxes

Dimensions = Inches

Cat. No.	Dimensions		Box Qty
	A	B	
18094	4.21	2.02	25

Malleable Square Fixture Hanger



- Used to support light fixtures, security cameras, exit signs, and a variety of electrical and electronic devices installed in industrial settings
- Pivot ball that allows the installed fixture and pipe stem to swing 20 degrees from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Square electrical boxes

Dimensions = Inches

Cat. No.	Dimensions		Box Qty
	A	B	
18093	4.21	2.02	25

MORRIS

Fixture Supports

O16