

LOUISIANA UNIFORM PUBLIC WORK BID FORM

50-00127130

Page: 5

TO: JEFFERSON PARISH
PURCHASING DEPT
200 DERBIGNY ST. SUITE 4400
GRETN, LA 70053
(Owner to provide name and address of owner)

BID FOR: LABOR, MATERIALS AND EQUIPMENT
NECESSARY TO FURNISH AND INSTALL A TOT
LOT AT PARD PLAYGROUND FOR THE
JEFFERSON PARISH DEPARTMENT OF PARKS
AND RECREATION

The undersigned bidder hereby declares and represents that she/he; a) has carefully examined and understands the Bidding Documents, b) has not received, relied on, or based his bid on any verbal instructions contrary to the Bidding Documents or any addenda, c) has personally inspected and is familiar with the project site, and hereby proposes to provide all labor, materials, tools, appliances and facilities as required to perform, in a workmanlike manner, all work and services for the construction and completion of the referenced project, all in strict accordance with the Bidding Documents prepared by: Jefferson Parish Parks and Recreation Department
Pard Playground and dated: 7/25/19
(Owner to provide name of entity preparing bidding documents.)

Bidders must acknowledge all addenda. The Bidder acknowledges receipt of the following ADDENDA: (Enter the number the Designer has assigned to each of the addenda that the Bidder is acknowledging) 1, 2, 3

TOTAL BASE BID: For all work required by the Bidding Documents (including any and all unit prices designated "Base Bid" * but not alternates) the sum of:

Ninety-nine Thousand Five Hundred and 00/100 Dollars (\$) 99,500.00

ALTERNATES: For any and all work required by the Bidding Documents for Alternates including any and all unit prices designated as alternates in the unit price description.

Alternate No. 1 (Owner to provide description of alternate and state whether add or deduct) for the lump sum of:

N/A Dollars (\$) 0.00

Alternate No. 2 (Owner to provide description of alternate and state whether add or deduct) for the lump sum of:

N/A Dollars (\$) 0.00

Alternate No. 3 (Owner to provide description of alternate and state whether add or deduct) for the lump sum of:

N/A Dollars (\$) 0.00

NAME OF BIDDER: Planet Recess Inc

ADDRESS OF BIDDER: P.O. Box 78140 Baton Rouge, LA 70837

LOUISIANA CONTRACTOR'S LICENSE NUMBER: 37277

NAME OF AUTHORIZED SIGNATORY OF BIDDER: Treyner McAdams

TITLE OF AUTHORIZED SIGNATORY OF BIDDER: President

SIGNATURE OF AUTHORIZED SIGNATORY OF BIDDER **: 

DATE: 9/23/19

THE FOLLOWING ITEMS ARE TO BE INCLUDED WITH THE SUBMISSION OF THIS LOUISIANA UNIFORM PUBLIC WORK BID FORM:

* The Unit Price Form shall be used if the contract includes unit prices. Otherwise it is not required and need not be included with the form. The number of unit prices that may be included is not limited and additional sheets may be included if needed.

** A CORPORATE RESOLUTION OR WRITTEN EVIDENCE of the authority of the person signing the bid for the public work as prescribed by LA-R.S. 38:2218 (B)(5).

BID SECURITY in the form of a bid bond, certified check or cashier's check as prescribed by LA-R.S. 38:2218.(A) is attached to and made a part of this bid.

LOUISIANA UNIFORM PUBLIC WORK BID FORM
UNIT PRICE FORM

Bid# 50-00127130

TO: JEFFERSON PARISH
PURCHASING DEPT
200 DERBIGNY ST. SUITE 4400
GRETN, LA 70053
(Owner to provide name and
address of owner)

LABOR, MATERIALS AND EQUIPMENT
NECESSARY TO FURNISH AND INSTALL A TOT
LOT AT PARD PLAYGROUND FOR THE JEFFERSON
PARISH DEPARTMENT OF PARKS AND
RECREATION

UNIT PRICES: This form shall be used for any and all work required by the Bidding Documents and described as unit prices.
Amounts shall be stated in figures and only in figures.

DESCRIPTION:	<input checked="" type="checkbox"/> Base Bid				0010 - Labor, Materials & Equipment necessary to furnish & install tot lot
	<input type="checkbox"/> Alt.#				equipment & rubber safety surface at PARD Playground per specifications
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	
29456	1.00	JOB	\$99,500.00	\$99,500.00	

DESCRIPTION:	<input checked="" type="checkbox"/> Base Bid				0020 - Cost to contractor to list Jefferson Parish as an additional
	<input type="checkbox"/> Alt.#				insured on Contractor's General Liability
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	
29456-A	1.00	EA	\$0.00	\$0.00	

DESCRIPTION:	<input checked="" type="checkbox"/> Base Bid				0030 - Cost to contractor to list Jefferson Parish as an additional
	<input type="checkbox"/> Alt.#				insured on Contractor's Automotive Insurance
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	
29456-B	1.00	EA	\$0.00	\$0.00	

DESCRIPTION:	<input type="checkbox"/> Base Bid				
	<input type="checkbox"/> Alt.#				
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	

DESCRIPTION:	<input type="checkbox"/> Base Bid				
	<input type="checkbox"/> Alt.#				
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	

DESCRIPTION:	<input type="checkbox"/> Base Bid				
	<input type="checkbox"/> Alt.#				
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	

DESCRIPTION:	<input type="checkbox"/> Base Bid				
	<input type="checkbox"/> Alt.#				
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	

DESCRIPTION:	<input type="checkbox"/> Base Bid				
	<input type="checkbox"/> Alt.#				
REF NO.	QUANTITY	UNIT OF MEASURE	UNIT PRICE	UNIT PRICE EXTENSION (Quantity times Unit Price)	

Wording for "DESCRIPTION" is to be provided by the Owner.
All quantities are estimated. The contractor will be paid based upon actual quantities as verified by the Owner.

CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF
Planet Recess
INCORPORATED.

AT THE MEETING OF DIRECTORS OF Planet Recess
INCORPORATED, DULY NOTICED AND HELD ON January 2nd 2019,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT
WAS:

RESOLVED THAT Treyor McAdams, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.

Elaine Lanclos

SECRETARY-TREASURER

9/19/19

DATE

Public Works Bid

AFFIDAVIT

STATE OF LOUISIANAPARISH/COUNTY OF EAST BATON ROUGE

BEFORE ME, the undersigned authority, personally came and appeared: Trey Nor
McAdams, (Affiant) who after being by me duly sworn, deposed and said that
he/she is the fully authorized President of Planet Recess (Entity),
the party who submitted a bid in response to Bid Number 50-00127130 to the Parish of
Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required
attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including
the date and amount of each contribution, made to current or
former elected officials of the Parish of Jefferson by Entity,
Affiant, and/or officers, directors and owners, including
employees, owning 25% or more of the Entity during the two-year
period immediately preceding the date of this affidavit or the
current term of the elected official, whichever is greater. Further,
Entity, Affiant, and/or Entity Owners have not made any
contributions to or in support of current or former members of the
Jefferson Parish Council or the Jefferson Parish President through
or in the name of another person or legal entity, either directly or
indirectly.


Choice B ✓ _____ there are NO campaign contributions made which would require
disclosure under Choice A of this section.

Affiant further said:

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the parish to the Affiant.

Choice B  _____ There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

Affiant further said:

Affiant personally has not been convicted of, nor has he/she entered into a plea of guilty or nolo contendere to any of the crimes or equivalent federal crimes listed below. No individual partner, incorporator, director, manager, officer, organizer, or member, who has a minimum of a ten percent ownership in the Bidding Entity, has been convicted of, or has entered a plea of guilty or nolo contendere to any of the crimes or equivalent federal crimes listed below. A conviction of or plea of guilty or nolo contendere to the following state crimes or equivalent federal crimes shall permanently bar any person or the bidding entity from bidding on public projects:

- (a) Public bribery (R.S. 14:118)
- (b) Corrupt influencing (R.S. 14:120)
- (c) Extortion (R.S. 14:66)
- (d) Money laundering (R.S. 14:230)

A conviction of or plea of guilty or nolo contendere to the following state crimes or equivalent federal crimes shall bar any person or the bidding entity from bidding on public projects for a period of five years from the date of conviction or from the date of the entrance of the plea of guilty or nolo contendere:


- (a) Theft (R.S. 14:67)
- (b) Identity Theft (R.S. 14:67, 16)
- (c) Theft of a business record (R.S. 14:67.20)
- (d) False accounting (R.S. 14:70)
- (e) Issuing worthless checks (R.S. 14:71)
- (f) Bank fraud (R.S. 14:71.1)
- (g) Forgery (R.S. 14:72)
- (h) Contractors; misapplication of payments (R.S. 14:202)
- (i) Malfeasance in office (R.S. 14:134)

The five-year prohibition provided for in this section shall apply only if the crime was committed during the solicitation or execution of a contract or bid awarded pursuant to these provisions. If evidence is submitted substantiating that a false attestation has been made and the project must be readvertised or the contract cancelled, the awarded entity making the false attestation shall be responsible to the public entity for the costs of rebidding, additional costs due to increased costs of bids and any and all delay costs due to the rebid or cancellation of this project.

[The remainder of this page is intentionally left blank.]

Affiant further said:

- (1) Entity is registered and participates in a status verification system to verify that all employees in the State of Louisiana are legal citizens of the United States or are legal aliens.
- (2) Entity shall continue, during the term of the contract, to utilize a status verification system to verify the legal status of all new employees in the State of Louisiana.
- (3) Entity shall require all subcontractors to submit to the Entity a sworn affidavit verifying compliance with statements (1) and (2).


Signature of Affiant

Treynor Holden
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME


ON THE 23rd DAY OF Sept., 2019.

Melisa C. Busby
Notary Public

Melisa C. Busby
Printed Name of Notary

78629
Notary/Bar Roll Number

My commission expires At Death

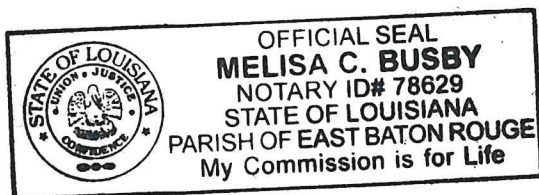

Print

Notary Search - Detail

Name: MS. MELISA C. BUSBY
Address: P.O. BOX 78160
BATON ROUGE, LA 70837
Phone: (225) 301-5868
Notary ID Number: 78629
Parish: EAST BATON ROUGE with authority in the following parishes:
ASCENSION, EAST FELICIANA, IBERVILLE, LIVINGSTON, POINTE COUPEE, WEST BATON ROUGE, WEST FELICIANA
Agency: N/A
Notary Type: Non Attorney
Status: Active
Commission Date: 02/21/2014
Oath Date: 02/19/2014
Surety Expiration Date: 11/09/2020
Annual Report Current: Yes

Notary Events

Suspension	From: 04/26/2016	To: 05/02/2016
Suspension	From: 11/10/2015	To: 01/08/2016
Suspension	From: 04/24/2015	To: 05/14/2015
Name Change	Previous Name: MELISA B. REEVES	Previous Commission Date: 02/21/2014
Parish Change	Previous Parish: CONCORDIA	Previous Commission Date: 11/19/2004
Suspension	From: 01/21/2014	To: 02/05/2014
Suspension	From: 01/22/2013	To: 08/14/2013

Deceased, Inactivated, Leave of Absence, Pre-Assessment Registration, Pre-Assessment Taken, Resigned, Retirement, and Revoked events are not available prior to February 11, 2012.

[Back to Search Results](#)[New Search](#)



PLANE-1

OP ID: DSE

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

12/28/2018

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Cooper Insurance Service, Inc Playground Book P.O. Box 638 Lapel, IN 46051 Steve B. Carraway	765-534-3152	CONTACT NAME Steve B. Carraway PHONE (A/C, Ho, Ext): 765-534-3152 FAX (A/C, Ho): 765-534-2067 E-MAIL ADDRESS:
INSURER(S) AFFORDING COVERAGE		NAIC #
INSURER A: Scottsdale Insurance Co.		41297
INSURER B: Evanston Insurance Company		35378
INSURER C:		
INSURER D:		
INSURER E:		
INSURER F:		

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR INSD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER <input type="checkbox"/> POLICY <input type="checkbox"/> PROJECT <input type="checkbox"/> LOC <input type="checkbox"/> OTHER			RBS0018617	01/01/2019	01/01/2020	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000 MED EXP (Any one person) \$ 1,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000 \$
	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO OWNED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> NON-OWNED AUTOS ONLY						COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
B	<input type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> OCCUR <input checked="" type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE <input type="checkbox"/> DED <input type="checkbox"/> RETENTION \$			EZXS3003960	01/01/2019	01/01/2020	EACH OCCURRENCE \$ 2,000,000 AGGREGATE \$ 2,000,000 \$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) <input type="checkbox"/> Y/N If yes, describe under DESCRIPTION OF OPERATIONS below		N/A				PER STATUTE <input type="checkbox"/> OTH-ER <input type="checkbox"/> E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

CERTIFICATE HOLDER

FOR INSURER

For Insured's Information

CANCELLATION

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

ACORD 25 (2016/03)

© 1988-2015 ACORD CORPORATION. All rights reserved.

The ACORD name and logo are registered marks of ACORD



PLANE-3

OP ID: DB

CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

06/24/2019

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Tyner Jeter Insurance Agency 5139 Bluebonnet Blvd Baton Rouge, LA 70809 Tyner Jeter Agency	225-227-2800	CONTACT NAME: Tyner Jeter Agency
		PHONE (A/C, No, Ext): 225-227-2800 FAX (A/C, No): 225-372-2078
		E-MAIL ADDRESS:
		INSURER(S) AFFORDING COVERAGE
		INSURER A: Houston Specialty Insurance NAIC # 12936
		INSURER B: LWCC 22350
		INSURER C:
		INSURER D:
		INSURER E:
		INSURER F:

INSURED
Planet Recess Inc
PO Box 78160
Baton Rouge, LA 70837-8160

COVERAGES

CERTIFICATE NUMBER:

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
	COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC <input type="checkbox"/> OTHER:						EACH OCCURRENCE \$ DAMAGE TO RENTED PREMISES (Ea occurrence) \$ MED EXP (Any one person) \$ PERSONAL & ADV INJURY \$ GENERAL AGGREGATE \$ PRODUCTS - COMP/OP AGG \$ \$
A	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO OWNED AUTOS ONLY <input checked="" type="checkbox"/> HIRED AUTOS ONLY <input checked="" type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS ONLY			HSLR180613401	06/21/2019	06/21/2020	COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ 1,000,000 PROPERTY DAMAGE (Per accident) \$ \$
	UMBRELLA LIAB <input type="checkbox"/> OCCUR EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED <input type="checkbox"/> RETENTION \$						EACH OCCURRENCE \$ AGGREGATE \$ \$
B	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) <input type="checkbox"/> Y/N If yes, describe under DESCRIPTION OF OPERATIONS below	N/A		153877	11/16/2018	11/16/2019	PER STATUTE <input type="checkbox"/> OTH-ER <input type="checkbox"/> E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

Contractor/Dealer - Park/Playground Equipment

CERTIFICATE HOLDER

CANCELLATION

SAMPL-1

TO WHOM IT MAY CONCERN

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

THE AMERICAN INSTITUTE OF ARCHITECTS



AIA Document A310

Bid Bond

KNOW ALL MEN BY THESE PRESENTS, that we

Planet Recess, Inc.

PO Box 78160, Baton Rouge, LA 70837

(Here insert full name, and address or legal title of Contractor)

as Principal, hereinafter called the Principal, and

North American Specialty Insurance Company

650 Elm Street, Manchester, NH 03101

(Here insert full name, and address or legal title of Surety)

a corporation duly organized under the laws of the State of **New Hampshire**

as Surety, hereinafter called the Surety, are held and firmly bound unto

Jefferson Parish Purchasing Department

200 Derbigny Street, Gretna, LA 70053

(Here insert full name, and address or legal title of Owner)

as Obligee, hereinafter called the Obligee, in the sum of *****FIVE PERCENT OF AMOUNT BID*****

Dollars (**5%**),

for the payment of which sum well and truly to be made, the said Principal and the said Surety, bind ourselves, our heirs, executors, administrators, successors and assigns, jointly and severally, firmly by these presents.

WHEREAS, the Principal has submitted a bid for **Furnish and Install a Tot Lot at Pard Playground**

(Here insert full name, address and description of project)

NOW, THEREFORE, if the Obligee shall accept the bid of the Principal and the Principal shall enter into a Contract with the Obligee in accordance with the terms of such bid and give such bond or bonds as may be specified in the bidding or Contract Documents with good and sufficient surety for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof, or in the event of the failure of the Principal to enter such Contract and give such bond or bonds, if the Principal shall pay to the Obligee the difference not to exceed the penalty hereof between the amount specified in said bid and such larger amount for which the Obligee may in good faith contract with another party to perform the Work covered by said bid then this obligation shall be null and void, otherwise to remain in full force and effect.

Signed and sealed this **24th** day of **September** **2019**
Planet Recess, Inc.

(Principal)

Traynor McAdams, President (Seal)

(Title)

North American Specialty Insurance Company

(Surety)

(Seal)

(Title)

Todd Schaap, Attorney-in-Fact

PROVIDED, HOWEVER, neither Principal nor Surety shall be bound hereunder unless Obligee prior to execution of the final contract shall furnish evidence satisfactory to Principal and Surety that financing has been firmly committed to cover the entire cost of the project.

SWISS RE CORPORATE SOLUTIONS

NORTH AMERICAN SPECIALTY INSURANCE COMPANY
WASHINGTON INTERNATIONAL INSURANCE COMPANY

GENERAL POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS, THAT North American Specialty Insurance Company, a corporation duly organized and existing under laws of the State of New Hampshire, and having its principal office in the City of Overland Park, Kansas, and Washington International Insurance Company, a corporation organized and existing under the laws of the State of New Hampshire and having its principal office in the City of Overland Park, Kansas, each does hereby make, constitute and appoint:

THOMAS O. CHAMBERS, TODD SCHAAP

and KIMBERLY S. RASCH

JOINTLY OR SEVERALLY

Its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its act and deed, bonds or other writings obligatory in the nature of a bond on behalf of each of said Companies, as surety, on contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract or suretyship executed under this authority shall exceed the amount of:


FIFTY MILLION (\$50,000,000.00) DOLLARS


This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of both North American Specialty Insurance Company and Washington International Insurance Company at meetings duly called and held on the 9th of May, 2012:

"RESOLVED, that any two of the Presidents, any Managing Director, any Senior Vice President, any Vice President, any Assistant Vice President, the Secretary or any Assistant Secretary be, and each or any of them hereby is authorized to execute a Power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings and all contracts of surety, and that each or any of them hereby is authorized to attest to the execution of any such Power of Attorney and to attach therein the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signatures or facsimile seal shall be binding upon the Company when so affixed and in the future with regard to any bond, undertaking or contract of surety to which it is attached."



By 
Steven P. Anderson, Senior Vice President of Washington International Insurance Company
& Senior Vice President of North American Specialty Insurance Company

By 
Michael A. Ito, Senior Vice President of Washington International Insurance Company
& Senior Vice President of North American Specialty Insurance Company




IN WITNESS WHEREOF, North American Specialty Insurance Company and Washington International Insurance Company have caused their official seals to be hereunto affixed, and these presents to be signed by their authorized officers this 11th day of April, 2018.

North American Specialty Insurance Company
Washington International Insurance Company

State of Illinois
County of Cook SS:


On this 11th day of April, 2018, before me, a Notary Public personally appeared Steven P. Anderson, Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and Michael A. Ito, Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company, personally known to me, who being by me duly sworn, acknowledged that they signed the above Power of Attorney as officers of and acknowledged said instrument to be the voluntary act and deed of their respective companies.




M. Kenny, Notary Public

I, Jeffrey Goldberg, the duly elected Assistant Secretary of North American Specialty Insurance Company and Washington International Insurance Company, do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by said North American Specialty Insurance Company and Washington International Insurance Company, which is still in full force and effect.


IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 24th day of September, 2019


Jeffrey Goldberg, Vice President & Assistant Secretary of
Washington International Insurance Company & North American Specialty Insurance Company

STATE OF WISCONSIN)

COUNTY OF **Racine**)

ON THIS 24th day of September, 2019,
before me, a notary public, within and for said County and State, personally appeared ____
Todd Schaap to me personally known, who being duly sworn,
upon oath did say that he is the Attorney-in-Fact of and for the _____
North American Specialty Insurance Company, a corporation
of New Hampshire, created, organized and existing under and
by virtue of the laws of the State of New Hampshire; that the corporate seal
affixed to the foregoing within instrument is the seal of the said Company; that the seal
was affixed and the said instrument was executed by authority of its Board of Directors;
and the said Todd Schaap did acknowledge that he/she
executed the said instrument as the free act and deed of said Company.

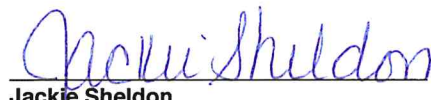

Jackie Sheldon

Notary Public, **Racine** County, Wisconsin

My Commission Expires **2/13/2023**



**Request for Taxpayer
Identification Number and Certification**

Give Form to the
requester. Do not
send to the IRS.

#122643

Print or type See Specific Instructions on page 2.	1 Name (as shown on your income tax return). Name is required on this line; do not leave this line blank. Treynor McAdams	
	2 Business name/disregarded entity name, if different from above Planet Recess, Inc.	
	3 Check appropriate box for federal tax classification; check only one of the following seven boxes: <input type="checkbox"/> Individual/sole proprietor or single-member LLC <input type="checkbox"/> Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=partnership) ▶ <input type="checkbox"/> Other (see instructions) ▶	
	4 Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3): Exempt payee code (if any) Exemption from FATCA reporting code (if any) <small>(Applies to accounts maintained outside the U.S.)</small>	
	5 Address (number, street, and apt. or suite no.) P.O. Box 78160	Requester's name and address (optional)
	6 City, state, and ZIP code Baton Rouge, LA 70837	
	7 List account number(s) here (optional)	

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the instructions for line 1 and the chart on page 4 for guidelines on whose number to enter.


Social security number								
			-					
or								
Employer identification number								
7	2	-	1	4	4	7	5	9

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
- I am a U.S. citizen or other U.S. person (defined below); and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

Certification instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions on page 3.

Sign Here	Signature of U.S. person ▶ 	Date ▶ 2/23/17
-----------	--	-----------------------

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.
Future developments. Information about developments affecting Form W-9 (such as legislation enacted after we release it) is at www.irs.gov/w9.

Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following:

- Form 1099-INT (interest earned or paid)
- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (block or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and third party network transactions)

- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
- Form 1099-C (canceled debt)
- Form 1099-A (acquisition or abandonment of secured property)

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.

If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See *What is backup withholding?* on page 2.

By signing the filled-out form, you:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued).
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the withholding tax on foreign partners' share of effectively connected income, and
- Certify that FATCA code(s) entered on this form (if any) indicating that you are exempt from the FATCA reporting, is correct. See *What is FATCA reporting?* on page 2 for further information.

📍 600 North Street, Baton Rouge, 70802 📞 (225) 765-2301 🗨 Text-To-Verify: 1 (855) 999-7896 

Louisiana State Licensing Board for Contractors

Contractor Information

Business Name PLANET RECESS, INC.
Mailing Address P. O. Box 78160
Baton Rouge, LA 70837
Phone Number (800) 344-6255
Fax Number (225) 778-4703
Email Address MELISA@PLANETRECESS.COM
Website <http://www.planetrecess.com>

Active Licenses

License Number 37277
Type Commercial License
Status LICENSED
Effective 10/20/2017
Expiration 10/19/2020
First Issued 10/19/2000

Classifications

Class	Qualifying Party	Parishes
BUSINESS AND LAW	Treynor B. McAdams	ALL
SPECIALTY: RECREATION & SPORTING FACILITIES & GOLF COURSES	Treynor B. McAdams	ALL



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 1 – Page 1 of 3

August 27, 2019

ADDENDUM # 1

Bid No.: 50-00127130

Bid Opening Date: August 27, 2019, 2:00 pm

Bid Opening Date Postponed to: September 24, 2019, 2:00 pm

For: LABOR, MATERIALS AND EQUIPMENT NECESSARY TO FURNISH AND INSTALL A TOT LOT
AT PARD PLAYGROUND FOR THE JEFFERSON PARISH DEPARTMENT OF PARKS AND
RECREATION

- ❖ Bid Opening Date Postponed to: September 24, 2019, 2:00 pm
- ❖ Clarification and Revision of Specifications

Approved Equals:

Quality Court Industries, LLC – Poured in Place Playground Safety Surface (QCI PIP) is accepted as a vendor for the rubber surface installation.

Vendor Questions and Answers:

Question #1: Would the owner remove the requirement for OSHA Training in section 1.03 B. 2. ?

This has not previously been a requirement for installation of playground equipment and safety surfacing in Jefferson Parish and is not required to hold a contractor's license with the special category of Recreation & Sporting Facilities & Golf Courses (required for installation of playground equipment over \$50,000.)

Answer #1: Remove Section 1.03, B, 2

(REMOVE) 2. The installation crew will include at least one member that has completed the OSHA 10 Hour Training course and received certification.

Question #2: Would the owner remove the requirement for the safety surfacing to have IPEMA certification? This has not previously been a requirement for installation of poured in place in Jefferson Parish and IPEMA is just one of many independent testing laboratories. The important thing is to have testing documentation from an independent testing facility for the appropriate critical fall height.

Answer #2: Remove all IPEMA certified requirements.

(REPLACE WITH) Must provide test results from an independent laboratory that meets or exceeds ASTM 1487-07 standards and CPSC guidelines for impact Attenuation.

Joseph S. Yenni Building – 1221 Elmwood Park Blvd., Ste. 404, Jefferson, LA 70123

Office 504.364.2678

General Government Bldg. – 200 Derbigny St – Suite 4400 - Gretna, LA 70053

Office 504.364.2678

Email: Purchasing@jeffparish.net Website: www.jeffparish.net

TME



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 1 – Page 2 of 3

Question #3: Please clarify the required submittals for preapproval. In section 2.02, you state that a complete submittal package, as outlined in section 1.04 submittals, must be provided. However, section 1.04 states that the following submittals are required prior to award, upon request from the Jefferson Parish Department of Parks and Recreation. And, Part 1, section 1.2.1.3, asks for a different list of items to be submitted for preapproval.

Answer #3: Remove in its entirety Section 2.02, A and Section 1.2.1.3. Remove in its entirety Section 1.04 and Replace with the following:

Prior approval requests shall be submitted to the Purchasing Department, Melissa Ovalle, by email to movealle@jeffparish.net or by mail to 200 Derbigny Street, Suite 4400 Gretna, LA 70053. A complete submittal package, as outlined below, shall be provided before a substitute product will be considered for prior approval. The following submittals are required for prior approval and shall be submitted ten (10) business days prior to the bid opening date:

- a) A Manufacturer's descriptive data and installation instructions
- b) A manufacturer's details showing depth of wear surface and sub-base materials, anchoring systems and edge details.
- c) A list of all materials and components to be installed, including Manufacturer's name, storage requirements, and precautions, and shall state chemical composition and test results to which material has been subjected in compliance with these specifications
- d) Test results to substantiate that the product meets or exceeds all ASTM & ADA requirements for each standard listed in Section 1.03 Quality Assurance prior to award. Test must be performed and certified by an independent laboratory.
- e) A Statement signed by the Manufacturer of the synthetic safety surfacing attesting that all materials under this section shall be installed by the Manufacturer or its Certified Installers
- f) A sample specimen of safety surface or a reference work site to look at for vender approval.
- g) A list of all organizations and affiliations of the company offering the product(s)
- h) A 2D drawing and color 3D drawing of Play Equipment

Question #4: Please clarify the date and time that pre-approval requests are due to you. (on your pages 3 and 17). Is it 7 calendar days or 7 business days? Specific date and time would be helpful.

Answer #4: Prior approval requests shall be submitted ten (10) business days prior to the bid opening date.

Question #5: Please remove the applicable standards on page 3 that refer to Canadian and European Standards (1.4.3 and 1.4.4)

Answer # 5: The Canadian and European standards are not required. Remove in its entirety Section 1.4.3 and 1.4.4.

(REMOVE) 1.4.3

CSA Z614-7

(REMOVE) 1.4.4

EN 1176-98 (if requested) European Standard for Playground Equipment

TME



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 1 – Page 3 of 3

Question #6: As discussed at the pre-bid meeting, please revise the bid date to allow more time for the design process once the questions are answered.

Answer #6: The bid Opening Date has been postponed per this addendum. Bid Opening Date Postponed to: September 24, 2019, 2:00 pm

Sincerely,

Melissa Ovalle

Melissa Ovalle, Buyer II
Jefferson Parish Purchasing Department

Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form as indicated. Failure to do so will result in bid rejection.

This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.

TME



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 2 – Page 1 of 2

September 16, 2019

ADDENDUM # 2

Bid No.: 50-00127130

Bid Opening Date: September 24, 2019, 2:00 pm

For: LABOR, MATERIALS AND EQUIPMENT NECESSARY TO FURNISH AND INSTALL A TOT LOT AT PARD PLAYGROUND FOR THE JEFFERSON PARISH DEPARTMENT OF PARKS AND RECREATION

Instructions Attached:

- Attached to this addendum (Addendum # 2) are Instructions for insurance lines and base bid line items on the Louisiana Public Work Bid Form and Unit Price Form.

Approved Equals:

- Playcraft Systems tot lot structure R35 #R5052644AA for ages 5-12 and structure R5 #R357AB93A for ages 2-5
- Robertson Recreational Surfaces, Tot Turf EPDM Poured in Place (PIP) Rubber
- Burke tot lot Series Basics, Nucleus, Ages 2-5 and 5-12, Planet Recess 140-1218221-1

Sincerely,

Melissa Ovalle

Melissa Ovalle, Buyer II
Jefferson Parish Purchasing Department

Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form as indicated. Failure to do so will result in bid rejection.

This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.

True



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 2 – Page 2 of 2

September 11, 2019

Base Bid Line Items

LA Public Work Bid Form and Unit Price Form

The bidder's Total Base Bid entry on the signature page must reflect the sum total of all base bid line items (inclusive of applicable insurance line items) from the Unit Price page of the Louisiana Public Work Bid Form. The line items pertaining to insurance must have a numeric entry in the unit price field for each type of insurance for the bid submission to be responsive, and must reflect actual cost to be incurred for the respective insurance line item. If your company will not incur a charge for the respective insurance(s), then you must enter a value, i.e., \$0.00, indicative of no charge, for the bid response to be responsive.

If you have any questions, please contact the buyer assigned to the bid.

Sincerely,

Jefferson Parish Purchasing Department

TME



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 3 – Page 1 of 2

September 18, 2019

ADDENDUM # 3

Bid No.: 50-00127130

Bid Opening Date: September 24, 2019, 2:00 pm

For: LABOR, MATERIALS AND EQUIPMENT NECESSARY TO FURNISH AND INSTALL A TOT LOT AT PARD PLAYGROUND FOR THE JEFFERSON PARISH DEPARTMENT OF PARKS AND RECREATION

Addendum # 3 corrects the following approved equal, which was listed on Addendum # 2.

Remove and Replace the following approved equal:

REMOVE: Burke tot lot Series Basics, Nucleus, Ages 2-5 and 5-12, Planet Recess 140-1218221-1

REPLACE WITH: Burke – Series: Basics, Nucleus, Ages 2-5 and 5-12, 140-121894-1

Section: 1.03 Quality Assurance, C. Contractor Qualifications and Submittal Requirements, 1.:

Remove in its entirety section 1.03, C, 1 and replace with the following:

- 1. Upon request and prior to award, bidders shall submit Material Safety Data Sheets (MSDS) and Product Data sheets on all materials.**

Questions:

- Q1:** The bid documents refer to new concrete needed on page 2. Section 6.0 Bid Specifications
-Both Sites have existing concrete foundations, but will need additional concrete added
-Drawings for Tot Lot and additional concrete is attached
I don't see in the drawings where the existing concrete and new concrete is noted'
- A1:** Drawings for the additional concrete are not available. Remove this section from the specifications. Reference section 5.0 – Quantities/Inspection and Section 1.01 Work Included, Concrete Sub-Base.

me



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

Addendum No. 3 – Page 2 of 2

Section 6.0 – Bid Specifications:

REMOVE: Drawings for additional concrete is attached.

Sincerely,

Melissa Ovalle

Melissa Ovalle, Buyer II
Jefferson Parish Purchasing Department

Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form as indicated. Failure to do so will result in bid rejection.

This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.









A handwritten signature in blue ink, appearing to be "me", is located in the bottom right corner of the page.



Blk binder clip



Table of Contents

1	 Welcome
2	 Certification Licenses Insurance
3	 3 – D's & Blueprints
4	 IPEMA
5	 Safety Data Sheets
6	 Poured- In-Place
7	 Color Scheme
8	 Warranties



Who Are We?

Established in 1996, Planet Recess has built an excellent reputation in Louisiana and Mississippi as the premier playground and splashpad consultant for schools, parent/teacher organizations, and parks and recreation departments that are seeking to invest in new playground equipment and splashpads.

Our knowledgeable staff of consultants, customer service personnel, and installation and service specialists is capable of assisting you with every aspect of planning. From safety concerns through complex design and installation issues, you will be guided each step of the way with the confidence which comes from years of experience.

We are a licensed State Contractor in Louisiana and Mississippi.

We have our own Factory Certified Installers.

We have several Nationally Certified Playground Safety Inspectors on staff.

We are a "qualified" playground contractor as recognized by the National Playground Contractors Association.

We have completed over 400 community-built playground projects and have over \$20 million in product installations throughout the Gulf South.

If our team can be of service to you, or answer any questions or concerns, you may contact us at:

**225.778.4700 or
800.344.6255**

www.planetrecess.com

Thank you for this opportunity to be a part of your plans.

Sincerely,
Treynor McAdams
President

Meet some of the people at Planet Recess who are dedicated to your success:

Treynor McAdams
President/MS Sales
NCPSI certified

Melisa McAdams
Senior Account Manager

Dana Davis
Administrative Assistant

Elaine Lanclos
Office Manager

Carol Billon
LA Sales

Treynor With
Howie Long



Treynor With
Laura Bush



Treynor With
Vince Gill



Treynor With
MS Governor
Hailey Barbour




Treynor With
Bob Nardelli
CEO Home Depot



© Treynor McAdams
With best wishes.

State of Louisiana




State Licensing Board for Contractors

This is to Certify that:

PLANET RECESS, INC.
P. O. Box 78160
Baton Rouge, LA 70837

is duly licensed and entitled to practice the following classifications

SPECIALTY: RECREATION & SPORTING FACILITIES & GOLF COURSES

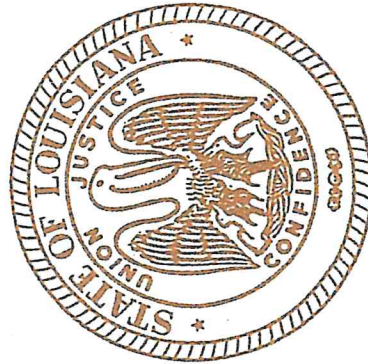

October 19, 2020

Expiration Date:

37277

License No:

Witness our hand and seal of the Board dated,
Baton Rouge, LA 20th day of October 2017

Will B. MacP

Director

Lee Madgett

Chairman

Andy Dumas

Treasurer

This License Is Not Transferrable

National Recreation and Park Association

Let it be known that

TREYNOR MCADAMS

has met the requirements of the standards set forth by the
National Certification Board
and is hereby granted certification as a

Certified Playground Safety Inspector



Certified
Playground
Safety Inspector

William J. White
CHAIRPERSON

Barbara Tulipano
NRPB PRESIDENT AND CEO

April 26, 2018

DATE CERTIFIED

41972-0521

CERTIFICATION NUMBER

May 01, 2021

EXPIRATION DATE



Certificate of Achievement

Awarded to:

Treynor McAdams

Has completed the

Recreation Installation Specialist Certification Course

This certificate of achievement is valid for the above individual who has successfully passed the required training as set by the National Playground Contractors Association, Inc.

2019-1130

Certificate Number

12/31/2022

Expiration Date

Ed Miller

*Ed Miller
NPCAI Board Chair*

02/26/2019

Issue Date



**National Playground
Contractors Association**



**Member ID#
2002-0516**

Certificate of Playground Contractor Qualification

*This certificate validates that the company below is listed as a **Qualified Playground Contractor** and a **Member** of the NPCAI and has the necessary requirements to conduct business.*

*This Certificate is valid until the date of
September 30, 2019*

PLANET RECESS, INC.

BATON ROUGE, LOUISIANA

The above named contractor has the proper licensing to conduct business in the following states:

State License #

LA #37277

Additional States



Kenda Daria, NPCAI Chairman

September 20, 2018


Date



Denise R. Calabrese, NPCAI Executive Director

September 20, 2018

Date



BCI Burke Company, LLC

Let it be known that

Treynor McAdams

with

Planet Recess, Inc.

attended and successfully completed the installation training at the
2019 BCI Burke Company Factory Certified Installers Training.

February 11th & 12th, 2019
Fond du Lac, Wisconsin
Expiration: March 1, 2021



Ken Krug, Plant Manager/Supplier Performance



Certificate of Registration

This certifies that the Environmental Management System of

BCI Burke Company, LLC

660 Van Dyne Road
Fond du Lac, Wisconsin, 54936, United States

has been assessed by NSF-ISR and found to be in conformance to the following standard(s):

ISO 14001:2015

Scope of Registration:

Design and Manufacture of Playground, Park and Recreation Equipment with the Design, Manufacture and Distribution of Specialized Parts.



Certificate Number: C0130541-EM4
Certificate Issue Date: 01-NOV-2017
Registration Date: 28-NOV-2017
Expiration Date *: 27-NOV-2020

Carl Blazik,
Director, Technical
Operations & Business Units,
NSF-ISR, Ltd.

Page 1 of 2

NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org

Authorized Registration and /or Accreditation Marks. This certificate is property of NSF-ISR and must be returned upon request.
*Company is audited for conformance at regular intervals. To verify registrations call (888) NSF-9000 or visit our web site at www.nsf-isr.org



ANNEX PAGE FOR CERTIFICATE REGISTRATION NUMBER

C0130541-EM4

CERTIFICATE ISSUE DATE: 01-NOV-2017

CERTIFICATE EXPIRATION DATE: 27-NOV-2020

BCI Burke Company, LLC

660 Van Dyne Road

Fond du Lac, Wisconsin, 54936, United States

Remote Location:

BCI Burke Company, LLC- C0130544

225 W. McWilliams Street

Fond du Lac, Wisconsin, 54936, United States

Scope:

Warehouse

NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org

This Annex is only Valid in connection with the above-mentioned certificate issued by NSF-ISR

Authorized Registration and /or Accreditation Marks. This certificate is property of NSF-ISR and must be returned upon request.

*Company is audited for conformance at regular intervals. To verify registrations call (888) NSF-9000 or visit our web site at www.nsf-isr.org



Certificate of Registration

This certifies that the Quality Management System of

BCI Burke Company, LLC

660 Van Dyne Road
Fond du Lac, Wisconsin, 54936, United States

has been assessed by NSF-ISR and found to be in conformance to the following standard(s):

ISO 9001:2015

Scope of Registration:

Design and Manufacture of Playground, Park and Recreation Equipment with the Design, Manufacture and Distribution of Specialized Parts.



Certificate Number: C0130541-ISO6
Certificate Issue Date: 27-AUG-2018
Registration Date: 18-MAY-2018
Expiration Date *: 17-MAY-2021

Carl Blazik,
Director, Technical
Operations & Business Units,
NSF-ISR, Ltd.

Page 1 of 2

NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org

Authorized Registration and/or Accreditation Marks. This certificate is property of NSF-ISR and must be returned upon request.
*Company is audited for conformance at regular intervals. To verify registrations call (888) NSF-9000 or visit our web site at www.nsf-isr.org



ANNEX PAGE FOR CERTIFICATE REGISTRATION NUMBER

C0130541-IS6

CERTIFICATE ISSUE DATE: 27-AUG-2018

CERTIFICATE EXPIRATION DATE: 17-MAY-2021

BCI Burke Company, LLC

660 Van Dyne Road

Fond du Lac, Wisconsin, 54936, United States

Remote Location:

BCI Burke Company, LLC- C0402824

665 N. Peters Ave.

Fond du Lac, Wisconsin, 54936, United States

Scope:

Receiving and Warehousing.

NSF International Strategic Registrations

789 North Dixboro Road, Ann Arbor, Michigan 48105 | (888) NSF-9000 | www.nsf-isr.org

This Annex is only Valid in connection with the above-mentioned certificate issued by NSF-ISR

Authorized Registration and/or Accreditation Marks. This certificate is property of NSF-ISR and must be returned upon request.
*Company is audited for conformance at regular intervals. To verify registrations call (888) NSF-9000 or visit our web site at www.nsf-isr.org



Company ID Number: 500952

THE E-VERIFY PROGRAM FOR EMPLOYMENT VERIFICATION MEMORANDUM OF UNDERSTANDING FOR E-VERIFY EMPLOYER AGENTS

ARTICLE I

PURPOSE AND AUTHORITY

The parties to this Agreement are the Department of Homeland Security (DHS), and **Planet Recess, Inc.** (E-Verify Employer Agent). The purpose of this Agreement is to set forth terms by which SSA and DHS will provide information to **Planet Recess, Inc.** (E-Verify Employer Agent) on behalf of the E-Verify Employer Agent's client (the Employer). This MOU explains certain features of the E-Verify program and enumerates specific responsibilities of DHS, SSA, the Employer, and the E-Verify Employer Agent. References to the Employer include the E-Verify Employer Agent when acting on behalf of the Employer. E-Verify is a program that electronically confirms an employee's eligibility to work in the United States after completion of the Employment Eligibility Verification Form (Form I-9). For covered government contractors, E-Verify is used to verify the employment eligibility of all newly hired employees and all existing employees assigned to Federal contracts or to verify the entire workforce if the contractor so chooses.

The Employer is not a party to this MOU. The E-Verify program requires an initial agreement between DHS and the E-Verify Employer Agent as part of the enrollment process. After agreeing to the MOU as set forth herein, completing the tutorial, and obtaining access to E-Verify as a E-Verify Employer Agent, the E-Verify Employer Agent will be given an opportunity to add a client once logged into E-Verify. All parties, including the Employer, will then be required to sign and submit a new MOU. The responsibilities of the parties remain the same in each MOU.

Authority for the E-Verify program is found in Title IV, Subtitle A, of the Illegal Immigration Reform and Immigrant Responsibility Act of 1996 (IIRIRA), Pub. L. 104-208, 110 Stat. 3009, as amended (8 U.S.C. § 1324a note). Authority for use of the E-Verify program by Federal contractors and subcontractors covered by the terms of Subpart 22.18, "Employment Eligibility Verification", of the Federal Acquisition Regulation (FAR) (hereinafter referred to in this MOU as a "Federal contractor with the FAR E-Verify clause") to verify the employment eligibility of certain employees working on Federal contracts is also found in Subpart 22.18 and in Executive Order 12989, as amended.

ARTICLE II

FUNCTIONS TO BE PERFORMED

A. RESPONSIBILITIES OF SSA

1. SSA agrees to provide the Employer (through the E-Verify Employer Agent) with available information that will allow the Employer to confirm the accuracy of Social Security Numbers



Company ID Number: 500952

provided by all employees verified under this MOU and the employment authorization of U.S. citizens.

2. SSA agrees to provide the Employer and E-Verify Employer Agent appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. SSA agrees to provide the E-Verify Employer Agent with names, titles, addresses, and telephone numbers of SSA representatives to be contacted during the E-Verify process.

3. SSA agrees to safeguard the information provided by the Employer through the E-Verify program procedures, and to limit access to such information, as is appropriate by law, to individuals responsible for the verification of Social Security Numbers and for evaluation of the E-Verify program or such other persons or entities who may be authorized by SSA as governed by the Privacy Act (5 U.S.C. § 552a), the Social Security Act (42 U.S.C. 1306(a)), and SSA regulations (20 CFR Part 401).

4. SSA agrees to provide a means of automated verification that is designed (in conjunction with DHS's automated system if necessary) to provide confirmation or tentative nonconfirmation of U.S. citizens' employment eligibility within 3 Federal Government work days of the initial inquiry.

5. SSA agrees to provide a means of secondary verification (including updating SSA records as may be necessary) for employees who contest SSA tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of U.S. citizens' employment eligibility and accuracy of SSA records for both citizens and non-citizens within 10 Federal Government work days of the date of referral to SSA, unless SSA determines that more than 10 days may be necessary. In such cases, SSA will provide additional verification instructions.

B. RESPONSIBILITIES OF DHS

1. After SSA verifies the accuracy of SSA records for employees through E-Verify, DHS agrees to provide the Employer (through the E-Verify Employer Agent) access to selected data from DHS's databases to enable the Employer (through the E-Verify Employer Agent) to conduct, to the extent authorized by this MOU:

- Automated verification checks on employees by electronic means, and
- Photo verification checks (when available) on employees.

2. DHS agrees to provide to the Employer and E-Verify Employer Agent appropriate assistance with operational problems that may arise during the Employer's participation in the E-Verify program. DHS agrees to provide the E-Verify Employer Agent names, titles, addresses, and telephone numbers of DHS representatives to be contacted during the E-Verify process.

3. DHS agrees to make available to the Employer (through the E-Verify Employer Agent) at the E-Verify website and on the E-Verify Web browser, instructional materials on E-Verify policies, procedures and requirements for both SSA and DHS, including restrictions on the use of E-Verify. DHS agrees to provide training materials on E-Verify.



Company ID Number: 500952

4. DHS agrees to provide to the Employer (through the E-Verify Employer Agent) a notice, which indicates the Employer's participation in the E-Verify program. DHS also agrees to provide to the Employer (through the E-Verify Employer Agent) anti-discrimination notices issued by the Office of Special Counsel for Immigration-Related Unfair Employment Practices (OSC), Civil Rights Division, U.S. Department of Justice.

5. DHS agrees to issue the E-Verify Employer Agent a user identification number and password that will be used exclusively by the E-Verify Employer Agent, on behalf of the Employer, to verify information provided by employees with DHS's databases.

6. DHS agrees to safeguard the information provided to DHS by the Employer (through the E-Verify Employer Agent), and to limit access to such information to individuals responsible for the verification of employees' employment eligibility and for evaluation of the E-Verify program, or to such other persons or entities as may be authorized by applicable law. Information will be used only to verify the accuracy of Social Security Numbers and employment eligibility, to enforce the Immigration and Nationality Act (INA) and Federal criminal laws, and to administer Federal contracting requirements.

7. DHS agrees to provide a means of automated verification that is designed (in conjunction with SSA verification procedures) to provide confirmation or tentative nonconfirmation of employees' employment eligibility within 3 Federal Government workdays of the initial inquiry.

8. DHS agrees to provide a means of secondary verification (including updating DHS records as may be necessary) for employees who contest DHS tentative nonconfirmations and photo non-match tentative nonconfirmations that is designed to provide final confirmation or nonconfirmation of the employees' employment eligibility within 10 Federal Government work days of the date of referral to DHS, unless DHS determines that more than 10 days may be necessary. In such cases, DHS will provide additional verification instructions.

C. RESPONSIBILITIES OF THE EMPLOYER

1. The Employer shall display the notices supplied by DHS (through the E-Verify Employer Agent) in a prominent place that is clearly visible to prospective employees and all employees who are to be verified through the system.

2. The Employer shall provide to the SSA and DHS the names, titles, addresses, and telephone numbers of the Employer representatives to be contacted regarding E-Verify.

3. The Employer shall become familiar with and comply with the most recent version of the E-Verify User Manual. The Employer will obtain the E-Verify User Manual from the E-Verify Employer Agent.

4. The Employer shall comply with current Form I-9 procedures, with two exceptions:

- If an employee presents a "List B" identity document, the Employer agrees to only



Company ID Number: 500952

accept "List B" documents that contain a photo. (List B documents identified in 8 C.F.R. § 274a.2(b)(1)(B)) can be presented during the Form I-9 process to establish identity.) If an employee objects to the photo requirement for religious reasons, the Employer should contact E-Verify at 1-888-464-4218.

- If an employee presents a DHS Form I-551 (Permanent Resident Card) or Form I-766 (Employment Authorization Document) to complete the Form I-9, the Employer agrees to make a photocopy of the document and to retain the photocopy with the employee's Form I-9. The photocopy must be of sufficient quality to allow for verification of the photo and written information. The employer will use the photocopy to verify the photo and to assist DHS with its review of photo non-matches that are contested by employees. Note that employees retain the right to present any List A, or List B and List C, documentation to complete the Form I-9. DHS may in the future designate other documents that activate the photo screening tool.

5. Participation in E-Verify does not exempt the Employer from the responsibility to complete, retain, and make available for inspection Forms I-9 that relate to its employees, or from other requirements of applicable regulations or laws, including the obligation to comply with the antidiscrimination requirements of section 274B of the INA with respect to Form I-9 procedures, except for the following modified requirements applicable by reason of the Employer's participation in E-Verify: (1) identity documents must have photos, as described in paragraph 4 above; (2) a rebuttable presumption is established that the Employer has not violated section 274A(a)(1)(A) of the Immigration and Nationality Act (INA) with respect to the hiring of any individual if it obtains confirmation of the identity and employment eligibility of the individual in good faith compliance with the terms and conditions of E-Verify; (3) the Employer must notify DHS if it continues to employ any employee after receiving a final nonconfirmation, and is subject to a civil money penalty between \$550 and \$1,100 for each failure to notify DHS of continued employment following a final nonconfirmation; (4) the Employer is subject to a rebuttable presumption that it has knowingly employed an unauthorized alien in violation of section 274A(a)(1)(A) if the Employer continues to employ an employee after receiving a final nonconfirmation; and (5) no person or entity participating in E-Verify is civilly or criminally liable under any law for any action taken in good faith based on information provided through the confirmation system. DHS reserves the right to conduct Form I-9 and E-Verify system compliance inspections during the course of E-Verify, as well as to conduct any other enforcement activity authorized by law.

6. The Employer shall initiate E-Verify verification procedures (through the E-Verify Employer Agent), for new employees within 3 Employer business days after each employee has been hired (but after the Form I-9 has been completed), and to complete as many (but only as many) steps of the E-Verify process as are necessary according to the E-Verify User Manual, or in the case of Federal contractors with the FAR E-Verify clause, the E-Verify User Manual for Federal contractors. The Employer is prohibited from initiating verification procedures before the employee has been hired and the Form I-9 completed. If the automated system to be queried is temporarily unavailable, the 3-day time period is extended until it is again operational in order to accommodate the Employer's attempting, in good faith, to make inquiries during the period of unavailability. Employers may initiate verification, through the E-Verify Employer Agent, by notating the Form I-9 in circumstances where the employee has applied for a Social Security Number (SSN) from the SSA and is waiting to receive the SSN, provided that the Employer



Company ID Number: 500952

(through the E-Verify Employer Agent) performs an E-Verify employment verification query using the employee's SSN as soon as the SSN becomes available.

7. The Employer may not use E-Verify procedures for pre-employment screening of job applicants, in support of any unlawful employment practice, or for any other use not authorized by this MOU. Employers must use E-Verify (through its E-Verify Employer Agent) for all new employees, unless an Employer is a Federal contractor that qualifies for the exceptions described in Article II.D.1.c. Except as provided in Article II.D, the Employer will not verify selectively and will not verify employees hired before the effective date of this MOU. The Employer understands that if the Employer uses the E-Verify system for any purpose other than as authorized by this MOU, the Employer may be subject to appropriate legal action and termination of its access to SSA and DHS information pursuant to this MOU.

8. The Employer (through the E-Verify Employer Agent) shall follow appropriate procedures (see Article III. below) regarding tentative nonconfirmations, including notifying employees in private of the finding and providing them written notice of the findings, providing written referral instructions to employees, allowing employees to contest the finding, and not taking adverse action against employees if they choose to contest the finding. Further, when employees contest a tentative nonconfirmation based upon a photo non-match, the Employer is required to take affirmative steps (see Article III.B. below) to contact DHS with information necessary to resolve the challenge.

9. The Employer shall not take any adverse action against an employee based upon the employee's perceived employment eligibility status while SSA or DHS is processing the verification request unless the Employer obtains knowledge (as defined in 8 C.F.R. § 274a.1(l)) that the employee is not work authorized. The Employer understands that an initial inability of the SSA or DHS automated verification system to verify work authorization, a tentative nonconfirmation, a case in continuance (indicating the need for additional time for the government to resolve a case), or the finding of a photo non-match, does not establish, and should not be interpreted as evidence, that the employee is not work authorized. In any of the cases listed above, the employee must be provided a full and fair opportunity to contest the finding, and if he or she does so, the employee may not be terminated or suffer any adverse employment consequences based upon the employee's perceived employment eligibility status (including denying, reducing, or extending work hours, delaying or preventing training, requiring an employee to work in poorer conditions, refusing to assign the employee to a Federal contract or other assignment, or otherwise subjecting an employee to any assumption that he or she is unauthorized to work, or otherwise mistreating an employee) until and unless secondary verification by SSA or DHS has been completed and a final nonconfirmation has been issued. If the employee does not choose to contest a tentative nonconfirmation or a photo non-match or if a secondary verification is completed and a final nonconfirmation is issued, then the Employer can find the employee is not work authorized and terminate the employee's employment. Employers or employees with questions about a final nonconfirmation may call E-Verify at 1-888-464-4218 or OSC at 1-800-255-8155 or 1-800-237-2515 (TDD).

10. The Employer shall comply with Title VII of the Civil Rights Act of 1964 and section 274B of the INA, as applicable, by not discriminating unlawfully against any individual in hiring, firing, or



Company ID Number: 500952

recruitment or referral practices because of his or her national origin or, in the case of a protected individual as defined in section 274B(a)(3) of the INA, because of his or her citizenship status. The Employer shall not engage in such illegal practices as selective verification or use of E-Verify except as provided in part D below, or discharging or refusing to hire employees because they appear or sound "foreign" or have received tentative nonconfirmations. The Employer further understands that any violation of the unfair immigration-related employment practices provisions in section 274B of the INA could subject the Employer to civil penalties, back pay awards, and other sanctions, and violations of Title VII could subject the Employer to back pay awards, compensatory and punitive damages. Violations of either section 274B of the INA or Title VII may also lead to the termination of its participation in E-Verify. If the Employer has any questions relating to the anti-discrimination provision, it should contact OSC at 1-800-255-8155 or 1-800-237-2515 (TDD).

11. The Employer shall record the case verification number on the employee's Form I-9 or to print the screen containing the case verification number and attach it to the employee's Form I-9.

12. The Employer will use the information it receives from SSA or DHS (through its E-Verify Employer Agent) pursuant to E-Verify and this MOU only to confirm the employment eligibility of employees as authorized by this MOU. The Employer agrees that it will safeguard this information, and means of access to it (such as PINS and passwords) to ensure that it is not used for any other purpose and as necessary to protect its confidentiality, including ensuring that it is not disseminated to any person other than employees of the Employer who are authorized to perform the Employer's responsibilities under this MOU, except for such dissemination as may be authorized in advance by SSA or DHS for legitimate purposes.

13. The information that the Employer receives through the E-Verify Employer Agent from SSA is governed by the Privacy Act (5 U.S.C. § 552a(i)(1) and (3)) and the Social Security Act (42 U.S.C. 1306(a)), and that any person who obtains this information under false pretenses or uses it for any purpose other than as provided for in this MOU may be subject to criminal penalties.

14. The Employer agrees to cooperate with DHS and SSA in their compliance monitoring and evaluation of E-Verify, including by permitting DHS and SSA, upon reasonable notice, to review Forms I-9 and other employment records and to interview it and its employees regarding the Employer's use of E-Verify, and to respond in a timely and accurate manner to DHS requests for information relating to their participation in E-Verify.

D. EMPLOYERS THAT ARE FEDERAL CONTRACTORS WITH THE FAR E-VERIFY CLAUSE

1. If the Employer is a Federal contractor subject to the employment verification terms in Subpart 22.18 of the FAR, it must verify the employment eligibility of any existing employee assigned to the contract and all new hires, as discussed in the Supplemental Guide for Federal Contractors. Once an employee has been verified through E-Verify by the Employer, the Employer may not reverify the employee through E-Verify.



Company ID Number: 500952

a. Federal contractors with the FAR E-Verify clause not enrolled at the time of contract award: An Employer that is not enrolled in E-Verify as a Federal contractor at the time of a contract award must enroll as a Federal contractor with the FAR E-Verify clause in the E-Verify program within 30 calendar days of contract award and, within 90 days of enrollment, begin to use E-Verify to initiate verification of employment eligibility of new hires of the Employer who are working in the United States, whether or not assigned to the contract. Once the Employer begins verifying new hires, such verification of new hires must be initiated within 3 business days after the date of hire. Once enrolled in E-Verify as a Federal contractor with the FAR E-Verify clause, the Employer must initiate verification of employees assigned to the contract within 90 calendar days from the time of enrollment in the E-Verify system and selecting which employees will be verified in E-Verify or within 30 days of an employee's assignment to the contract, whichever date is later.

b. Federal contractors already enrolled in E-Verify at the time of a contract award but are not enrolled in the system as a Federal contractor with the FAR E-Verify clause: Employers enrolled in E-Verify as a Federal contractor for 90 days or more at the time of a contract award must use E-Verify to initiate verification of employment eligibility for new hires of the Employer who are working in the United States, whether or not assigned to the contract, within 3 business days after the date of hire. Employers enrolled in E-Verify as other than a Federal contractor with the FAR E-Verify clause, must update E-Verify to indicate that they are a Federal contractor with the FAR E-Verify clause within 30 days after assignment to the contract. If the Employer is enrolled in E-Verify as a Federal contractor for 90 calendar days or less at the time of contract award, the Employer must, within 90 days of enrollment, begin to use E-Verify to initiate verification of new hires of the contractor who are working in the United States, whether or not assigned to the contract. Such verification of new hires must be initiated within 3 business days after the date of hire. An Employer enrolled as a Federal contractor with the FAR E-Verify clause in E-Verify must initiate verification of each employee assigned to the contract within 90 calendar days after date of contract award or within 30 days after assignment to the contract, whichever is later.

c. Institutions of higher education, State, local and tribal governments and sureties: Federal contractors with the FAR E-Verify clause that are institutions of higher education (as defined at 20 U.S.C. 1001(a)), State or local governments, governments of Federally recognized Indian tribes, or sureties performing under a takeover agreement entered into with a Federal agency pursuant to a performance bond may choose to only verify new and existing employees assigned to the Federal contract. Such Federal contractors with the FAR E-Verify clause may, however, elect to verify all new hires, and/or all existing employees hired after November 6, 1986. The provisions of Article II, part D, paragraphs 1.a and 1.b of this MOU providing timeframes for initiating employment verification of employees assigned to a contract apply to such institutions of higher education, State, local and tribal governments, and sureties.

d. Verification of all employees: Upon enrollment, Employers who are Federal contractors with the FAR E-Verify clause may elect to verify employment eligibility of all existing employees working in the United States who were hired after November 6, 1986, instead of verifying only new employees and those existing employees assigned to a covered Federal contract. After enrollment, Employers must elect to do so only in the manner designated by DHS



Company ID Number: 500952

and initiate E-Verify verification of all existing employees within 180 days after the election.

e. Form I-9 procedures for existing employees of Federal contractors with the FAR E-Verify clause: A Federal contractor with the FAR E-Verify clause may choose to complete new Forms I-9 for all existing employees other than those that are completely exempt from this process. Federal contractors with the FAR E-Verify clause may also update previously completed Forms I-9 to initiate E-Verify verification of existing employees who are not completely exempt as long as that Form I-9 is complete (including the SSN), complies with Article II.C.4, the employee's work authorization has not expired, and the Employer has reviewed the information reflected in the Form I-9 either in person or in communications with the employee to ensure that the employee's stated basis in section 1 of the Form I-9 for work authorization has not changed (including, but not limited to, a lawful permanent resident alien having become a naturalized U.S. citizen). If the Employer is unable to determine that the Form I-9 complies with Article II.C.4, if the employee's basis for work authorization as attested in section 1 has expired or changed, or if the Form I-9 contains no SSN or is otherwise incomplete, the Employer shall complete a new I-9 consistent with Article II.C.4, or update the previous I-9 to provide the necessary information. If section 1 of the Form I-9 is otherwise valid and up-to-date and the form otherwise complies with Article II.C.4, but reflects documentation (such as a U.S. passport or Form I-551) that expired subsequent to completion of the Form I-9, the Employer shall not require the production of additional documentation, or use the photo screening tool described in Article II.C.4, subject to any additional or superseding instructions that may be provided on this subject in the Supplemental Guide for Federal contractors. Nothing in this section shall be construed to require a second verification using E-Verify of any assigned employee who has previously been verified as a newly hired employee under this MOU, or to authorize verification of any existing employee by any Employer that is not a Federal contractor with the FAR E-Verify clause.

2. If the Employer is a Federal contractor with the FAR E-Verify clause, its compliance with this MOU is a performance requirement under the terms of the Federal contract or subcontract, and the Employer consents to the release of information relating to compliance with its verification responsibilities under this MOU to contracting officers or other officials authorized to review the Employer's compliance with Federal contracting requirements.

E. RESPONSIBILITIES OF E-VERIFY EMPLOYER AGENT

1. The E-Verify Employer Agent agrees to provide to the SSA and DHS the names, titles, addresses, and telephone numbers of the E-Verify Employer Agent representatives who will be accessing information under E-Verify.
2. The E-Verify Employer Agent agrees to become familiar with and comply with the E-Verify User Manual and provide a copy of the manual to the Employer so that the Employer can become familiar with and comply with E-Verify policy and procedures
3. The E-Verify Employer Agent agrees that any E-Verify Employer Agent Representative who will perform employment verification queries will complete the E-Verify Tutorial before that individual initiates any queries.



Company ID Number: 500952

A. The E-Verify Employer Agent agrees that all E-Verify Employer Agent representatives will take the refresher tutorials initiated by the E-Verify program as a condition of continued use of E-Verify, including any tutorials for Federal contractors if the Employer is a Federal contractor with the FAR E-Verify clause.

B. Failure to complete a refresher tutorial will prevent the E-Verify Employer Agent and Employer from continued use of the program.

4. The E-Verify Employer Agent agrees to obtain the necessary equipment to utilize E-Verify.

5. The E-Verify Employer Agent agrees to provide the Employer with the notices described in Article II.B.4 above.

6. The E-Verify Employer Agent agrees to initiate E-Verify procedures on behalf of the Employer in accordance with the E-Verify Manual and E-Verify Web-Based Tutorial. The E-Verify Employer Agent will query the automated system using information provided by the Employer and will immediately communicate the response back to the Employer. If the automated system to be queried is temporarily unavailable, the 3-day time period is extended until it is again operational in order to accommodate the E-Verify Employer Agent's attempting, in good faith, to make inquiries on behalf of the Employer during the period of unavailability. In all cases, the E-Verify Employer Agent will use the SSA verification procedures first, and will use DHS verification procedures only as directed by the SSA verification response.

7. The E-Verify Employer Agent agrees to cooperate with DHS and SSA in their compliance monitoring and evaluation of E-Verify, including by permitting DHS and SSA, upon reasonable notice, to review Forms I-9 and other employment records and to interview it and its employees regarding the use of E-Verify, and to respond in a timely and accurate manner to DHS requests for information relating to their participation in E-Verify.

ARTICLE III

REFERRAL OF INDIVIDUALS TO SSA AND DHS

A. REFERRAL TO SSA

1. If the Employer receives a tentative nonconfirmation issued by SSA, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.

2. The Employer will refer employees to SSA field offices only as directed by the automated system based on a tentative nonconfirmation, and only after the Employer records the case verification number, reviews the input to detect any transaction errors, and determines that the employee contests the tentative nonconfirmation. The Employer (through the E-Verify Employer Agent), will transmit the Social Security Number to SSA for verification again if this review



Company ID Number: 500952

indicates a need to do so. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

3. If the employee contests an SSA tentative nonconfirmation, the Employer will provide the employee with a system-generated referral letter and instruct the employee to visit an SSA office within 8 Federal Government work days. SSA will electronically transmit the result of the referral to the Employer (through the E-Verify Employer Agent) within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

4. The Employer shall not ask the employee to obtain a printout from the Social Security Number database (the Numident) or other written verification of the Social Security Number from the SSA.

B. REFERRAL TO DHS

1. If the Employer receives a tentative nonconfirmation issued by DHS, the Employer must print the tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the tentative nonconfirmation.

2. If the Employer finds a photo non-match for an employee who provides a document for which the automated system has transmitted a photo, the employer must print the photo non-match tentative nonconfirmation notice as directed by the automated system and provide it to the employee so that the employee may determine whether he or she will contest the finding.

3. The Employer shall refer individuals to DHS only when the employee chooses to contest a tentative nonconfirmation received from DHS automated verification process or when the Employer issues a tentative nonconfirmation based upon a photo non-match. The Employer will determine whether the employee contests the tentative nonconfirmation as soon as possible after the Employer receives it.

4. If the employee contests a tentative nonconfirmation issued by DHS, the Employer shall provide the employee with a referral letter and instruct the employee to contact DHS through its toll-free hotline (as found on the referral letter) within 8 Federal Government work days.

5. If the employee contests a tentative nonconfirmation based upon a photo non-match, the Employer will provide the employee with a referral letter to DHS. DHS will electronically transmit the result of the referral to the Employer within 10 Federal Government work days of the referral unless it determines that more than 10 days is necessary. The Employer agrees to check the E-Verify system regularly for case updates.

6. If an employee contests a tentative nonconfirmation based upon a photo non-match, the Employer shall send a copy of the employee's Form I-551 or Form I-766 to DHS for review by:

- Scanning and uploading the document, or



Company ID Number: 500952

- Sending a photocopy of the document by an express mail account (furnished and paid for by DHS).

7. If the Employer (through the E-Verify Employer Agent) determines that there is a photo non-match when comparing the photocopied List B document described in Article II.C.5 with the image generated in E-Verify, the Employer (through the E-Verify Employer Agent) must forward the employee's documentation to DHS using one of the means described in the preceding paragraph, and allow DHS to resolve the case.

ARTICLE IV

SERVICE PROVISIONS

The SSA and DHS will not charge the Employer or the E-Verify Employer Agent for verification services performed under this MOU. DHS is not responsible for providing the equipment needed to make inquiries. A personal computer with Internet access is needed to access the E-Verify System.

ARTICLE V

PARTIES

A. This MOU is effective upon the signature of the parties, and shall continue in effect for as long as the SSA and DHS conduct the E-Verify program unless modified in writing by the mutual consent of all parties, or terminated by any party upon 30 days prior written notice to the others. Any and all system enhancements to the E-Verify program by DHS or SSA, including but not limited to the E-Verify checking against additional data sources and instituting new verification procedures, will be covered under this MOU and will not cause the need for a supplemental MOU that outlines these changes. DHS agrees to train employers on all changes made to E-Verify through the use of mandatory refresher tutorials and updates to the E-Verify User Manual, the E-Verify User Manual for Federal Contractors or the E-Verify Supplemental Guide for Federal Contractors. Even without changes to E-Verify, DHS reserves the right to require E-Verify Employer Agents to take mandatory refresher tutorials. An E-Verify Employer Agent for an Employer that is a Federal contractor with the FAR E-Verify clause may terminate this MOU when the Federal contract that requires the Employer's participation in E-Verify is terminated or completed. In such a circumstance, the E-Verify Employer Agent must provide written notice to DHS. If the E-Verify Employer Agent fails to provide such notice, that Employer will remain a participant in the E-Verify program on behalf of the Employer, will remain bound by the terms of this MOU that apply to participants that are not Federal contractors with the FAR E-Verify clause, and will be required to use the E-Verify procedures to verify the employment eligibility of all the Employer's newly hired employees.

B. Notwithstanding Article V, part A of this MOU, DHS may terminate access to E-Verify if it is deemed necessary because of the requirements of law or policy, or upon a determination by SSA or DHS that there has been a breach of system integrity or security by the E-Verify



Company ID Number: 500952

Employer Agent or the Employer, or a failure on the part of either to comply with established procedures or legal requirements. The E-Verify Employer Agent understands that if the Employer is a Federal contractor with the FAR E-Verify clause, termination of this MOU by any party for any reason may negatively affect the Employer's performance of its contractual responsibilities.

C. Some or all SSA and DHS responsibilities under this MOU may be performed by contractor(s), and SSA and DHS may adjust verification responsibilities between each other as they may determine necessary. By separate agreement with DHS, SSA has agreed to perform its responsibilities as described in this MOU.

D. Nothing in this MOU is intended, or should be construed, to create any right or benefit, substantive or procedural, enforceable at law by any third party against the United States, its agencies, officers, or employees, or against the E-Verify Employer Agent, the Employer, or their agents, officers, or employees.

E. Each party shall be solely responsible for defending any claim or action against it arising out of or related to E-Verify or this MOU, whether civil or criminal, and for any liability wherefrom, including (but not limited to) any dispute between the E-Verify Employer Agent or the Employer and any other person or entity regarding the applicability of Section 403(d) of IIRIRA to any action taken or allegedly taken by the E-Verify Employer Agent or the Employer.

F. Participation in E-Verify is not confidential information and may be disclosed as authorized or required by law and DHS or SSA policy, including but not limited to, Congressional oversight, E-Verify publicity and media inquiries, determinations of compliance with Federal contractual requirements, and responses to inquiries under the Freedom of Information Act (FOIA).

G. The foregoing constitutes the full agreement on this subject between DHS and the E-Verify Employer Agent.



Company ID Number: 500952

The individuals whose signatures appear below represent that they are authorized to enter into this MOU on behalf of the E-Verify Employer Agent and DHS respectively. If you have any questions, contact E-Verify at 1-888-464-4218.

Approved by:

Employer Planet Recess, Inc.	
Treynor McAdams	
Name (Please Type or Print)	Title
<i>Electronically Signed</i>	02/07/2012
Signature	Date
Department of Homeland Security – Verification Division	
USCIS Verification Division	
Name (Please Type or Print)	Title
<i>Electronically Signed</i>	02/07/2012
Signature	Date

Information Required for the E-Verify Program	
Information relating to your Company:	
Company Name:	Planet Recess, Inc.
Company Facility Address:	13645 Brown Road
	Baker, LA 70714
Company Alternate Address:	P.O. Box 78160
	Baton Rouge, LA 70837



Company ID Number: 500952

County or Parish:	EAST BATON ROUGE
Employer Identification Number:	721447595
North American Industry Classification Systems Code:	454
Administrator:	
Number of Employees:	5 to 9
Number of Sites Verified for:	1
Are you verifying for more than 1 site? If yes, please provide the number of sites verified for in each State:	
<ul style="list-style-type: none">• LOUISIANA 1 site(s)	



Company ID Number: 500952

Information relating to the Program Administrator(s) for your Company on policy questions or operational problems:

Name: **Sarah R Cannon**

Telephone Number: **(225) 778 - 4700**

Fax Number: **(225) 778 - 4703**

E-mail Address: **sarah@planetrecess.com**

Name: **Treynor B McAdams**

Telephone Number: **(225) 778 - 4700**

Fax Number: **(225) 778 - 4703**

E-mail Address: **treynor@planetrecess.com**

Name: **Heather A Brady**

Telephone Number: **(225) 778 - 4700**

Fax Number: **(225) 778 - 4703**

E-mail Address: **heather@planetrecess.com**



PROPOSAL: 140-121894-1

PARD PLAYGROUND





PROPOSAL: 140-121894-1

PARD PLAYGROUND





SERIES: Basics, Nucleus
SITE PLAN
DRAWN BY: Maggie Colton

Pard Playground
5185 Eighty Arpent Road
Marrero, LA 70072


BCI Burke Company, LLC PO Box 549 Fond du Lac, Wisconsin 54936-0549 Telephone 920-921-9220

Planet Recess
140-121894-1

August 26, 2019


NOTE: ALTHOUGH ALL ATTEMPTS HAVE BEEN MADE TO PROVIDE AN ACCURATE SITE IT MAY NOT TRULY REPRESENT THE AREA WHERE THIS STRUCTURE IS TO BE PLACED.

TOTAL ADDITIONAL CONCRETE: 435 S.F.



ADDITIONAL CONCRETE: 40 S.F.

ADDITIONAL CONCRETE: 395 S.F.

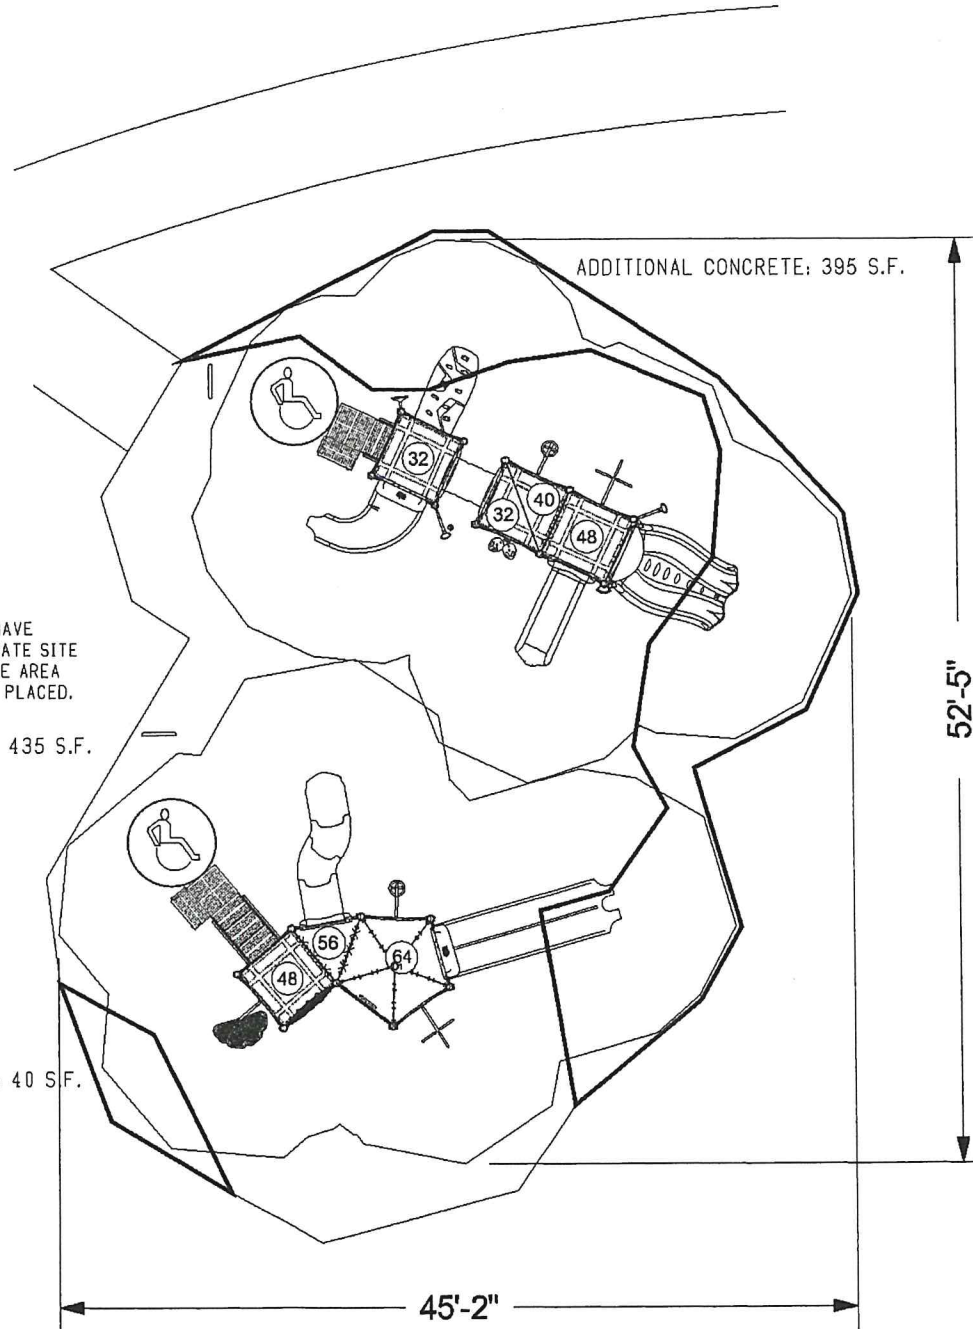

ADA ACCESSIBILITY GUIDELINE (ADAAG CONFORMANCE)

NUMBER OF PLAY EVENTS:	20	
NUMBER OF ELEVATED PLAY EVENTS:	15	
NUMBER OF ELEVATED PLAY EVENTS ACCESSIBLE BY RAMP:	PROVIDED: 0	REQ'D: 0
NUMBER OF ELEVATED PLAY EVENTS ACCESSIBLE BY TRANSFER SYSTEM:	PROVIDED: 15	
NUMBER OF ELEVATED PLAY EVENTS ACCESSIBLE BY RAMP OR TRANSFER SYSTEM:		REQ'D: 8
NUMBER OF GROUND LEVEL PLAY EVENTS:	PROVIDED: 5	REQ'D: 5
NUMBER OF TYPES OF GROUND LEVEL PLAY EVENTS:	PROVIDED: 5	REQ'D: 3

WARNING!

ACCESSIBLE SAFETY SURFACING MATERIAL IS REQUIRED BENEATH AND AROUND THIS EQUIPMENT.

FOR SLIDE FALL ZONE SURFACING AREA SEE CPSC's Handbook for Public Playground Safety.

PLATFORM HEIGHTS ARE IN INCHES ABOVE RESILIENT MATERIAL.

INFORMATION
MINIMUM FALL ZONE
SURFACED WITH
RESILIENT MATERIAL
AREA

1497 SQ.FT.

PERIMETER

221 FT.

STRUCTURE SIZE

52' 5" x 45' 2"

STRUCTURE IS DESIGNED
FOR CHILDREN AGES:

- ☐ 6-23 MONTH OLDS
☒ 2-5 YEAR OLDS
☒ 5-12 YEAR OLDS
☐ 13 + YEAR OLDS







To verify product certification,
visit www.ipema.org

The play components identified
in this plan are IPEMA
certified. The use and layout of
these components conform to the
requirements of ASTM F1487.
To verify product certification,
visit www.ipema.org

The space requirements shown
here are to ASTM standards.
Requirements for other standards
may be different.

The use and layout of play
components identified in this plan
conform to the CPSC guidelines.
U.S. CPSC recommends the
separation of age groups in
playground layouts.

ITEM	COMP.	DESCRIPTION
1	270-0006	PENTAGON PLATFORM SSP
2	270-0050	8" CLOSURE PLATE
3	270-0129	TRIANGLE PLATFORM
4	270-0130	SQUARE PLATFORM
5	270-0136	SPLIT SQUARE PLATFORM
6	270-0263	FUN PHONE GRND - GRND
7	370-0037	ASCEND ROCK CLIMBER, 32"-40"
8	370-0150	COIL CLIMBER 32"-48"
9	370-0157	COIL CLIMBER 56"-72"
10	370-0382	FAN CLIMBER 40" - 48"
11	370-0421	LEAF CLIMBER 32"
12	370-0446	LINKING RING CLIMBER 32"-48"
13	370-0447	LINKING RING CLIMBER 56"-72"
14	370-0718	TRANSFER STATION, HANDRAIL
15	370-0720	TRANSFER STATION, HANDRAIL
16	370-1623	CRUNCH BAR STATION
17	470-0434	DOUBLE POLY WAVE SLIDE 56"-48"
18	470-0437	QUARTER TURN SLIDE 32"-40"
19	470-0507	ROCKN ROLL SLIDE, 40" - 48"
20	470-0540	VIPER S 48-56
21	470-0755	LUGE SLIDE, 48"-56"
22	570-0066	SHORT TUNNEL W/ PORTS ASS
23	570-0785	TUNNEL PANEL ASSEMBLY
24	570-0788	TIC TAC TOE PANEL ASSEMBLY
25	570-0864	GEAR PANEL, BELOW PLATFORM
26	570-2666	CAR PANEL
27	570-2669	MAZE ACCESSIBLE REACH PAN
28	580-1021	FS SIGN, AGES 2-5 BOTH SIDES
29	580-1022	FS SIGN, AGES 5-12 BOTH SIDES
30	670-0031	POST MOUNTED STEERING WH

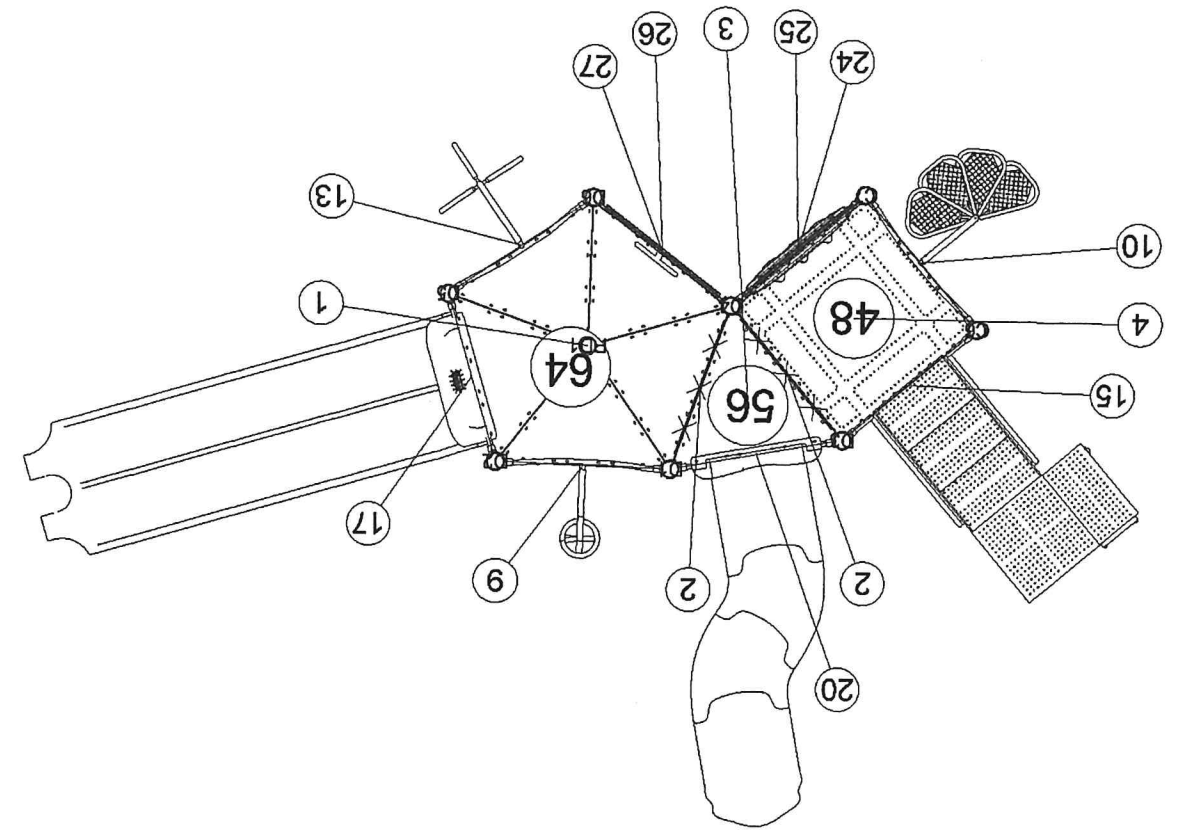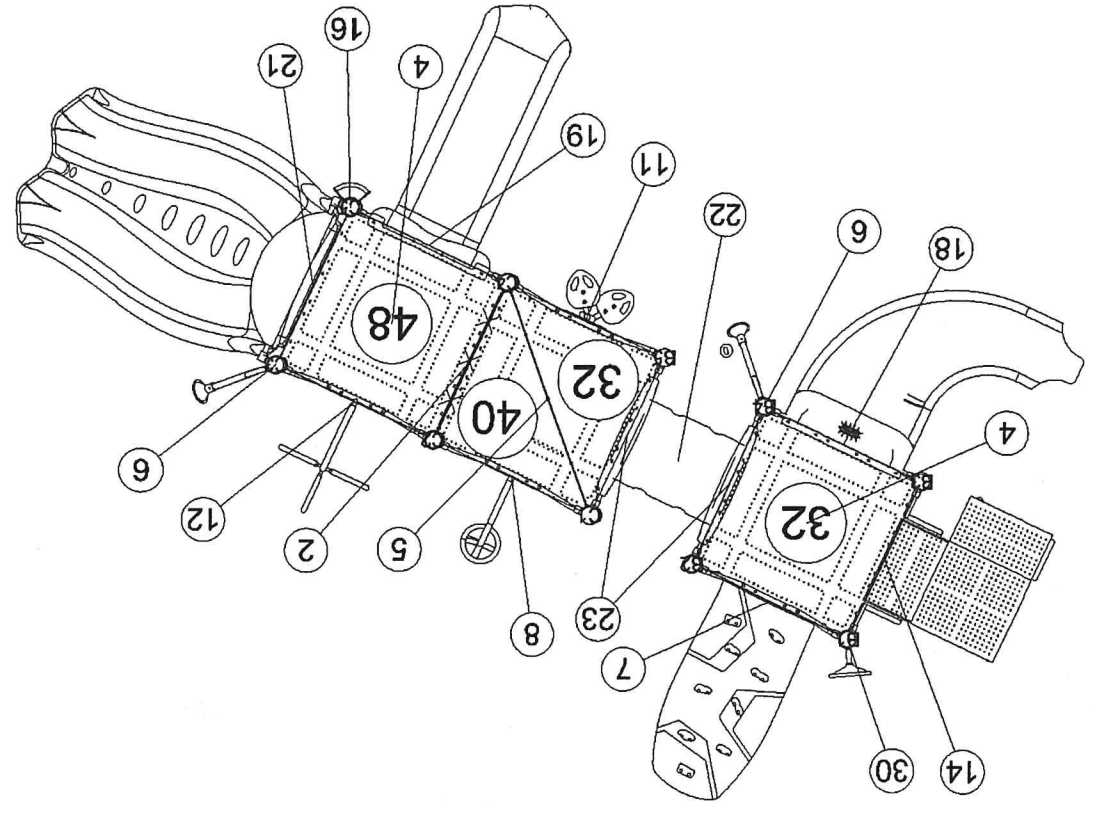

SERIES: Basics, Nucleus
COMPONENT PLAN
DRAWN BY: Maggie Colton

Pard Playground
5185 Eighty Arpent Road
Marrero, LA 70072

BCI Burke Company, LLC PO Box 549 Fond du Lac, Wisconsin 54936-0549 Telephone 920-921-9220

August 26, 2019

Planet Recess
140-121894-1



INTERNATIONAL
PLAY EQUIPMENT
MANUFACTURERS
ASSOCIATION



IPEMA ASTM F1487-17 CERTIFICATE OF COMPLIANCE

ISSUE DATE: September 19, 2019

Requested By: Carol Billon

Project: Pard Playground

In the interest of public playground safety, IPEMA provides a third-party certification service whereby TÜV SÜD America validates a manufacturer's certification of conformance to the ASTM F1487-17 (excluding sections 7.1.1, 10, 13.1.1, 13.1.2, 13.2, and 13.3) Standard Consumer Safety Performance Specification for Playground Equipment for Public Use.

The manufacturer listed below has received written validation from TÜV SÜD America that the product(s) listed conform with the requirements of ASTM F1487-17 (excluding sections 7.1.1, 10, 13.1.1, 13.1.2, 13.2, and 13.3).

This certificate is invalid if any component or part is replaced, unless purchased from the original manufacturer and assembled in accordance with the original equipment manufacturer's instructions. Check with the manufacturer to determine the validity of the certification of the product(s) listed prior to using this certificate for proof of certification.

MODEL #	COMMERCIAL NAME OF PRODUCT	PRODUCT LINE	MANUFACTURER
470-0540	Viper S, 48"- 56"	Nucleus	BCI Burke Co., LLC
570-0785	Tunnel Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0129	Triangle Platform	Nucleus	BCI Burke Co., LLC
370-0720	Transfer Station, 48"	Nucleus	BCI Burke Co., LLC
370-0718	Transfer Station, 32"	Nucleus	BCI Burke Co., LLC
570-0788	Tic Tac Toe Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0130	Square Platform	Nucleus	BCI Burke Co., LLC
270-0136	Split Square Platform	Nucleus	BCI Burke Co., LLC
570-0066	Short Tunnel w/ports	Nucleus	BCI Burke Co., LLC
470-0507	Rock 'n Roll Slide, 40"- 48"	Nucleus	BCI Burke Co., LLC
470-0437	Quarter Turn Slide 32"-40"	Nucleus	BCI Burke Co., LLC
670-0031	Post Mounted Steering Wheel	Nucleus	BCI Burke Co., LLC
670-0166	Post Assembly, 5" x 139"	Nucleus	BCI Burke Co., LLC
670-0165	Post Assembly, 5" x 123"	Nucleus	BCI Burke Co., LLC
670-0002	Post Assembly, 5" x 107"	Nucleus	BCI Burke Co., LLC
670-0386	Pentagon Stubby Post, 60"- 72"	Nucleus	BCI Burke Co., LLC
270-0006	Pentagon Platform	Nucleus	BCI Burke Co., LLC
470-0755	Luge Slide 48"- 56"	Nucleus	BCI Burke Co., LLC
370-0447	Linking Ring Climber, 56"- 72"	Nucleus	BCI Burke Co., LLC
370-0446	Linking Ring Climber, 32"- 48"	Nucleus	BCI Burke Co., LLC
370-0421	Leaf Climber 32"	Nucleus	BCI Burke Co., LLC
570-0864	Gear Panel, G/L	Nucleus	BCI Burke Co., LLC
270-0263	Fun Phone, Gr.-Gr.	Nucleus	BCI Burke Co., LLC
370-0382	Fan Climber 40"-48"	Nucleus	BCI Burke Co., LLC
470-0434	Double Poly Wave Slide 56"-64"	Nucleus	BCI Burke Co., LLC
370-1623	Crunch Bar	Nucleus	BCI Burke Co., LLC
370-0157	Coil Climber 56"-72"	Nucleus	BCI Burke Co., LLC
370-0150	Coil Climber 32"-48"	Nucleus	BCI Burke Co., LLC
570-2666	Car Panel	Nucleus	BCI Burke Co., LLC
370-0037	Ascend Rock Climber 32"- 40"	Nucleus	BCI Burke Co., LLC



INTERNATIONAL
PLAY EQUIPMENT
MANUFACTURERS
ASSOCIATION



IPEMA ASTM F1487-17 CERTIFICATE OF COMPLIANCE

ISSUE DATE: September 19, 2019

Requested By: Carol Billon

Project: Pard Playground

MODEL #	COMMERCIAL NAME OF PRODUCT	PRODUCT LINE	MANUFACTURER
270-0050	8" Closure Plate	Nucleus	BCI Burke Co., LLC



INTERNATIONAL
PLAY EQUIPMENT
MANUFACTURERS
ASSOCIATION



IPEMA CAN/CSA Z-614-14 CERTIFICATE OF COMPLIANCE

ISSUE DATE: September 19, 2019

Requested By: Carol Billon

Project: Pard Playground

In the interest of public playground safety, IPEMA provides a third-party certification service whereby TÜV SÜD America validates a manufacturer's certification of conformance to CAN/CSA-Z614-14 (excluding clauses 10 and 11) Children's Playspaces and Equipment.

The manufacturer listed below has received written validation from TÜV SÜD America that the product(s) listed conform with the requirements of CAN/CSA-Z614-14 (excluding clauses 10 and 11).

This certificate is invalid if any component or part is replaced, unless purchased from the original manufacturer and assembled in accordance with the original equipment manufacturer's instructions. Check with the manufacturer to determine the validity of the certification of the product(s) listed prior to using this certificate for proof of certification.

MODEL #	COMMERCIAL NAME OF PRODUCT	PRODUCT LINE	MANUFACTURER
570-0785	Tunnel Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0129	Triangle Platform	Nucleus	BCI Burke Co., LLC
570-0788	Tic Tac Toe Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0130	Square Platform	Nucleus	BCI Burke Co., LLC
270-0136	Split Square Platform	Nucleus	BCI Burke Co., LLC
570-0066	Short Tunnel w/ports	Nucleus	BCI Burke Co., LLC
470-0507	Rock 'n Roll Slide, 40"- 48"	Nucleus	BCI Burke Co., LLC
470-0437	Quarter Turn Slide 32"-40"	Nucleus	BCI Burke Co., LLC
670-0031	Post Mounted Steering Wheel	Nucleus	BCI Burke Co., LLC
670-0166	Post Assembly, 5" x 139"	Nucleus	BCI Burke Co., LLC
670-0165	Post Assembly, 5" x 123"	Nucleus	BCI Burke Co., LLC
670-0002	Post Assembly, 5" x 107"	Nucleus	BCI Burke Co., LLC
670-0386	Pentagon Stubby Post, 60"- 72"	Nucleus	BCI Burke Co., LLC
270-0006	Pentagon Platform	Nucleus	BCI Burke Co., LLC
470-0755	Luge Slide 48"- 56"	Nucleus	BCI Burke Co., LLC
370-0447	Linking Ring Climber, 56"- 72"	Nucleus	BCI Burke Co., LLC
370-0446	Linking Ring Climber, 32"- 48"	Nucleus	BCI Burke Co., LLC
370-0421	Leaf Climber 32"	Nucleus	BCI Burke Co., LLC
570-0864	Gear Panel, G/L	Nucleus	BCI Burke Co., LLC
270-0263	Fun Phone, Gr.-Gr.	Nucleus	BCI Burke Co., LLC
370-0382	Fan Climber 40"-48"	Nucleus	BCI Burke Co., LLC
470-0434	Double Poly Wave Slide 56"-64"	Nucleus	BCI Burke Co., LLC
370-1623	Crunch Bar	Nucleus	BCI Burke Co., LLC
370-0157	Coil Climber 56"-72"	Nucleus	BCI Burke Co., LLC
370-0150	Coil Climber 32"-48"	Nucleus	BCI Burke Co., LLC
570-2666	Car Panel	Nucleus	BCI Burke Co., LLC
370-0037	Ascend Rock Climber, 32"- 40"	Nucleus	BCI Burke Co., LLC
570-2669	ADA Maze Accessible Reach Panel	Nucleus	BCI Burke Co., LLC
270-0050	8" Closure Plate	Nucleus	BCI Burke Co., LLC



INTERNATIONAL
PLAY EQUIPMENT
MANUFACTURERS
ASSOCIATION



IPEMA CAN/CSA Z-614-14 CERTIFICAT DE CONFORMITÉ

Date de Délivrance Initiale: septembre 19, 2019

Demandé par: Carol Billon

Nom du parc: Pard Playground

Dans l'intérêt de la sécurité au terrain de jeu, IPEMA offre une certification par une tierce partie et TÜV SÜD America valide une certification par le fabricant de la conformité à la norme CAN/CSA-Z614-14 (excluant les articles 10, 11) les enfants les espaces de jeu et du matériel.

Le fabricant ci-dessous a reçu la validation de la part de TÜV SÜD America que les produits énumérés ci-dessous sont conformes aux exigences de la norme CAN/CSA-Z614-14 (excluant les articles 10, 11).

Ce certificat n'est pas valide si un composant ou une pièce est remplacé, à moins que le composant soit acheté du fabricant d'origine et assemblé conformément aux instructions du fabricant de l'équipement. Vérifiez auprès du fabricant pour déterminer la validité de la certification du (des) produit(s) indiqué(s) avant d'utiliser ce certificat pour la preuve de la certification.

MODÈLE n°	NOM COMMERCIAL DU PRODUIT	LIGNE DE PRODUIT	MANUFACTURIER
570-0785	Tunnel Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0129	Triangle Platform	Nucleus	BCI Burke Co., LLC
570-0788	Tic Tac Toe Panel Assembly	Nucleus	BCI Burke Co., LLC
270-0130	Square Platform	Nucleus	BCI Burke Co., LLC
270-0136	Split Square Platform	Nucleus	BCI Burke Co., LLC
570-0066	Short Tunnel w/ports	Nucleus	BCI Burke Co., LLC
470-0507	Rock 'n Roll Slide, 40"- 48"	Nucleus	BCI Burke Co., LLC
470-0437	Quarter Turn Slide 32"-40"	Nucleus	BCI Burke Co., LLC
670-0031	Post Mounted Steering Wheel	Nucleus	BCI Burke Co., LLC
670-0166	Post Assembly, 5" x 139"	Nucleus	BCI Burke Co., LLC
670-0165	Post Assembly, 5" x 123"	Nucleus	BCI Burke Co., LLC
670-0002	Post Assembly, 5" x 107"	Nucleus	BCI Burke Co., LLC
670-0386	Pentagon Stubby Post, 60"- 72"	Nucleus	BCI Burke Co., LLC
270-0006	Pentagon Platform	Nucleus	BCI Burke Co., LLC
470-0755	Luge Slide 48"- 56"	Nucleus	BCI Burke Co., LLC
370-0447	Linking Ring Climber, 56"- 72"	Nucleus	BCI Burke Co., LLC
370-0446	Linking Ring Climber, 32"- 48"	Nucleus	BCI Burke Co., LLC
370-0421	Leaf Climber 32"	Nucleus	BCI Burke Co., LLC
570-0864	Gear Panel, G/L	Nucleus	BCI Burke Co., LLC
270-0263	Fun Phone, Gr.-Gr.	Nucleus	BCI Burke Co., LLC
370-0382	Fan Climber 40"-48"	Nucleus	BCI Burke Co., LLC
470-0434	Double Poly Wave Slide 56"-64"	Nucleus	BCI Burke Co., LLC
370-1623	Crunch Bar	Nucleus	BCI Burke Co., LLC
370-0157	Coil Climber 56"-72"	Nucleus	BCI Burke Co., LLC
370-0150	Coil Climber 32"-48"	Nucleus	BCI Burke Co., LLC
570-2666	Car Panel	Nucleus	BCI Burke Co., LLC
370-0037	Ascend Rock Climber, 32"- 40"	Nucleus	BCI Burke Co., LLC
570-2669	ADA Maze Accessible Reach Panel	Nucleus	BCI Burke Co., LLC
270-0050	8" Closure Plate	Nucleus	BCI Burke Co., LLC

1. Identification

Product identifier	BLACK RAL 9005 031-0049	
Other means of identification		
Product Code	03671 679102 604	
Recommended use	Not available.	
Manufacturer/Importer/Supplier/Distributor information		
Manufacturer		
Company name	Quest Industrial Products, LLC.	
Address	N92 W14701 Anthony Avenue Menomonee Falls, WI 53051 United States	
Telephone	Phone	(262) 255-9500
Website	quest-ip.com	
E-mail	info@quest-ip.com	
Emergency phone number	Chemtrec Phone	800-424-9300

2. Hazard(s) identification

Physical hazards	Flammable aerosols	Category 1
	Gases under pressure	Liquefied gas
Health hazards	Skin corrosion/irritation	Category 2
	Serious eye damage/eye irritation	Category 2A
	Carcinogenicity	Category 2
	Reproductive toxicity	Category 2
	Specific target organ toxicity, single exposure	Category 3 narcotic effects
	Specific target organ toxicity, repeated exposure	Category 1
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 2
	Hazardous to the aquatic environment, long-term hazard	Category 3
OSHA defined hazards	Not classified.	

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	48.07% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 48.07% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
XYLENE		1330-20-7	10 to <20
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
CARBON BLACK		1333-86-4	0.1 to <1
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

Fire fighting equipment/instructions

In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.

General fire hazards

Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Environmental precautions

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

Components	Type	Value
ACETONE (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm
CARBON BLACK (CAS 1333-86-4)	PEL	3.5 mg/m3
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m3

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value
PROPANE (CAS 74-98-6)	PEL	100 ppm 1800 mg/m ³
XYLENE (CAS 1330-20-7)	PEL	1000 ppm 435 mg/m ³ 100 ppm

US. ACGIH Threshold Limit Values

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	STEL	750 ppm	Inhalable fraction.
	TWA	500 ppm	
CARBON BLACK (CAS 1333-86-4)	TWA	3 mg/m ³	
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm	
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm	
XYLENE (CAS 1330-20-7)	STEL	150 ppm	
	TWA	100 ppm	

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
ACETONE (CAS 67-64-1)	TWA	590 mg/m ³ 250 ppm
CARBON BLACK (CAS 1333-86-4)	TWA	0.1 mg/m ³
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m ³
	TWA	125 ppm 435 mg/m ³ 100 ppm
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m ³ 800 ppm
PROPANE (CAS 74-98-6)	TWA	1800 mg/m ³ 1000 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values**ACGIH Biological Exposure Indices**

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6) Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state Liquid.

Form Aerosol. Liquefied gas.

Color Not available.

Odor Not available.

Odor threshold Not available.

pH Not available.

Melting point/freezing point -305.68 °F (-187.6 °C) estimated

Initial boiling point and boiling range -43.78 °F (-42.1 °C) estimated

Flash point -156.0 °F (-104.4 °C) estimated

Evaporation rate Not available.

Flammability (solid, gas) Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%) 1.9 % estimated

Flammability limit - upper (%) 12.8 % estimated

Explosive limit - lower (%) Not available.

Explosive limit - upper (%) Not available.

Vapor pressure 2349.44 hPa estimated

Vapor density Not available.

Relative density Not available.

Solubility(ies)

Solubility (water) Not available.

Partition coefficient (n-octanol/water) Not available.

Auto-ignition temperature 550 °F (287.78 °C) estimated

Decomposition temperature Not available.

Viscosity Not available.

Other information

Density 6.34 lbs/gal

Flammability class Flammable IA estimated

Heat of combustion (NFPA 30B)	26.82 kJ/g estimated
Percent volatile	82.14
Specific gravity	0.76
VOC	533.689867 g/l Regulatory 4.4538578 lbs/gal Regulatory 2.8798629 lbs/gal Material 345.083682 g/l Material

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
-----------------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 15800 mg/kg
Inhalation		
LC50	Rat	76 mg/l, 4 Hours
Oral		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
CARBON BLACK (CAS 1333-86-4)		
<u>Acute</u>		
Oral		
LD50	Rat	> 8000 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	17800 mg/kg
Oral		
LD50	Rat	3500 mg/kg

Components	Species	Test Results
N-BUTANE (CAS 106-97-8)		
<u>Acute</u>		
<u>Inhalation</u>		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours
PROPANE (CAS 74-98-6)		
<u>Acute</u>		
<u>Inhalation</u>		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	> 43 g/kg
<u>Inhalation</u>		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
<u>Oral</u>		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation	Causes skin irritation.
Serious eye damage/eye irritation	Causes serious eye irritation.
Respiratory or skin sensitization	
Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	This product is not expected to cause skin sensitization.
Germ cell mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Carcinogenicity	Suspected of causing cancer.
IARC Monographs. Overall Evaluation of Carcinogenicity	
CARBON BLACK (CAS 1333-86-4)	2B Possibly carcinogenic to humans.
ETHYLBENZENE (CAS 100-41-4)	2B Possibly carcinogenic to humans.
XYLENE (CAS 1330-20-7)	3 Not classifiable as to carcinogenicity to humans.
OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)	
Not listed.	
Reproductive toxicity	Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.
Specific target organ toxicity - single exposure	May cause drowsiness and dizziness.
Specific target organ toxicity - repeated exposure	Causes damage to organs through prolonged or repeated exposure.
Aspiration hazard	Not an aspiration hazard.
Chronic effects	Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity	Toxic to aquatic life. Harmful to aquatic life with long lasting effects.		
Components	Species		Test Results
ACETONE (CAS 67-64-1)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	21.6 - 23.9 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)	4740 - 6330 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	1.37 - 4.4 mg/l, 48 hours
Fish	LC50	Fathead minnow (Pimephales promelas)	7.5 - 11 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (Lepomis macrochirus)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Environmental hazards	No.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	10 to <20
ETHYLBENZENE	100-41-4	1 to <5

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

ETHYLBENZENE (CAS 100-41-4)
XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
CARBON BLACK (CAS 1333-86-4)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
CARBON BLACK (CAS 1333-86-4)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
CARBON BLACK (CAS 1333-86-4)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
CARBON BLACK (CAS 1333-86-4)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

CARBON BLACK (CAS 1333-86-4)	Listed: February 21, 2003
ETHYLBENZENE (CAS 100-41-4)	Listed: June 11, 2004

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No

Country(s) or region	Inventory name	On inventory (yes/no)*
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-12-2015

Version # 01

HMIS® ratings Health: 2*
Flammability: 4
Physical hazard: 0

NFPA ratings Health: 2
Flammability: 4
Instability: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier RED 031-0026

Other means of identification

Product Code 03671 048956 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.

Address N92 W14701 Anthony Avenue
Menomonee Falls, WI 53051
United States


Telephone Phone (262) 255-9500

Website quest-ip.com

E-mail info@quest-ip.com

Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

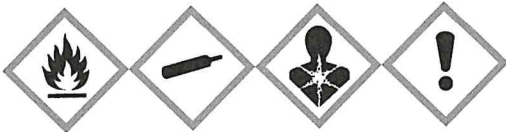Physical hazards	Flammable aerosols	Category 1
	Gases under pressure	Liquefied gas
Health hazards	Skin corrosion/irritation	Category 2
	Serious eye damage/eye irritation	Category 2A
	Carcinogenicity	Category 2
	Reproductive toxicity	Category 2
	Specific target organ toxicity, single exposure	Category 3 narcotic effects
	Specific target organ toxicity, repeated exposure	Category 1
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 2
	Hazardous to the aquatic environment, long-term hazard	Category 3
OSHA defined hazards	Not classified.	
Label elements		

Signal word

Danger

Hazard statement

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	50.68% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 50.68% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
XYLENE		1330-20-7	10 to <20
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
TITANIUM DIOXIDE		13463-67-7	0.1 to <1
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters**Fire fighting equipment/instructions****Specific methods****General fire hazards**

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.

Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm	
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m3 100 ppm	
PROPANE (CAS 74-98-6)	PEL	1800 mg/m3	

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m3	Total dust.
XYLENE (CAS 1330-20-7)	PEL	435 mg/m3 100 ppm	

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL	750 ppm
	TWA	500 ppm
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m3
XYLENE (CAS 1330-20-7)	STEL	150 ppm
	TWA	100 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
ACETONE (CAS 67-64-1)	TWA	590 mg/m3 250 ppm
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m3
	TWA	125 ppm 435 mg/m3
N-BUTANE (CAS 106-97-8)	TWA	100 ppm 1900 mg/m3
PROPANE (CAS 74-98-6)	TWA	800 ppm 1800 mg/m3 1000 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines
US - California OELs: Skin designation

PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6) Can be absorbed through the skin.

Appropriate engineering controls	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.
Individual protection measures, such as personal protective equipment	
Eye/face protection	Wear safety glasses with side shields (or goggles).
Skin protection	
Hand protection	Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.
Other	Wear appropriate chemical resistant clothing.
Respiratory protection	If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.
Thermal hazards	Wear appropriate thermal protective clothing, when necessary.
General hygiene considerations	When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state	Liquid.
Form	Aerosol. Liquefied gas.
Color	Not available.
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	-305.68 °F (-187.6 °C) estimated
Initial boiling point and boiling range	-43.78 °F (-42.1 °C) estimated
Flash point	-156.0 °F (-104.4 °C) estimated
Evaporation rate	Not available.
Flammability (solid, gas)	Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)	1.9 % estimated
Flammability limit - upper (%)	12.8 % estimated
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	2332.88 hPa estimated
Vapor density	Not available.
Relative density	Not available.
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	550 °F (287.78 °C) estimated
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	6.38 lbs/gal
Flammability class	Flammable IA estimated

Heat of combustion (NFPA 30B)	26.91 kJ/g estimated
Percent volatile	82.13
Specific gravity	0.77
VOC	347.296348 g/l Material 4.4984161 lbs/gal Regulatory 539.029128 g/l Regulatory 2.8983285 lbs/gal Material

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
-----------------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 15800 mg/kg
Inhalation		
LC50	Rat	76 mg/l, 4 Hours
Oral		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	17800 mg/kg
Oral		
LD50	Rat	3500 mg/kg
N-BUTANE (CAS 106-97-8)		
<u>Acute</u>		
Inhalation		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours

Components	Species	Test Results
PROPANE (CAS 74-98-6)		
<u>Acute</u>		
<u>Inhalation</u>		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	> 43 g/kg
<u>Inhalation</u>		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
<u>Oral</u>		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation	Causes skin irritation.
Serious eye damage/eye irritation	Causes serious eye irritation.
Respiratory or skin sensitization	
Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	This product is not expected to cause skin sensitization.
Germ cell mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Carcinogenicity	Suspected of causing cancer.
IARC Monographs. Overall Evaluation of Carcinogenicity	
ETHYLBENZENE (CAS 100-41-4)	2B Possibly carcinogenic to humans.
TITANIUM DIOXIDE (CAS 13463-67-7)	2B Possibly carcinogenic to humans.
XYLENE (CAS 1330-20-7)	3 Not classifiable as to carcinogenicity to humans.
OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)	
Not listed.	
Reproductive toxicity	Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.
Specific target organ toxicity - single exposure	May cause drowsiness and dizziness.
Specific target organ toxicity - repeated exposure	Causes damage to organs through prolonged or repeated exposure.
Aspiration hazard	Not an aspiration hazard.
Chronic effects	Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Aquatic</u>		
Crustacea	EC50	Water flea (Daphnia magna) 21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss) 4740 - 6330 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)		
<u>Aquatic</u>		
Crustacea	EC50	Water flea (Daphnia magna) 1.37 - 4.4 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Fathead minnow (<i>Pimephales promelas</i>)	7.5 - 11 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (<i>Daphnia magna</i>)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (<i>Fundulus heteroclitus</i>)	> 1000 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (<i>Lepomis macrochirus</i>)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Environmental hazards	No.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	10 to <20
ETHYLBENZENE	100-41-4	1 to <5

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

ETHYLBENZENE (CAS 100-41-4)
XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

CARBON BLACK (CAS 1333-86-4)	Listed: February 21, 2003
ETHYLBENZENE (CAS 100-41-4)	Listed: June 11, 2004
SILICA, CRYSTALLINE QUARTZ (CAS 14808-60-7)	Listed: October 1, 1988
TITANIUM DIOXIDE (CAS 13463-67-7)	Listed: September 2, 2011

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes

Country(s) or region	Inventory name	On inventory (yes/no)*
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-11-2015

Version # 01

HMIS® ratings Health: 2*
Flammability: 4
Physical hazard: 0

NFPA ratings Health: 2
Flammability: 4
Instability: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier BROWN 031-0048

Other means of identification

Product Code 03671 681413 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.

Address N92 W14701 Anthony Avenue
Menomonee Falls, WI 53051
United States

Telephone Phone (262) 255-9500

Website quest-ip.com

E-mail info@quest-ip.com

Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Gases under pressure Liquefied gas

Health hazards Acute toxicity, oral Category 4
Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A
Carcinogenicity Category 2
Reproductive toxicity (the unborn child) Category 2
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 2

Environmental hazards Hazardous to the aquatic environment, acute hazard Category 1
Hazardous to the aquatic environment, long-term hazard Category 3

OSHA defined hazards Not classified.

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Harmful if swallowed. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging the unborn child. May cause damage to organs through prolonged or repeated exposure. Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If swallowed: Call a poison center/doctor if you feel unwell. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Rinse mouth. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	40.38% of the mixture consists of component(s) of unknown acute oral toxicity. 49.2% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 49.2% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
TOLUENE		108-88-3	10 to <20
METHYL ETHYL KETONE		78-93-3	5 to <10
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
TITANIUM DIOXIDE		13463-67-7	0.1 to <1
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. Rinse mouth. If vomiting occurs, keep head low so that stomach content doesn't get into the lungs. Get medical advice/attention if you feel unwell.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim warm. Keep victim under observation. Symptoms may be delayed.
General information	If exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Material name: BROWN 031-0048

03671 681413 604 Version #: 01 Issue date: 04-11-2015

SDS US

2 / 11

Special protective equipment and precautions for firefighters

Fire fighting equipment/instructions

Specific methods

General fire hazards

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.

Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. Do not taste or swallow. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m ³ 1000 ppm	
METHYL ETHYL KETONE (CAS 78-93-3)	PEL	590 mg/m ³	
PROPANE (CAS 74-98-6)	PEL	200 ppm 1800 mg/m ³	

Material name: BROWN 031-0048

03671 681413 604 Version #: 01 Issue date: 04-11-2015

SDS US

3 / 11

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m3	Total dust.

US. OSHA Table Z-2 (29 CFR 1910.1000)

Components	Type	Value
TOLUENE (CAS 108-88-3)	Ceiling	300 ppm
	TWA	200 ppm

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL	750 ppm
	TWA	500 ppm
METHYL ETHYL KETONE (CAS 78-93-3)	STEL	300 ppm
	TWA	200 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m3
TOLUENE (CAS 108-88-3)	TWA	20 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
ACETONE (CAS 67-64-1)	TWA	590 mg/m3 250 ppm
METHYL ETHYL KETONE (CAS 78-93-3)	STEL	885 mg/m3
	TWA	300 ppm 590 mg/m3 200 ppm
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m3 800 ppm
PROPANE (CAS 74-98-6)	TWA	1800 mg/m3 1000 ppm
TOLUENE (CAS 108-88-3)	STEL	560 mg/m3 150 ppm
	TWA	375 mg/m3 100 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
METHYL ETHYL KETONE (CAS 78-93-3)	2 mg/l	MEK	Urine	*
TOLUENE (CAS 108-88-3)	0.3 mg/g	o-Cresol, with hydrolysis	Creatinine in urine	*
	0.03 mg/l	Toluene	Urine	*
	0.02 mg/l	Toluene	Blood	*

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

PROPYLENE GLYCOL METHYL ETHER ACETATE
(CAS 108-65-6)

Can be absorbed through the skin.

TOLUENE (CAS 108-88-3)

Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

TOLUENE (CAS 108-88-3)

Skin designation applies.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Keep away from food and drink. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Aerosol. Liquefied gas.

Color

Not available.

Odor

Not available.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

-305.68 °F (-187.6 °C) estimated

Initial boiling point and boiling range

-43.78 °F (-42.1 °C) estimated

Flash point

-156.0 °F (-104.4 °C) estimated

Evaporation rate

Not available.

Flammability (solid, gas)

Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

1.3 % estimated

Flammability limit - upper (%)

12.8 % estimated

Explosive limit - lower (%)

Not available.

Explosive limit - upper (%)

Not available.

Vapor pressure

2110.3 hPa estimated

Vapor density

Not available.

Relative density

Not available.

Solubility(ies)

Solubility (water)

Not available.

Partition coefficient (n-octanol/water)

Not available.

Auto-ignition temperature

550 °F (287.78 °C) estimated

Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	6.20 lbs/gal
Flammability class	Flammable IA estimated
Heat of combustion (NFPA 30B)	29.43 kJ/g estimated
Percent volatile	89.43
Specific gravity	0.75
VOC	599.350459 g/l Regulatory 5.001822 lbs/gal Regulatory 391.975118 g/l Material 3.2711909 lbs/gal Material

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Acids. Strong oxidizing agents. Nitrates. Ammonia. Amines. Isocyanates. Fluorine. Caustics. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Harmful if swallowed.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Harmful if swallowed. Narcotic effects.
-----------------------	---

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
Acute		
Dermal		
LD50	Rabbit	> 15800 mg/kg
Inhalation		
LC50	Rat	76 mg/l, 4 Hours
Oral		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
METHYL ETHYL KETONE (CAS 78-93-3)		
Acute		
Dermal		
LD50	Rabbit	> 8000 mg/kg
Inhalation		
LC50	Mouse	11000 ppm, 45 Minutes

Components	Species	Test Results
	Rat	11700 ppm, 4 Hours
Oral		
LD50	Mouse	670 mg/kg
	Rat	2300 - 3500 mg/kg
N-BUTANE (CAS 106-97-8)		
Acute		
Inhalation		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours
PROPANE (CAS 74-98-6)		
Acute		
Inhalation		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
TOLUENE (CAS 108-88-3)		
Acute		
Dermal		
LD50	Rabbit	12124 mg/kg
		14.1 ml/kg
Inhalation		
LC50	Mouse	5320 ppm, 8 Hours
		400 ppm, 24 Hours
	Rat	26700 ppm, 1 Hours
		12200 ppm, 2 Hours
		8000 ppm, 4 Hours
Oral		
LD50	Rat	2.6 g/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

TITANIUM DIOXIDE (CAS 13463-67-7)

2B Possibly carcinogenic to humans.

TOLUENE (CAS 108-88-3)

3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity Suspected of damaging the unborn child.

Specific target organ toxicity - single exposure May cause drowsiness and dizziness.

Specific target organ toxicity - repeated exposure May cause damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects May cause damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Components		Species	Test Results
ACETONE (CAS 67-64-1)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss)	4740 - 6330 mg/l, 96 hours
METHYL ETHYL KETONE (CAS 78-93-3)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	4025 - 6440 mg/l, 48 hours
Fish	LC50	Sheepshead minnow (Cyprinodon variegatus)	> 400 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (Fundulus heteroclitus)	> 1000 mg/l, 96 hours
TOLUENE (CAS 108-88-3)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	5.46 - 9.83 mg/l, 48 hours
Fish	LC50	Coho salmon, silver salmon (Oncorhynchus kisutch)	8.11 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
METHYL ETHYL KETONE	0.29
N-BUTANE	2.89
PROPANE	2.36
TOLUENE	2.73

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1

Transport hazard class(es)**Class** Not available.**Subsidiary risk** -**Packing group** Not applicable.**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.**IATA****UN number** UN1950**UN proper shipping name** Aerosols, flammable, 2.1**Transport hazard class(es)****Class** Not available.**Subsidiary risk** -**Packing group** Not applicable.**Environmental hazards** No.**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.**Other information****Passenger and cargo aircraft** Forbidden.**Cargo aircraft only** Forbidden.**IMDG****UN number** UN1950**UN proper shipping name** Aerosols, flammable, 2.1**Transport hazard class(es)****Class** Not available.**Subsidiary risk** -**Packing group** Not applicable.**Environmental hazards****Marine pollutant** No.**EmS** Not available.**Special precautions for user** Read safety instructions, SDS and emergency procedures before handling.**Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code** Not established.**15. Regulatory information****US federal regulations**

This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1) Listed.

METHYL ETHYL KETONE (CAS 78-93-3) Listed.

N-BUTANE (CAS 106-97-8) Listed.

PROPANE (CAS 74-98-6) Listed.

TOLUENE (CAS 108-88-3) Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)**Hazard categories**
Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No**SARA 302 Extremely hazardous substance**

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
TOLUENE	108-88-3	10 to <20

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

TOLUENE (CAS 108-88-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1)	6532
METHYL ETHYL KETONE (CAS 78-93-3)	6714
TOLUENE (CAS 108-88-3)	6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1)	35 %WV
METHYL ETHYL KETONE (CAS 78-93-3)	35 %WV
TOLUENE (CAS 108-88-3)	35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1)	6532
METHYL ETHYL KETONE (CAS 78-93-3)	6714
TOLUENE (CAS 108-88-3)	594

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
METHYL ETHYL KETONE (CAS 78-93-3)
N-BUTANE (CAS 106-97-8)
TITANIUM DIOXIDE (CAS 13463-67-7)
TOLUENE (CAS 108-88-3)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
METHYL ETHYL KETONE (CAS 78-93-3)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
TOLUENE (CAS 108-88-3)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
METHYL ETHYL KETONE (CAS 78-93-3)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
TOLUENE (CAS 108-88-3)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
METHYL ETHYL KETONE (CAS 78-93-3)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
TOLUENE (CAS 108-88-3)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
METHYL ETHYL KETONE (CAS 78-93-3)

N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TOLUENE (CAS 108-88-3)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer and birth defects or other reproductive harm.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

4-Methyl-2-pentanone (CAS 108-10-1)	Listed: November 4, 2011
CARBON BLACK (CAS 1333-86-4)	Listed: February 21, 2003
ETHYL ALCOHOL (CAS 64-17-5)	Listed: April 29, 2011
	Listed: July 1, 1988
ETHYLBENZENE (CAS 100-41-4)	Listed: June 11, 2004
SILICA, CRYSTALLINE QUARTZ (CAS 14808-60-7)	Listed: October 1, 1988
TITANIUM DIOXIDE (CAS 13463-67-7)	Listed: September 2, 2011

US - California Proposition 65 - CRT: Listed date/Developmental toxin

4-Methyl-2-pentanone (CAS 108-10-1)	Listed: March 28, 2014
ETHYL ALCOHOL (CAS 64-17-5)	Listed: October 1, 1987
METHANOL (CAS 67-56-1)	Listed: March 16, 2012
TOLUENE (CAS 108-88-3)	Listed: January 1, 1991

US - California Proposition 65 - CRT: Listed date/Female reproductive toxin

TOLUENE (CAS 108-88-3)	Listed: August 7, 2009
------------------------	------------------------

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	Yes
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-11-2015

Version # 01

HMIS® ratings Health: 2*
Flammability: 4
Physical hazard: 0

NFPA ratings Health: 2
Flammability: 4
Instability: 0

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.



SAFETY DATA SHEET

1. Identification

Product identifier GREEN 031-0020

Other means of identification

Product Code 03671 045659 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.
Address N92 W14701 Anthony Avenue
Menomonee Falls, WI 53051
United States
Telephone Phone (262) 255-9500
Website quest-ip.com
E-mail info@quest-ip.com
Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

Physical hazards Not classified.

Health hazards Not classified.

Environmental hazards Not classified.

OSHA defined hazards Not classified.

Label elements

Hazard symbol None.

Signal word None.

Hazard statement The substance does not meet the criteria for classification.

Precautionary statement

Prevention Observe good industrial hygiene practices.

Response Wash hands after handling.

Storage Store away from incompatible materials.

Disposal Dispose of waste and residues in accordance with local authority requirements.

Hazard(s) not otherwise classified (HNOC) None known.

Supplemental information None.

3. Composition/information on ingredients

Substances

The manufacturer lists no ingredients as hazardous according to OSHA 29 CFR 1910.1200.

Chemical name	Common name and synonyms	CAS number	%
GREEN 031-0020		N/A	100

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation Call a physician if symptoms develop or persist.
Skin contact Wash off with soap and water. Get medical attention if irritation develops and persists.
Eye contact Rinse with water. Get medical attention if irritation develops and persists.
Ingestion Rinse mouth. Get medical attention if symptoms occur.

Most important symptoms/effects, acute and delayed

Direct contact with eyes may cause temporary irritation.

Indication of immediate medical attention and special treatment needed

Treat symptomatically.

General information

Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves.

5. Fire-fighting measures

Suitable extinguishing media

Water fog. Foam. Dry chemical powder. Carbon dioxide (CO₂).

Unsuitable extinguishing media

Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical

During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters

Self-contained breathing apparatus and full protective clothing must be worn in case of fire.

Fire fighting equipment/instructions

Move containers from fire area if you can do so without risk.

Specific methods

Use standard firefighting procedures and consider the hazards of other involved materials.

General fire hazards

No unusual fire or explosion hazards noted.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures

Keep unnecessary personnel away. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Large Spills: Stop the flow of material, if this is without risk. Dike the spilled material, where this is possible. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination.

Environmental precautions

Never return spills to original containers for re-use. For waste disposal, see section 13 of the SDS. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage

Precautions for safe handling

Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Store in original tightly closed container. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

No exposure limits noted for ingredient(s).

Biological limit values

No biological exposure limits noted for the ingredient(s).

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level.

Individual protection measures, such as personal protective equipment

Eyeface protection

If contact is likely, safety glasses with side shields are recommended.

Skin protection

Hand protection

For prolonged or repeated skin contact use suitable protective gloves.

Other

Wear suitable protective clothing.

Respiratory protection

In case of insufficient ventilation, wear suitable respiratory equipment.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state	Liquid.
Form	Liquid.
Color	Not available.
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	Not available.
Initial boiling point and boiling range	Not available.
Flash point	Not available.
Evaporation rate	Not available.
Flammability (solid, gas)	Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)	Not available.
Flammability limit - upper (%)	Not available.
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.

Vapor pressure	Not available.
Vapor density	Not available.
Relative density	Not available.

Solubility(ies)

Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.

Auto-ignition temperature	Not available.
Decomposition temperature	Not available.
Viscosity	Not available.

Other information

Density	6.26 lbs/gal
Percent volatile	87.98
Specific gravity	0.75
VOC	384.531128 g/l Material 4.9301976 lbs/gal Regulatory 3.2090678 lbs/gal Material 590.767963 g/l Regulatory

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	No dangerous reaction known under conditions of normal use.
Conditions to avoid	Contact with incompatible materials.
Incompatible materials	Strong oxidizing agents.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	No adverse effects due to inhalation are expected.
Skin contact	No adverse effects due to skin contact are expected.
Eye contact	Direct contact with eyes may cause temporary irritation.
Ingestion	Expected to be a low ingestion hazard.

Symptoms related to the physical, chemical and toxicological characteristics Direct contact with eyes may cause temporary irritation.

Information on toxicological effects

Acute toxicity	Not available.
Skin corrosion/irritation	Prolonged skin contact may cause temporary irritation.
Serious eye damage/eye irritation	Direct contact with eyes may cause temporary irritation.

Respiratory or skin sensitization

Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	This product is not expected to cause skin sensitization.
Germ cell mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Carcinogenicity	This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity	This product is not expected to cause reproductive or developmental effects.
Specific target organ toxicity - single exposure	Not classified.
Specific target organ toxicity - repeated exposure	Not classified.
Aspiration hazard	Not an aspiration hazard.

12. Ecological information

Ecotoxicity	The product is not classified as environmentally hazardous. However, this does not exclude the possibility that large or frequent spills can have a harmful or damaging effect on the environment.
Persistence and degradability	No data is available on the degradability of this product.
Bioaccumulative potential	No data available.
Mobility in soil	No data available.
Other adverse effects	No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal.

14. Transport information

DOT

Not regulated as dangerous goods.

IATA

Not regulated as dangerous goods.

IMDG

Not regulated as dangerous goods.

Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information**US federal regulations**

This product is not known to be a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Not listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)**Hazard categories**

Immediate Hazard - No
Delayed Hazard - No
Fire Hazard - No
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No**SARA 313 (TRI reporting)**

Not regulated.

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Not regulated.

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Not regulated.

Safe Drinking Water Act (SDWA) Not regulated.**US state regulations****US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)**

Not listed.

US. Massachusetts RTK - Substance List

Not regulated.

US. New Jersey Worker and Community Right-to-Know Act

Not listed.

US. Pennsylvania Worker and Community Right-to-Know Law

Not listed.

US. Rhode Island RTK

Not regulated.

US. California Proposition 65

California Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65): This material is not known to contain any chemicals currently listed as carcinogens or reproductive toxins.

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No
Canada	Domestic Substances List (DSL)	No
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	No

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-11-2015

Version # 01

HMIS® ratings Health: 0
Flammability: 0
Physical hazard: 0
Personal protection: B

NFPA ratings Health: 0
Flammability: 0
Instability: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier RED 031-0026

Other means of identification

Product Code 03671 048956 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.

Address N92 W14701 Anthony Avenue
Menomonee Falls, WI 53051
United States

Telephone Phone (262) 255-9500

Website quest-ip.com

E-mail info@quest-ip.com

Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Gases under pressure Liquefied gas

Health hazards Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A
Carcinogenicity Category 2
Reproductive toxicity Category 2
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 1

Environmental hazards Hazardous to the aquatic environment, acute hazard Category 2
Hazardous to the aquatic environment, long-term hazard Category 3

OSHA defined hazards Not classified.

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	50.68% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 50.68% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
XYLENE		1330-20-7	10 to <20
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
TITANIUM DIOXIDE		13463-67-7	0.1 to <1
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters	Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.
Fire fighting equipment/instructions	In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.
General fire hazards	Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
Methods and materials for containment and cleaning up	Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.
Environmental precautions	Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS. Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.
Conditions for safe storage, including any incompatibilities	Level 2 Aerosol. Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm	
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m3	
PROPANE (CAS 74-98-6)	PEL	100 ppm 1800 mg/m3	

Material name: RED 031-0026

03671 048956 604 Version #: 01 Issue date: 04-11-2015

SDS US

3 / 11

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m3	Total dust.
XYLENE (CAS 1330-20-7)	PEL	435 mg/m3 100 ppm	

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL	750 ppm
	TWA	500 ppm
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m3
XYLENE (CAS 1330-20-7)	STEL	150 ppm
	TWA	100 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
ACETONE (CAS 67-64-1)	TWA	590 mg/m3 250 ppm
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m3
	TWA	125 ppm 435 mg/m3 100 ppm
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m3 800 ppm
PROPANE (CAS 74-98-6)	TWA	1800 mg/m3 1000 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines
US - California OELs: Skin designation

PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6) Can be absorbed through the skin.

Appropriate engineering controls	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.
Individual protection measures, such as personal protective equipment	
Eye/face protection	Wear safety glasses with side shields (or goggles).
Skin protection	
Hand protection	Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.
Other	Wear appropriate chemical resistant clothing.
Respiratory protection	If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.
Thermal hazards	Wear appropriate thermal protective clothing, when necessary.
General hygiene considerations	When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state	Liquid.
Form	Aerosol. Liquefied gas.
Color	Not available.
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	-305.68 °F (-187.6 °C) estimated
Initial boiling point and boiling range	-43.78 °F (-42.1 °C) estimated
Flash point	-156.0 °F (-104.4 °C) estimated
Evaporation rate	Not available.
Flammability (solid, gas)	Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)	1.9 % estimated
Flammability limit - upper (%)	12.8 % estimated
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	2332.88 hPa estimated
Vapor density	Not available.
Relative density	Not available.
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	550 °F (287.78 °C) estimated
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	6.38 lbs/gal
Flammability class	Flammable IA estimated

Heat of combustion (NFPA 30B)	26.91 kJ/g estimated
Percent volatile	82.13
Specific gravity	0.77
VOC	347.296348 g/l Material 4.4984161 lbs/gal Regulatory 539.029128 g/l Regulatory 2.8983285 lbs/gal Material

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
----------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	> 15800 mg/kg
<u>Inhalation</u>		
LC50	Rat	76 mg/l, 4 Hours
<u>Oral</u>		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	17800 mg/kg
<u>Oral</u>		
LD50	Rat	3500 mg/kg
N-BUTANE (CAS 106-97-8)		
<u>Acute</u>		
<u>Inhalation</u>		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours

Components	Species	Test Results
PROPANE (CAS 74-98-6)		
Acute		
Inhalation		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
Acute		
Dermal		
LD50	Rabbit	> 43 g/kg
Inhalation		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
Oral		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

ETHYLBENZENE (CAS 100-41-4) 2B Possibly carcinogenic to humans.

TITANIUM DIOXIDE (CAS 13463-67-7) 2B Possibly carcinogenic to humans.

XYLENE (CAS 1330-20-7) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.

Specific target organ toxicity - single exposure May cause drowsiness and dizziness.

Specific target organ toxicity - repeated exposure Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
Aquatic		
Crustacea	EC50	Water flea (Daphnia magna) 21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss) 4740 - 6330 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)		
Aquatic		
Crustacea	EC50	Water flea (Daphnia magna) 1.37 - 4.4 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Fathead minnow (<i>Pimephales promelas</i>)	7.5 - 11 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (<i>Daphnia magna</i>)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (<i>Fundulus heteroclitus</i>)	> 1000 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (<i>Lepomis macrochirus</i>)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Environmental hazards	No.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	10 to <20
ETHYLBENZENE	100-41-4	1 to <5

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

ETHYLBENZENE (CAS 100-41-4)
XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

CARBON BLACK (CAS 1333-86-4)	Listed: February 21, 2003
ETHYLBENZENE (CAS 100-41-4)	Listed: June 11, 2004
SILICA, CRYSTALLINE QUARTZ (CAS 14808-60-7)	Listed: October 1, 1988
TITANIUM DIOXIDE (CAS 13463-67-7)	Listed: September 2, 2011

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes

Country(s) or region	Inventory name	On inventory (yes/no)*
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date	04-11-2015
Version #	01
HMIS® ratings	Health: 2* Flammability: 4 Physical hazard: 0
NFPA ratings	Health: 2 Flammability: 4 Instability: 0
Disclaimer	The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier BLUE 031-0025

Other means of identification

Product Code 03671 672441 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.

Address N92 W14701 Anthony Avenue
Menomonee Falls, WI 53051
United States

Telephone Phone (262) 255-9500

Website quest-ip.com

E-mail info@quest-ip.com

Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Gases under pressure Liquefied gas

Health hazards Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2A
Carcinogenicity Category 2
Reproductive toxicity Category 2
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 1

Environmental hazards Hazardous to the aquatic environment, acute hazard Category 1
Hazardous to the aquatic environment, long-term hazard Category 3

OSHA defined hazards Not classified.

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	51.27% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 51.27% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	10 to <20
N-BUTANE		106-97-8	5 to <10
XYLENE		1330-20-7	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
PHTHALOCYANINE BLUE		147-14-8	1 to <5
TITANIUM DIOXIDE		13463-67-7	1 to <5
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical**Special protective equipment and precautions for firefighters****Fire fighting equipment/instructions****Specific methods****General fire hazards**

Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.

Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm	
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m3	

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
PROPANE (CAS 74-98-6)	PEL	100 ppm 1800 mg/m3	Total dust.
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m3	
XYLENE (CAS 1330-20-7)	PEL	435 mg/m3 100 ppm	

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL	750 ppm
	TWA	500 ppm
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m3
XYLENE (CAS 1330-20-7)	STEL	150 ppm
	TWA	100 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	TWA	590 mg/m3 250 ppm	Dust and mist.
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m3	
	TWA	125 ppm 435 mg/m3 100 ppm	
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m3 800 ppm	
PHTHALOCYANINE BLUE (CAS 147-14-8)	TWA	1 mg/m3	
PROPANE (CAS 74-98-6)	TWA	1800 mg/m3 1000 ppm	

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

PROPYLENE GLYCOL METHYL ETHER ACETATE
(CAS 108-65-6)

Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Aerosol. Liquefied gas.

Color

Not available.

Odor

Not available.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

-305.68 °F (-187.6 °C) estimated

Initial boiling point and boiling range

-43.78 °F (-42.1 °C) estimated

Flash point

-156.0 °F (-104.4 °C) estimated

Evaporation rate

Not available.

Flammability (solid, gas)

Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

1.9 % estimated

Flammability limit - upper (%)

12.8 % estimated

Explosive limit - lower (%)

Not available.

Explosive limit - upper (%)

Not available.

Vapor pressure

2307.8 hPa estimated

Vapor density

Not available.

Relative density

Not available.

Solubility(ies)

Solubility (water)

Not available.

Partition coefficient (n-octanol/water)

Not available.

Auto-ignition temperature

550 °F (287.78 °C) estimated

Decomposition temperature

Not available.

Viscosity

Not available.

Other information

Density	6.42 lbs/gal
Flammability class	Flammable IA estimated
Heat of combustion (NFPA 30B)	27.16 kJ/g estimated
Percent volatile	82.88
Specific gravity	0.77
VOC	4.6204244 lbs/gal Regulatory 553.648947 g/l Regulatory 355.387292 g/l Material 2.9658507 lbs/gal Material

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
----------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 15800 mg/kg
Inhalation		
LC50	Rat	76 mg/l, 4 Hours
Oral		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	17800 mg/kg
Oral		
LD50	Rat	3500 mg/kg

Components	Species	Test Results
N-BUTANE (CAS 106-97-8)		
<u>Acute</u>		
Inhalation		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours
PROPANE (CAS 74-98-6)		
<u>Acute</u>		
Inhalation		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 43 g/kg
Inhalation		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
Oral		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

ETHYLBENZENE (CAS 100-41-4)

2B Possibly carcinogenic to humans.

TITANIUM DIOXIDE (CAS 13463-67-7)

2B Possibly carcinogenic to humans.

XYLENE (CAS 1330-20-7)

3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.

Specific target organ toxicity - single exposure May cause drowsiness and dizziness.

Specific target organ toxicity - repeated exposure Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
Aquatic		
Crustacea	EC50 Water flea (Daphnia magna)	21.6 - 23.9 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Rainbow trout,donaldson trout (Oncorhynchus mykiss)	4740 - 6330 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	1.37 - 4.4 mg/l, 48 hours
Fish	LC50	Fathead minnow (Pimephales promelas)	7.5 - 11 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (Fundulus heteroclitus)	> 1000 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (Lepomis macrochirus)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.

Subsidiary risk -
Packing group Not applicable.
Environmental hazards No.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Other information
Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
 All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PHTHALOCYANINE BLUE (CAS 147-14-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
 Delayed Hazard - Yes
 Fire Hazard - Yes
 Pressure Hazard - No
 Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	5 to <10
ETHYLBENZENE	100-41-4	1 to <5

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

ETHYLBENZENE (CAS 100-41-4)
 XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)

ETHYLBENZENE (CAS 100-41-4)

N-BUTANE (CAS 106-97-8)

TITANIUM DIOXIDE (CAS 13463-67-7)

XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)

ETHYLBENZENE (CAS 100-41-4)

N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)

TITANIUM DIOXIDE (CAS 13463-67-7)

XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)

ETHYLBENZENE (CAS 100-41-4)

N-BUTANE (CAS 106-97-8)

PHTHALOCYANINE BLUE (CAS 147-14-8)

PROPANE (CAS 74-98-6)

TITANIUM DIOXIDE (CAS 13463-67-7)

XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)

ETHYLBENZENE (CAS 100-41-4)

N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)

TITANIUM DIOXIDE (CAS 13463-67-7)

XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)

ETHYLBENZENE (CAS 100-41-4)

N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)

XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

ETHYLBENZENE (CAS 100-41-4) Listed: June 11, 2004

SILICA, CRYSTALLINE QUARTZ (CAS 14808-60-7) Listed: October 1, 1988

TITANIUM DIOXIDE (CAS 13463-67-7) Listed: September 2, 2011

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	No

Country(s) or region	Inventory name	On inventory (yes/no)*
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	No
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	No
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date	04-11-2015
Version #	01
HMIS® ratings	Health: 2* Flammability: 4 Physical hazard: 0
NFPA ratings	Health: 2 Flammability: 4 Instability: 0

Disclaimer

The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier LIME 6018 031-0064

Other means of identification

Product Code 03671 709317 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name	Quest Industrial Products, LLC.	
Address	N92 W14701 Anthony Avenue Menomonee Falls, WI 53051 United States	
Telephone	Phone	(262) 255-9500
Website	quest-ip.com	
E-mail	info@quest-ip.com	
Emergency phone number	Chemtrec Phone	800-424-9300

2. Hazard(s) identification

Physical hazards	Flammable aerosols	Category 1
	Gases under pressure	Liquefied gas
Health hazards	Skin corrosion/irritation	Category 2
	Serious eye damage/eye irritation	Category 2A
	Carcinogenicity	Category 2
	Reproductive toxicity	Category 2
	Specific target organ toxicity, single exposure	Category 3 narcotic effects
	Specific target organ toxicity, repeated exposure	Category 1
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 1
	Hazardous to the aquatic environment, long-term hazard	Category 3
OSHA defined hazards	Not classified.	

Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	50.18% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 50.18% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
XYLENE		1330-20-7	10 to <20
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
COPPER		7440-50-8	0.1 to <1
TITANIUM DIOXIDE		13463-67-7	0.1 to <1
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO ₂).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.

Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.
Special protective equipment and precautions for firefighters	Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.
Fire fighting equipment/instructions	In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.
General fire hazards	Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
Methods and materials for containment and cleaning up	Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water. Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.
Environmental precautions	Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage

Precautions for safe handling	Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.
Conditions for safe storage, including any incompatibilities	Level 2 Aerosol. Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection

Occupational exposure limits

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m3 1000 ppm	
COPPER (CAS 7440-50-8)	PEL	1 mg/m3	Dust and mist.

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
ETHYLBENZENE (CAS 100-41-4)	PEL	0.1 mg/m3 435 mg/m3	Fume.
PROPANE (CAS 74-98-6)	PEL	100 ppm 1800 mg/m3	
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m3	Total dust.
XYLENE (CAS 1330-20-7)	PEL	435 mg/m3 100 ppm	

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL	750 ppm
	TWA	500 ppm
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m3
XYLENE (CAS 1330-20-7)	STEL	150 ppm
	TWA	100 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	TWA	590 mg/m3 250 ppm	
COPPER (CAS 7440-50-8)	TWA	1 mg/m3	Dust and mist.
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m3	
	TWA	125 ppm 435 mg/m3 100 ppm	
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m3 800 ppm	
PROPANE (CAS 74-98-6)	TWA	1800 mg/m3 1000 ppm	

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values
ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

PROPYLENE GLYCOL METHYL ETHER ACETATE
(CAS 108-65-6)

Can be absorbed through the skin.

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection

Wear safety glasses with side shields (or goggles).

Skin protection

Hand protection

Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.

Other

Wear appropriate chemical resistant clothing.

Respiratory protection

If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state

Liquid.

Form

Aerosol. Liquefied gas.

Color

Not available.

Odor

Not available.

Odor threshold

Not available.

pH

Not available.

Melting point/freezing point

-305.68 °F (-187.6 °C) estimated

Initial boiling point and boiling range

-43.78 °F (-42.1 °C) estimated

Flash point

-156.0 °F (-104.4 °C) estimated

Evaporation rate

Not available.

Flammability (solid, gas)

Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)

1.9 % estimated

Flammability limit - upper (%)

12.8 % estimated

Explosive limit - lower (%)

Not available.

Explosive limit - upper (%)

Not available.

Vapor pressure

2341.18 hPa estimated

Vapor density

Not available.

Relative density

Not available.

Solubility(ies)

Solubility (water)

Not available.

Partition coefficient (n-octanol/water)

Not available.

Auto-ignition temperature

550 °F (287.78 °C) estimated

Decomposition temperature

Not available.

Viscosity

Not available.

Other information

Density	6.41 lbs/gal
Flammability class	Flammable IA estimated
Heat of combustion (NFPA 30B)	26.84 kJ/g estimated
Percent volatile	81.96
Specific gravity	0.77
VOC	540.267247 g/l Regulatory 2.8982228 lbs/gal Material 347.283683 g/l Material 4.5087487 lbs/gal Regulatory

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
----------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	> 15800 mg/kg
<u>Inhalation</u>		
LC50	Rat	76 mg/l, 4 Hours
<u>Oral</u>		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	17800 mg/kg
<u>Oral</u>		
LD50	Rat	3500 mg/kg

Components	Species	Test Results
N-BUTANE (CAS 106-97-8)		
Acute		
Inhalation		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours
PROPANE (CAS 74-98-6)		
Acute		
Inhalation		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
Acute		
Dermal		
LD50	Rabbit	> 43 g/kg
Inhalation		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
Oral		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not a respiratory sensitizer.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity Suspected of causing cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

ETHYLBENZENE (CAS 100-41-4) 2B Possibly carcinogenic to humans.

TITANIUM DIOXIDE (CAS 13463-67-7) 2B Possibly carcinogenic to humans.

XYLENE (CAS 1330-20-7) 3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.

Specific target organ toxicity - single exposure May cause drowsiness and dizziness.

Specific target organ toxicity - repeated exposure Causes damage to organs through prolonged or repeated exposure.

Aspiration hazard Not an aspiration hazard.

Chronic effects Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity Very toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
Aquatic		
Crustacea	EC50 Water flea (Daphnia magna)	21.6 - 23.9 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss)	4740 - 6330 mg/l, 96 hours
COPPER (CAS 7440-50-8)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	0.036 mg/l, 48 hours
Fish	LC50	Fathead minnow (Pimephales promelas)	0.0319 - 0.0544 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	1.37 - 4.4 mg/l, 48 hours
Fish	LC50	Fathead minnow (Pimephales promelas)	7.5 - 11 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (Daphnia magna)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (Fundulus heteroclitus)	> 1000 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (Lepomis macrochirus)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards No.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Other information
Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
COPPER (CAS 7440-50-8)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	10 to <20

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
ETHYLBENZENE	100-41-4	1 to <5
COPPER	7440-50-8	0.1 to <1

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

ETHYLBENZENE (CAS 100-41-4)
 XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)
 PROPANE (CAS 74-98-6)

Safe Drinking Water Act Not regulated.
(SDWA)

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations**US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)**

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
 COPPER (CAS 7440-50-8)
 ETHYLBENZENE (CAS 100-41-4)
 N-BUTANE (CAS 106-97-8)
 TITANIUM DIOXIDE (CAS 13463-67-7)
 XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
 COPPER (CAS 7440-50-8)
 ETHYLBENZENE (CAS 100-41-4)
 N-BUTANE (CAS 106-97-8)
 PROPANE (CAS 74-98-6)
 TITANIUM DIOXIDE (CAS 13463-67-7)
 XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
 COPPER (CAS 7440-50-8)
 ETHYLBENZENE (CAS 100-41-4)
 N-BUTANE (CAS 106-97-8)
 PROPANE (CAS 74-98-6)
 TITANIUM DIOXIDE (CAS 13463-67-7)
 XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
 COPPER (CAS 7440-50-8)
 ETHYLBENZENE (CAS 100-41-4)
 N-BUTANE (CAS 106-97-8)
 PROPANE (CAS 74-98-6)
 TITANIUM DIOXIDE (CAS 13463-67-7)
 XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
 COPPER (CAS 7440-50-8)
 ETHYLBENZENE (CAS 100-41-4)
 N-BUTANE (CAS 106-97-8)

PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

ETHYLBENZENE (CAS 100-41-4)	Listed: June 11, 2004
SILICA, CRYSTALLINE QUARTZ (CAS 14808-60-7)	Listed: October 1, 1988
TITANIUM DIOXIDE (CAS 13463-67-7)	Listed: September 2, 2011

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	Yes
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date	Draft version.
Version #	Draft version.
HMIS® ratings	Health: 2* Flammability: 4 Physical hazard: 0
NFPA ratings	Health: 2 Flammability: 4 Instability: 0
Disclaimer	The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

1. Identification

Product identifier ORANGE 2008 031-0067

Other means of identification

Product Code 03671 709320 604

Recommended use Not available.

Manufacturer/Importer/Supplier/Distributor information

Manufacturer

Company name Quest Industrial Products, LLC.
Address N92 W14701 Anthony Avenue
 Menomonee Falls, WI 53051
 United States
Telephone Phone (262) 255-9500
Website quest-ip.com
E-mail info@quest-ip.com
Emergency phone number Chemtrec Phone 800-424-9300

2. Hazard(s) identification

Physical hazards	Flammable aerosols	Category 1
	Gases under pressure	Liquefied gas
Health hazards	Skin corrosion/irritation	Category 2
	Serious eye damage/eye irritation	Category 2A
	Carcinogenicity	Category 2
	Reproductive toxicity	Category 2
	Specific target organ toxicity, single exposure	Category 3 narcotic effects
	Specific target organ toxicity, repeated exposure	Category 1
Environmental hazards	Hazardous to the aquatic environment, acute hazard	Category 2
	Hazardous to the aquatic environment, long-term hazard	Category 3
OSHA defined hazards	Not classified.	

Label elements



Signal word

Danger

Hazard statement

Extremely flammable aerosol. Contains gas under pressure; may explode if heated. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of causing cancer. Suspected of damaging fertility or the unborn child. Causes damage to organs through prolonged or repeated exposure. Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe mist or vapor. Wash thoroughly after handling. Do not eat, drink or smoke when using this product. Use only outdoors or in a well-ventilated area. Avoid release to the environment. Wear protective gloves/protective clothing/eye protection/face protection.

Response	If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse.
Storage	Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Store in a well-ventilated place. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.
Disposal	Dispose of contents/container in accordance with local/regional/national/international regulations.
Hazard(s) not otherwise classified (HNOC)	None known.
Supplemental information	50.42% of the mixture consists of component(s) of unknown acute hazards to the aquatic environment. 50.42% of the mixture consists of component(s) of unknown long-term hazards to the aquatic environment.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
ACETONE		67-64-1	30 to <40
PROPANE		74-98-6	10 to <20
XYLENE		1330-20-7	10 to <20
N-BUTANE		106-97-8	5 to <10
PROPYLENE GLYCOL METHYL ETHER ACETATE		108-65-6	5 to <10
ETHYLBENZENE		100-41-4	1 to <5
TITANIUM DIOXIDE		13463-67-7	1 to <5
Other components below reportable levels			10 to <20

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	No adverse effects due to skin contact are expected. Remove contaminated clothing. Wash with plenty of soap and water. If skin irritation occurs: Get medical advice/attention. Wash contaminated clothing before reuse.
Eye contact	Immediately flush eyes with plenty of water for at least 15 minutes. Remove contact lenses, if present and easy to do. Continue rinsing. Get medical attention if irritation develops and persists. No specific first aid measures noted.
Ingestion	Not likely, due to the form of the product. In the unlikely event of swallowing contact a physician or poison control center. Rinse mouth.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Alcohol resistant foam. Water fog. Dry chemical powder. Carbon dioxide (CO2).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame. During fire, gases hazardous to health may be formed.

Special protective equipment and precautions for firefighters**Fire fighting equipment/instructions****Specific methods****General fire hazards**

Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.

In case of fire: Stop leak if safe to do so. Do not move cargo or vehicle if cargo has been exposed to heat. Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.

Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.

Extremely flammable aerosol. Contents under pressure. Pressurized container may explode when exposed to heat or flame.

6. Accidental release measures**Personal precautions, protective equipment and emergency procedures**

Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Many gases are heavier than air and will spread along ground and collect in low or confined areas (sewers, basements, tanks). Wear appropriate protective equipment and clothing during clean-up. Do not breathe mist or vapor. Emergency personnel need self-contained breathing equipment. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Cover with plastic sheet to prevent spreading. Absorb in vermiculite, dry sand or earth and place into containers. Prevent product from entering drains. Following product recovery, flush area with water.

Environmental precautions

Small Spills: Wipe up with absorbent material (e.g. cloth, fleece). Clean surface thoroughly to remove residual contamination. For waste disposal, see section 13 of the SDS.

Avoid release to the environment. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground. Inform appropriate managerial or supervisory personnel of all environmental releases.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe mist or vapor. Avoid contact with eyes, skin, and clothing. Avoid prolonged exposure. When using, do not eat, drink or smoke. Pregnant or breastfeeding women must not handle this product. Should be handled in closed systems, if possible. Use only in well-ventilated areas. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Secure cylinders in an upright position at all times, close all valves when not in use. Store in a well-ventilated place. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

Components	Type	Value	Form
ACETONE (CAS 67-64-1)	PEL	2400 mg/m ³ 1000 ppm	
ETHYLBENZENE (CAS 100-41-4)	PEL	435 mg/m ³ 100 ppm	
PROPANE (CAS 74-98-6)	PEL	1800 mg/m ³	

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

Components	Type	Value	Form
TITANIUM DIOXIDE (CAS 13463-67-7)	PEL	1000 ppm 15 mg/m ³	Total dust.
XYLENE (CAS 1330-20-7)	PEL	435 mg/m ³ 100 ppm	

US. ACGIH Threshold Limit Values

Components	Type	Value
ACETONE (CAS 67-64-1)	STEL TWA	750 ppm 500 ppm
ETHYLBENZENE (CAS 100-41-4)	TWA	20 ppm
N-BUTANE (CAS 106-97-8)	STEL	1000 ppm
TITANIUM DIOXIDE (CAS 13463-67-7)	TWA	10 mg/m ³
XYLENE (CAS 1330-20-7)	STEL TWA	150 ppm 100 ppm

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
ACETONE (CAS 67-64-1)	TWA	590 mg/m ³ 250 ppm
ETHYLBENZENE (CAS 100-41-4)	STEL	545 mg/m ³ 125 ppm
	TWA	435 mg/m ³ 100 ppm
N-BUTANE (CAS 106-97-8)	TWA	1900 mg/m ³ 800 ppm
PROPANE (CAS 74-98-6)	TWA	1800 mg/m ³ 1000 ppm

US. Workplace Environmental Exposure Level (WEEL) Guides

Components	Type	Value
PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6)	TWA	50 ppm

Biological limit values**ACGIH Biological Exposure Indices**

Components	Value	Determinant	Specimen	Sampling Time
ACETONE (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
ETHYLBENZENE (CAS 100-41-4)	0.15 g/g	Sum of mandelic acid and phenylglyoxylic acid	Creatinine in urine	*
XYLENE (CAS 1330-20-7)	1.5 g/g	Methylhippuric acids	Creatinine in urine	*

* - For sampling details, please see the source document.

Exposure guidelines**US - California OELs: Skin designation**

PROPYLENE GLYCOL METHYL ETHER ACETATE (CAS 108-65-6) Can be absorbed through the skin.

Appropriate engineering controls	Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.
Individual protection measures, such as personal protective equipment	
Eye/face protection	Wear safety glasses with side shields (or goggles).
Skin protection	
Hand protection	Wear appropriate chemical resistant gloves. Suitable gloves can be recommended by the glove supplier.
Other	Wear appropriate chemical resistant clothing.
Respiratory protection	If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.
Thermal hazards	Wear appropriate thermal protective clothing, when necessary.
General hygiene considerations	When using do not smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties

Appearance

Physical state	Liquid.
Form	Aerosol. Liquefied gas.
Color	Not available.
Odor	Not available.
Odor threshold	Not available.
pH	Not available.
Melting point/freezing point	-305.68 °F (-187.6 °C) estimated
Initial boiling point and boiling range	-43.78 °F (-42.1 °C) estimated
Flash point	-156.0 °F (-104.4 °C) estimated
Evaporation rate	Not available.
Flammability (solid, gas)	Not applicable.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)	1.9 % estimated
Flammability limit - upper (%)	12.8 % estimated
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.

Vapor pressure	2336.57 hPa estimated
Vapor density	Not available.
Relative density	Not available.
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	550 °F (287.78 °C) estimated
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Density	6.41 lbs/gal
Flammability class	Flammable IA estimated

Heat of combustion (NFPA 30B)	26.88 kJ/g estimated
Percent volatile	82.06
Specific gravity	0.77
VOC	2.9059104 lbs/gal Material 348.20486 g/l Material 4.5207082 lbs/gal Regulatory 541.700311 g/l Regulatory

10. Stability and reactivity

Reactivity	The product is stable and non-reactive under normal conditions of use, storage and transport.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Heat. Avoid temperatures exceeding the flash point. Contact with incompatible materials.
Incompatible materials	Strong acids. Acids. Strong oxidizing agents. Nitrates. Halogens. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information

Information on likely routes of exposure

Inhalation	May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Prolonged inhalation may be harmful.
Skin contact	Causes skin irritation.
Eye contact	Causes serious eye irritation.
Ingestion	Expected to be a low ingestion hazard.
Symptoms related to the physical, chemical and toxicological characteristics	Headache. May cause drowsiness and dizziness. Nausea, vomiting. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity	Narcotic effects.
----------------	-------------------

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	> 15800 mg/kg
<u>Inhalation</u>		
LC50	Rat	76 mg/l, 4 Hours
<u>Oral</u>		
LD50	Mouse	3000 mg/kg
	Rat	5800 mg/kg
ETHYLBENZENE (CAS 100-41-4)		
<u>Acute</u>		
<u>Dermal</u>		
LD50	Rabbit	17800 mg/kg
<u>Oral</u>		
LD50	Rat	3500 mg/kg
N-BUTANE (CAS 106-97-8)		
<u>Acute</u>		
<u>Inhalation</u>		
LC50	Mouse	680 mg/l, 2 Hours
	Rat	658 mg/l, 4 Hours

Components	Species	Test Results
PROPANE (CAS 74-98-6)		
<u>Acute</u>		
Inhalation		
LC50	Rat	> 1442.847 mg/l, 15 Minutes
XYLENE (CAS 1330-20-7)		
<u>Acute</u>		
Dermal		
LD50	Rabbit	> 43 g/kg
Inhalation		
LC50	Mouse	3907 mg/l, 6 Hours
	Rat	6350 mg/l, 4 Hours
Oral		
LD50	Mouse	1590 mg/kg
	Rat	3523 - 8600 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation	Causes skin irritation.
Serious eye damage/eye irritation	Causes serious eye irritation.
Respiratory or skin sensitization	
Respiratory sensitization	Not a respiratory sensitizer.
Skin sensitization	This product is not expected to cause skin sensitization.
Germ cell mutagenicity	No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.
Carcinogenicity	Suspected of causing cancer.

IARC Monographs. Overall Evaluation of Carcinogenicity

ETHYLBENZENE (CAS 100-41-4)	2B Possibly carcinogenic to humans.
TITANIUM DIOXIDE (CAS 13463-67-7)	2B Possibly carcinogenic to humans.
XYLENE (CAS 1330-20-7)	3 Not classifiable as to carcinogenicity to humans.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Reproductive toxicity	Components in this product have been shown to cause birth defects and reproductive disorders in laboratory animals. Suspected of damaging fertility or the unborn child.
Specific target organ toxicity - single exposure	May cause drowsiness and dizziness.
Specific target organ toxicity - repeated exposure	Causes damage to organs through prolonged or repeated exposure.
Aspiration hazard	Not an aspiration hazard.
Chronic effects	Causes damage to organs through prolonged or repeated exposure. Prolonged inhalation may be harmful. Prolonged exposure may cause chronic effects.

12. Ecological information

Ecotoxicity	Toxic to aquatic life. Harmful to aquatic life with long lasting effects.
--------------------	---

Components	Species	Test Results
ACETONE (CAS 67-64-1)		
<u>Aquatic</u>		
Crustacea	EC50	Water flea (Daphnia magna) 21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (Oncorhynchus mykiss) 4740 - 6330 mg/l, 96 hours
ETHYLBENZENE (CAS 100-41-4)		
<u>Aquatic</u>		
Crustacea	EC50	Water flea (Daphnia magna) 1.37 - 4.4 mg/l, 48 hours

Components		Species	Test Results
Fish	LC50	Fathead minnow (<i>Pimephales promelas</i>)	7.5 - 11 mg/l, 96 hours
TITANIUM DIOXIDE (CAS 13463-67-7)			
Aquatic			
Crustacea	EC50	Water flea (<i>Daphnia magna</i>)	> 1000 mg/l, 48 hours
Fish	LC50	Mummichog (<i>Fundulus heteroclitus</i>)	> 1000 mg/l, 96 hours
XYLENE (CAS 1330-20-7)			
Aquatic			
Fish	LC50	Bluegill (<i>Lepomis macrochirus</i>)	7.711 - 9.591 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential

Partition coefficient n-octanol / water (log Kow)

ACETONE	-0.24
ETHYLBENZENE	3.15
N-BUTANE	2.89
PROPANE	2.36
XYLENE	3.12 - 3.2

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions	Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.
Local disposal regulations	Dispose in accordance with all applicable regulations.
Hazardous waste code	The waste code should be assigned in discussion between the user, the producer and the waste disposal company.
Waste from residues / unused products	Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).
Contaminated packaging	Since emptied containers may retain product residue, follow label warnings even after container is emptied. Empty containers should be taken to an approved waste handling site for recycling or disposal. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable, 2.1
Transport hazard class(es)	
Class	Not available.
Subsidiary risk	-
Packing group	Not applicable.
Environmental hazards	No.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.

Other information

Passenger and cargo aircraft Forbidden.
Cargo aircraft only Forbidden.

IMDG

UN number UN1950
UN proper shipping name Aerosols, flammable, 2.1
Transport hazard class(es)
Class Not available.
Subsidiary risk -
Packing group Not applicable.
Environmental hazards
Marine pollutant No.
EmS Not available.
Special precautions for user Read safety instructions, SDS and emergency procedures before handling.
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code Not established.

15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

ACETONE (CAS 67-64-1)	Listed.
ETHYLBENZENE (CAS 100-41-4)	Listed.
N-BUTANE (CAS 106-97-8)	Listed.
PROPANE (CAS 74-98-6)	Listed.
XYLENE (CAS 1330-20-7)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories Immediate Hazard - Yes
Delayed Hazard - Yes
Fire Hazard - Yes
Pressure Hazard - No
Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
XYLENE	1330-20-7	10 to <20
ETHYLBENZENE	100-41-4	1 to <5

Other federal regulations

Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List

ETHYLBENZENE (CAS 100-41-4)
XYLENE (CAS 1330-20-7)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.

Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number

ACETONE (CAS 67-64-1) 6532

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

ACETONE (CAS 67-64-1) 35 %WV

DEA Exempt Chemical Mixtures Code Number

ACETONE (CAS 67-64-1) 6532

US state regulations

US. California Controlled Substances. CA Department of Justice (California Health and Safety Code Section 11100)

Not listed.

US. California. Candidate Chemicals List. Safer Consumer Products Regulations (Cal. Code Regs, tit. 22, 69502.3, subd. (a))

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Massachusetts RTK - Substance List

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. New Jersey Worker and Community Right-to-Know Act

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Pennsylvania Worker and Community Right-to-Know Law

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
TITANIUM DIOXIDE (CAS 13463-67-7)
XYLENE (CAS 1330-20-7)

US. Rhode Island RTK

ACETONE (CAS 67-64-1)
ETHYLBENZENE (CAS 100-41-4)
N-BUTANE (CAS 106-97-8)
PROPANE (CAS 74-98-6)
XYLENE (CAS 1330-20-7)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause cancer.

US - California Proposition 65 - CRT: Listed date/Carcinogenic substance

ETHYLBENZENE (CAS 100-41-4) Listed: June 11, 2004
TITANIUM DIOXIDE (CAS 13463-67-7) Listed: September 2, 2011

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	No

Country(s) or region	Inventory name	On inventory (yes/no)*
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	Yes
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 04-11-2015

Version # 01

HMS® ratings Health: 2*
Flammability: 4
Physical hazard: 0

NFPA ratings Health: 2
Flammability: 4
Instability: 0

Disclaimer The information in the sheet was written based on the best knowledge and experience currently available. THE INFORMATION CONTAINED HEREIN IS BASED ON DATA BELIEVED TO BE RELIABLE AND THE MANUFACTURER DISCLAIMS ANY LIABILITY INCURRED FROM THE USE OR RELIANCE UPON THE SAME. THE INFORMATION GIVEN IS DESIGNED ONLY AS A GUIDANCE FOR SAFE HANDLING, USE, PROCESSING, STORAGE, TRANSPORTATION, DISPOSAL AND RELEASE AND IS NOT TO BE CONSIDERED A WARRANTY OR QUALITY SPECIFICATION. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text. This safety information is not a license to use this material as claimed by any patents of third parties. The user alone must finally determine whether a contemplated use of this material will infringe any such patents, and for obtaining any required licenses.

Safety Data Sheet

Section 1. Identification

Product Name: Patching Compound
Product Code: JX-205 Patch 408 Brown LF

Date Issued: 4/3/2013

Manufacturer:
Lakeside Plastics Inc.
450 W 33rd Ave.
Oshkosh, WI 54903

Emergency Contact:
800-535-5053

Section 2. Hazard Identification

Emergency Overview: Flammable liquid and vapor.

Eye contact: Mildly irritating to the eyes.

Skin contact: Moderately irritating during brief skin contact. Prolonged and repeated contact removes oils from skin and may dry skin causing irritation, redness and rash.

Ingestion: Slightly toxic if swallowed. Mild to severe lung injury may occur if this material is drawn into lungs during swallowing or during vomiting.

Inhalation: Prolonged exposure to high vapor concentrations can cause central nervous system depression, including headache, dizziness, weakness, confusion, nausea and loss of consciousness.

Caution: Based on rat inhalation studies, IARC concluded there is "sufficient evidence in experimental animals" to classify carbon black as "possibly carcinogenic to humans", (Group 2B). Carbon black is not classified as a carcinogen by OSHA, NTP nor ACGIH.

Section 3. Composition /Information on Ingredients

Chemical	CAS #	% by weight	OSHA PEL	ACGIH TLV
Methyl ethyl ketone	78-93-3	30.0 – 40.0	200 ppm	300 ppm
Acetone	67-64-1	30.0 – 40.0	1000 ppm	750 ppm
Carbon Black	1333-86-4	0.1 – 0.5	3.5 mg/m ³	3.5 mg/m ³

Section 4. First Aid Measures

Eyes: Flush with large amounts of water, holding eyelid open for 15 minutes. If irritation persists, seek medical attention.

Skin: Remove contaminated clothing and footwear. Wash with soap and water or plain water for 15 minutes. If rash or irritation develops, seek medical attention.

Inhalation: Remove to fresh air. Seek medical attention if irritation persists.

Ingestion: Do not induce vomiting. Never give anything by mouth to an unconscious person. If vomiting occurs spontaneously, keep airway clear, give water and seek medical attention.

Section 5. Fire Fighting Measures

Flash Point: -4 deg F

OSHA Flammability Classification: Class IB

Flammable Limits:	Lower	Upper
Methyl ethyl ketone	1.9%	11.5%
Acetone	2.6%	12.8%

Extinguishing Media: Dry chemical, carbon dioxide, foam.

Special Firefighting Procedures: Wear self-contained breathing apparatus. Use water spray to cool containers exposed to fire.

Unusual Fire and Explosion Hazards: Flammable vapors may travel distances along the ground before reaching a source of ignition and flashing back. Electrostatic charge may build-up during handling. Grounding of equipment is recommended. Closed containers may rupture from pressure build-up when exposed to fire or extreme heat.

Section 6. Accidental Release Measures

Action to be taken in case of release or spill: Remove any sources of ignition. Contain with inert material and scoop up or soak up material with absorbent compound. Use non-sparking tools. Prevent this material from entering sewers or waterways. Consult a regulatory specialist to determine appropriate state or local reporting requirements, for assistance in waste characterization and hazardous waste disposal.

Section 7. Handling and Storage

Handling: Keep away from heat, sparks and flame. Wear protective gloves and safety glasses. Use only with adequate ventilation. Use grounding and bonding connections when transferring material to prevent static discharges, fire or explosion. Do not weld on or torch cut on or near this container.

Storage: Store at temperatures below 30 deg C and keep containers closed when not in use. Limit indoor storage to areas equipped with appropriate automatic sprinkler system and in a cool well ventilated place.

Section 8. Exposure Controls/ Personal Protection

Engineering Controls: Provide sufficient mechanical ventilation or other engineering controls to maintain exposure below TLV's. All electrical equipment should comply with NFPA NEC standards.

Respiratory Protective Equipment: For known vapor concentrations above the listed exposure guidelines in Section 2, use a NIOSH-approved organic vapor respirator.

Protective Gloves: Rubber, neoprene, nitrile or PVC. Avoid skin contact. Before eating, drinking, smoking, use of toilet facilities or leaving work, wash hands with plenty of mild soap and water.

Eye and Face Protection: Industrial safety glasses. Where there is a likelihood of misting, splashing or spraying, use of chemical goggles and face shield should be worn.

Other Protective Equipment: Use chemical resistant apron or other impervious clothing, if needed, to avoid contaminating regular clothing which could result in prolonged or repeated skin contact. Immediately remove any contaminated clothing, including shoes. Ensure that an emergency eye wash station and safety shower are near the work station.

Ventilation: Local exhaust is recommended.

Section 9. Physical and Chemical Properties

Appearance: Liquid

VOC: 4.6 – 4.8 lbs/gal

Boiling Range: 120 – 200 F

Specific Gravity: 0.86

Vapor Density: 2.0 – 2.41 (Air = 1.0)

% Volatile by Weight: 65.0 – 70.0

Evaporation Rate: Slower than ether

Section 10. Stability and Reactivity

Stability: Stable

Hazardous Polymerization: Will not occur.

Hazardous Decomposition Products: Oxides of carbon.

Incompatibility: Strong oxidizers, inorganic oxidizers and halogens.

Conditions to Avoid: Prolonged exposure to temperatures above 300 deg F and sources of ignition.

Section 11. Toxicological Information

Oral Acetone: Acute oral LD50(rat) 5800 mg/kg

Oral MEK: Acute oral LD50(rat) 2700 – 5600 mg/kg

Inhalation Acetone: Acute 8 hour LD50(rat) 50,100 mg/kg
Inhalation MEK: Acute 4 hour LD50(rat) 11,700 ppm
Eye: Severe eye irritant based on standard Draize tests.
Dermal Acetone: Acute dermal LD50(rabbit) 20,000 mg/kg
Dermal MEK: Acute 4-hour LD50(rabbit) 11,700 mg/kg

Section 12. Ecological Information

Ecotoxicological Information: Non-toxic to aquatic life.

Section 13. Disposal Considerations

Disposal Method: Dispose of in accordance with local, state and federal regulations.

Section 14. Transportation Information

DOT Shipping Name: Adhesives, 3, UN1133, PG II *

DOT Hazard Class: Class 3, Flammable Liquid

RQ: for Methyl ethyl ketone 5,000 lb
for Acetone 5,000 lb

* Consult 49CFR 173.150 for exemptions to DOT shipping requirements.

Section 15. Regulatory Information

TSCA Status: All components of this compound are listed on the US TSCA Inventory.

SARA Section 313 Toxic Chemicals: None

California Proposition 65: This product contains chemical(s) known to the State of California to cause birth defects or other reproductive harm.

Section 16. Other Information

Disclaimer of Expressed and Implied Warranties: The information in this document is believed to be correct as of the date issued. However, no warranty of fitness for any particular purpose, or any other warranty is expressed or is to be implied regarding the accuracy or completeness of this information, the results to be obtained from the use of this information or the product, the safety of this product, or the hazards related to its use. This information and product are furnished on the condition that the person receiving them shall make his own determination as to the suitability of the product for his particular purpose and on condition that he assume the risk of his use thereof.

SAFETY DATA SHEET

1. Identification

Product number 0617404
Product identifier **CLEAN CHOICE GRAFFITI REMOVER**
Company information FASTENAL
2001 THEURER BLVD
WINONA, MN 55987 United States
Emergency telephone US 1-866-836-8855
Emergency telephone outside US 1-952-852-4646
Version # 01
Recommended use CLEANER
Recommended restrictions None known.

2. Hazard(s) identification

Physical hazards Flammable aerosols Category 1
Health hazards Skin corrosion/irritation Category 2
Serious eye damage/eye irritation Category 2
Reproductive toxicity Category 2
Specific target organ toxicity, single exposure Category 3 narcotic effects
Specific target organ toxicity, repeated exposure Category 2
Aspiration hazard Category 1
Environmental hazards Not classified.
OSHA defined hazards Not classified.
Label elements



Signal word Danger

Hazard statement Extremely flammable aerosol. May be fatal if swallowed and enters airways. Causes skin irritation. Causes serious eye irritation. May cause drowsiness or dizziness. Suspected of damaging fertility or the unborn child. May cause damage to organs through prolonged or repeated exposure.

Precautionary statement

Prevention

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Keep away from heat/sparks/open flames/hot surfaces. - No smoking. Do not spray on an open flame or other ignition source. Pressurized container: Do not pierce or burn, even after use. Do not breathe gas. Wash thoroughly after handling. Use only outdoors or in a well-ventilated area. Wear protective gloves/protective clothing/eye protection/face protection.

Response

If swallowed: Immediately call a poison center/doctor. If swallowed: Rinse mouth. Do NOT induce vomiting. If on skin: Wash with plenty of water. If inhaled: Remove person to fresh air and keep comfortable for breathing. If in eyes: Rinse cautiously with water for several minutes. Remove contact lenses, if present and easy to do. Continue rinsing. If exposed or concerned: Get medical advice/attention. Call a poison center/doctor if you feel unwell. Specific treatment (see this label). Do NOT induce vomiting. If skin irritation occurs: Get medical advice/attention. If eye irritation persists: Get medical advice/attention. Take off contaminated clothing and wash before reuse. Collect spillage.

Storage

Store in a well-ventilated place. Keep container tightly closed. Store locked up. Protect from sunlight. Do not expose to temperatures exceeding 50°C/122°F.

Disposal

Dispose of contents/container in accordance with local/regional/national/international regulations.

Hazard(s) not otherwise classified (HNOC) None known.

Supplemental information None.

3. Composition/information on ingredients

Mixtures

Chemical name	Common name and synonyms	CAS number	%
Toluene		108-88-3	20 - 40
2-butoxyethanol		111-76-2	2.5 - 10
Acetone		67-64-1	2.5 - 10
Butane		106-97-8	2.5 - 10
Diethylene Glycol Monobutyl Ether		112-34-5	2.5 - 10
Propane		74-98-6	2.5 - 10
Sodium Hydroxide		1310-73-2	0.1 - 1
Other components below reportable levels			20 - 40

*Designates that a specific chemical identity and/or percentage of composition has been withheld as a trade secret.

4. First-aid measures

Inhalation	Remove victim to fresh air and keep at rest in a position comfortable for breathing. Call a POISON CENTER or doctor/physician if you feel unwell.
Skin contact	Wash off with soap and water. Get medical attention if irritation develops and persists.
Eye contact	Rinse with water. Get medical attention if irritation develops and persists.
Ingestion	Rinse mouth. Get medical attention if symptoms occur.
Most important symptoms/effects, acute and delayed	May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain. Prolonged exposure may cause chronic effects.
Indication of immediate medical attention and special treatment needed	Provide general supportive measures and treat symptomatically. Keep victim under observation. Symptoms may be delayed.
General information	IF exposed or concerned: Get medical advice/attention. If you feel unwell, seek medical advice (show the label where possible). Ensure that medical personnel are aware of the material(s) involved, and take precautions to protect themselves. Show this safety data sheet to the doctor in attendance.

5. Fire-fighting measures

Suitable extinguishing media	Powder. Foam. Carbon dioxide (CO ₂).
Unsuitable extinguishing media	Do not use water jet as an extinguisher, as this will spread the fire.
Specific hazards arising from the chemical	Contents under pressure. Pressurized container may explode when exposed to heat or flame.
Special protective equipment and precautions for firefighters	Firefighters must use standard protective equipment including flame retardant coat, helmet with face shield, gloves, rubber boots, and in enclosed spaces, SCBA.
Fire-fighting equipment/instructions	Move containers from fire area if you can do so without risk. Containers should be cooled with water to prevent vapor pressure build up. For massive fire in cargo area, use unmanned hose holder or monitor nozzles, if possible. If not, withdraw and let fire burn out.
Specific methods	Use standard firefighting procedures and consider the hazards of other involved materials. Move containers from fire area if you can do so without risk. In the event of fire and/or explosion do not breathe fumes.
General fire hazards	Extremely flammable aerosol.

6. Accidental release measures

Personal precautions, protective equipment and emergency procedures	Keep unnecessary personnel away. Keep people away from and upwind of spill/leak. Keep out of low areas. Wear appropriate protective equipment and clothing during clean-up. Do not breathe gas. Do not touch damaged containers or spilled material unless wearing appropriate protective clothing. Ventilate closed spaces before entering them. Local authorities should be advised if significant spillages cannot be contained. For personal protection, see section 8 of the SDS.
--	--

Methods and materials for containment and cleaning up

Refer to attached safety data sheets and/or instructions for use. Eliminate all ignition sources (no smoking, flares, sparks, or flames in immediate area). Keep combustibles (wood, paper, oil, etc.) away from spilled material. Stop leak if you can do so without risk. Move the cylinder to a safe and open area if the leak is irreparable. Isolate area until gas has dispersed. Prevent entry into waterways, sewer, basements or confined areas. For waste disposal, see section 13 of the SDS.

Environmental precautions

Avoid release to the environment. Inform appropriate managerial or supervisory personnel of all environmental releases. Prevent further leakage or spillage if safe to do so. Avoid discharge into drains, water courses or onto the ground.

7. Handling and storage**Precautions for safe handling**

Obtain special instructions before use. Do not handle until all safety precautions have been read and understood. Pressurized container: Do not pierce or burn, even after use. Do not use if spray button is missing or defective. Do not spray on a naked flame or any other incandescent material. Do not smoke while using or until sprayed surface is thoroughly dry. Do not cut, weld, solder, drill, grind, or expose containers to heat, flame, sparks, or other sources of ignition. All equipment used when handling the product must be grounded. Do not re-use empty containers. Do not breathe gas. Do not get in eyes, on skin, or on clothing. Avoid prolonged exposure. Use only in well-ventilated areas. Should be handled in closed systems, if possible. Pregnant or breastfeeding women must not handle this product. Wear appropriate personal protective equipment. Wash hands thoroughly after handling. Avoid release to the environment. Observe good industrial hygiene practices.

Conditions for safe storage, including any incompatibilities

Level 2 Aerosol.

Store locked up. Pressurized container. Protect from sunlight and do not expose to temperatures exceeding 50°C/122 °F. Do not puncture, incinerate or crush. Do not handle or store near an open flame, heat or other sources of ignition. This material can accumulate static charge which may cause spark and become an ignition source. Refrigeration recommended. Store away from incompatible materials (see Section 10 of the SDS).

8. Exposure controls/personal protection**Occupational exposure limits****US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)**

Components	Type	Value
2-butoxyethanol (CAS 111-76-2)	PEL	240 mg/m3
Acetone (CAS 67-64-1)	PEL	50 ppm 2400 mg/m3
Propane (CAS 74-98-6)	PEL	1000 ppm 1800 mg/m3
Sodium Hydroxide (CAS 1310-73-2)	PEL	1000 ppm 2 mg/m3

US. OSHA Table Z-2 (29 CFR 1910.1000)

Components	Type	Value
Toluene (CAS 108-88-3)	Ceiling	300 ppm
	TWA	200 ppm

US. ACGIH Threshold Limit Values

Components	Type	Value	Form
2-butoxyethanol (CAS 111-76-2)	TWA	20 ppm	
Acetone (CAS 67-64-1)	STEL	750 ppm	
	TWA	500 ppm	
Butane (CAS 106-97-8)	STEL	1000 ppm	
Diethylene Glycol	TWA	10 ppm	Inhalable fraction and vapor.
Monobutyl Ether (CAS 112-34-5)			
Sodium Hydroxide (CAS 1310-73-2)	Ceiling	2 mg/m3	
Toluene (CAS 108-88-3)	TWA	20 ppm	

US. NIOSH: Pocket Guide to Chemical Hazards

Components	Type	Value
2-butoxyethanol (CAS 111-76-2)	TWA	24 mg/m3
		5 ppm
Acetone (CAS 67-64-1)	TWA	590 mg/m3
		250 ppm
Butane (CAS 106-97-8)	TWA	1900 mg/m3
		800 ppm
Propane (CAS 74-98-6)	TWA	1800 mg/m3
		1000 ppm
Sodium Hydroxide (CAS 1310-73-2)	Ceiling	2 mg/m3
Toluene (CAS 108-88-3)	STEL	560 mg/m3
		150 ppm
	TWA	375 mg/m3
		100 ppm

Biological limit values

ACGIH Biological Exposure Indices

Components	Value	Determinant	Specimen	Sampling Time
2-butoxyethanol (CAS 111-76-2)	200 mg/g	Butoxyacetic acid (BAA), with hydrolysis	Creatinine in urine	*
Acetone (CAS 67-64-1)	50 mg/l	Acetone	Urine	*
Toluene (CAS 108-88-3)	0.3 mg/g	o-Cresol, with hydrolysis	Creatinine in urine	*
	0.03 mg/l	Toluene	Urine	*
	0.02 mg/l	Toluene	Blood	*

* - For sampling details, please see the source document.

Exposure guidelines

US - California OELs: Skin designation

2-butoxyethanol (CAS 111-76-2)	Can be absorbed through the skin.
Toluene (CAS 108-88-3)	Can be absorbed through the skin.

US - Minnesota Haz Subs: Skin designation applies

2-butoxyethanol (CAS 111-76-2)	Skin designation applies.
Toluene (CAS 108-88-3)	Skin designation applies.

US - Tennessee OELs: Skin designation

2-butoxyethanol (CAS 111-76-2)	Can be absorbed through the skin.
--------------------------------	-----------------------------------

US NIOSH Pocket Guide to Chemical Hazards: Skin designation

2-butoxyethanol (CAS 111-76-2)	Can be absorbed through the skin.
--------------------------------	-----------------------------------

US. OSHA Table Z-1 Limits for Air Contaminants (29 CFR 1910.1000)

2-butoxyethanol (CAS 111-76-2)	Can be absorbed through the skin.
--------------------------------	-----------------------------------

Appropriate engineering controls

Good general ventilation (typically 10 air changes per hour) should be used. Ventilation rates should be matched to conditions. If applicable, use process enclosures, local exhaust ventilation, or other engineering controls to maintain airborne levels below recommended exposure limits. If exposure limits have not been established, maintain airborne levels to an acceptable level. Eye wash facilities and emergency shower must be available when handling this product.

Individual protection measures, such as personal protective equipment

Eye/face protection Wear safety glasses with side shields (or goggles).

Hand protection Wear appropriate chemical resistant gloves.

Skin protection

Other Wear appropriate chemical resistant clothing. Use of an impervious apron is recommended.

Skin protection

Respiratory protection If permissible levels are exceeded use NIOSH mechanical filter / organic vapor cartridge or an air-supplied respirator.

Thermal hazards

Wear appropriate thermal protective clothing, when necessary.

General hygiene considerations

When using, do not eat, drink or smoke. Always observe good personal hygiene measures, such as washing after handling the material and before eating, drinking, and/or smoking. Routinely wash work clothing and protective equipment to remove contaminants.

9. Physical and chemical properties**Appearance**

Physical state	Gas.
Form	Aerosol.
Color	Tan.
Odor	Solvent.
Odor threshold	Not available.
pH	12.5 - 13.4 estimated
Melting point/freezing point	Not available.
Initial boiling point and boiling range	193.64 °F (89.8 °C) estimated
Flash point	-156.0 °F (-104.4 °C) Propellant estimated
Evaporation rate	Not available.
Flammability (solid, gas)	Not available.

Upper/lower flammability or explosive limits

Flammability limit - lower (%)	2.1 % estimated
Flammability limit - upper (%)	10.6 % estimated
Explosive limit - lower (%)	Not available.
Explosive limit - upper (%)	Not available.
Vapor pressure	60 - 75 psig @70F estimated
Vapor density	Not available.
Relative density	Not available.
Solubility(ies)	
Solubility (water)	Not available.
Partition coefficient (n-octanol/water)	Not available.
Auto-ignition temperature	896 °F (480 °C) estimated
Decomposition temperature	Not available.
Viscosity	Not available.
Other information	
Specific gravity	0.746 estimated

10. Stability and reactivity

Reactivity	Reacts violently with strong acids. This product may react with oxidizing agents.
Chemical stability	Material is stable under normal conditions.
Possibility of hazardous reactions	Hazardous polymerization does not occur.
Conditions to avoid	Avoid temperatures exceeding the flash point. Do not mix with other chemicals. Contact with incompatible materials.
Incompatible materials	Acids. Strong oxidizing agents. Oxidizing agents. Nitrates. Fluorine. Chlorine.
Hazardous decomposition products	No hazardous decomposition products are known.

11. Toxicological information**Information on likely routes of exposure**

Ingestion	Droplets of the product aspirated into the lungs through ingestion or vomiting may cause a serious chemical pneumonia.
-----------	--

Inhalation May cause damage to organs through prolonged or repeated exposure by inhalation. May cause drowsiness and dizziness. Headache. Nausea, vomiting. Narcotic effects. Prolonged inhalation may be harmful.

Skin contact Causes skin irritation.

2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans.

Eye contact Causes serious eye irritation.

Symptoms related to the physical, chemical and toxicological characteristics May cause drowsiness and dizziness. Headache. Nausea, vomiting. Irritation of nose and throat. Aspiration may cause pulmonary edema and pneumonitis. Severe eye irritation. Symptoms may include stinging, tearing, redness, swelling, and blurred vision. Skin irritation. May cause redness and pain.

Information on toxicological effects

Acute toxicity May be fatal if swallowed and enters airways. Narcotic effects.

Components	Species	Test Results
2-butoxyethanol (CAS 111-76-2)		
Acute		
<i>Dermal</i>		
LD50	Guinea pig	230 ml/kg, 24 Hours
		7.3 ml/kg, 4 Days
	Rabbit	450 ml/kg, 24 Hours
		435 mg/kg, 24 Hours
		0.63 ml/kg
	Rat	> 2000 mg/kg, 24 Hours
<i>Inhalation</i>		
LC50	Rabbit	400 ppm, 7 Hours
	Rat	450 ppm, 4 Hours
<i>Oral</i>		
LD100	Rabbit	695 mg/kg
LD50	Dog	> 695 mg/kg
	Guinea pig	1200 mg/kg
	Mouse	1519 mg/kg
	Rat	530 - 2800 mg/kg
Acetone (CAS 67-64-1)		
Acute		
<i>Dermal</i>		
LD50	Guinea pig	> 7426 mg/kg, 24 Hours
		> 9.4 ml/kg, 24 Hours
	Rabbit	> 7426 mg/kg, 24 Hours
		> 9.4 ml/kg, 24 Hours
<i>Inhalation</i>		
LC50	Rat	55700 ppm, 3 Hours
		132 mg/l, 3 Hours
		50.1 mg/l
<i>Oral</i>		
LD50	Rat	5800 mg/kg
		2.2 ml/kg
Butane (CAS 106-97-8)		
Acute		
<i>Inhalation</i>		
LC50	Mouse	1237 mg/l, 120 Minutes

Components	Species	Test Results
		52 %, 120 Minutes
	Rat	1355 mg/l
Diethylene Glycol Monobutyl Ether (CAS 112-34-5)		
Acute		
<i>Dermal</i>		
LD50	Rabbit	2764 mg/kg, 24 Hours
	Rat	2021 mg/kg
<i>Inhalation</i>		
LC50	Rat	74 mg/l/4h
<i>Oral</i>		
LD100	Rabbit	4000 mg/kg
LD50	Guinea pig	2000 mg/kg
	Mouse	2410 mg/kg
	Rabbit	2500 - 3000 mg/kg
	Rat	3306 mg/kg
Propane (CAS 74-98-6)		
Acute		
<i>Inhalation</i>		
LC50	Mouse	1237 mg/l, 120 Minutes
		52 %, 120 Minutes
	Rat	1355 mg/l
		658 mg/l/4h
Sodium Hydroxide (CAS 1310-73-2)		
Acute		
<i>Dermal</i>		
LD50	Rat	1350 mg/kg
Toluene (CAS 108-88-3)		
Acute		
<i>Dermal</i>		
LD50	Rabbit	> 5000 mg/kg, 24 Hours
<i>Inhalation</i>		
LC50	Mouse	6405 - 7436 ppm, 6 Hours
		5320 ppm, 8 Hours
	Rat	5879 - 6281 ppm, 6 Hours
		12.5 - 28.8 mg/l, 4 Hours
<i>Oral</i>		
LD50	Rat	5000 mg/kg

* Estimates for product may be based on additional component data not shown.

Skin corrosion/irritation Causes skin irritation.

Serious eye damage/eye irritation Causes serious eye irritation.

Respiratory or skin sensitization

Respiratory sensitization Not available.

Skin sensitization This product is not expected to cause skin sensitization.

Germ cell mutagenicity No data available to indicate product or any components present at greater than 0.1% are mutagenic or genotoxic.

Carcinogenicity This product is not considered to be a carcinogen by IARC, ACGIH, NTP, or OSHA.

IARC Monographs. Overall Evaluation of Carcinogenicity

 2-butoxyethanol (CAS 111-76-2) 3 Not classifiable as to carcinogenicity to humans.

Not listed.

Reproductive toxicity	Suspected of damaging fertility or the unborn child.
Specific target organ toxicity - single exposure	May cause drowsiness and dizziness.
Specific target organ toxicity - repeated exposure	Respiratory system. Skin. Kidneys. Central nervous system. Eyes. Liver. May cause damage to organs through prolonged or repeated exposure.
Aspiration hazard	May be fatal if swallowed and enters airways.
Chronic effects	Prolonged inhalation may be harmful. May be harmful if absorbed through skin. 2-Butoxy ethanol may be absorbed through the skin in toxic amounts if contact is repeated and prolonged. These effects have not been observed in humans. May cause damage to organs through prolonged or repeated exposure.

12. Ecological information

Ecotoxicity Toxic to aquatic life with long lasting effects.

Components		Species	Test Results
2-butoxyethanol (CAS 111-76-2)			
Aquatic			
Fish	LC50	Inland silverside (<i>Menidia beryllina</i>)	1250 mg/l, 96 hours
Acetone (CAS 67-64-1)			
Aquatic			
Crustacea	EC50	Water flea (<i>Daphnia magna</i>)	21.6 - 23.9 mg/l, 48 hours
Fish	LC50	Rainbow trout, donaldson trout (<i>Oncorhynchus mykiss</i>)	4740 - 6330 mg/l, 96 hours
Diethylene Glycol Monobutyl Ether (CAS 112-34-5)			
Aquatic			
Crustacea	EC50	Daphnia	2803 mg/L, 48 Hours
Fish	LC50	Bluegill (<i>Lepomis macrochirus</i>)	1300 mg/l, 96 hours
		Fish	1304 mg/L, 96 Hours
Sodium Hydroxide (CAS 1310-73-2)			
Aquatic			
Crustacea	EC50	Water flea (<i>Ceriodaphnia dubia</i>)	34.59 - 47.13 mg/l, 48 hours
Fish	LC50	Fish	45, 96 Hours
Toluene (CAS 108-88-3)			
Aquatic			
Algae	IC50	Algae	433.0001 mg/L, 72 Hours
Crustacea	EC50	Daphnia	7.645 mg/L, 48 Hours
		Water flea (<i>Daphnia magna</i>)	5.46 - 9.83 mg/l, 48 hours
Fish	LC50	Coho salmon, silver salmon (<i>Oncorhynchus kisutch</i>)	8.11 mg/l, 96 hours

* Estimates for product may be based on additional component data not shown.

Persistence and degradability No data is available on the degradability of this product.

Bioaccumulative potential No data available.

Partition coefficient n-octanol / water (log Kow)

2-butoxyethanol	0.83
Acetone	-0.24
Butane	2.89
Diethylene Glycol Monobutyl Ether	0.56
Propane	2.36
Toluene	2.73

Mobility in soil No data available.

Other adverse effects No other adverse environmental effects (e.g. ozone depletion, photochemical ozone creation potential, endocrine disruption, global warming potential) are expected from this component.

13. Disposal considerations

Disposal instructions Collect and reclaim or dispose in sealed containers at licensed waste disposal site. Contents under pressure. Do not puncture, incinerate or crush. Do not allow this material to drain into sewers/water supplies. Do not contaminate ponds, waterways or ditches with chemical or used container. Dispose of contents/container in accordance with local/regional/national/international regulations.

Local disposal regulations Dispose in accordance with all applicable regulations.

Hazardous waste code The waste code should be assigned in discussion between the user, the producer and the waste disposal company.

US RCRA Hazardous Waste U List: Reference

Acetone (CAS 67-64-1)	U002
Toluene (CAS 108-88-3)	U220

Waste from residues / unused products Dispose of in accordance with local regulations. Empty containers or liners may retain some product residues. This material and its container must be disposed of in a safe manner (see: Disposal instructions).

Contaminated packaging Empty containers should be taken to an approved waste handling site for recycling or disposal. Since emptied containers may retain product residue, follow label warnings even after container is emptied. Do not re-use empty containers.

14. Transport information

DOT

UN number	UN1950
UN proper shipping name	Aerosols, flammable, (each not exceeding 1 L capacity)
Transport hazard class(es)	
Class	2.1
Subsidiary risk	-
Label(s)	2.1
Packing group	Not applicable.
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Special provisions	N82
Packaging exceptions	306
Packaging non bulk	None
Packaging bulk	None

This product meets the exception requirements of section 173.306 as a limited quantity and may be shipped as a limited quantity. Until 12/31/2020, the "Consumer Commodity - ORM-D" marking may still be used in place of the new limited quantity diamond mark for packages of UN 1950 Aerosols. Limited quantities require the limited quantity diamond mark on cartons after 12/31/20 and may be used now in place of the "Consumer Commodity ORM-D" marking and both may be displayed concurrently.

IATA

UN number	UN1950
UN proper shipping name	Aerosols, flammable
Transport hazard class(es)	
Class	2.1
Subsidiary risk	-
Label(s)	2.1
Packing group	Not applicable.
Environmental hazards	No.
ERG Code	10L
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Other information	
Passenger and cargo aircraft	Allowed.
Cargo aircraft only	Allowed.
Packaging Exceptions	LTD QTY

IMDG

UN number	UN1950
UN proper shipping name	AEROSOLS
Transport hazard class(es)	
Class	2.1

Subsidiary risk	-
Label(s)	2.1
Packing group	Not applicable.
Environmental hazards	
Marine pollutant	No.
EmS	F-D, S-U
Special precautions for user	Read safety instructions, SDS and emergency procedures before handling.
Packaging Exceptions	LTD QTY
Transport in bulk according to Annex II of MARPOL 73/78 and the IBC Code	Not applicable.
DOT	



IATA; IMDG



15. Regulatory information

US federal regulations This product is a "Hazardous Chemical" as defined by the OSHA Hazard Communication Standard, 29 CFR 1910.1200.
All components are on the U.S. EPA TSCA Inventory List.

TSCA Section 12(b) Export Notification (40 CFR 707, Subpt. D)

Not regulated.

CERCLA Hazardous Substance List (40 CFR 302.4)

Acetone (CAS 67-64-1)	Listed.
Sodium Hydroxide (CAS 1310-73-2)	Listed.
Toluene (CAS 108-88-3)	Listed.

SARA 304 Emergency release notification

Not regulated.

OSHA Specifically Regulated Substances (29 CFR 1910.1001-1050)

Not listed.

Superfund Amendments and Reauthorization Act of 1986 (SARA)

Hazard categories	Immediate Hazard - Yes
	Delayed Hazard - Yes
	Fire Hazard - Yes
	Pressure Hazard - No
	Reactivity Hazard - No

SARA 302 Extremely hazardous substance

Not listed.

SARA 311/312 Hazardous chemical No

SARA 313 (TRI reporting)

Chemical name	CAS number	% by wt.
Toluene	108-88-3	20 - 40
2-butoxyethanol	111-76-2	2.5 - 10

Other federal regulations**Clean Air Act (CAA) Section 112 Hazardous Air Pollutants (HAPs) List**

Toluene (CAS 108-88-3)

Clean Air Act (CAA) Section 112(r) Accidental Release Prevention (40 CFR 68.130)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Safe Drinking Water Act (SDWA) Not regulated.**Drug Enforcement Administration (DEA). List 2, Essential Chemicals (21 CFR 1310.02(b) and 1310.04(f)(2) and Chemical Code Number**

Acetone (CAS 67-64-1) 6532

Toluene (CAS 108-88-3) 6594

Drug Enforcement Administration (DEA). List 1 & 2 Exempt Chemical Mixtures (21 CFR 1310.12(c))

Acetone (CAS 67-64-1) 35 %WV

Toluene (CAS 108-88-3) 35 %WV

DEA Exempt Chemical Mixtures Code Number

Acetone (CAS 67-64-1) 6532

Toluene (CAS 108-88-3) 594

US state regulations**US. Massachusetts RTK - Substance List**

2-butoxyethanol (CAS 111-76-2)

Acetone (CAS 67-64-1)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Sodium Hydroxide (CAS 1310-73-2)

Toluene (CAS 108-88-3)

US. New Jersey Worker and Community Right-to-Know Act

2-butoxyethanol (CAS 111-76-2)

Acetone (CAS 67-64-1)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Sodium Hydroxide (CAS 1310-73-2)

Toluene (CAS 108-88-3)

US. Pennsylvania Worker and Community Right-to-Know Law

2-butoxyethanol (CAS 111-76-2)

Acetone (CAS 67-64-1)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Sodium Hydroxide (CAS 1310-73-2)

Toluene (CAS 108-88-3)

US. Rhode Island RTK

Acetone (CAS 67-64-1)

Butane (CAS 106-97-8)

Propane (CAS 74-98-6)

Sodium Hydroxide (CAS 1310-73-2)

Toluene (CAS 108-88-3)

US. California Proposition 65

WARNING: This product contains a chemical known to the State of California to cause birth defects or other reproductive harm.

US - California Proposition 65 - CRT: Listed date/Developmental toxin

Toluene (CAS 108-88-3) Listed: January 1, 1991

US - California Proposition 65 - CRT: Listed date/Female reproductive toxin

Toluene (CAS 108-88-3) Listed: August 7, 2009

International Inventories

Country(s) or region	Inventory name	On inventory (yes/no)*
Australia	Australian Inventory of Chemical Substances (AICS)	Yes
Canada	Domestic Substances List (DSL)	Yes
Canada	Non-Domestic Substances List (NDSL)	No
China	Inventory of Existing Chemical Substances in China (IECSC)	Yes
Europe	European Inventory of Existing Commercial Chemical Substances (EINECS)	Yes
Europe	European List of Notified Chemical Substances (ELINCS)	No
Japan	Inventory of Existing and New Chemical Substances (ENCS)	No
Korea	Existing Chemicals List (ECL)	No
New Zealand	New Zealand Inventory	Yes
Philippines	Philippine Inventory of Chemicals and Chemical Substances (PICCS)	No
United States & Puerto Rico	Toxic Substances Control Act (TSCA) Inventory	Yes

*A "Yes" indicates that all components of this product comply with the inventory requirements administered by the governing country(s)

A "No" indicates that one or more components of the product are not listed or exempt from listing on the inventory administered by the governing country(s).

16. Other information, including date of preparation or last revision

Issue date 10-12-2015

Version # 01

Disclaimer We cannot anticipate all conditions under which this information and its product, or the products of other manufacturers in combination with its product, may be used. It is the user's responsibility to ensure safe conditions for handling, storage and disposal of the product, and to assume liability for loss, injury, damage or expense due to improper use. The information in the sheet was written based on the best knowledge and experience currently available. The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

Material Safety Data Sheet



The Chemical Company

CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

1. PRODUCT AND COMPANY INFORMATION

Company	:	BASF Building Systems 889 Valley Park Drive Shakopee, MN 55379
Telephone	:	952-496-6000
Emergency telephone number	:	(800) 424-9300 (703) 527-3887 (Outside Continental US)
Product name	:	CHEMREX CX948 ADHESIVE
MSDS ID No.	:	10681
TSCA Inventory	:	All components of this product are included, or are exempt from inclusion, in the EPA Toxic Substances Control Act (TSCA) Chemical Substance Inventory.
Canadian DSL	:	All components of this product are included, or are exempt from inclusion, in the Canadian Domestic Substance List (DSL).
Product Use Description	:	Adhesive

2. HAZARDOUS INGREDIENTS

<u>Chemical</u>	<u>CAS No.</u>	<u>TLV</u>	<u>STEL</u>	<u>PEL</u>	<u>CEIL</u>	<u>Weight %</u>
HYDROTREATED MIDDLE PETROLEUM DISTILLATES	64742-46-7		N.E.	N.E.	N.E.	5.00 - 10.00 %
METHYLENE BISPHENYL DIISOCYANATE	101-68-8	0.005 ppm	N.E.	N.E.	0.02 ppm	1.00 - 5.00 %
POLYMETHYLENE POLYPHENYL ISOCYANATE	9016-87-9	N.E.	N.E.	N.E.	N.E.	1.00 - 5.00 %

3. HAZARDS IDENTIFICATION

HMIS® Rating	HEALTH 2	FLAMMABILITY 1	PHYSICAL HAZARD 0
WHMIS Class	:	D2B	
Primary Routes of Entry	:	Skin contact Inhalation Eye contact	

Material Safety Data Sheet



CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

- Skin : Prolonged skin contact may defat the skin and produce dermatitis. Prolonged or repeated exposure can cause skin irritation and redness. Repeated or prolonged skin contact may cause allergic reactions with susceptible persons. May cause sensitization by skin contact.
- Eyes : Can cause slight irritation.
- Ingestion : Intake can cause gastrointestinal irritation, nausea, and vomiting.
- Chronic exposure : Existing respiratory or skin ailments may be aggravated by exposure. This product contains solvents. Reports associate repeated and prolonged occupational overexposure to solvents with permanent brain and nervous system damage. Reports also indicate that solvents cause liver damage, kidney damage, and mucous membrane irritation. Be warned that intentional misuse by deliberately inhaling the vapors and/or the product contents (a process often called "sniffing") can be harmful or fatal. This product contains isocyanates. Prolonged repeated exposure to isocyanates can lead to skin sensitization. For persons so sensitized even brief exposures to an isocyanate can produce reddening, swelling, rash, or blisters. Similarly, prolonged and repeated exposure to isocyanates can lead to respiratory sensitization. In such individuals, brief exposures to isocyanates at levels well below established exposure limits can produce chemical asthma and nonspecific asthmatic conditions.

Carcinogenicity

	ACGIH	IARC	NTP	OSHA
HYDROTREATED MIDDLE PETROLEUM DISTILLATES	N.E.	N.E.	N.E.	N.E.
METHYLENE BISPHENYL DIISOCYANATE	N.E.	No data.	N.E.	N.E.
POLYMETHYLENE POLYPHENYL ISOCYANATE	N.E.	No data.	N.E.	N.E.

4. FIRST AID MEASURES

- Eye contact : Flush eyes with water, lifting upper and lower lids occasionally for 15 minutes. Seek medical attention.
- Skin contact : Remove contaminated clothing. Wash thoroughly with soap and water. If irritation persists seek medical attention. Wash contaminated clothing before reuse.
- Ingestion : Do not induce vomiting without medical advice. If conscious, drink plenty of water. If a person feels unwell or symptoms of skin irritation appear, consult a physician. If a person vomits, place him/her in the recovery position. Never give anything by mouth to an unconscious person.
- Inhalation : Remove victim from exposure. If difficulty with breathing, administer oxygen. If breathing has stopped administer artificial respiration, preferably mouth-to-mouth. Seek immediate medical attention.

5. FIRE-FIGHTING MEASURES

- Flash point : 250.00 °F (121.11 °C)
- Autoignition temperature : no data available

Material Safety Data Sheet



CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

Lower explosion limit	:	1.6 %(V)
Upper explosion limit	:	10.2 %(V)
Suitable extinguishing media	:	carbon dioxide (CO2) dry chemical water fog
Fire and Explosion Hazards	:	Containers can build up pressure if exposed to heat (fire). Cool closed containers exposed to fire with water spray. Solid stream of water or foam can cause frothing.
Special Fire-fighting Procedures	:	As in any fire, wear pressure demand self-contained breathing apparatus (NIOSH approved or equivalent) and full protective gear.

6. ACCIDENTAL RELEASE MEASURES

Methods for cleaning up	:	Wear appropriate protective equipment (refer to section 8). Take action to eliminate source of leak; prevent from entry into open streams or sewers; contain spill by diking; vacuum up liquid or use absorbent media; remove to storage for disposal and rinse residual stain with water.
-------------------------	---	--

7. HANDLING AND STORAGE

Handling	:	Use only in area provided with appropriate ventilation. Keep out of reach of children. For personal protection see section 8.
Storage	:	Keep tightly closed in a dry and cool place.

8. EXPOSURE CONTROLS / PERSONAL PROTECTION

Eye protection	:	Wear as appropriate: safety glasses with side-shields goggles face-shield
Hand protection	:	Wear as appropriate: impervious gloves
Body Protection	:	Wear as appropriate: impervious clothing preventive skin protection
Respiratory protection	:	In case of insufficient ventilation wear suitable respiratory equipment. When workers are facing concentrations above the exposure limit they must use NIOSH approved respirators.
Hygienic Practices	:	Avoid contact with skin, eyes and clothing. Ensure adequate ventilation, especially in confined areas. Wash hands before breaks and at the end of workday. When using, do not eat, drink or smoke. Handle in accordance with good industrial hygiene and safety practice.
Engineering Controls	:	Local exhaust ventilation can be necessary to control any air contaminants to within their TLVs during the use of this product.

CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

9. PHYSICAL AND CHEMICAL PROPERTIES

Color	: tan
Physical State	: paste
Odor	: mild oily
pH	: no data available
Odor Threshold	: no data available
Vapor Pressure	: no data available
Vapor Density	: Heavier than air
Boiling point/range	: 342.00 - 514.00 °F (172.22 - 267.78 °C)
Freeze Point	: no data available
Water solubility	: slightly soluble
Specific Gravity	: 1.26
Viscosity	: no data available
Evaporation rate	: Slower than Butyl acetate
Partition coefficient (n-octanol/water)	: no data available
VOC Concentration as applied (less water and exempt solvents)	: 45 g/l

10. STABILITY AND REACTIVITY

Stability	: Stable under recommended storage conditions.
Conditions to avoid	: Prolonged exposure to high temperatures
Materials to avoid	: strong acids strong bases strong oxidizing agents
Hazardous decomposition products	: Burning produces obnoxious and toxic fumes. Oxides of carbon
Hazardous polymerization	: Will not occur when handled according to manufacturer's instructions.

CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

11. TOXICOLOGICAL INFORMATION**Acute inhalation toxicity**

<u>Product</u>	<u>Type</u> LC50	<u>Value</u> no data available	<u>Species</u>	<u>Exposure time</u>
<u>Component</u>				
HYDROTREATED MIDDLE PETROLEUM DISTILLATES	LC50	no data available		
METHYLENE BISPHENYL DIISOCYANATE	LC50	no data available		
POLYMETHYLENE POLYPHENYL ISOCYANATE	LC50	no data available		

Acute oral toxicity

<u>Product</u>	<u>Type</u> LD50 (Oral)	<u>Value</u> no data available	<u>Species</u>
<u>Component</u>			
HYDROTREATED MIDDLE PETROLEUM DISTILLATES	LD50 (Oral)	no data available	
METHYLENE BISPHENYL DIISOCYANATE	LD50 (Oral)	9,200 mg/kg	
POLYMETHYLENE POLYPHENYL ISOCYANATE	LD50 (Oral)	no data available	

Acute dermal toxicity

<u>Product</u>	<u>Type</u> LD50 (Dermal)	<u>Value</u> no data available	<u>Species</u>
<u>Component</u>			
HYDROTREATED MIDDLE PETROLEUM DISTILLATES	LD50 (Dermal)	no data available	
METHYLENE BISPHENYL DIISOCYANATE	LD50 (Dermal)	no data available	
POLYMETHYLENE POLYPHENYL ISOCYANATE	LD50 (Dermal)	no data available	

12. ECOLOGICAL INFORMATION

Ecotoxicological Information : There is no data available for this product.

13. DISPOSAL CONSIDERATIONS

Recommendations: Use excess product in an alternate beneficial application. Handle disposal of waste material in manner which complies with local, state, province and federal regulation.

Material Safety Data Sheet



CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

14. TRANSPORT INFORMATION

DOT	: Proper shipping name	Not regulated
IATA	: Proper shipping name	Not regulated

15. REGULATORY INFORMATION

SARA 311/312 (RTK)

This product has been reviewed according to the EPA 'Hazard Categories' promulgated under Sections 311 and 312 of the Superfund Amendments and Reauthorization Act of 1986 (SARA Title III) and is considered, under applicable definitions, to meet the following categories:

IMMEDIATE (ACUTE) HEALTH HAZARD DELAYED (CHRONIC) HEALTH HAZARD

SARA 313

This product contains the following substances subject to the reporting requirements of Section 313 of Title III of the Superfund Amendments and Reauthorization Act of 1986 and 40 CFR Part 372:

<u>Weight %</u>	<u>CAS No.</u>	<u>Chemical Name</u>
1.00 - 5.00 %	101-68-8	METHYLENE BISPHENYL DIISOCYANATE
1.00 - 5.00 %	9016-87-9	POLYMETHYLENE POLYPHENYL ISOCYANATE

CERCLA

CERCLA section 103(a) specifically requires the person in charge of a vessel or facility to report immediately to the National Response Center (NRC) a release of a hazardous substance whose amount equals or exceeds the assigned RQ. The following hazardous substances are contained in this product.

<u>RQ</u>	<u>CAS No.</u>	<u>Chemical Name</u>
5,000 lbs	101-68-8	METHYLENE BISPHENYL DIISOCYANATE

TSCA Section 12(b) Export Notification

This product contains the following chemical substances subject to the reporting requirements of TSCA 12(b) if exported from the United States:

<u>CAS No.</u>	<u>Chemical Name</u>
----------------	----------------------

There are no TSCA 12(b) Chemicals in this product.

California Proposition 65

The chemical(s) noted below and contained in this product, are known to the state of California to cause cancer, birth defects or other reproductive harm. Unless otherwise specified in Section 2 of this MSDS, these chemicals are present at < 0.1%:

<u>CAS No.</u>	<u>Chemical Name</u>
7440-38-2	ARSENIC
7439-92-1	INORGANIC LEAD
7440-43-9	CADMIUM
14808-60-7	SILICA, CRYSTALLINE QUARTZ

Material Safety Data Sheet



The Chemical Company

CHEMREX CX948 ADHESIVE

Version 1.5

06/28/2006

16. OTHER INFORMATION

Legend : N.E. - Not Established
TLV - Threshold Limit Value
STEL - Short Term Exposure Limit
PEL - Permissible Exposure Limit
CEIL - Ceiling

Prepared By : Environment, Health and Safety Department

This information is furnished without warranty, representation, or license of any kind, except that this information is accurate to the best of the manufacturer's knowledge, or is obtained from sources believed by the manufacturer to be accurate and is not intended to be all inclusive. No warranty is expressed or implied regarding the accuracy of this information or the results to be obtained from its use thereof. The manufacturer assumes no responsibility for injuries proximately caused by use of the Material if reasonable safety procedures are not followed as stipulated in this Data Sheet. Additionally, the manufacturer assumes no responsibility for injuries proximately caused by abnormal use of the Material even if reasonable safety procedures are followed. Buyer assumes the risk in its use of the Material.

End of MSDS.



POURED-IN-PLACE SAFETY SURFACING

QCI SAFETY SURFACE

QCI Poured-In-Place Safety Surface is a premium quality surface designed to meet your custom recreational surfacing needs.

- Installed on site
- Site prep and subbase installation work available
- Two-course porous system, an SBR base mat blended with polyurethane binder and a top course of TPV or EPDM rubber and binder
- Base course of varying thickness and a color cap layer of ½" nominal thickness
- Edges are formed as required
- Installed, placed, and leveled to provide a new seamless, permeable, low maintenance, anti-slip, cushioned surface
- QCI PIP Safety Surface complies with Laboratory Test Requirements of ASTM F1292-17: Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment
- Custom pattern and color combinations available
- Certified professional installers

APPLICATIONS

**PLAYGROUNDS
POOL DECKS
SPRAY GROUNDS
RECREATIONAL COURTS
WALKING TRACKS / TRAILS**

PLAY IT SAFE AND CHOOSE QCI SAFETY SURFACE FOR YOUR PLAYGROUND.



A FULL SERVICE TOTAL SPORTS AND RECREATIONAL CONSTRUCTION COMPANY.



Quality Court Industries, LLC Poured in Place (QCI – PIP) Rubber Safety Surface

Architectural Specifications

PART I – GENERAL

1. DESCRIPTION

- a. All necessary material components shall be obtained from trusted, pre-approved quality suppliers and / or American Recycling Center, Inc. (95% materials made in United States).
- b. Quality Court Industries, LLC is enrolled in the Materials Certification Program verifying the materials shipped to job site. To ensure the same material tested is the same material used a "Certificate of Compliance" shall be issued (at the end of this doc.).

2. QUALITY ASSURANCE

- a. Qualifications
 - i. Installers are generally in house.
When outside installers are used they will adhere to specific Quality Court Industry, LLC guidelines.

3. DESIGN AND DETAILING

- a. Poured in place rubber surface is utilized in and around play equipment as an impact absorbing cushioned surface.
- b. Sub-bases of asphalt, concrete or compacted crushed stone are acceptable for base materials. Other substrates must be approved prior to application.

4. DELIVERY, STORAGE AND HANDLING

- a. All materials shall be delivered in good condition in original unopened packages with all labels and documentation intact.
- b. Materials shall be protected from weather and stored at room temperature, not less than 40 degrees Fahrenheit.

5. PROJECT CONDITIONS

- a. Ambient air temperatures shall be 40 degrees Fahrenheit and rising at the time of installation of the system and shall remain at 40 degrees Fahrenheit or greater for 48 hours after completion of installation.
- b. All pour in place surface materials shall be protected from extreme weather, vandalism, foot and animal traffic, or other damage before, during and after application to ensure proper curing.

PART II – EXECUTION

1. INSPECTION

- a. Prior to application of the surface, the supervising applicator will evaluate the sub-base for grade and structural performance. Notice of all discrepancies shall be reported to the project manager and will proceed only when the conditions are corrected or if he/she is supplied with the written notice acknowledging the existing condition and authorization to move forward has been obtained.

Quality Court Industries, LLC 5661 Brownfields Dr., Baton Rouge, LA 70811
Phone: Toll Free: (855) 774-9974 OR (225) 774-9974 Fax: (225) 774-9984
www.qualitycourt.com

2. INSTALLATION

- a. The sub-base shall have a specific minimum 1% slope or no less than 1" in 10' in any one given direction towards drains or to the outside perimeter of the playground. Base must exhibit positive drainage. Concrete base shall have a broomed finished and must cure for a minimum of seven (7) days, asphalt must cure for 14 days (after curing, asphalt must be pressure washed before surface installed). Compacted Stone sub base shall maintain slope to drains or to low end and must exhibit positive drainage in all areas. Compacted Stone base must be mechanically compacted to a 90% compaction ratio (note: a compaction test is required and must be submitted to Quality Court Industries, LLC prior to installation.)
- b. Thickness: Surface thickness will vary in the cushion course according to the required fall height. The required thickness within a continuous surface area may vary from the specific equipment to other play structures. Where this occurs, provide a smooth, uniform transition between areas.
- c. Primer shall be applied as needed at the rate of 300 square feet per gallon to asphalt or concrete using a short nap roller or spray equipment.
- d. The Base Mat: This material shall be mechanically mixed using a mortar mixer at a ratio of one 50 lb. Bag of 4-8 mesh buffing to 16 lbs of premium aromatic binder. The materials should be mixed until all material is uniformly coated with binder. The materials shall then be poured in place and hand troweled at the specified thickness. Using a beam to determine depth of base, straight edge and strike off excess material to desired thickness, trowel as required to smooth finish. Allow the base mat to cure, usually 8/24 hours, depending on temperature and humidity.
- e. The wearing course: Apply primer to the base mat at a rate of 300 sq. ft. per gallon. The primer mix is aromatic urethane binder in a ratio of 60/40 with ethyl acetate to prime the base mat. The wearing course shall be installed at nominal 1/2" thickness unless otherwise specified. The wearing course shall have a surface weight of 2.73 lbs per sq. foot. The wearing course shall be mixed using the appropriate combination of colored rubber and premium rubber granules by a mechanical mixer (mortar mixer) until all granules are uniformly coated with binder. Surface materials shall be mechanically mixed at a ratio of one 55 lb. bag to 12 lbs of Premium Approved binder. Using a 5/8" beam to achieve uniform thickness, straightedge and strike off excess material, trowel as required to smooth finish. For compacting, lubricate trowel with mineral spirits. Allow 48-72 hours curing time (depending on temperature) before allowing foot traffic on area. To assist in curing a light mist of water may be applied.
- f. Where graphic designs and color transitions are specified, there shall be a full wear course depth. Where transitions occur between colors, if the first color is cured, the edge of the first color installed should be primed to receive adjacent color. If the colors are installed wet on wet no primer is needed.
- g. Large areas: Prior to installation, the installer shall report to the project manager locations of cold joints for approval.

3. SECURITY

Security is an essential part of every application. Protection of the uncured surface should be a primary concern. Foot traffic must be restricted on both the base and top course installations to ensure proper curing and aesthetics. Finished system must cure 48 to 72 hours (pending ambient temperature) prior to use.

4. CLEANING

Perform cleaning during installation of the work and upon completion of the work.
Remove from the site all excess materials, debris and equipment.

PART III – MATERIALS

1. GENERAL

- a. Pour in place rubber surface shall be porous and non-slip.
- b. Primer: single component moisture cured polyurethane primer (note: Approved Polyurethane Premium Binder) mixed with ethyl acetate at a rate of 60/40.
- c. Aromatic Binder: The premium binder is a single component MDI, aromatic binder with slight odor manufactured to withstand extremes in temperature and weather.
- d. Aliphatic Binder: The binder is a single component MDI, non ambering binder with slight odor manufactured to withstand extremes in temperature and weather.
- e. Cushion layer SBR buffing/shred: This rubber is 100% recycled and screened to 4 – 8 mesh strands containing less than 2% dust. This material is conveniently packaged in 50 lb. bags.
- f. Colored Rubber: Both TPV and EPDM rubber granules can be used depending on the color choices desired. Both products are UV stable and have been tested and proven in the safety surface industry.
- g. Premium 1350 Black Rubber is UV stable and is sized from 1 – 3.5 mm. This material is 100% recycled from post-industrial scrap rubber and consists of a high grade mixed polymers.

2. BASE OPTIONS

- a. Asphalt-Requires minimum thickness (typically 4”) for non-weight bearing loads per the standards of the geographic region and must cure for at least 14 days.
- b. Concrete-Requires minimum thickness (typically 4”) for non-weight bearing loads per the standards of the geographic region and must cure for at least seven (7) days.
- c. Crushed stone-
 - i. 90% Standard Proctor Compaction (as per ASTM Test) is of the critical importance.
 - ii. Stone for the base MUST be crushed so it compacts to the above standard and should be a homogeneous mix of the following sizes:

Sieve Size	% Passing by Weight
1”	90 – 100
5/8”	50 – 80
1 / 4”	30 – 50
#4	14 – 35
#8	10 – 30
#30	3 – 5
#200	0 – 3

- iii. Minimum depth of crushed stone base should be 4”.
- d. Other bases – Bases other than asphalt, concrete or crushed stone must be approved.

3. MAINTENANCE

- a. Although it is not required, power washing (Do not exceed 1500 psi) will improve the aesthetic appearance of the surface. This may be done 1 to 2 times per year.
- b. For stain removal, the use of a commercial or household detergent soap that is not caustic, acidic or solvent based, mixed with warm water, is recommended.

Certificate of Compliance

Site Location: _____ Attraction _____

Total Sq Footage: _____ Thickness of System: _____

Material Ship Date: _____ Installation Date: _____

The installing contractor certifies to the owner (_____) that all materials used in the installation of the pour in place (PIP) surface noted below are of the same components and manufacturer that was approved by the State Department of Health for use in such.

These materials consist of the following:

Cap Surface Material: _____ Binder Type _____
(Fill in product Name & Reference Number)

Cushion Material: _____ Binder Type _____
(Fill in product Name & Reference Number)

Color Percentages & Sq Footages

1.	2.
3.	4.

Binder % Ratios

CAP	Cushion
-----	---------

Contractor: _____

Material Supplier: _____

Address: _____

Address: _____

Contact Phone Number: _____

Contact Phone Number: _____

Ext _____

Ext _____

Sign _____ Date _____

Sign _____ Date _____

Print _____

Print _____

Authorization / Accepted (Sign) _____ Date _____
(Owner Representative) (Print Name)

LABORATORY TESTING IMPACT EVALUATION ASTM F1292



Project Information

Project Name	Playground Padding Impact Evaluation Test Methods ASTM F1292, ASTM F355E Impact Attenuation of Playground Surfacing Materials		
Client Info	Quality Court Industries 5661 Brownfields Drive Baton Rouge, LA 70811		
Report Date	10/12/2017	Test Date	7/7/2017
Report Status	Final	Job no.	92183/2303
Prepared by	Kieran O'Donnell Field Operation Manager		
Checked by	Jeffrey Gentile Laboratory Director		

Notes:

1. This report has been prepared by Sports Labs USA with all reasonable skill, care and diligence within the terms of the contract with the Client and within the limitations of the resources devoted to it.
2. This report is confidential to the Client and Sports Labs USA accepts no responsibility whatsoever to third parties to whom this report, or any part thereof, is made known. Any such party relies upon the report at their own risk.
3. This report shall not be used for engineering or contractual purposes unless signed by the Author and the Checker and unless the report status is "Final."

Summary

Sports Labs USA was commissioned to perform laboratory testing for the following characteristics listed below.

- ASTM F1292-17: Impact Attenuation of Surfacing Materials Within the Use Zone of Playground Equipment

The results have been summarized in the quick reference table below. Complete results and background information can be found in the subsequent sections of this report.

System Descriptions	Product Description	Temperatures Tested
20" x 20" x 1.75" Pour in Place Pad over Concrete	Samples are comprised of a rubber buffings layer and a cap layer at 4 different thicknesses	25°F 72°F 120°F
20" x 20" x 2.5" Pour in Place Pad over Concrete		
20" x 20" x 3.5" Pour in Place Pad over Concrete		
20" x 20" x 4.5" Pour in Place Pad over Concrete		

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304
Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 1 of 6



Accreditation #88949

LABORATORY TESTING

IMPACT EVALUATION ASTM F1292



Table Contents

Project Information	1
Summary	1
Procedure	2
Requirements	2
Test Equipment	2
Results 1.75" Pad- Drop Height 4 ft.....	3
Results 2.5" Pad- Drop Height 6 ft.....	4
Results 3.5" Pad- Drop Height 8 ft.....	5
Results 4.5" Pad- Drop Height 10 ft.....	6

Procedure

This testing followed the ASTM F1292-17: Impact Attenuation of Surfacing Materials within the Use Zone of Playground Equipment protocol. The samples were conditioned to (3) temperatures for 8hrs at each temperature per F1292 protocol. General information can be found below.

Requirements

The average HIC value for three consecutive drops per location shall not exceed 1000 when dropped from the specified drop height per each sample.

Test Equipment

SL USA ID	Description	Manufacturer	Model	Calibration Due
SL 299	Hemispherical Missile	Playground Clearing House	ASTM	5/24/018
SL 292	Tri-Axial Accelerometer	PCB	356A67	12/31/2017
SL 232	Temperature Probe	Lavatools	PT12	2/28/2018
SL 275	Laser Measure	Leica Geosystems	DISTO A6	7/31/2018

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304

Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 2 of 6



Accreditation #88949

LABORATORY TESTING IMPACT EVALUATION ASTM F1292



Results 1.75" Pad- Drop Height 4 ft.

Temperature (°F)	Sample #	Drop 1		Drop 2		Drop 3		Averages	
		Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Avg. Gmax	Avg. HIC
25	1	154	760	160	829	154	785	157	807
	2	160	818	164	852	152	714	158	852
	3	154	778	150	724	163	854	156	789
72	1	144	630	161	792	156	747	159	770
	2	154	739	158	750	163	780	161	765
	3	149	698	157	743	152	687	155	715
120	1	145	682	145	702	151	757	148	730
	2	146	713	152	752	149	732	151	742
	3	151	747	145	704	152	776	149	740

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304
Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 3 of 6



LABORATORY TESTING IMPACT EVALUATION ASTM F1292



Results 2.5" Pad- Drop Height 6 ft.

Temperature (°F)	Sample #	Drop 1		Drop 2		Drop 3		Averages	
		Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Avg. Gmax	Avg. HIC
25	1	156	957	155	934	157	956	156	945
	2	153	913	154	949	151	925	153	937
	3	152	944	153	930	159	934	156	932
72	1	125	718	130	766	133	785	132	776
	2	130	771	131	772	128	734	130	753
	3	129	750	133	802	135	822	134	812
120	1	132	762	136	801	139	821	138	811
	2	133	785	135	801	130	824	133	813
	3	135	793	138	820	140	831	139	826

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304

Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 4 of 6



Accreditation #88949

LABORATORY TESTING IMPACT EVALUATION ASTM F1292



Results 3.5" Pad- Drop Height 8 ft.

Temperature (°F)	Sample #	Drop 1		Drop 2		Drop 3		Averages	
		Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Avg. Gmax	Avg. HIC
25	1	141	927	156	994	142	938	149	966
	2	139	908	139	913	138	896	139	905
	3	140	928	142	938	146	989	144	964
72	1	120	739	122	753	117	696	120	725
	2	121	753	117	726	119	731	118	729
	3	119	775	119	714	122	752	121	733
120	1	131	854	135	901	135	898	135	967
	2	133	877	131	853	134	899	133	876
	3	132	869	133	889	135	891	134	890

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304

Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 5 of 6



Accreditation #58949

LABORATORY TESTING IMPACT EVALUATION ASTM F1292



Results 4.5" Pad- Drop Height 10 ft.

Temperature (°F)	Sample #	Drop 1		Drop 2		Drop 3		Averages	
		Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Gmax (G's) (ASTM F355E)	HIC (ASTM F355E)	Avg. Gmax	Avg. HIC
25	1	128	930	129	933	129	929	129	931
	2	127	902	126	893	128	900	127	897
	3	117	810	128	917	124	867	126	892
72	1	113	797	113	786	114	803	114	795
	2	112	777	112	782	112	787	112	785
	3	113	793	114	801	114	799	114	800
120	1	107	718	106	710	108	728	107	719
	2	109	745	109	738	107	732	108	735
	3	110	739	111	746	109	744	110	745

End of Report

INFORMATION, ADVICE & KNOW-HOW: FROM THE SYNTHETIC SPORTS SURFACE EXPERTS



SPORTS LABS USA

Unit #2 • 155 River Road • Bow • New Hampshire • 03304

Telephone: (603) 731 6248 • E-Mail: Info@sportslabsusa.com

October 12, 2017 • Page 6 of 6



Accreditation #88949

QCI

Critical Fall Height

Depth

1.75"

2.50"

3.50"

4.5"

Height

4'


6'

8'

10'

Burke COLORS THAT MOVE YOU


HDPE PLASTIC PANELS

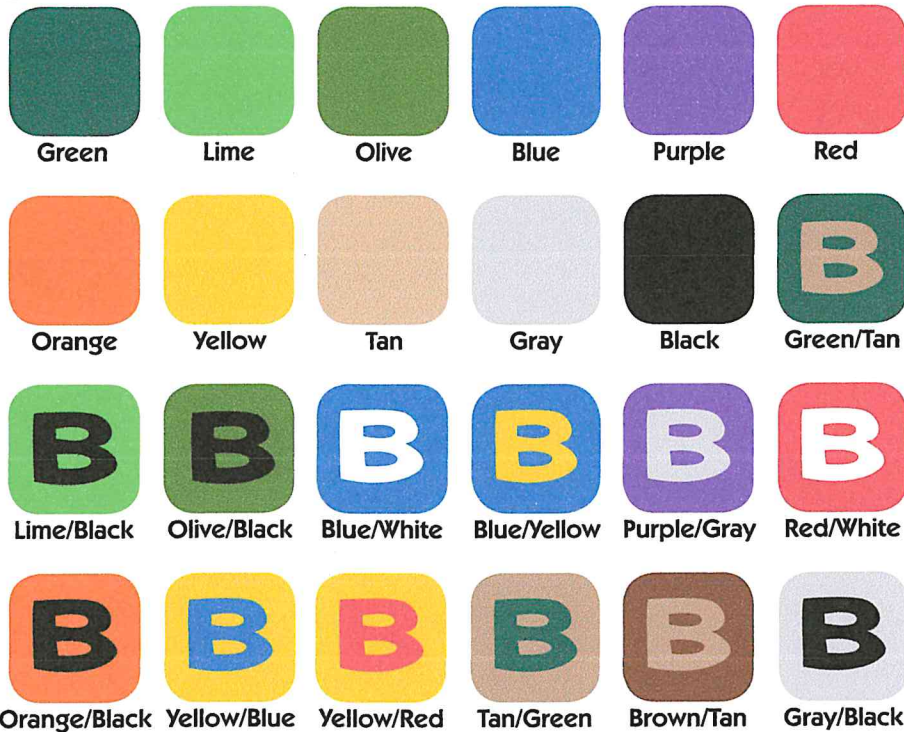


POWDER COAT PAINT




SHADE CANOPIES

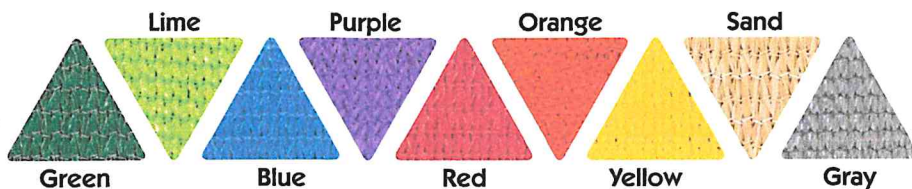


PLATFORMS

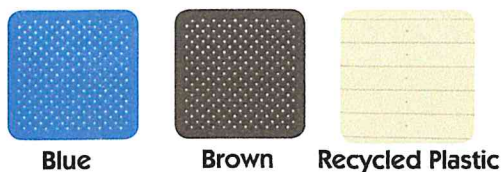

ROCKIT CLIMBERS

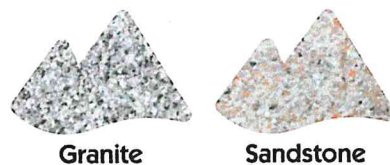

ROTOMOLD PLASTIC

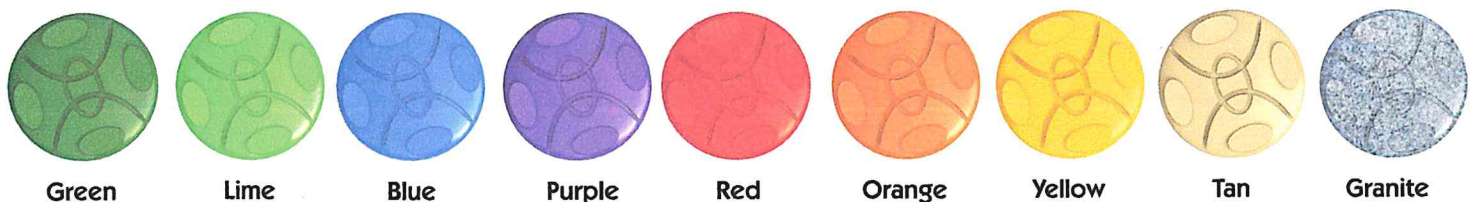

VISIT BCIBURKE.COM/COLORSELECTION TO CUSTOMIZE YOUR PLAYGROUND COLORS!

BCIBURKE.COM

Burke
PLAY THAT MOVES YOU.

800.266.1250

Trademark(s) are the property of BCI Burke Company. © BCI Burke Company 2018. All rights reserved. 05/2018

Burke COLORS THAT MOVE YOU



Electric

Navy posts, granite plastic, blue shade, lime accessories & blue platforms



Marina

Olive posts, blue plastic, blue shade, tan accessories & brown platforms



Angelfish

Navy posts, yellow plastic, yellow shade, sky accessories & brown platforms



Aster

Aqua posts, purple plastic, purple shade, lemon accessories & brown platforms



Urban

Silver posts, red plastic, red shade, black accessories & brown platforms



Psychedelic

Navy posts, orange plastic, lime shade, lime accessories & brown platforms



Ocean

Yellow posts, lime plastic, lime shade, sky accessories & brown platforms



Freedom

Sky posts, red plastic, red shade, white accessories & brown platforms



Forest

Burgundy posts, green plastic, green shade, tan accessories & brown platforms



Terrace

Olive posts, tan plastic, tan shade, black accessories & brown platforms



Enchanted

Brown posts, lime plastic, lime shade, tan accessories & brown platforms



Sunflower

Redwood posts, yellow plastic, yellow shade, yellow accessories, & brown platforms



Circus

Red posts, blue plastic, blue shade, yellow accessories & blue platforms



Viola

Charcoal posts, purple plastic, purple shade, orange accessories & brown platforms



Parrot

Sky posts, red plastic, red shade, lemon accessories & brown platforms



Tucan

Yellow posts, orange plastic, orange shade, blue accessories & brown platforms

BCIBURKE.COM

Burke
PLAY THAT MOVES YOU.

800.266.1250

Trademark(s) are the property of BCI Burke Company. © BCI Burke Company 2018. All rights reserved. 05/2018



QCI SAFETY SURFACE **BENEFITS**

Extended Life and Wear

Critical Fall Height Protection*

**Complies with the Laboratory Testing of ASTM F1292-17*

Vibrant Coloration

Slip-Resistant

Seamless Custom Designs

Reduction of Discoloration and Hardening

Comprehensive Warranty

Meets Consumer Product Safety

Commission Guidelines

ASK US ABOUT OUR OTHER **SAFETY SURFACING PRODUCTS:**

Loose Fill Rubber Mulch


Rubber Tiles

Playground Turf


Bonded Rubber Mulch

QCI Critical Fall Height


Depth	Height
1.75"	4'
2.50"	6'
3.50"	8'
4.5"	10'




50% BLACK
50% TAN



50% BLACK
50% GREEN



50% BLACK
50% BLUE



50% BLACK
50% TERRA COTTA RED

ALL COLOR CHOICES:

Beige, Terra Cotta Red, Green, Blue, Yellow, Purple, Orange, Grey, Black, Teal, White, Brown

OUR INSTALLERS ARE:

- GRADUATES OF THE PLAYGROUND CONSTRUCTION SCHOOL
- MEMBERS OF PLAYGROUND CONTRACTORS ASSOCIATION
- RECOGNIZED BY THE INTERNATIONAL PLAYGROUND CONTRACTOR'S ASSOCIATION
- CERTIFIED PLAYGROUND SAFETY INSPECTOR ON STAFF
- EXPERIENCED IN ALL ASPECTS OF ASTM, CPSC, AND ADA COMPLIANCE



QUALITY PLAY BEGINS WITH A QUALITY SURFACE.



5661 BROWNFIELDS DRIVE BATON ROUGE, LA 70811

TOLL-FREE 855.774.9974 225.774.9974 EMAIL info@qualitycourt.com

WWW.QUALITYCOURT.COM



BURKE GENERATIONS WARRANTY®

The Longest and Strongest warranty in the industry

BCI Burke Company, LLC ("Burke") warrants that all standard products are warranted to be free from defects in materials and workmanship, under normal use and service, for a period of one (1) year from the date of invoice.

We stand behind our products.

In addition, the following products are warranted, under normal use and service from the date of invoice as follows:

- One Hundred (100) Year Limited Warranty on aluminum and steel upright posts (including Intensity®, Voltage®, Nucleus®, Little Buddies® and ELEVATE®/ACTIVATE®) against structural failure due to corrosion, deterioration or workmanship.
- One Hundred (100) Year Limited Warranty on KoreConnect® clamps against structural failure due to corrosion, deterioration or workmanship.
- One Hundred (100) Year Limited Warranty on Hardware (nuts, bolts, washers)
- One Hundred (100) Year Limited Warranty on bolt-through fastening and clamp systems (Voltage®, Intensity®, Nucleus®, Little Buddies® and ELEVATE®/ACTIVATE®).
- Twenty-Five (25) Year Limited Warranty on spring assemblies and aluminum cast animals.
- Fifteen (15) Year Limited Warranty on main structure platforms and decks, metal roofs, table tops, bench tops, railings and barriers.
- Fifteen (15) Year Limited Warranty on all plastic components including StoneBorders against structural failure due to materials or workmanship.
- Ten (10) Year Limited Warranty on ShadePlay Canopies fabric, threads, and cables against degradation, cracking or material breakdown resulting from ultra-violet exposure, natural deterioration or manufacturing defects. This warranty is limited to the design loads as stated in the specifications.
- Ten (10) Year Limited Warranty on NaturePlay® Boulders and GFRC products against structural failure due to natural deterioration or workmanship. Natural wear, which may occur with any concrete product with age, is excluded from this warranty.
- Ten (10) Year Limited Warranty on Full Color Custom Signage against manufacturing defects that cause delamination or degradation of the sign. Full Color Custom Signs also carry a two (2) year warranty against premature fading of the print and graphics on the signs.
- Five (5) Year Limited Warranty on Intensity® and RopeVenture® cables and LEVEL X® flex bridge against premature wear due to natural deterioration or manufacturing defects. Determination of premature wear will be at the manufacturer's discretion.
- Five (5) Year Limited Warranty on swing seats and hangers; Kid Koaster® Trolleys and other moving parts against structural failure due to materials or workmanship.
- Five (5) Year Limited Warranty on PlayEnsemble™ cables and mallets against defects in materials and workmanship.
- Three (3) Year Limited Warranty on electronic panel speakers, sound chips and circuit boards against electronic failure caused by manufacturing defects.

The warranty stated above is valid only if the equipment is erected in conformity with the layout plan and/or installation instructions furnished by BCI Burke Company, LLC using approved parts; have been maintained and inspected in accordance with BCI Burke Company, LLC instructions. Burke's liability and your exclusive remedy hereunder will be limited to repair or replacement of those parts found in Burke's reasonable judgment to be defective. Any claim made within the above stated warranty periods must be made promptly after discovery of the defect. A part is covered only for the original warranty period of the applicable part. Replacement parts carry the applicable warranty from the date of shipment of the replacement from Burke. After the expiration of the warranty period, you must pay for all parts, transportation and service charges.

Burke reserves the right to accept or reject any claim in whole or in part. Burke will not accept the return of any product without its prior written approval. Burke will assume transportation charges for shipment of the returned product if it is returned in strict compliance with Burke's written instructions.

THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ANY OTHER WARRANTY, EXPRESS OR IMPLIED, INCLUDING BUT NOT LIMITED TO ANY IMPLIED WARRANTY OR MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE. IF THE FOREGOING DISCLAIMER OF ADDITIONAL WARRANTIES IS NOT GIVEN FULL FORCE AND EFFECT, ANY RESULTING ADDITIONAL WARRANTY SHALL BE LIMITED IN DURATION TO THE EXPRESS WARRANTIES AND BE OTHERWISE SUBJECT TO AND LIMITED BY THE TERMS OF BURKE'S PRODUCT WARRANTY. SOME STATES DO NOT ALLOW THE EXCLUSION OF CERTAIN IMPLIED WARRANTIES, SO THE ABOVE LIMITATION MAY NOT APPLY TO YOU.

Warranty Exclusions: The above stated warranties do not cover: "cosmetic" defects, such as scratches, dents, marring, or fading; damage due to incorrect installation, vandalism, misuse, accident, wear and tear from normal use, exposure to extreme weather; immersion in salt or chlorine water, unauthorized repair or modification, abnormal use, lack of maintenance, or other cause not within Burke's control; and

Limitation of Remedies: Burke is not liable for consequential or incidental damages, including but not limited to labor costs or lost profits resulting from the use of or inability to use the products or from the products being incorporated in or becoming a component of any other product. If, after a reasonable number of repeated efforts, Burke is unable to repair or replace a defective or nonconforming product, Burke shall have the option to accept return of the product, or part thereof, if such does not substantially impair its value, and return the purchase price as the buyer's entire and exclusive remedy. Without limiting the generality of the foregoing, Burke will not be responsible for labor costs involved in the removal of products or the installation of replacement products. Some states do not allow the exclusion of incidental damages, so the above exclusion may not apply to you.

Contact your local Burke Representative for warranty information regarding Burke Turf® and Burke Tile products.

Terms of Sale

Pricing: Prices published in this catalog are in USD, are approximate and do not include shipping & handling, surfacing, installation nor applicable taxes. All prices are subject to change without notice. Contact your Burke representative for current pricing. Payments are to be made in USD.

Weights: Weights are approximate and may vary with actual orders.

Installation: All equipment is shipped unassembled. For a list of factory-certified installers in your area, please contact your Burke representative.

Specifications: Product specifications in this catalog were correct at the time of publication. However, product improvements are ongoing at Burke, and we reserve the right to change or discontinue specifications without notice.

Loss or Damage in Transit: A signed bill of lading is our receipt from a carrier that our shipment to you was complete and in good condition upon arrival. Before you sign, please check the Bill of Lading carefully when the shipment arrives to make sure nothing is missing and there are no damages. Once the shipment leaves our plant, we are no longer responsible for any damage, loss or shortage.

For more information regarding the warranty, call Customer Service at 920-921-9220 or 1-800-356-2070.

01/2019

Quality Court Industries, LLC

Sample Warranty

Re: Five (3) - Year Limited Warranty for
QCI Job Number

Quality Court Industries, LLC (QCI) warrants the poured in place (PIP) safety surface installed under this contract agreement located at _____ for a period of three (3) years commencing from the date of substantial completion established as _____ and the warranty period shall expire on _____. This limited warranty shall provide for 100% of the cost for necessary repairs caused by the failure of the QCI PIP surfacing system only.

This limited warranty includes only QCI obligation to repair and/or replace any defective materials or workmanship in the surface area or surface areas that have failed during the warranty period. A failed area or failed areas include edge raveling, bubbling, delamination, peeling, and loss of integrity as a result of the QCI PIP surfacing system degradation. QCI is under no obligation or responsibility to repair and/or replace the QCI PIP surface if damaged by vandalism (including burns, cuts, gouges, etc.), product misuse, abuse or alterations, improper slab or base or subbase design or construction, improper drainage, improper or lack of maintenance, any foreign residue that may be deposited on the surface, normal wear and tear, damage for sharp objects (high heels, spikes, etc.) or acts of God.

All warranty claims shall be made in writing to QCI, within thirty (30) days after the Owner has knowledge thereof, but in no event later than thirty (30) days after expiration of the warranty period. The written notification from the Owner shall include the following: the date of the first notice of the failure, details of the failure, photos of the failed area and a request for a warranty claim meeting with QCI at the installation site (if applicable). QCI shall not be responsible for warranty claims for any notices received from the Owner after thirty (30) days of Owners' first knowledge of the failure.

QCI shall determine the validity of all warranty claims after sufficient evidence has been gathered. QCI shall then replace, repair or make a refund for any claims validated by it. Any refund, credit or allowance provided to the Owner on a warranty claim is exercisable only if said allowance is used to accommodate replacement with QCI's surfacing system.

Any dispute as to whether and to what extent there is a QCI PIP surface failure and a subsequent valid warranty claim within the meaning of this warranty, shall be initially dealt with by joint investigation and discussion between QCI and Owner in order to achieve a mutually agreeable solution. If such solution can not be reached within thirty (30) days, then either the Owner or QCI shall submit the matter to an arbitrator who is a member of the American Arbitration Association and who shall make a determination in accordance with the rules and regulations said American Arbitration Association. The decision of said arbitrator shall be binding on both parties.

This limited warranty does NOT include the underlying material (e.g. existing surface, existing or new asphalt, concrete, base, subbase or subgrade). If the underlying material fails for any reason whatsoever (including hydrostatic pressure, cracking, shifting, heaving), then QCI's warranty shall be rendered invalid. If the underlying material is concrete, a "curing agent" is NOT allowed, as it will probably cause delamination of the QCI PIP surface. Also, an elastomeric coating applied to the underlying material may bubble also causing delamination of the QCI PIP surface. Additionally, there is no warranty against surface cracking along expansion joints or underlying cracks, or separation from an adjacent border, curb or walkway. The limited warranty does not include discoloration as a result of ultraviolet rays, unapproved cleaning materials or vandalism. **WARNING:** Surface temperatures can prove dangerous under warm conditions. Shoes and/or socks must be worn during warm weather conditions.

Underwater, Water Play and Pool Deck Applications: Foreign or excessive chemicals in the water can cause potential damage to the QCI PIP resulting in fading, chalking, bleeding, and/or degradation. Pool chemicals and water treatments such as "Ozone" and chlorine levels with a ppm greater than 3 will harm/degrade the QCI PIP Surface. The colors will fade. QCI will not warrant the QCI PIP product when foreign or excessive chemicals are used in or around the QCI PIP application. QCI will not warrant against discoloration and/or fading around pooldecks / water areas, nor will QCI warrant against mildew due to improper drainage and/or improper sloping around the pool area, sauna area, steam area or shower area. Minimum slope for drainage is 2%.

Owner agrees that it will not, under any circumstances, make alterations to the QCI PIP surface without the written authorization of QCI. Any unauthorized alteration by the Owner shall result in the immediate termination of all warranties for the QCI PIP surface and shall also give rise to duty by the Owner to hold harmless, defend and indemnify QCI from any claim, suit or cause of action personal injury, death, or property arising out of or related to said alterations.

This limited warranty is expressly made in lieu of any other warranties and is exclusive to the original Owner. Owner acknowledges that the limited warranty will be voided if the Owner fails to follow the QCI PIP Maintenance Guidelines provided by QCI. Owner agrees that in no event shall QCI have any liability to Owner for loss of use or loss of profits or any form of consequential damages. **NOTE:** The following chemicals can cause potential damage to the QCI PIP surface and should be avoided: disinfectants, concentrated bleach, gasoline, diesel, hydraulic and lubricating oils, weak acids and organic solvents.

If the contract price is not paid timely as per the terms and conditions of this contract, the limited warranty is automatically voided.

This warranty agreement is not valid until QCI receives full and final payment of the entire contract amount. Any damages to the surface during the curing period will be repaired or paid for at the Owner's expense. This limited warranty does not lessen or eliminate any other contractual obligations of Owner to QCI.

Customer Initial: _____

Burke[®]
PLAY THAT MOVES YOU.



PLAY THAT MOVES YOU[®]



Burke
PLAY THAT MOVES YOU.

BCI Burke Company
P.O. Box 549
Fond du Lac, WI 54936-0549 USA
800-266-1250 • 920-921-9220
bciburke.com



PLANET RECESS[™]

YOUR LA & MS REPRESENTATIVE
P.O. Box 78160 • Baton Rouge, LA 70837
225.778.4700 • 800.344.6255
www.planetrecess.com