



Three Phase Cast Iron

NEMA

MOTOR MODEL:	GR3-CI-TF-284T-4-BR-D-25
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

ELECTRICAL DATA		
	60 Hz	50 Hz
Horsepower	25.0	25.0
Speed, RPM	1770	1460
Voltage	230/460	190/380
# Phase	3	
Full Load Amps	58.84/29.42	70.4/35.2
Power Factor	0.85	-
Nominal Efficiency	93.6	90.5
Service Factor	1.25	1.0
KVA Code	K	F
FL Amps. @ 208 V	65.0669	-
LRC @ 60Hz HV	269.106	-
Start Capacitor	-	
Start Capacitor V	-	
Run Capacitor	-	
Run Capacitor V	-	
Number of Leads	12	
Connection	DD/D	
Coil Resistance	-	
Date Code	-	
Load	Efficiency %	P.F.
50%	91.59	0.73
75%	92.84	0.82
100%	93.05	0.87
FULL LOAD TEMPERATURE RISE		
FL Temp Rise °C	51.0	-
3D Image Link		
GR3-CI-TF-284T-4-BR-D-25		

GENERAL DATA		
Frame Size	284T	
Frame Enclosure	TEFC	
Mounting	Rigid	
Insulation Class	F	
Duty	Cont. / S1	
NEMA Design	A	
Frame Material	Cast Iron	
Ingress Protection	55	
Tropicalization	true	
Cable Entry	1-NPT 1-1/2"	
Feet Removable	true	
Double Drilled	-	
Paint Color	Graphite Gray	
Paint RAL	7024	
Weight lb	366.03	
MECHANICAL DATA		
DE Bearing	6311C3	
NDE Bearing	6311C3	
dB No-Load	-	
Rotor Wk², Lb-Ft²	-	
Comp Ring (wavey washer)	DE	
TORQUE VALUES	Torque lb-ft	% FLT
Locked Rotor Torque	209.565	283.0
Pull-Up Torque	152.546	206.0
Breakdown Torque	259.179	350.0
Full Load Torque	74.0512	100.0
SITE CONDITIONS		
Ambient Temp °C	40	
Altitude Above Sea Level m	1000	

*This report valid for above Date Code and newer models, please contact Techtop for more info.

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com




Three Phase Cast Iron

MOTOR MODEL:	GR3-CI-TF-284T-4-BR-D-25
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

Torque Speed (T-n) Curve

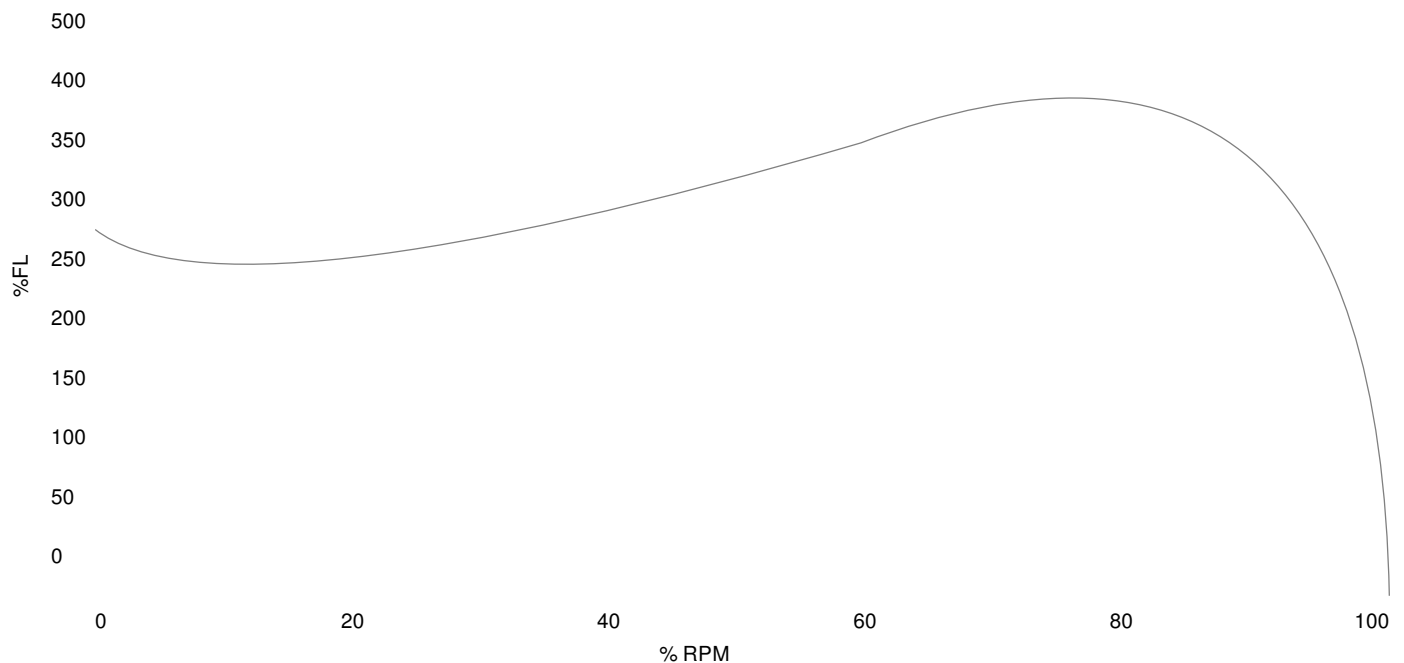

Performance Load Values, High Voltage, 60Hz

Torque Values	Torque lb-ft	% FLT	Performance Values	
Locked Rotor Torque	209.565	283.0	Start Configuration	-
Pull-Up Torque	152.546	206.0	Starting Current (A)	-
Breakdown Torque	259.179	350.0	No-Load Current (A)	-
Full Load	74.0512	100.0	No-Load Power Factor	-


% Load	Horsepower	Current, Amps	Input power, Kilowatts	Speed, RPM	Efficiency	PF
0	-	11.63	-	-	-	-
25	6.25	11.99	5.36	1793.7	86.79	0.56
50	12.5	17.43	10.15	1788.3	91.59	0.73
75	18.75	22.92	15.03	1782.5	92.84	0.82
100	25.0	28.72	19.99	1776.1	93.05	0.87
125	31.25	35.08	25.06	1769.2	92.77	0.9

Techtop Industries
2815 Colonnades Court
Peachtree Corners, GA 30071
Tel: 678-436-5540
E-Mail: info@techttopind.com


MOTOR MODEL:	GR3-CI-TF-284T-4-BR-D-25
FACTORY TYPE:	TXC

Premium NEMA Cast Iron, TEFC

3 Phase NEMA $\Delta\Delta/\Delta$ 12 Lead 230/460V

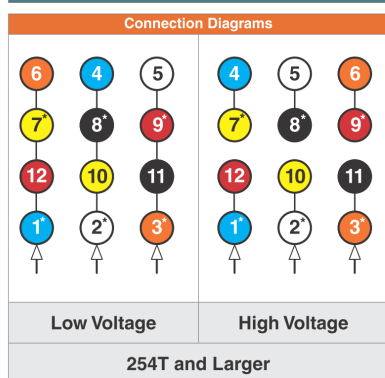

Wire	Color
T1, T4	Blue
T5, T2	White
T3, T6	Orange
T7, T10	Yellow
T8, T11	Black
T9, T12	Red

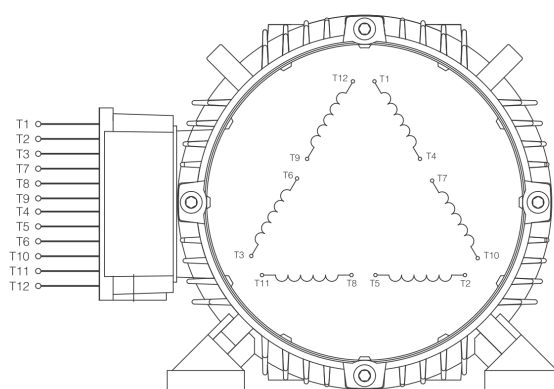

When motor is in F1 position, leads shown with "*" exit the casing above the center line of the motor, the remaining leads exit below the center line. This information can be used to identify missing or mislabelled leads.

MOTOR MODEL:	GR3-CI-TF-284T-4-BR-D-25
FACTORY TYPE:	TXC

NEMA

Premium NEMA Cast Iron, TEFC

