

DATE: 8/12/2019

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00127661

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR: 27118 BLANK BID COPY VENDOR

BUYER: BBELLOW

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

5 Days ARO

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME:

Crawford Electric Supply

SIGNATURE:

(Must be signed here)

[Signature]

TITLE:

Sales

PRINT OR TYPE NAME:

Mason Lee

ADDRESS:

200 L & A Rd

CITY, STATE:

Metairie, LA

ZIP:

70001

TELEPHONE:

(504) 731-0480

FAX:

(504) 731-0490

EMAIL ADDRESS:

mlee@Crawfordelectricsupply.com

TOTAL PRICE OF ALL BID ITEMS: \$ 1,277.04

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00127661

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	24.00	EA	ONE TIME PURCHASE OF LED LIGHT FIXTURES FOR THE RECREATION DEPARTMENT 0010 2X4 Flat panel lay-in light fixture 0-10V dimming, 5000L, 41K LED, item number TJHCP TCPFP4UZD5041K Tony QUOTING EQUAL Fixture Brand: Premise Cat #: FPH1-2450S40-1	\$53.21	\$1,277.04



Project	
Date	
Prepared by	
Model #	FPH1-2450S40-1

FPH1-SERIES

2X4 HYBRID FLAT PANEL



OVERVIEW

The FPH1-Series Hybrid LED Flat Panel ceiling light is a high performance LED panel that uses a unique back-lit design to provide a longer lasting lighting solution that replaces traditional fluorescent lighting or low-end edge-lits found in offices, hospitals, schools and more.

PRODUCT HIGHLIGHTS

- Back-lit design requires no light guide plate
- Lightweight design (30% lighter than edge-lit flat panels)
- Unique "waffle" pan design makes it exceptionally strong (won't bow/flex when hung)
- Flicker-free with 0-10V, PWM, & resistance dimming
- Post-painted white aluminum frame to fit any decor
- Designed to easily fit into existing suspended T-bar ceilings or hang via aircraft cable (optional accessory)
- Available in 3500K, 4000K and 5000K




OPTICAL SPECIFICATIONS

Lumen Output (lm) ₁	5507	Beam Angle (°) ₁	110°
CCT (K) ₁	4000K	Projected Lifetime (L ₇₀)	>50,000
CRI (Ra) ₁	82	Chromaticity Shift (K)	275K
Efficacy (lm/W) ₁	107 lm/W		

ELECTRICAL SPECIFICATIONS

Power	50W	Current Draw at 120V _{AC} (A) ₂	0.42A
System Wattage	50W	Current Draw at 208V _{AC} (A) ₂	0.23A
Input Voltage	100-277V	Current Draw at 240V _{AC} (A) ₂	0.19A
Replacement For	2 Lamp 32W T8	Current Draw at 277V _{AC} (A) ₂	0.16A

PRODUCT DIMENSION

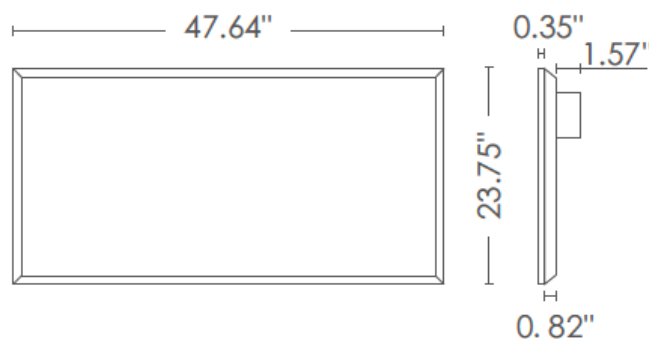


CONSTRUCTION		APPROVALS AND LISTINGS	
Housing Material	Aluminum Frame	DLC	PLNR4WLHD3W6
Housing Color	White		
Dimensions (inch/mm)	1211mm (L)x 602mm (W) x 70mm (H) 47.68" (L) x 23.70" (W) x 2.74" (H)	Damp Location Rated	Yes
Weight	4.28 kg/9.44 lbs		
Installation Method	Recessed mount for T-bar ceilings Optional Methods (Not included): Aircraft Cables	UL/ETL Listed	cULus
Operation Range (°F/°C)	-20°C to +40°C / -4°F to +104°F		
Warranty	5 years		

LED AND DRIVER SPECIFICATIONS			
LED Design Origin	Nationstar	THD (%)	<20%
LED (Brand)	China	Inrush Current (A)	<60A
LED Type	2835	Driver Class	Class 2
Dimmable	Yes (0-10V, PWM, Resistance) Flicker Free	Surge Protection (kV)	L-N:1KV, L-N-GD:2KV
Output Voltage (VDC)	25-42V	Driver Band	Lifud
Power Factor	>0.9		

OPTIONAL ACCESSORIES	
AC-24	Aircraft Cables for 2x4 Flat Panels

CANDELA	ILLUMINANCE AT A DISTANCE
---------	---------------------------

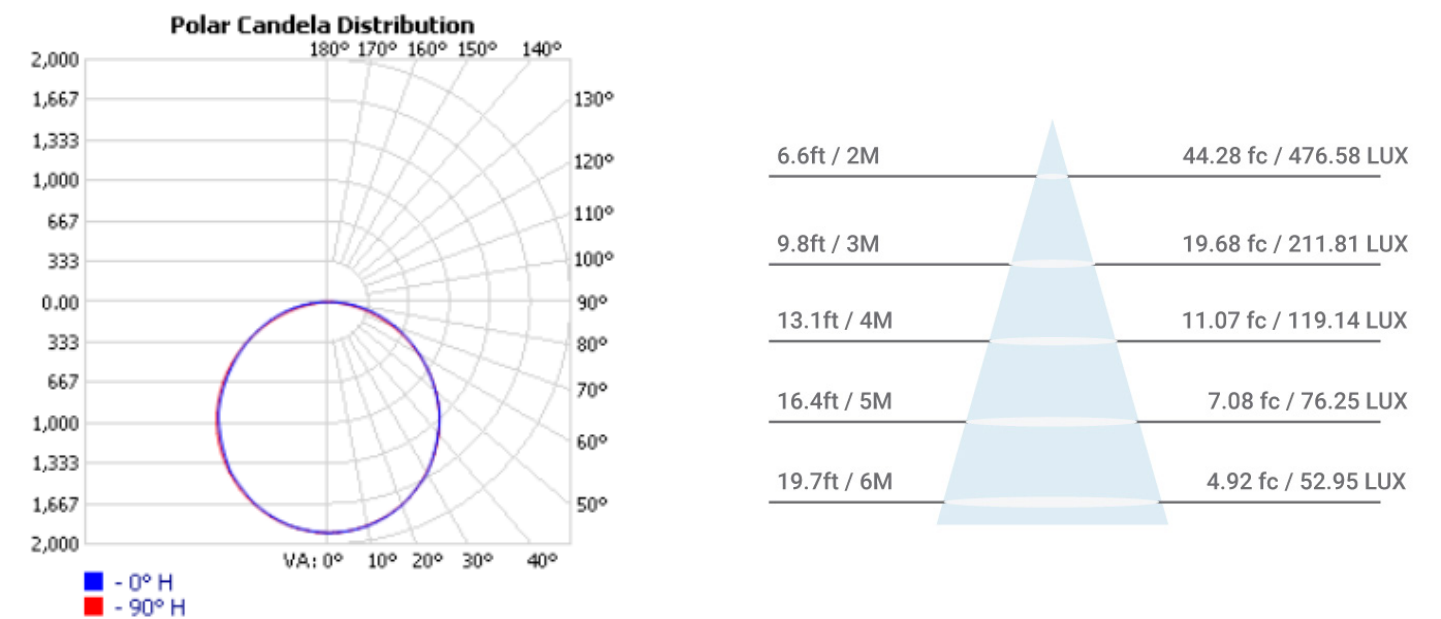

1. Due to the special conditions of manufacturing, the typical data of optical specifications can only reflect statistical figures and do not necessarily correspond to the actual parameters of each single product which could differ from the typical data.
2. Exceeding maximum ratings for input voltage and current will cause hazardous overload and will likely destroy the LED fixture.
3. Refer to Warranty Terms & Conditions available at premiseled.com/warranty