

DATE: 2/20/2025

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 5

BID NO.:50-00147232

JEFFERSON PARISH
PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR:27118 BLANK BID COPY VENDOR

PURCHASING SPECIALIST:
SCHAMPAGNE

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

less than 30 days

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

N/A

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

N/A

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda:NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME: **LED Lighting Wholesale inc LLC**

SIGNATURE: *Erich Adalbert* TITLE: **Owner**
(Must be signed here)

PRINT OR TYPE NAME: **Erich Adalbert**

ADDRESS: **400 E. Cork St.**

CITY, STATE: **Kalamazoo MI** ZIP: **49001**

TELEPHONE: **(269) 532-1020** FAX: **() N/A**

EMAIL ADDRESS: **scott@ledlightingwholesaleinc.com**

TOTAL PRICE OF ALL BID ITEMS: \$ **\$3,220.00**



Estimate

Date	Estimate #
2/21/2025	9038

Name / Address
Jefferson Parish

Ship To

Project

Item	Des c r i p t i o n	Qty	Price	Tot al
HY-P B-2 x4 P - 3 W3 CCT	wattage and color selectable 2x4 flat panel (30/40/50 watt)	40	62.50	2,500.00T
EDI-T84F24-AB-XXK G1	(3000/4000/5000 K cct) wattage and color selectable 4ft T8 (10/12/15/18/22 watt)	120	6.00	720.00T
	(2700/3500/4000/5000/5700/6500 K cct)			
	free shipping			

		Subtotal	\$3,220.00
400 E. Cork St. Kalamazoo, MI 49001 1-877-LED-5554 or 269-532-1313		Sales Tax (0.0%)	\$0.00
www.LEDLightingWHOLESALEinc.com		Total	\$3,220.00

Project Name:


Date:

Note:

LED BACK-LIT PANEL LIGHT - Watt and CCT Selectable



Slide switch for color selection



Slide switch for power selection



Application: Office, school, conference room, hospital, and more commercial spaces

Product Description

LED Back-Lit Panel is a direct lighting product with high lumen efficiency. It makes full use of all light and is more cost effective compared with edge lighting LED panel light. Adopt optical lens to offer a uniform light effect. With integrated iron plate, providing great thermal management.

Certifications



SPECIFICATIONS

Model No.	HY-PB-1X4P-3W3CCT	HY-PB-2X2P-3W3CCT	HY-PB-2X4P-3W3CCT	HY-PB-2X4PH-3W3CCT
Wattage	20W/30W/40W		30W/40W/50W	40W/50W/60W
Size	1'x4'	2'x2'	2'x4'	
Lumens	2600/3900/5200 LM		3900/5200/6500 LM	5200/6500/7800 LM
Rated Input Voltage(V)	AC100-277V			
Dimming	0-10V Dimmable			
CCT	3K/4K/5K Selectable	3K/4K/5K or 4K/5K/6K Selectable	3K/4K/5K Selectable	4K/5K/6K Selectable
CRI	≥80			
Beam Angle (°)	120°			
Electrical Class	Class I			
Lumen Efficiency	130 Lm/W			
Color Rendering Index	Ra>70			
Materials of Optics	PMMA (Lens)			
Working Temperature	-4 ° F ~+122 ° F / -20 ° C ~+40 ° C			
Storage Temperature	-4 ° F ~+149 ° F / -20 ° C ~+65 ° C			
Environment Location	IP 20 – Indoor Only			
Lifespan	> 50000H			
Lampshell	White			
DLC ID	P2U165MP			
Package Info	PYKN0DJH	PLW4UJM5	PGF000AG	
PC/ Master Pack	49.6" x 13.6" x 4.33"	25.19" x 25.59" x 4.33"	49.61" x 25.59" x 4.33"	
Weight	2	2	2	
	14LB	12 LB	23 LB	

FEATURE

- Uniform light effect with optic lens
- Integrated iron plate design provides excellent thermal management.
- Direct light design provides more even light distribution and longer lifespan

OPTIONAL ACCESSORIES

Type	Image	Size
Surface Mount Kit		Available in all 3 sizes
Emergency Back Up		Available in 8W and 15W


ORDERING CODE DEFINITION

EXAMPLE: HY-PB-2X2P-3W3CCT


Company Code	Product	Size	P	Power: 3W	CCT: 3CCT
HY	PB: LED Backlit Panel	2'x2'	P: DLC Premium Listed	2'x2' : 20W/30W/40W	CCT Selectable: 4K/5K/65K or 3K/4K/5K
		1'x4'		1'x4' : 20W/30W/40W	
		2'x4'		2'x4' : 30W/40W/50W or 40W/50W/60W	

PRODUCT DIMENSION


2X2

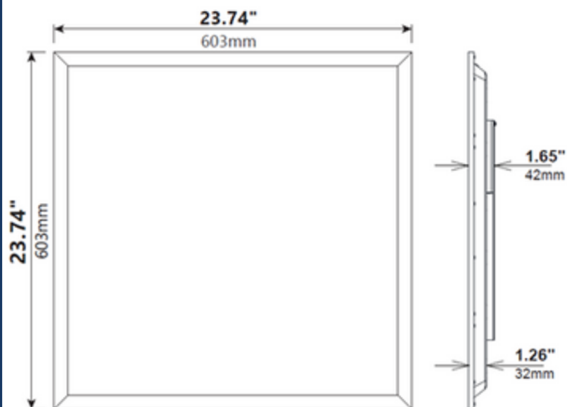

2X4

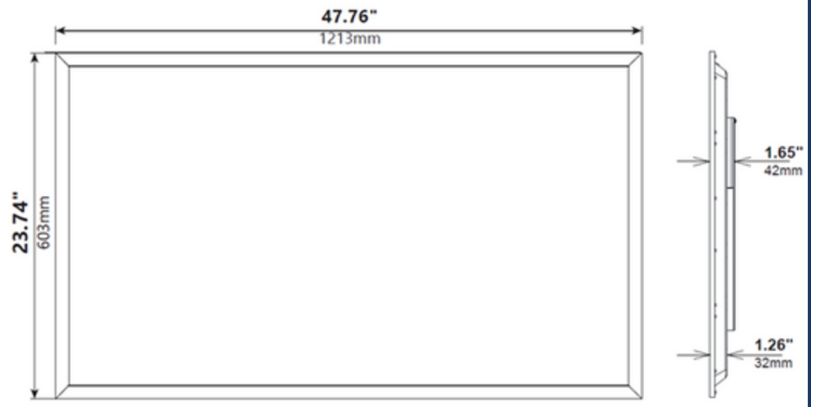


1x4

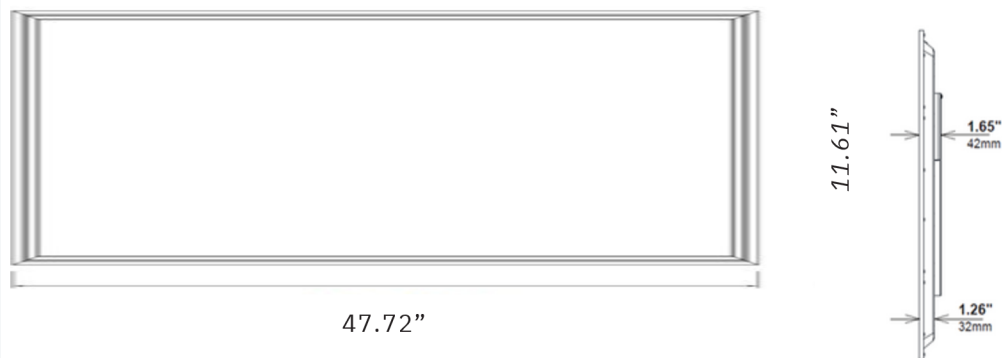


WIRING GUIDE


1. Remove the knock down hole on box by screwdriver

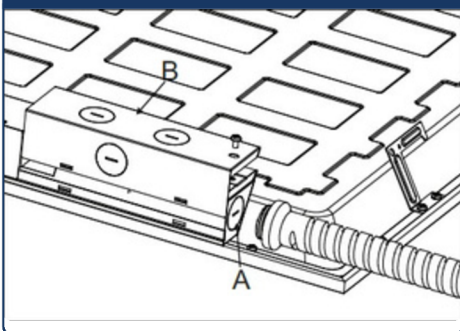

2. Connect the wire as the picture showing


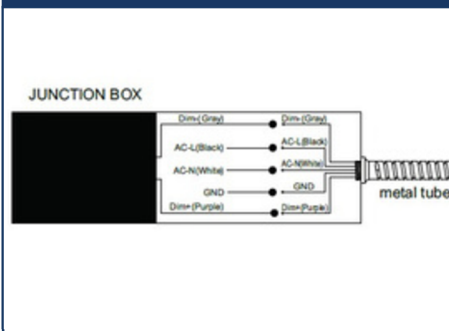


3. Cover the driver box and tighten it


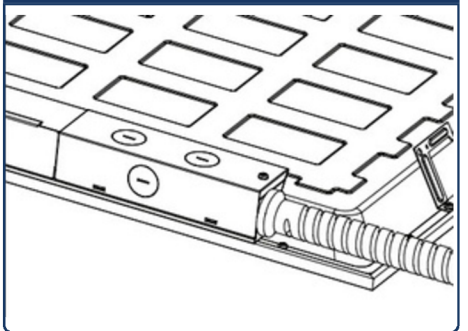


Watt and CCT Selectable


1'x4' and 2'x2



2'x4'




RECESSED

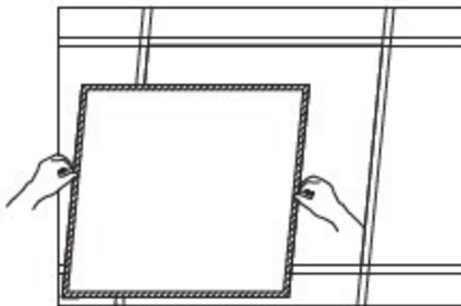


←
① Remove the ceiling plaster slab.

→
② Feed the main AC wire in driver terminal block respectively, connect the panel light and driver.

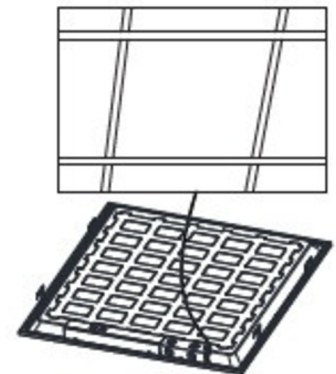


←
③ Fix the panel light into plaster ceiling.

→
④ Make sure the led panel light is firmly fixed, turn on the power.

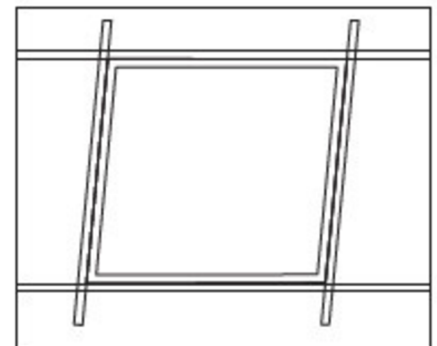


SURFACE MOUNTED


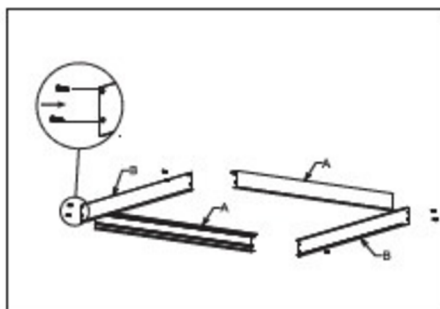


←
① Assemble the surface mounted frame and fix by screws.


→
② knock the plastic anchor into ceiling, fix the surface mounted frame on the ceiling by screws.

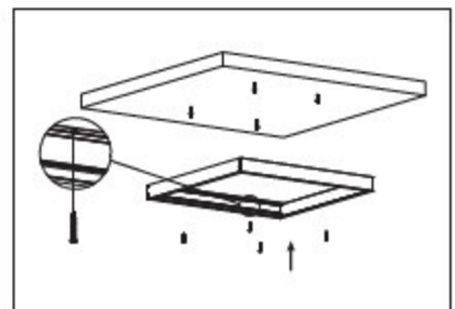

↓
③ Unscrew the side frame then take out, connect the panel light to power supply, insert the panel light into the frame.

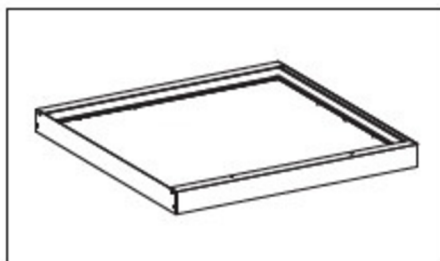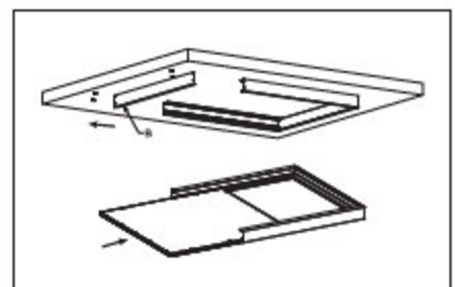


↑
⑤ Make sure the frame and panel light are firmly fixed, turn on the power.

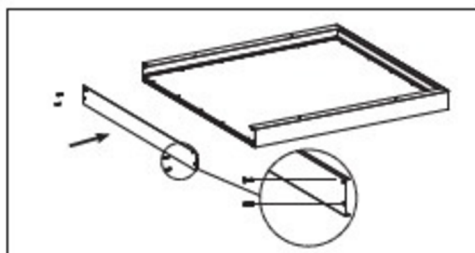

6CCT & 5Wattage Selectable T8 tube



High-quality high-brightness LED lamp beads.
No stroboscopic, high index, energy saving.

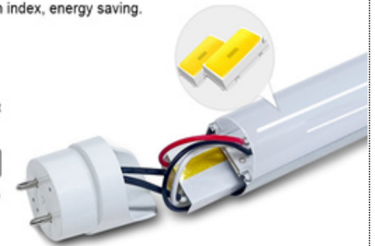

5.1



warranty

Type A

120°


Housing

Product Features

- **Installation:** Type AB, Plug & Play Compatible Electronic Ballast & ballast bypass, Direct wire, Single-End or Double-End Input.
- **ALL IN ONE: 5 Power & 6 CCT Adjustable**
- **Construction:** Aluminum case and PC lens, Standard colors are Clear and Frosted.
- **LED System:** LED system with a life rating of $\geq 50,000$ hours at L70 @25°C. Luminous efficacy > 130 lm/W.
- **Electrical:** 100V-277/347 VAC. PF ≥ 0.9 and THD $\leq 20\%$.
- **Certification:** ETL Listed, DLC SSL 5.1, FCC, RoHS.
- **Warranty:** Limited 5-Year Warranty.

Dimension

Item	L×W×H (inch)
4FT	48" x 1.12" x 1.28"

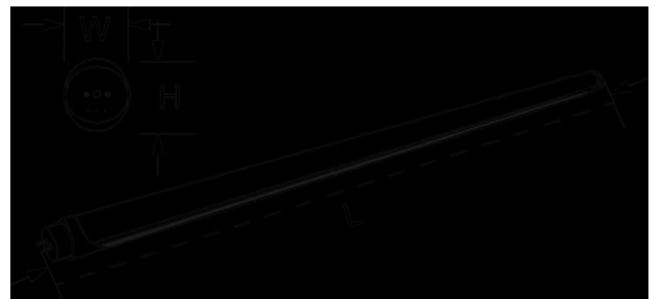

Order Information

Part No.	Length	Power	Lu m inou s Efficacy	Lu m inou s Flux	Certificate
EDI-T84F24-AB-XXK G1	4ft	10W-12W-15W-18W-22W 5 Powers Adjustable	130 lm/W	3120 lm	ETL DLC 5.1

Specifications

Model Number		EDI-T84F24-AB-XXK G1
	Length	4ft
	Voltage	100-277V / 100-347V
	Wattage	10W-12W-15W-18W-22W 5 Powers Adjustable
	CCT	2700K-3500K-4000K-5000K-5700K-6500K 6 CCT Adjustable
	Efficacy	130 lm/W
	Luminous	3120 lm
	Base	G13
Certifications	Safety / DLC	ETL DLCStander5.1
Photo metric	CCT	
	SDCM	≤6
	Beam Angle	120°
	Ra	>80
	R9	>0
Electrical	Wattage	Max 24W
	Current	Max 0.24A
	Rated Voltage	100-277V / 100-347V
	Frequency	50/60Hz
	THD	≤20%
	Surge Protection	2KV
	Power Factor	≥0.9
Lifetime	L70	≥ 50000
	L90	≥ 36000
	Warranty	5 Years
Construction	Hou si ng	Alu m inu m
	Optical-Lens	PC Frosted / Clear
Operation	Start Time	≤1S
	OperatingTemp	-4°F - 104°F
	Storage Temp	-22°F - 140°F
	Optical-Lens	PC Frosted /Clear
	Environment	Indoor
	Ingress Protection	IP22 Rating

Packing / weight

Size	Outer box (L*W*H)	Qty/ Ctn (pcs)	G.W/Ctn (lbs)	Container 20GP(28 m ²)	Container 40HQ(68 m ²)	Container 45HQ(78 m ²)
4ft	48.6*7.28*7.28 in 1235*185*185 mm	25	16.0	13000 pcs	39600 pcs	45000 pcs

Warranty

This product has a warranty of period of 5 years from the date of purchase. The warranty is invalid in the case of improper use, installation, tampering or removal of the Q.C. and/or date label, usage in improper working environment or installation not according to the current edition of the National Electric Code. Should this product fail during the warranty period it will be replaced free of charge, subject to correct installation and return of the faulty unit. Manufacturer does not accept responsibility for any installation costs associated with the replacement of this product. This warranty is in addition to the statutory rights in your country of purchase. Manufacturer reserves the right to alter specifications without prior notice.

Note

- 1.The installation and maintenance must be completed by electricians or professionals.
- 2.Please cut off the power before installation and maintenance.
- 3.The thermally insulating material is not allowed to cover the fixture.
- 4.Please keep away from the corrosive substance, and keep the fixture dry and clean.
- 5.Working temperature: -4°F~104°F, storage temperature: -22°F~140°F.