



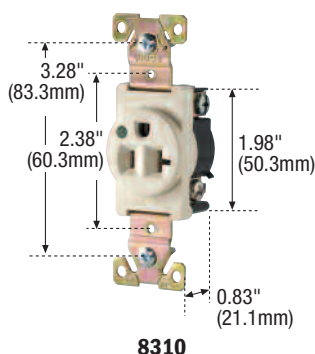

## G-1 Straight Blade Receptacles



### TESTING & CODE COMPLIANCE

- Meets all UL 498 Hospital Grade requirements, Federal Spec. WC-596
- UL Listed, (file no. E15058).
- CSA Certified, (file no. 6914 (6233-01)), Meets all CSA requirements, C22.2 no. 42.
- NOM Certified, except as noted.

### MATERIAL CHARACTERISTICS

Environmental:  
Flammability per UL 94 requirements, V2 rated.

Temperature Rating:  
Duplex receptacles:  
-20° C to 70 °C;  
Single receptacles:  
-20° C to 60 °C.

## Hospital Grade Straight Blade Receptacles

**2-Pole, 3-Wire Grounding**  
**15A 125V, 15A 250V**  
**20A 125V, 20A 250V**

### Duplex and Single Receptacles

#### FEATURES

- Exclusive screw terminal guards provide fast, easy insulation from conductive surfaces.
- Exclusive 5-leaf nickel-plated brass line contacts ensure lowest heat rise, smooth plug blade insertion, long-term retention and corrosion resistance.
- Rigid, glass reinforced nylon base lends ultimate strength and superior high heat resistance in contact carrier.
- 0.050" (1.27mm) solid brass, nickel-plated mounting strap with non-riveted, integral one-piece grounding system for highest durability – assures superior ground integrity and corrosion resistance under heaviest use.
- High impact and chemical-resistant nylon face.
- Tapered lead-in slots on back wiring holes assist in gathering stranded wires for faster, more secure connections.
- All terminal (H-N-G) and mounting screws nickel-plated, triple combination (slot/Phillips/Robertson) head for superior corrosion resistance and maximum flexibility.
- Long, broad mounting strap helps reach large panel cutouts for Code Compliance.
- Automatic grounding system eliminates need for bonding jumper in grounded metal enclosure, provides redundant measure of ground continuity where jumper used.
- Screw-Catch™ feature on duplex devices speeds mounting of wallplates.
- Long-life neon bulb in illuminated devices easily identifies emergency circuits.

#### Back and Side Wire

Rating A	V	NEMA	Color	Catalog No.		
				Duplex	Duplex Illuminated†	Single†
15	125	5-15R	Black	8200BK◇	—	—
			Brown	8200B◇	—	8210B
			Gray	8200GY◇	—	8210GY
			Ivory	8200V◇	8200LTV	8210V
			Red	8200RD◇	8200LTRD	8210RD
			White	8200W◇	8200LTW	8210W
15	250	6-15R	Ivory	8600V*	—	8610V*
			White	8600W*	—	8610W*
20	125	5-20R	Black	8300BK◇	—	—
			Brown	8300B◇	—	8310B
			Gray	8300GY◇	—	8310GY
			Ivory	8300V◇	8300LTV	8310V
			Light Almond	8300LA◇	—	—
			Red	8300RD◇	8300LTRD	8310RD
20	250	6-20R	White	8300W◇	8300LTW	8310W
			Brown	8400B*	—	8410B*
			Gray	8400GY*	—	8410GY*
			Ivory	8400V*	—	8410V*
			Red	8400RD*	—	8410RD*
			White	8400W*	—	8410W*

◇ Pre-wired device available—consult your CWD sales rep.

\*Not NOM certified

†Meet all UL, CSA & Federal Specifications, but differ in design and construction from duplexes noted above.



5-15R



6-15R



5-20R



6-20R