

DATE: 5/27/2020

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00131118

JEFFERSON PARISHPURCHASING DEPARTMENT
P.O. BOX 9
GRETN, LA. 70054-0009
504-364-2678

VENDOR: 27118 BLANK BID COPY VENDOR

BUYER: RSCOTT

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES _____

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK _____

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK _____

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME:	
Bayou Lighting + Elec. Supply	
SIGNATURE: (Must be signed here)	TITLE:
<i>Mark Van Camp</i>	Sales
PRINT OR TYPE NAME:	
Mark Van Camp	
ADDRESS:	
7501 Westbank Expressway	
CITY, STATE:	ZIP:
Marrero La.	70072
TELEPHONE:	FAX:
(504) 347-0228	(504) 347-8484
EMAIL ADDRESS:	
MARK@BayouLighting	

TOTAL PRICE OF ALL BID ITEMS: \$ 6,960.00

DATE: 5/27/2020

INVITATION TO BID FROM JEFFERSON PARISH - continued

Page: 5

BID NO.: 50-00131118

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			Purchase of flat panel LED light fixtures for the Jefferson Parish General Services Department		
1	80.00	EA	0010 - WESTGATE 2X4 PANEL 4000K 50W 6260LM 0-10V DIM 120-277V DLC 4.0 MPN: LP-2X4-50W-40K-D-HL <i>HFP402D3841K TCP</i>	<i>74.00</i>	<i>5920.00</i>
2	20.00	EA	0020 - WESTGATE 2X2 PANEL 4000K 50W 5280LM 0-10V DIM 120-277V DLC 4.0 MPN: LP-2X2-40W-40K-D-HL <i>HFP202D3841K TCP</i>	<i>52.00</i>	<i>1040.00</i>
<p>ORDERED BY/FOR: E.ROMAIN</p> <p>SPECIFICATIONS ATTACHED</p> <p>CONTACT: J.P. GENERAL SERVICES ATTN: ERIC ROMAIN 1221 ELMWOOD PARK BLVD JEFFERSON, LA 70123 (504)736-6036</p>					

Applications

TCP LED Flat Panel luminaires are cost-effective, high-efficiency alternatives to traditional T5, T8 and T12 linear fluorescent troffers. Featuring a slim, low-profile design, our LED flat panels use edge-lit technology to deliver full panel diffusion and superior uniformity. Applications include offices, schools, retail locations, healthcare, hospitality and other T-grid and commercial ceilings.

Construction


- Rectangular white frame
- Lens: frosted white diffuser
- IP20 rated
- IC rated for direct contact with insulation
- Designed for easy drop into T-bar grid ceilings

Electrical

- UL/cUL damp location rated
- 0-10V dimming driver (standard)
- LED Driver with integrated junction box
- System rated for long 50,000 hour life
- Optional emergency back-up
- PMMA Light Guide

Optics

- Innovative edge-lit technology paired with acrylic light guide and thin frosted white diffuser
- 120° beam angle
- Delivers full panel diffusion and excellent uniformity

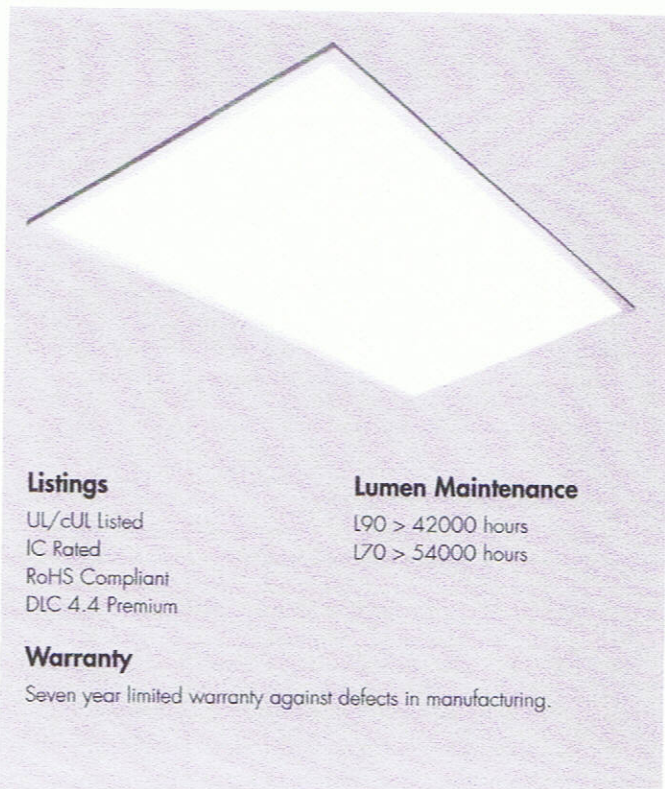

Listings

UL/cUL Listed
IC Rated
RoHS Compliant
DLC 4.4 Premium

Lumen Maintenance

L90 > 42000 hours
L70 > 54000 hours

Warranty

Seven year limited warranty against defects in manufacturing.

Catalog Ordering Matrix

Example: HFP4UZDA141K

HFP	4	U	ZD			
FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE ^{1,2,3}	COLOR TEMPERATURE	OPTIONS
HFP = High Efficiency Flat Panel	4 = 2' x 4'	U = 120V-277V	ZD = 0-10V Dimming	23 = 3250 Lumens 29 = 4000 Lumens 38 = 5200 Lumens 46 = 6000 Lumens	30K = 3000K 35K = 3500K 41K = 4100K 50K = 5000K	EB = Emergency Battery Backup

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

³ 23W, 29W and 38W are permanently fixed; 46W is adjustable

Accessories:

Item Number	Description
FPSK4	2X2 FLAT PANEL SUR MOUNT KIT (WHITE)
DTFLK4	RECESS MOUNT FLANGE KIT FOR 2X4 TROFFERS AND PANELS
YHANGER6PK	Y FIT CABLE HANGER 6 PACK
DRVEXTCABLE	3FT DRIVER EXTENSION CABLE

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

For the most up-to-date specs and warranty information, please visit www.tcp.com



Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.

Applications

TCP LED Flat Panel luminaires are cost-effective, high-efficiency alternatives to traditional T5, T8 and T12 linear fluorescent troffers. Featuring a slim, low-profile design, our LED flat panels use edge-lit technology to deliver full panel diffusion and superior uniformity. Applications include offices, schools, retail locations, healthcare, hospitality and other T-grid and commercial ceilings.

Construction


- Rectangular white frame
- Lens: frosted white diffuser
- IP20 rated
- IC rated for direct contact with insulation
- Designed for easy drop into T-bar grid ceilings

Electrical

- UL/cUL damp location rated
- 0-10V dimming driver (standard)
- LED Driver with integrated junction box
- System rated for long 50,000 hour life
- Optional emergency back-up
- PMMA Light Guide

Optics

- Innovative edge-lit technology paired with acrylic light guide and thin frosted white diffuser
- 120° beam angle
- Delivers full panel diffusion and excellent uniformity

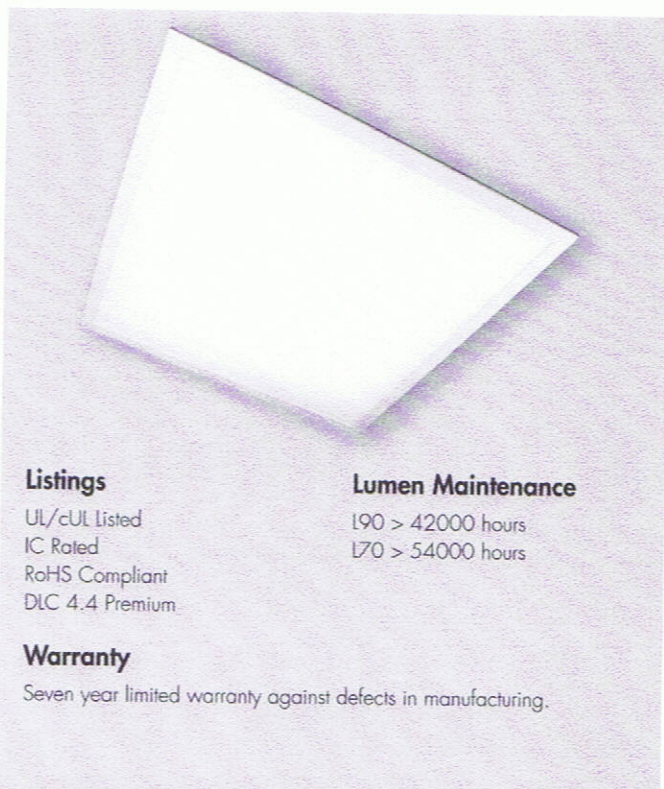

Listings

UL/cUL Listed
IC Rated
RoHS Compliant
DLC 4.4 Premium

Lumen Maintenance

L90 > 42000 hours
L70 > 54000 hours

Warranty

Seven year limited warranty against defects in manufacturing.

Catalog Ordering Matrix

Example: HFP2UZDA141K

HFP	2	U	ZD			
FAMILY	SIZE	VOLTAGE	DIMMING	WATTAGE ^{1,2,3}	COLOR TEMPERATURE	OPTIONS
HFP = High Efficiency Flat Panel	2 = 2' x 2'	U = 120V-277V	ZD = 0-10V Dimming	23 = 3000 Lumens 29 = 3800 Lumens 38 = 4800 Lumens	30K = 3000K 35K = 3500K 41K = 4100K 50K = 5000K	EB = Emergency Battery Backup

¹ Approximate lumen output. Actual performance may vary based on CCT, options selected and end user application.

² Actual wattage may differ by +/- 5%; when operating between 120-277V +/- 10%.

³ 23W and 29W are permanently fixed; 38W is adjustable

Accessories:

Item Number	Description
FPSK2	2X2 FLAT PANEL SUR MOUNT KIT (WHITE)
DTFLK2	RECESS MOUNT FLANGE KIT FOR 2X2 TROFFERS AND PANELS
YHANGER6PK	Y FIT CABLE HANGER 6 PACK
DRVEXTCABLE	3FT DRIVER EXTENSION CABLE

TCP®

325 Campus Dr. | Aurora, Ohio 44202 | P: 800-324-1496 | tcp.com

For the most up-to-date specs and warranty information, please visit www.tcp.com



Not all versions of this product are qualified on the DLC QPL. To view our DLC qualified products, please consult the DLC Qualified Products List at www.designlights.org/qpl.