

3/29

DATE: 3/22/2019

INVITATION TO BID  
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00126063

**JEFFERSON PARISH**

PURCHASING DEPARTMENT  
P.O. BOX 9  
GRETNA, LA. 70054-0009  
504-364-2678

VENDOR: Basic Supply LLC

BUYER: DREAMEY

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

<b>DELIVERY: FOB JEFFERSON PARISH</b>	
INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES	<u>2-3 weeks</u>
INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK	_____
INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK	_____

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_  
 NUMBER: \_\_\_\_\_  
 NUMBER: \_\_\_\_\_  
 NUMBER: \_\_\_\_\_

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) \_\_\_\_\_

<b>*** ALL BIDDERS MUST COMPLETE SECTION BELOW ***</b>	
FIRM NAME: <u>Basic Supply LLC</u>	
SIGNATURE: <u>[Signature]</u> (Must be signed here)	TITLE: <u>Manager</u>
PRINT OR TYPE NAME: <u>John Atkinson</u>	
ADDRESS: <u>P O Box 63066</u>	
CITY, STATE: <u>Lafayette LA</u>	ZIP: <u>70596</u>
TELEPHONE: <u>337-769-0122</u>	FAX: <u>337-247-7699</u>
EMAIL ADDRESS: <u>charlotte@basicsupply.com</u>	

TOTAL PRICE OF ALL BID ITEMS: \$ 3602.00

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126063

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	3.00	CS	ONE TIME PURCHASE:  0010 Clark Corn Light 5000K 150W 100-277V 360BS IP64 18000LM E39 Base  RPL400W UL Listed Corn Cob Bulb, 6 per case. Item Number: 1125922 MPN Number: SNC-CLW-150WB1 5000K E39	761.00 <sup>21</sup>	2283
2	10.00	EA	0020 Mobern Wrap 4 Foot 2-Light Wrap Wrap Around 2-F32T8, LED Ready, Wired  Without Ballast, Surface Mount Item Number: 1570012 USE 1 MPN Number: 770-232LED-2E LT WRAP	45.00	450.00
3	10.00	EA	0030 Mobern Wrap 4 Foot 4-Light Wrap Around LED Ready No Ballast  Item Number: 1570013 MPN Number: 769432LED2E 4-LT WRAP	38.90	389.00
4	2.00	CS	0040 Clark 4 Foot 15W T8 5000K Clear NANO 2120LM AC100-277V UL DLC 310BS  143LPW, 30 Per Case Item Number: 1315221 MPN Number: ORM-T8-4FT-15W-ID 5000K CL	240.00	480.00
5	16.00	EA	0050 Clark Sports Light 5000K 300W 100-277V TR 39000LM RPL 1000W DLC 4.2 Listed Philips Chips Meanwell HLG-240H-48A/B Driver 5 Year Warranty IP65 Outdoor Rated 10KV Surge Item Number: 1655915 MPN Number: HD-SP300W VCT 120-277V  Needed for playground tennis courts  Deliver to:  East Bank Recreation 6925 Saints Drive Metairie, LA 70003  Contact:  Roy Blum at 504-736-6999	X	X

Job Name/Title: \_\_\_\_\_ Catalog Number \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Notes: \_\_\_\_\_

# LED Linear Lighting

## 18W 4 Ft Single-Ended LED Retrofit Clear T8 with Internal Driver Ballast Bypass

### Features

- Bypass single-end connection\*
- Polycarbonate lens and aluminum heat sink
- Non-shunted lampholder included
- Extremely long life and energy efficient
- No mercury
- Easy and safe replacement for fluorescent T8 systems

### Specs


- 18W
- 120-277V
- 82 CRI
- 50,000 Average Rated Life
- 130° Beam angle
- -20°C to 40°C Ambient temperature

### Applications

- Office, retail, hospitality, warehouse



G13 Bi-pin Base



Catalog Number	Product Code	UPC Code	Color Temp	Watts	Lumens	LPW	Case Qty	DLC
<b>L4T8B/835/18C/SE-75</b>	71041	751338015753	3500K	18	2,088	116	1/20	Y
<b>L4T8B/840/18C/SE-75</b>	71042	751338015760	4000K	18	2,124	118	1/20	Y
<b>L4T8B/850/18C/SE-75</b>	71043	751338015777	5000K	18	2,160	120	1/20	Y
<b>L4T8B/860/18C/SE-75</b>	71044	751338015784	6000K	18	2,190	122	1/20	-

Specifications are subject to change without prior notice.  
 \* Requires non-shunted lampholder for single-end connection

Quoting 71043



## LED Wrap Fixture FROSTED LENS



### Superior LED Technology and Consistent Color Rendering

Topaz's LED Wrap Fixture with Frosted Lens are an aesthetically pleasing and energy saving alternative for linear fluorescent fixtures. Available in two and four feet, these fixtures are designed to create the feel of an open space and distribute light evenly, in both vertical and horizontal work spaces. This simple installation will provide consistent, comfortable lighting with worry free maintenance, for at least 50,000 hours.

### FEATURES

- 2' and 4' LED replacement for 2x17WT8 and 2x32WT8
- Modern aesthetic design
- Steel housing with white enamel coat finish
- Equipped with heat resistant polycarbonate frosted lens
- Ceiling box mount, surface mount or chain mount
- Linkable up to 8 fixtures
- Non-Dimmable

### APPLICATIONS

- Office and industrial lighting
- Hospitals
- Schools



## LED Wrap Fixture FROSTED LENS

### GENERAL SPECIFICATIONS

**Input Voltage:** 120-277VAC, 50/60Hz

**Power Factor:** 0.9

**THD:** <15%



**CRI:** 80

**Beam Angle:** 105°

**Ambient operating temperature:** -10°F to 110°F

**Average Rated Life:** 50K hours (L70)

End-to-end  
connector provided

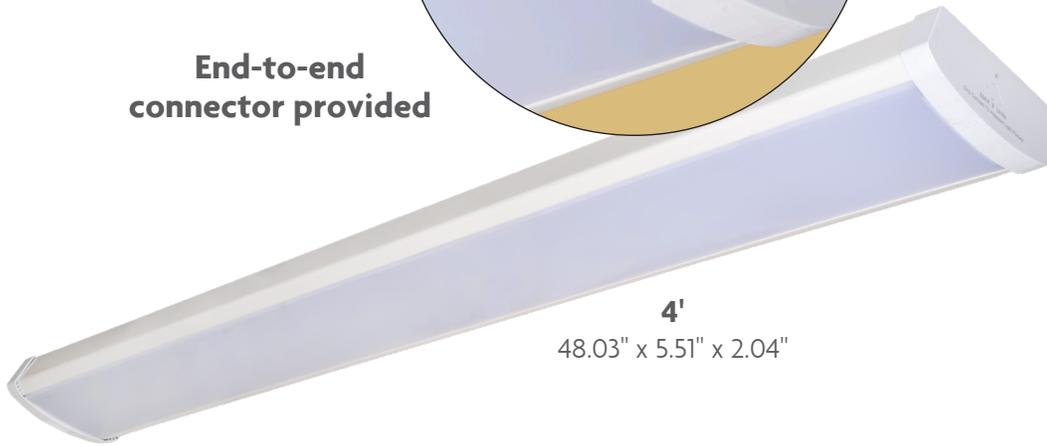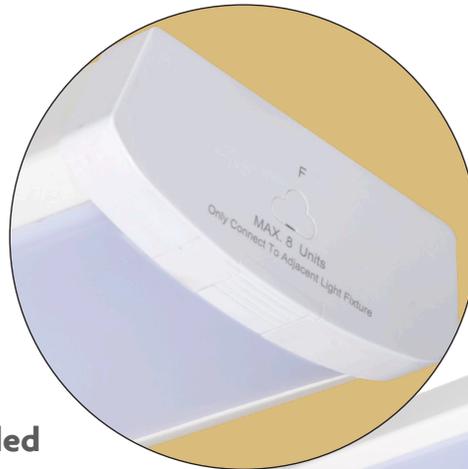

4'

48.03" x 5.51" x 2.04"



2'

21.34" x 5.51" x 2.04"

### SPECIFICATIONS / ORDER INFO

Catalog Number	Order Code	Watts	Input Amps	Lumens	Lumens Per Watt	CCT (Kelvin)	Size	ENERGY STAR	DLC ID	Replacement Wattage	PK-Qty
F-LWRAP/25W/40K/F-75	74270	25	0.23	2,650	106	4000K	2'	-	PLO3WQN9DBNK	2x17W T8	1/12
F-LWRAP/48W/40K/F-75	74274	48	0.43	4,250	89	4000K	4'	Y	N/A	2x32W T8	1/6

### NOMENCLATURE

Example: F-LWRAP/25W/40K/F

F=Fixture / LWRAP=LED Wrap / 25W=25W / 40K=4000K

## Quoting 74274

Specifications subject to change without notice.

Job Name/Title: \_\_\_\_\_ Catalog Number \_\_\_\_\_  
 Contractor: \_\_\_\_\_ Notes: \_\_\_\_\_

# LED Office/Industrial Lighting

## Prismatic Linear Wrap Fixture

### Features


- Replacement for 4' 2x32W T8 or 2' 2x17W T8
- Steel housing with UV resistant powder coat finish
- Polycarbonate prismatic lens
- Ceiling box mount, surface mount or chain mount
- 4-ft has (3) 1/2" knockouts on back panel
- 2-ft has (2) 1/2" knockouts on back panel

### Specs

- 105 Lumens per watt (LPW)
- 80 CRI
- 50,000 (L70) Average rated life
- -10°F to 110°F Ambient rating
- THD: <20%; Power factor: >0.9
- 100° Beam angle
- Non dimmable

### Applications

- Office and industrial lighting
- Hospitals
- Schools

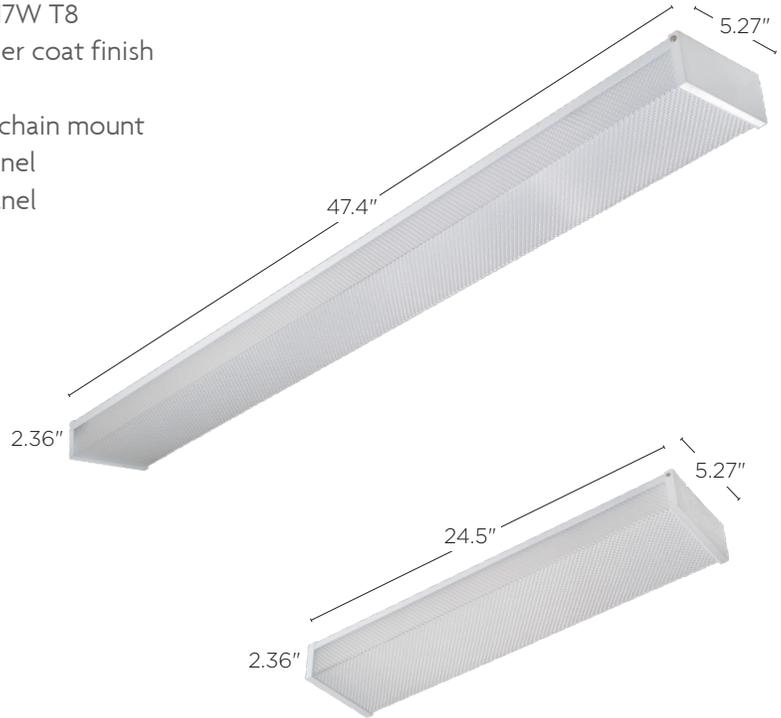

**Occupancy Sensor**  
 Item #: WD-OS  
 Product Code: 72700

Catalog Number	Product Code	UPC	CCT	Input Voltage	Input Amps @120/@277V	Watts	Lumens	Length (ft.)	Replacement Wattage	DLC ID	Case Qty
<b>F-LWRAP/20W/40K-75</b>	74265	751338030695	4000K	120-277V	0.2 / 0.10	20W	2,100	2	2x17W T8	PLRP3XZBASPZ	1/12
<b>F-LWRAP/20W/50K-75</b>	74266	751338030701	5000K	120-277V	0.2 / 0.10	20W	2,100	2	2x17W T8	PLLDUGZXAWCK	1/12
<b>F-LWRAP/40W/40K-75</b>	74267	751338030718	4000K	120-277V	0.4 / 0.2	40W	4,200	4	2x32W T8	PL4X164JGZ2D	1/6
<b>F-LWRAP/40W/50K-75</b>	74268	751338030725	5000K	120-277V	0.4 / 0.2	40W	4,200	4	2x32W T8	PL01582VW1V7	1/6

## Quoting 74267

Specifications are subject to change without prior notice.



## LED Post Top/High Bay Lights



### High Performance LED

Topaz's Post Top/High Bay lights are the advanced alternative to traditional acorn, globe or high bay warehouse lighting. Designed to the highest standard, these lights offer maximum efficiency, while featuring the latest technology in thermal management, optics and LEDs. Suitable for damp locations for both indoor and outdoor applications, they offer improved quality of light compared to high pressure sodium and metal halide light sources while reducing cost of ownership through minimal maintenance, lower utility costs and disposal issues.

### FEATURES

- Optimized performance with premium chipset
- Improved construction and thermal management design
- Ballast bypass model
- 6kV Surge protection
- 360° True omnidirectional light output
- Designed to produce at least 70% of initial light output after 50,000 hours

### APPLICATIONS

- Commercial indoor and outdoor settings such as acorns, post top and high bay applications





Job Name/Title: \_\_\_\_\_ Catalog Number \_\_\_\_\_

Contractor: \_\_\_\_\_ Notes: \_\_\_\_\_

## LED Post Top/High Bay Lights

### GENERAL SPECIFICATIONS

- Input Voltage:** 120-277V
- Frequency:** 50/60Hz
- Power Factor:** ≥0.9
- THD:** <20%
- CRI:** 80
- Average Rated Life:** 50,000 Hours
- Location Rating:** Rated for damp locations
- Enclosed Fixture Rating:** Suitable for enclosed fixtures\*
- Ambient Operating Temp:** -4°F to 140°F
- Operating Position:** Base up / Base down



### SPECIFICATIONS / ORDER INFO

Catalog Number	Product Code	UPC	DLC ID	Base	Watts	Replacement Watts	CCT Kelvin	Lamp Lumens	Lamp LPW	DLC Fixture Lumens	Fixture LPW	Weight (Lbs)	MOL In.	MOD In.	PK QTY
<b>LPT80/830/E39/G3</b>	74364	751338032583	PLQMU9ZNFVJT	E39	80W	320W	3000K	11,200	140	9,569	120	3.2	10.7"	5.1"	1/6
<b>LPT80/850/E39/G3</b>	74365	751338033047	PLZXAT7OKTBO	E39	80W	320W	5000K	11,520	144	9,876	123	3.2	10.7"	5.1"	1/6
<b>LPT100/850/EX39/G3</b>	74366	751338033054	PLEWCFEQYJ46	EX39	100W	400W	5000K	14,400	144	12,570	126	3.4	11.5"	5.1"	1/6
<b>LPT125/850/EX39/G3</b>	74368	751338033085	PL9RV4TJNTOJ	EX39	125W	600W	5000K	18,000	144	15,143	121	3.7	12.5"	5.1"	1/6

### NOMENCLATURE

Example: **LPT80/830/E39/G3**

**LPT80**=LED Post Top High Bay, 80 Watts / **830**=80 CRI, 3000K / **E39**=E39 Base / **G3**=Gen 3  
**EX39**=EX39 Base

**Quoting 74368**

### ENERGY SAVINGS

	LED Watts	HID	HID Fixture Watts	Energy Saving, Watts	Yearly Saving, Fixture	5 Year Savings
<b>Based on 12 hours/day and .11/kwhr</b>						
LPT80	80W	320W	350W	270W	\$130.00	\$650.00
LPT100	100W	400W	455W	355W	\$171.00	\$855.00
LPT125	125W	600W	660W	535W	\$257.75	\$1,288.75

Specifications are subject to change without prior notice.

Note: When installing Topaz LED post top lamps in an HID fixture, ballast must be bypassed when present.

\*Suitable for enclosed fixtures, as long as ambient temperature does not exceed 140°F (60°C)

**Safety cable required in high bay or base up applications.**

This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation. Specifications subject to change without notice.

©2019 Topaz Lighting Corp.