



SPECIFICATION SHEET

STYLE: 715SNFLB



G-Tek® PosiGrip®

Seamless Knit Nylon Glove with Nitrile Coated Foam Grip on Palm & Fingers

- Seamless one-piece nylon shell offers increased comfort, finger dexterity and breathability
- Foam Nitrile coatings are breathable and durable, designed with a cell structure that disperse fluids on contact for an improved grip
- Silicone Free
- Knit Wrist helps prevent dirt and debris from entering the glove
- Color coded hems for easy size identification
- Washable, resistant to chemicals, water, and ultraviolet light

Applications

- Secure Dry Grip and Oil Resistant
- Handling and Assembly of Parts and Materials
- Equipment Maintenance and Repair
- Parts Cleaning
- Fastening and Anchoring



4131



Technical Data

Color	Salt & Pepper
Sizes Available	XS-2XL
Packaging	Bulk Pack
Packed	12 Dozen/Case
Case Dimensions (in)	20.88 x 12.06 x 9.06
Case Weight (lbs)	14.55
Country of Origin	China
Liner Material	Nylon
Coating	Nitrile
Coating Color	Black
Coating Coverage	Palm & Fingers
Grip	Foam
Gauge	15
Cuff	Knit Wrist
Impact Protection	--
Construction	Coated Seamless Knit
Certifications	Silicone Free

Performance Data

ANSI Abrasion Level	3
ANSI Impact Level	--
EN 388	4131X
EN Abrasion Level	4
EN Cut Level	1
EN Tear Level	3
EN Puncture Level	1

Care Instructions



Machine Wash



Water Temp 40°C



Do Not Bleach



Tumble Dry



Low Heat

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: +1 (800) 262-5755 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED. 2022-03-22



SPECIFICATION SHEET

STYLE: 715SNFLB

SKU Information

SKU	COLOR	SIZE	UPC	UPC (INNER)	UPC (CASE)
715SNFLB/XS	Salt & Pepper	XS	662909071842	20662909071846	10662909071849
715SNFLB/S	Salt & Pepper	S	662909071859	20662909071853	10662909071856
715SNFLB/M	Salt & Pepper	M	662909071866	20662909071860	10662909071863
715SNFLB/L	Salt & Pepper	L	662909071873	20662909071877	10662909071870
715SNFLB/XL	Salt & Pepper	XL	662909071880	20662909071884	10662909071887
715SNFLB/XXL	Salt & Pepper	2XL	662909071897	20662909071891	10662909071894

PROTECTIVE INDUSTRIAL PRODUCTS, INC. | BRINGING THE BEST OF THE WORLD TO YOU®

AMERICAS: +1 (800) 262-5755 | EUROPE: +34-96182-41-48 | AMEA: (ASIA, MIDDLE EAST, AFRICA) 852-2475-9228 | www.pipglobal.com

This document and the information contained herein is the property of Protective Industrial Products, Inc. (PIP) and may not be used or reproduced without permission. Product users should conduct all appropriate testing or other evaluations to determine the suitability of PIP products for a particular purpose or use within a particular environment. PIP DISCLAIMS ALL WARRANTIES OTHER THAN AS EXPRESSLY PROVIDED. 2022-03-22

Technical Specification Sheet

3M™ Particulate Respirator 8210, N95

Key Features

- NIOSH approved N95 rating
- Adjustable nose clip
- Nose foam
- Ultrasonically welded headbands

Material Composition

- Straps – Thermoplastic Elastomer
- Nose Clip – Aluminum
- Nose foam - Polyurethane
- Filter – Polypropylene
- Shell – Polyester
- Coverweb - Polyester
- This respirator contains no components made from natural rubber latex
- Approximate weight of product: 0.35 oz.
- See the 3M Technical Bulletin - [Cellulose Certification - Filtering Facepiece Respirators](#) for information about which 3M respirators contain cellulose

Country of Origin

Made in the USA with globally sourced materials

Use For

- Use for solid particulates and liquid mists in concentrations not exceeding 10X PEL/OEL
- Always follow User Instructions and use in manners as indicated



Do Not Use For

- DO NOT use for gases and vapors, oil aerosols, asbestos, arsenic, cadmium, lead, 4,4-methylene dianiline (MDA), or abrasive blasting
- DO NOT use for particulate concentrations exceeding 10X PEL/OEL
- DO NOT use in any manner not indicated in the User Instructions

Approvals and Standards

- NIOSH approved N95 particulate respirator
- Meets NIOSH 42 CFR 84 N95 requirements for a minimum 95% filtration efficiency against solid and liquid aerosols that do not contain oil.
- NIOSH approval number: TC-84A-0007
- Assigned Protection Factor (APF 10) per US OSHA and Canada CSA

Time Use Limitation

Replace the respirator when it becomes dirty, damaged, or difficult to breathe through.

Shelf Life and Storage

- 5 years from the date of manufacture
- Use By date on box in MM/YYYY format
- Store respirators in the original packaging, away from contaminated areas, dust, sunlight, extreme temperatures, excessive moisture, and damaging chemicals
- Store in temperatures between -4°F (-20°C) and +86°F (+30°C) and not exceeding 80% RH

WARNING!

This respirator helps reduce exposures to certain airborne contaminants. Before use, the wearer must read and understand the User Instructions provided as a part of the product packaging. Follow all local regulations. In the U.S., a written respiratory protection program must be implemented meeting all the requirements of OSHA 1910.134, including training, fit testing and medical evaluation. In Canada, CSA standard Z94.4 requirements must be met and/or requirements of the applicable jurisdiction, as appropriate. **Misuse may result in sickness or death.** For correct use, consult supervisor and the User Instructions or call 3M PSD Technical Service in USA at 1-800-243-4630 and in Canada at 1-800-267-4414.



Personal Safety Division
3M Center, Building 0235-2W-70
St. Paul, MN 55144-1000
3M.com/workersafety

3M PSD products are occupational use only.

Acceptable Fit Test Protocols

Fit Test Protocol*		Acceptable with this product?
Qualitative Protocols	Saccharin	<input checked="" type="checkbox"/>
	Bitrex™	<input checked="" type="checkbox"/>
	Irritant Smoke	<input type="checkbox"/>
	Isoamyl Acetate	<input type="checkbox"/>
Quantitative Protocols		<input checked="" type="checkbox"/>

*Refer to OSHA 1910.134

For More Information

Technical Assistance 1-800-243-4630
Hours of Operation: M-Th 8am - 6pm, Fri 8am - 4:30 pm CST
© 3M 2018. All rights reserved.

Empire level Barricade tape 77-1001



- Made of durable plastic
- Plastic remains pliant in cold weather
- 2.5 - 4 mil thickness
- 3" X 1000'
- Available in red and yellow
- Made in USA
- 2.5 mil



Insight® Variable Auto-Darkening Filter – Digital Welding Helmet

HSL 100
Narrow shell design
for work in tight spaces

Extended front
increases throat protection from sparks, slag and other physical hazards

Touch only system
No need to remove the hat as you change PPE

HXL 100
6oz. ultra lightweight shell
helps reduce neck tension

370 Headgear
is one of the most comfortable headgear units in the market

Convenient, all-in-one hard hat interchange system
helps reduce parts inventory

Features:

- Variable shade 9-13 to shield and protect eyes from radiant energy during weld
- Viewing area of 3.94" x 2.36" offers unobstructed views during all stages of welding process without lifting hood
- Sensitivity and delay adjustments for different tasks and durations
- Weld and Grind modes
- Four independent sensors reduce blockage possibility
- Lithium batteries with easy access
- Solar assist provides additional energy source
- Low-battery indicator light
- Compatible with HSL 100 and HXL 100 shells
- Meets ANSI Z87.1 – 2010 Standard and is CSA compliant



Hard Hat Interchange System
Let's you easily, remove or switch between welding helmet or face shield without removing your hard hat

Insight® Digital Variable ADF Welding Helmet

Code	Description	Units/Case	Choice of Style and Graphic Design
46129	HSL 100 Welding Helmet with Insight* Variable ADF — Black	1	HSL 100 - Narrow shell design is perfect for tight spaces and extended front increases throat protection  Black
46138	HLX 100 Welding Helmet with Insight* Variable ADF — I ²	1	
46131	HLX 100 Welding Helmet with Insight* Variable ADF — Black	1	HLX 100 -Ultra lightweight helps reduce neck tension and the shell provides flexibility and durability  I ² Arc Angel Gold Wings Stars & Scars Flaming Butterfly Metal
46130	HLX 100 Welding Helmet with Insight* Variable ADF — Arc Angel	1	
46100	HLX 100 Welding Helmet with Insight* Variable ADF — Gold Wings	1	
46101	HLX 100 Welding Helmet with Insight* Variable ADF — Stars & Scars	1	
46109	HLX 100 Welding Helmet with Insight* Variable ADF — Flaming Butterfly	1	
46108	HLX 100 Welding Helmet with Insight* Variable ADF — Metal	1	
46128	Insight* Variable ADF Cartridge	1	
41594	Insight* Clear Internal Safety Plate	10	
41589	Insight* Clear Safety Plate Kit	10	
20696	370 Replacement Headgear	1	

To learn more, please contact your SureWerx Sales representative or visit www.surewerx.com

Contact customer service:
1-800-323-7402



† Registration needed to be eligible for 2 yr warranty

Jackson Safety® Auto-Darkening Filter (ADF) Warning

- Provides limited eye protection. Additional protective devices are required for full eye coverage and protection.
- Should not be worn to protect from other hazards including, but not limited to, airborne dusts or mists, liquid splashes, impact hazards and sports activities.

The selection and use of welding personal protective equipment must be based on a hazard assessment of the wearer's work environment conducted by the wearer, or for an industrial environment, an appropriately trained individual for your employer or organization in accordance with OSHA regulations 29 CFR 1910.133 and ANSI Standard No. Z87.1. Make sure the ADF is installed properly into the helmet shell and is clean. If the ADF is scratched or damaged, do not use it and replace it with a new one. Do not use the ADF without the Jackson Safety® brand internal and external safety plates. To clean, wipe only with a soft cloth. Do not immerse ADF in liquids.

A
SureWerx™
Brand

Justrite 7210120



Model No 7210120
UPC Code 697841140400
International Model No.7210120Z
FM Approval Yes
UL Approval Yes
ULC Approval Yes
TUV Approval Yes
OSHA Compliance Yes
Complies with NFPA Code 30 Yes
CARB Compliance Yes
Color Red
Material Specifications Steel
Dimensions, Exterior 10.5" H x 9.5" Outer Dia.
267mm H x 241mm Outer Dia.
Capacity 1 gallon
Liter Capacity 4
Fill/Pour Hole inch 1.68
Fill/Pour Hole mm 43
Hose Dimensions 9" L x 0.625" Outer Dia.
229mm L x 16mm Outer Dia.
Net Weight, lbs 3.0
Net Weight, kg 1.4

Justrite 7220120



Model No 7220120
UPC Code 697841140462
International Model No.7220120Z
FM Approval Yes
UL Approval Yes
ULC Approval Yes
TUV Approval Yes
OSHA Compliance Yes
Complies with NFPA Code 30 Yes
CARB Compliance Yes
Color Red
Material Specifications Steel
Dimensions, Exterior 13.25" H x 9.5" Outer Dia.
337mm H x 241mm Outer Dia.
Capacity 2 gallon
Liter Capacity 8
Fill/Pour Hole inch 1.68
Fill/Pour Hole mm 43
Hose Dimensions 9" L x 0.625" Outer Dia.
229mm L x 16mm Outer Dia.
Net Weight, lbs 5.5
Net Weight, kg 2.5

Justrite 7250130



Model No 7250130
UPC Code 697841140691
International Model No.7250130Z
FM Approval Yes
UL Approval Yes
ULC Approval Yes
TUV Approval Yes
OSHA Compliance Yes
Complies with NFPA Code 30 Yes
CARB Compliance Yes
Color Red
Material Specifications Steel
Dimensions, Exterior 17.5" H x 11.75" Outer Dia.
445mm H x 298mm Outer Dia.
Capacity 5 gallon
Liter Capacity 19
Fill/Pour Hole inch 1.68
Fill/Pour Hole mm 43
Hose Dimensions 9" L x 1" Outer Dia.
229mm L x 25mm Outer Dia.
Net Weight, lbs 8.4
Net Weight, kg 3.8

Justrite 7250220



Model No 7250220
UPC Code 697841140721
International Model No.7250220
FM Approval Yes
UL Approval Yes
ULC Approval Yes
TUV Approval Yes
OSHA Compliance Yes
Complies with NFPA Code 30 Yes
CARB Compliance Yes
Color Yellow
Material Specifications Steel
Dimensions, Exterior 17.5" H x 11.75" Outer Dia.
445mm H x 298mm Outer Dia.
Capacity 5 gallon
Liter Capacity 19
Fill/Pour Hole inch 1.68
Fill/Pour Hole mm 43
Hose Dimensions 9" L x 0.625" Outer Dia.
229mm L x 16mm Outer Dia.
Net Weight, lbs 8.3
Net Weight, kg 3.7



HIGH VISIBILITY ACCESSORIES

AVAILABLE IN MANY STYLES

BE SAFE AND BE SEEN



RANGER HAT

- Polyester Mesh/Solid Top Crown
- Inner Dimensions: M (22.8"), L (23.6"), XL (24.4")
- 1" Reflective Tape with Contrasting Trim
- Adjustable drawstring for fit & security
- Sizing: M-XL

LUX-RNG | MESH TOP CROWN

LUX-RNG-ST | SOLID TOP CROWN



LEG GAITERS

- Polyester Mesh
- 2" Reflective Tape
- Hook & Loop Closure
- 15½" Length

LUX-SG



BALL CAP

- Polyester
- Polyester Sweatband
- Elastic Back
- Hard Bill

LUX-BCAP



SEAT BELT COVERS

- Polyester Tricot
- Reflective Strip
- Hook & Loop Closure
- 18½" Length

LUX-900



HQ / EASTERN WAREHOUSE

585-52 North Bicycle Path
Port Jefferson Station, NY 11776

WESTERN WAREHOUSE

555 Vista Blvd
Sparks, NV 89434



Standard Goggle

Specification Sheet

PRODUCT DESCRIPTION:

Our goggles provide a wide, unobstructed field of vision and can be worn with most half-mask respirators. The transparent protective PVC body permits a comfortable fit over prescription eyewear while protecting against impact. Available in vented, perforated, and ventless styles. Goggle straps contain No Latex.

FEATURES:

- PVC body permits a comfortable fit over prescription eyewear
- Options available to protect against impact, small particles and debris
- Rugged polycarbonate lens filters 99.9% of harmful U.V. rays
- Exclusive Duramass® scratch resistant coating
- Straps contain No Latex.



TECHNICAL DATA FOR: 2220R

Frame Material: PVC

Lens Design: Single

Dielectric: Yes

Strap: Rubber

Packaging: White Inner Box

Case Pack: 144 PR per CS

Case Dimensions: 25.197 x 14.173 x 14.961 IN

Case Weight: 30.348 LB

Meets or exceeds the following certifications:

ANSI Z87+

Country of Origin: China

<u>Item No:</u>	<u>Lens Options:</u>	<u>VLT %:</u>	<u>Frame Color:</u>	<u>Vent:</u>	<u>Strap:</u>
2120	Clear	90	Clear, Small	Direct Vented / Perforated	Elastic
2220	Clear	90	Clear	Direct Vented / Perforated	Elastic
2220R	Clear	90	Clear	Direct Vented / Perforated	Rubber
2225R	Clear, Anti-fog	90	Clear	Direct Vented / Perforated	Rubber
2225RB	Clear, Anti-fog	90	Clear	Direct Vented / Perforated	Rubber
2230R	Clear	90	Clear	Indirect Vented	Rubber
2230RB	Clear	90	Clear	Indirect Vented	Rubber
2235R	Clear, Anti-fog	90	Clear	Indirect Vented	Rubber
2235RB	Clear, Anti-fog	90	Clear	Indirect Vented	Rubber
2237R	Clear, Anti-fog	90	Clear	Ventless	Rubber

MCR 181560 face shield



8" x 15.5" Polycarbonate Clear Replacement Visor (181560) by MCR Safety®. MCR Safety's headgear and faceshields offer superior protection from liquid splashes and flying debris that would otherwise be damaging to the face. An assortment of brackets and faceshield sizes and materials make it a good bet that you can find an option just right for you.

Specifications:

Lens Color: Clear

Size: 8" x 15.5"

Pack Case 75 pair

Thickness: 0.60"

Features:

- Designed for effective personal protection
- Will reliably serve in hard working conditions
- Unwavering commitment to excellence
- Backed by quality that is second-to-none
- Offered at a competitive price

Crossfire Talon Performance Safety Eyewear



The sporty and lightweight design of the Crossfire Talon Safety Glass was created for a great fit and ease of use in diverse environments.

Vented Rubber Nosepiece for comfort and breathability

Rubber Insert Temple Grips for a snug fit

Hard coat polycarbonate lens protects against scratches

Provides 99.9% UVA and UVB protection

Complies with ANSI Z87.1 standards

P/N 124- Black frame clear lens

P/N 121- Black frame, Gray lens



Scan this QR Code with your smart phone to view the online product video!



brigade



Vented Rubber Nosepiece for breathability

Lightweight Half Frame for all day use

17312 - Gold Mirror Lens
Matte Black Frame



1733 - Silver Mirror Lens
Shiny Black/Red Frame



1731 - Smoke Lens
Matte Black Frame



1734 - Clear Lens
Matte Black Frame



Contact us at sales@radians.com • 877-723-4267




www.crossfiresafety.com

• www.radians.com

RAD-APOCALYPSE™



Rubber Tipped Temples / Neck Cord Included

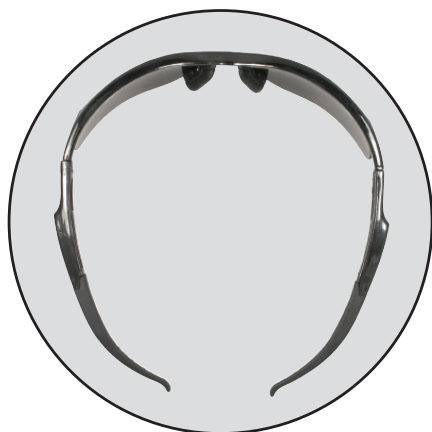

SOFT, RUBBER TEMPLES WITH FLARED ENDS

Provides superior comfort and fit



POLYCARBONATE LENS

Provides impact resistance

RUBBER NOSEPIECE

Provides a comfortable fit



INCLUDES NECK CORD

Conveniently hangs glass around the neck



CUSTOM IMPRINTING

Up to 2 colors on Temples or Lens

Model #	Lens
AP1-10	Clear
AP1-11	Clear Anti-Fog
AP1-20	Smoke
AP1-40	Amber

Model #	Lens
AP1-60	Silver Mirror
AP1-90	Indoor/Outdoor
AP1-B	Light Blue



Meets ANSI Z87.1 Standards and Provides 99.9% UVA/UVB Protection.



HEADQUARTERS
5305 Distriplex Farms Drive
Memphis, Tennessee 38141
Toll Free: 877-723-4267
Phone: 901-388-7776 / Fax: 901-266-2558
www.radians.com

AP1-SSH REV03_10-30-18