
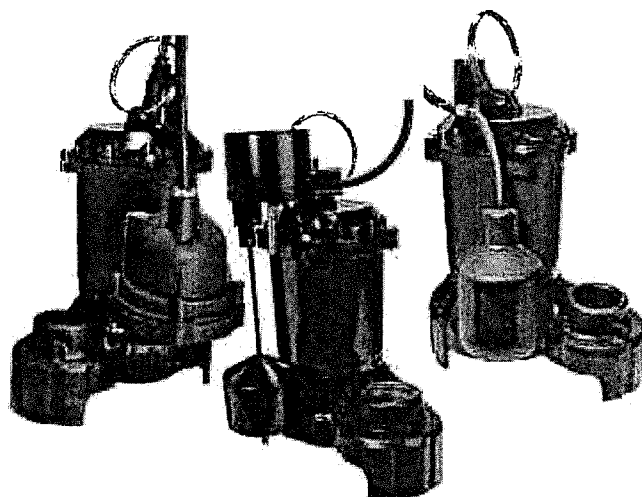


# MYERS® MS Series

Submersible Sump Pumps for Dewater

## SPECIFICATIONS

Applications	Basement sumps, dewatering	
Capacities	1/2HP at 56 GPM	212 LPM
	1/3HP at 45 GPM	170 LPM
Shut-off head	25'	7.6 m
Operation:		
Tethered: On	14"	356 mm
Off	5"	127 mm
Vertical: On	7.5"	190.5 mm
Off	3"	76 mm
Diaphragm: On	9-1/2"	241 mm
Off	5"	127 mm
Solids handling	1/4"	6.4 mm
Liquids handling	Drain water	
Intermittent liquid temp	up to 140°F	up to 60°C
Motor	1/3 HP or 1/2 HP, PSC Motor	
Electrical data	3000 RPM, 115V, 1Ø, 60Hz FLA 1/3 HP = 3.9, 1/2 HP = 4.1	
Acceptable pH range	6-9	
Shaft seal	Double lip	
Motor housing	Corrosion Resistant Material	
Volute case	Cast iron	
Power cord	10'	25.4 m
Discharge, NPT	1-1/2"	
Min. sump diameter		
Tethered Float:	14"	356 mm
Vertical Float or Diaphragm Switch:	10"	254 mm

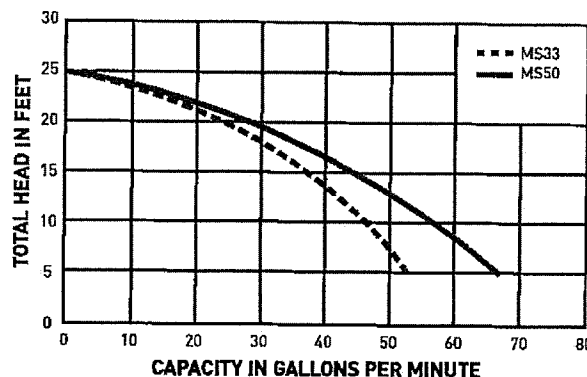

## FEATURES

- Versatility for many light-duty jobs
- Designed for drain water removal or permanent applications with small amounts of debris
- Maintenance-free operation
- Wide-angle for 14" or larger sumps, vertical float switch or diaphragm switch for smaller sumps.
- CSA Listed
- Dual ball-bearing motor and double lip seal provide durability and longer pump life
- Durable PSC motor for years of service
- Oil-filled motor for maximum heat dissipation, continuous bearing lubrication
- Thermal overload protection with automatic reset



**3 YEAR**  
WARRANTY



## MODEL NUMBERS

MS33V10	MS33D10
MS50V10	MS50D10
MS33T10	
MS50T10	


# MYERS® MS Series

Submersible Sump Pumps for Dewater


688P1N92485

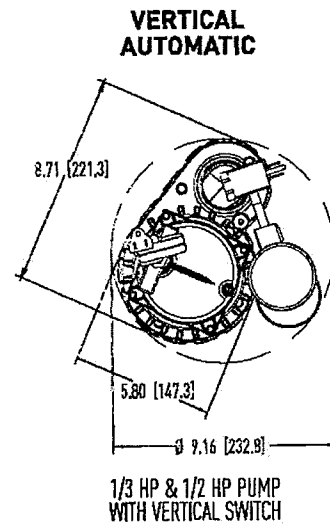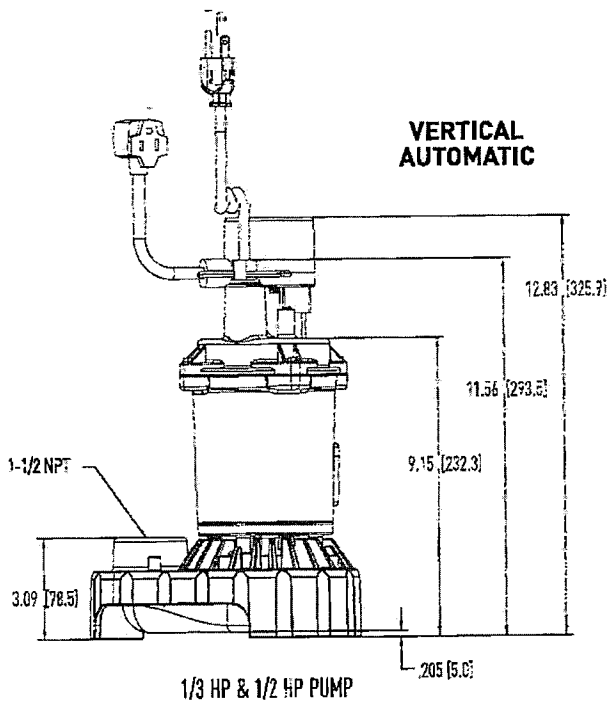

## DIAPHRAGM AUTOMATIC



## TETHERED AUTOMATIC

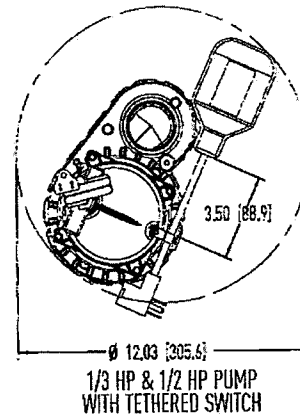

USA  
293 WRIGHT STREET, DELAVAN, WI 53115 WWW.FEMYERS.COM  
PH: 888-987-8677 ORDERS FAX: 800-426-9446

CANADA  
490 PINEBUSH ROAD, UNIT 4, CAMBRIDGE, ONTARIO, N1T 6A5  
PH: 800-363-7867 FAX # 888-606-5484

Because we are continuously improving our products and services, Pentair reserves the right to change specifications without prior notice.