





December 14, 2021

Jefferson Parish
200 Derbigny Street
Suite 4400
Jefferson, LA 70123

Re: Bid Number 50-00136406 Tot Lot Structure at Girard Playground

Enclosed please find our proposal for new playground equipment and poured in place surfacing for the tot lot at Girard Playground.

Bliss Products and Services, Inc. has over 37 years of experience in installing playgrounds such as this one we are proposing. We have worked with Play & Park Structures, the playground manufacturer, for over 13 years and have formed a great working relationship with them. Working with Play & Park Structures on this, we designed a nautical ship themed playground, similar to the one specified in the bid.

Please do not hesitate to contact us with any questions. Should any arise, please contact our Bid Manager, Kristen George. She can be reached via phone at 800-248-2547 or by email at kristen@blissproducts.com.

We look forward to the opportunity to work with you on this project.

Sincerely,

Gregg Bliss
President
Bliss Products and Services, Inc.
800-248-2547
gregg@blissproducts.com
www.blissproducts.com



TABLE OF CONTENTS

**PROPOSED PLAYGROUND DESIGN AND
SPECIFICATIONS**

ABOUT BLISS PRODUCTS

ABOUT PLAY & PARK STRUCTURES

COMPLETED BID DOCUMENTS

BID BOND



UPRIGHT BLUE

ACCENT WHITE

DECK BROWN

PLASTIC RED

HDPE BROWN

HDPE2C BRN/BG

SHADE N/A

ROOF N/A

CABLE N/A

MAX/APEX RED

GIRARD PLAYGROUND GRETN, LOUISIANA

000-000000

PLEASE NOTE: RENDERINGS ARE FOR VISUAL PURPOSES ONLY. ANY PRODUCTS AND/OR SITE DETAILS HEREIN MAYBE SUBJECT TO CHANGE WITHOUT NOTICE.



play&park
structures®
A PLAYCORE Company

544 CHESTNUT ST.
CHATTANOOGA, TN 37402
800.727.1907
PLAYANDPARK.COM



UPRIGHT BLUE

ACCENT WHITE

DECK BROWN

PLASTIC RED

HDPE BROWN

HDPE2C BRN/BG

SHADE N/A

ROOF N/A

CABLE N/A

MAX/APEX RED

GIRARD PLAYGROUND GRETN, LOUISIANA

000-000000

PLEASE NOTE: RENDERINGS ARE FOR VISUAL PURPOSES ONLY. ANY PRODUCTS AND/OR SITE DETAILS HEREIN MAYBE SUBJECT TO CHANGE WITHOUT NOTICE.



544 CHESTNUT ST.
CHATTANOOGA, TN 37402
800.727.1907
PLAYANDPARK.COM



UPRIGHT BLUE

ACCENT WHITE

DECK BROWN

PLASTIC RED

HDPE BROWN

HDPE2C BRN/BG

SHADE N/A

ROOF N/A

CABLE N/A

MAX/APEX RED

GIRARD PLAYGROUND GRETN, LOUISIANA

000-000000

PLEASE NOTE: RENDERINGS ARE FOR VISUAL PURPOSES ONLY. ANY PRODUCTS AND/OR SITE DETAILS HEREIN MAYBE SUBJECT TO CHANGE WITHOUT NOTICE.



544 CHESTNUT ST.
CHATTANOOGA, TN 37402
800.727.1907
PLAYANDPARK.COM



UPRIGHT BLUE

ACCENT WHITE

DECK BROWN

PLASTIC RED

HDPE BROWN

HDPE2C BRN/BG

SHADE N/A

ROOF N/A

CABLE N/A

MAX/APEX RED



GIRARD PLAYGROUND GRETN, LOUISIANA

000-000000


PLEASE NOTE: RENDERINGS ARE FOR VISUAL PURPOSES ONLY. ANY PRODUCTS AND/OR SITE DETAILS HEREIN MAYBE SUBJECT TO CHANGE WITHOUT NOTICE.



544 CHESTNUT ST.
CHATTANOOGA, TN 37402
800.727.1907
PLAYANDPARK.COM

Girard Playground Jefferson Parish Gretna, Louisiana		This play equipment is recommended for children ages: 5-12 Minimum Area Required: 30'-4" X 33'-10"	Scale: 3/16" = 1'-0" This drawing can be scaled only when in an 11" x 17" format	Drawn By: Chris Yates Date: 11/30/21 Quote Number: 645-147827	<div> 544 Chestnut Street Chattanooga, TN 37402 800-727-1907 / www.playandpark.com</div>	<div></div>	<table><tr><td>Total Play Components</td><td>12</td></tr><tr><td>Elevated Play Components</td><td>8</td></tr><tr><td>Elevated Play Components Accessible by Ramp</td><td>0</td></tr><tr><td>Elevated Components Accessible by Transfer</td><td>7</td></tr><tr><td>Accessible Ground Level Components Shown</td><td>4</td></tr><tr><td>Different Types of Ground Level Components</td><td>3</td></tr></table>	Total Play Components	12	Elevated Play Components	8	Elevated Play Components Accessible by Ramp	0	Elevated Components Accessible by Transfer	7	Accessible Ground Level Components Shown	4	Different Types of Ground Level Components	3	<table><tr><td>User Capacity</td><td>40-50</td></tr><tr><td>Critical Fall Height</td><td>8'-0"</td></tr></table>	User Capacity	40-50	Critical Fall Height	8'-0"
Total Play Components	12																							
Elevated Play Components	8																							
Elevated Play Components Accessible by Ramp	0																							
Elevated Components Accessible by Transfer	7																							
Accessible Ground Level Components Shown	4																							
Different Types of Ground Level Components	3																							
User Capacity	40-50																							
Critical Fall Height	8'-0"																							

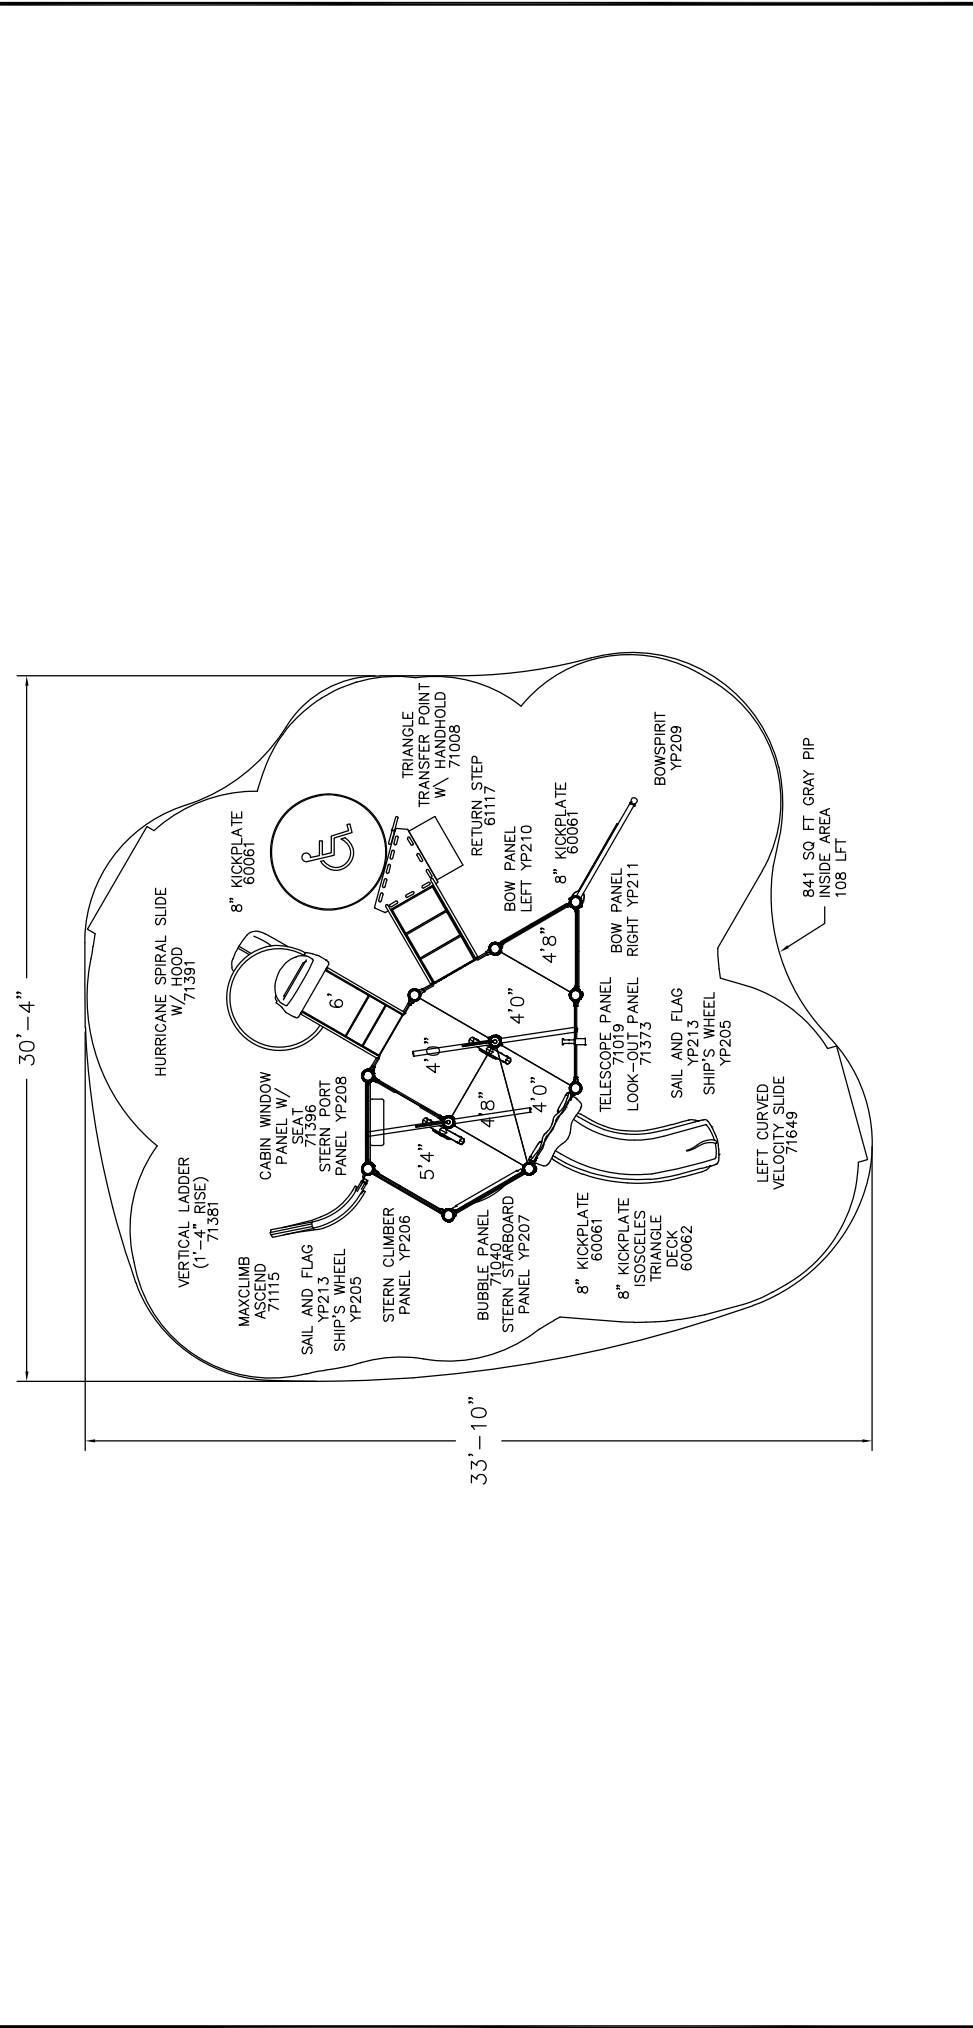

It is the manufacturer's opinion that the structure shown herein complies with current ada standards concerning accessibility if used with proper accessible surfacing and together with other necessary ground level play equipment. Top view drawings and measurements are for overall site and structure appearance purposes. Top view should not be conceived as a construction detail; therefore, all measurements and slope requirements should be field verified prior to construction. **IMPORTANT:** Never install play equipment over hard, unresilient surfaces such as asphalt, concrete, or compacted earth. It is the owner's responsibility to ensure the "minimum area required" contains an appropriate amount of resilient material to cushion accidental falls.

Girard Playground
645-147827

11/30/2021

SuperMax Specifications

General System Specifications:

SuperMax features 5" O.D. uprights with a high-strength aluminum alloy clamp fastening system finished with a polyester powder-coat. All uprights shall receive factory installed aluminum post caps and will ship with labels for manufacturer identification.

All decks and components shall connect using the aluminum alloy clamping system. All climbing attachments shall include a 15" wide deck entry archway to control deck access to one child at a time and help prevent inadvertent falls.

Manufacturer shall offer the following warranties on the materials and components of its system:

- Lifetime limited warranty on support posts (uprights)
- 15-Year limited warranty on punched steel decks, pipes, rails, loops and rungs
- 15-Year limited warranty on rotationally molded polyethylene components
- Lifetime limited warranty on all hardware

Manufacturer shall be ISO 9001/2000 certified

Manufacturer shall show IPEMA certification of compliance for each component that the product conforms with the requirements of ASTM F1487-01.

General Specifications of Materials

Uprights, Aluminum

The posts shall be 5" outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Hardware

All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will

prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Uprights, Aluminum

The posts shall be 5" outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Hardware

All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Deck Components

Kickplates

Kickplate is cut from galvalume sheet metal with (8) 7/16" x 1" slotted holes punched to coincide with deck flange holes. Corners are rounded, edges are ground smooth, and receives a baked-on polyester powder-coated finish after fabrication.

General Specifications of Materials

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Deck Components

Kickplate - Isosceles

Kickplate measures 9-1/2" x 58", and is cut from galvalume sheet metal with (10) 7/16" x 1" slotted holes punched to coincide with deck flange holes. Edges are ground smooth and receives a baked-on polyester powder-coated finish after fabrication.

General Specifications of Materials

Uprights, Aluminum

The posts shall be 5" outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Hardware

All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Uprights, Aluminum

The posts shall be 5" outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Hardware

All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Uprights, Aluminum

The posts shall be 5" outside diameter tubing with an 1/8" minimum wall thickness. The material shall be extruded from 6005-T5 seamless aluminum alloy conforming to ASTM-B-221. Minimum yield strength shall be 35,000 psi and minimum tensile strength shall be 38,000 psi. All upright posts shall be coated with a custom formula TGIC polyester powder coating in conformance with the specifications outlined herein.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Hardware

All nuts, bolts, and washers, with exceptions noted, shall be 3/8" diameter 18-8 stainless steel in varying lengths, with a vandal-resistant hex-pinned head configuration and factory-applied locking patch. When allowed a 72-hour cure time, the locking patch will prevent the bolt from loosening without at least 4 times the installation torque. Play & Park Structures will supply the special tool

required to turn vandal-resistant hardware with each shipment. 1/2" diameter Ramp and Arch Bridge connecting hardware shall be Grade 5 zinc-plated, and 3/8" Clatter Bridge security bolts shall be Grade 8 hardened and zinc-plated.

Deck Components

Return Step

Return Step

The Return Step shall be made from 12 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Return Steps shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Support legs shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Support Legs shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

General Specifications of Materials

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Deck Platforms

Metal decks shall be a one-piece construction and shall be designed to maintain a full 48" on center post spacing. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the

deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

General Specifications of Materials

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Deck Platforms

Metal decks shall be a one-piece construction and shall be designed to maintain a full 48" on center post spacing. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Isosceles Triangle Deck

Metal decks shall be a one-piece construction and shall be designed to maintain a 48" on center post spacing on two sides with a 90° corner between the two 48" sides and a 67-7/8" center post spacing on the final side. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Isosceles Triangle Deck

Metal decks shall be a one-piece construction and shall be designed to maintain a 48" on center post spacing on two sides with a 90° corner between the two 48" sides and a 67-7/8" center post spacing on the final side. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Deck Platforms

Metal decks shall be a one-piece construction and shall be designed to maintain a full 48" on center post spacing. Metal decks shall be fabricated from 11 gauge hot rolled steel which shall be punched, formed, and reinforced with welded in place 2-1/2" x 11 ga. steel strips. Decks shall include a pattern of equally spaced slots on each side to provide a flush mounting of play events that attach to the deck, as well as the design of more than one adjacent deck at the same height. Each deck shall have welded at the corner underside a threaded 3/8" stud for attachment to the post's Deck Clamps. This fastening technique eliminates the need for hardware protruding through the deck surface, thereby eliminating the possibility of an entanglement hazard and presenting a clean and smooth deck surface. Entire deck assembly, after fabrication, shall be dipped in a textured skid-resistant poly-vinyl-chloride (plastisol) coating to a minimum thickness of .080".

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

Tensile Strength - 2,800 psi

Elongation - 290 %

Tear Strength - 420 lbs/in

Deck Components

Kickplates

Kickplate is cut from galvanized sheet metal with (8) 7/16" x 1" slotted holes punched to coincide with deck flange holes. Corners are rounded, edges are ground smooth, and receives a baked-on polyester powder-coated finish after fabrication.

Triangle Transfer with Handhold

Triangle Transfer with Handhold

The Triangle Transfer shall be made from 12 gauge punched steel with a protective p&o finish in conformance with the specifications outlined herein. The Triangle Transfer shall be a one-piece welded assembly finished with the matte PVC coating per the specifications herein. Handhold shall be fabricated from 1 7/8" O.D. x .12" (11 gauge) wall and 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Support legs shall be fabricated from 1-5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing. Handhold and Support Legs shall be all-welded assemblies and shall be coated after fabrication with a custom formula of TGIC polyester powder in conformance with the specifications outlined herein.

Metal Components

Telescope Panel

Telescope

Shall have a one piece cast aluminum frame with cast aluminum connectors. Telescope shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

Telescope Panel

Shall be fabricated from 1.315" O.D. galvanized steel tubing with 1.029" O.D. 15-gauge galvanized steel tubing inserts and 3/16" flat stainless steel used for the tabs. Telescope panel shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

HARDWARE

All nuts, bolts, screws, inserts, and lock washers used in the assembly of all play equipment shall be stainless steel, yellow dichromate plated steel, blue-coat plated steel, mechanically galvanized or powder coated/yellow dichromate plated steel. All primary fasteners shall be 304 alloy stainless steel. Fasteners with yellow dichromate treatment have an electro-deposited, 99.9% pure zinc substrate applied from a specially formulated solution sealed with a yellow dichromate top coat designed to work in conjunction with the zinc plating. Yellow dichromate has a 320% longer life to white corrosion and 275% longer to red corrosion than does hot-dip galvanizing. Stainless steel fasteners shall be button pin-in head, hex socket cap screws with a two-part epoxy locking patch added to the threads. The two-part locking patch shall consist of one part resin and one part catalyst which are activated during installation. After curing, the material shall require a minimum of five times the installation torque to remove the fastener. Manufacturer shall provide special installation tools for pinned fasteners.

Rotomolded Components

Bubble Panel - Roto-Molded

Clamps are cast from 356 high-strength aluminum alloy with a baked-on polyester powder-coat finish. Mounting Bracket shall be formed from 1/8" hot-rolled steel plate and 7/8" O.D. 16-gauge galvanized steel tubing. The Mounting Bracket shall be an all-welded assembly and is coated after fabrication with a custom formula of TGIC polyester powder coating. Panel shall be rotationally molded from an extremely durable double-walled low-density polyethylene with (UV) light stabilizers and color molded in. This material complies with STM-D-1248, Type 2, Class A, and Federal specification LP-390C, Type 1, Class M, Grade2, Category 3, and has a minimum 1/4" wall thickness. Bubble is made from a clear polycarbonate, 3/16" thick.

30" Crawl-Thru Panel

Clamps are cast from a 356 high-strength aluminum alloy with a baked on polyester powder-coated finish.

Panel is made of double-walled high-impact rotationally molded and UV-stabilized polyethylene with a minimum of 3/16" wall thickness and rounded corners and edges. Each Panel measures 42" wide by 41-1/8" high and is supported by two 1/4" X 1-3/4" stainless steel brackets with a powder coated finish. Center opening of panel measures 30" diameter.

General Specifications of Materials

Rotationally Molded Plastics

All Rotationally Molded Products are manufactured from linear low-density polyethylene UV-stabilized color and an anti-static compound additive. The tensile strength of this material is to be 2500 PSI as defined by ASTM D638. The typical wall thickness will be .250" (1/4"). All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD). All solid plastic panels are manufactured from high-density polyethylene. All solid plastic panels shall meet or exceed the following specifications: Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790).

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Rotomolded Components

MaxClimb

SIDE ENTRY ARCHWAY shall be fabricated of 1 5/16" O.D. x .083" (14 gauge) wall galvanized steel tubing with vertical rungs fabricated from 1-1/16" O.D. x 15 gauge (.075" thick) galvanized steel tubing. L-Fitting is fabricated from 3/16" thick hot rolled steel for attachment to clamp. The Entrance Enclosure shall be an all-welded assembly and shall be coated after fabrication with a custom formula of TGIC polyester powder coating.

CLIMBING WALLS shall be rotationally molded from an extremely durable double-walled low-density polyethylene with (UV) light stabilizers and color molded in. This material complies with STM-D-1248, Type 2, Class A, and Federal specification LP-390C, Type 1, Class M, Grade2, Category 3, and has a minimum 1/4" wall thickness.

SUPPORTS are fabricated from .120 (11 gauge) hot-rolled flat steel, and 2-1/2" X 1-1/2" black steel tubing. Supports shall be coated after fabrication with a custom formula of TGIC polyester powder coating in conformance with the specifications outlined herein.

CABLES are 5/8"galvanized wire reinforced cable with a urethane coated polyester cover.

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

HDPE Components

HDPE Panels

Panels shall be precision cut from a single solid sheet of .750" thick UV-stabilized extruded high-density polyethylene with colors molded in. The material will have a density of 60 lbs/ft³ and a tensile strength of 4400 PSI (30 Mpa) as determined per procedure C of ASTM D1928. All edges shall have radiused and all corners rounded for safe play.

Look Out Panel

Panel Side Brackets are fabricated from 3/16" steel angle with 1-5/16" O.D. 14-gauge galvanized steel tubing welded for attachment. Panel is cut from a sheet of high density .750" thick extruded solid polyethylene with color molded in and UV-stabilized.

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

HDPE Components

HDPE Panels

Panels shall be precision cut from a single solid sheet of .750" thick UV-stabilized extruded high-density polyethylene with colors molded in. The material will have a density of 60 lbs/ft³ and a tensile strength of 4400 PSI (30 Mpa) as determined per procedure C of ASTM D1928. All edges shall have radiused and all corners rounded for safe play.

Metal Components

Vertical Ladder (HDPE)

Flat Bracket is made from 11-gauge galvanized steel sheet. The bracket receives a baked-on polyester powder-coated finish. The Entrance Barrier Wall is fabricated from 1-5/16" O.D. 14-gauge galvanized steel tubing steel welded to yellow-zinc coated 'L'-Fittings and 2-7/8" x 38-1/8" 7-gauge galvanized plate. The Entrance Barrier Wall receives a baked-on polyester powder-coated finish. Step Panels are cut from a sheet of high-density .850" thick extruded solid polyethylene with color molded in and UV-stabilized.

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Rotationally Molded Plastics

All Rotationally Molded Products are manufactured from linear low-density polyethylene UV-stabilized color and an anti-static compound additive. The tensile strength of this material is to be 2500 PSI as defined by ASTM D638. The typical wall thickness will be .250" (1/4"). All rotationally molded products shall meet or exceed the following specifications: ASTM D-1248, type 2, class A and Federal specification LP-390C, type 1, class M, grade 2, category 3; Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790); Heat Distortion (ASTM-648); Low Temperature Impact (ARM-STD). All solid plastic panels are manufactured from high-density polyethylene. All solid plastic panels shall meet or exceed the following specifications: Density (ASTM D- 1505); Brittleness Temperature (ASTM D-746); Tensile Values (ASTM D-638); Flexural Modulus (ASTM D-790).

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

Plastisol Coating

All metal deck platforms, steps, bridge planks, ramps, kickplates, and chains are plastisol-coated. Each part is chemically washed and completely submerged in a special heat-activated primer and allowed to dry. Parts are then pre-heated and immersed in liquid poly-vinyl-chloride (plastisol). The PVC coating shall have a typical thickness of .080" to .120", and a hardness of Shore A 83 +/-5 normal durometer range. This material is classed as "Self Extinguishing", meets or exceeds automotive specifications NVSS302, and contains ultraviolet inhibitors to help prolong the life of the coating. Standard color is brown, with optional colors available. The following characteristics apply:

- Tensile Strength - 2,800 psi
- Elongation - 290 %
- Tear Strength - 420 lbs/in

HDPE Components

HDPE Panels

Panels shall be precision cut from a single solid sheet of .750" thick UV-stabilized extruded high-density polyethylene with colors molded in. The material will have a density of 60 lbs/ft³ and a tensile strength of 4400 PSI (30 Mpa) as determined per procedure C of ASTM D1928. All edges shall have radiused and all corners rounded for safe play.

Rotomolded Components

Hurricane Slide

The Extension Platform is fabricated from pre-punched steel sheet 11-gauge thickness with steel flat support bars welded underneath to increase strength. After welding, the entire platform is Plastisol-coated with a thickness of 80 mils min. on top wear surface. Exit Support Bracket is made from 1.315" O.D. 14-gauge galvanized steel tubing welded to 11-gauge steel plate and coated with a baked on polyester powder-coated finish. The one-piece Hurricane Spiral Slide shall be a double wall, one-piece construction of color impregnated rotationally molded linear low-density polyethylene with a 1/4" nominal wall thickness. The slide mast shall be aluminum and permanently molded into the slide during the molding process. The slide shall include a ground socket to receive the mast. Wall Panels are cut from a single sheet of high-density .850" thick extruded solid polyethylene with color molded in and UV-stabilized.

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.

Polyester Powder-Coating Process

Powder-coat shall be an electrostatically applied custom formula of TGIC polyester powder. All components will be free of sharp edges and excess weld spatter and shall be cleaned in a four stage solvent/zirconium based bath, as a rust inhibitor, and a sealer to prevent flash rusting before coating. The coating shall have a super tough finish with maximum exterior durability and will have superior adhesion characteristics. Typical characteristics are: 3.0 - 5.0 mil thickness and oven cured between 375 to 425 degrees Fahrenheit. Pencil Hardness H (ASTM D-3363), Impact (ASTM D-2794-69), Wedge Bend (ASTM D-522-68), Adhesion (Cross Hatch ASTM D-3359 & Knife Scratch ASTM D-2197), Environmental (Stain Resistance ASTM D-1308, Humidity ASTM D 2247 - 87, Salt Spray ASTM B-117 & Fadometer 300 hrs with no loss of gloss), Oven-bake Stability 200% at 350 degrees Fahrenheit for 10 minutes.

HDPE Components

HDPE Panels

Panels shall be precision cut from a single solid sheet of .750" thick UV-stabilized extruded high-density polyethylene with colors molded in. The material will have a density of 60 lbs/ft³ and a tensile strength of 4400 PSI (30 Mpa) as determined per procedure C of ASTM D1928. All edges shall have radiused and all corners rounded for safe play.

Cabin Window w/ Seat

Reinforced Angle Brackets are made from 3/16" x 2" flat steel. Panels are cut from a single sheet of high-density, .750" and .350" thick extruded solid polyethylene with color molded in and UV-stabilized.

General Specifications of Materials

SuperMax Clamp

Clamp Ring and Adapters are die cast from an A380 high-strength aluminum alloy with a baked-on polyester powder-coat finish.



About Bliss Products and Services, Inc.

Bliss Products and Services, Inc. has been in the recreation business since 1984. Not only have we survived over thirty years in an ever changing market, but we've undergone tremendous growth that has enabled our organization to expand from servicing a few states to being a formidable presence in the Southeast.

We take pride in this growth, which can be directly attributed to our "low key" and customer focused sales solutions. BPS provides exceptional customer service and quality recreational equipment. Thirty years in the industry has enabled us to develop long term relationships with vendors, clients and our sales force.



Our team has experience in design and development of all types of play environments. Our services include custom design consultations, site evaluations, budgeting, and installation. We are CPSI certified, industry trained, customer oriented, and committed to ensuring that our customers are treated as a part of our team.

You'll find our sales representatives, inside sales support, and install team are enthusiastic, responsive, and ready to work with you at your convenience.



BPS Product Offerings

With the wide variety of products offered at Bliss Products and Services, Inc., (BPS) we are able to propose a solution for all of your recreation equipment needs: playground equipment, playground surfacing, shades, shelters, bleachers, dog parks, outdoor fitness, site amenities and athletic equipment.



PLAYGROUND EQUIPMENT

BPS is the exclusive distributor for Play & Park Structures in the Southeast. Play & Park Structures is owned by Playcore, Inc. By joining the Playcore family of companies, BPS is able to ensure our customers always receive an outstanding product, a competitive price and excellent customer service.

We also represent : BigToys, UltraPlay, Sportsplay, and Elephant Play



DOG PARKS, SITE AMENITIES, ETC.

By incorporating a dog park within your recreational area, you can create an environment that allows all family members to play, socialize, and get the physical activity so critical to health and well being.

Adding other site amenities, such as trash receptacles and benches, to your site, you can provide comfortability and cleanliness.



SHADES, SHELTERS & MORE

Shade is becoming more and more of an important part of any recreation environment. Fabric shades over a playground, dog park, or over a pool can provide relief from the sun while being active. Metal or wood picnic shelters, paired with picnic tables and grills, are a great addition to serve as a gathering space for the community.



BPS Installation Warranty

Bliss Products and Services, Inc. (BPS) hereby warrants and guarantees the installation work for a period of one year from the date of substantial completion.

BPS will repair or replace to the satisfaction of the Owner any or all work that may prove defective in workmanship or materials within the guarantee period together with any other work which may be damaged or displaced in so doing. This guarantee does not cover equipment that is not maintained properly. It also does not cover ordinary wear and tear, vandalism, or an other unusual abuse or neglect of the property.





**McCARTHA
COBB & ASSOCIATES**

1407 CALHOUN STREET | COLUMBIA, SC 29201
PHONE: 803.799.3474 | FAX: 803.799.3711

April 2, 2020

To Whom It May Concern:

Re: Bliss Products and Services, Inc.

It is the privilege of United States Fire Insurance Company to provide surety-ship for Bliss Products and Services, Inc.

In the capacity as surety, we are familiar with the company's financial standing, quality management and performance record. We currently have a bond line of \$1,000,000 single / 2,000,000 aggregate. Amount above this line can be considered. Currently, there all of this bond line available.


We stand ready to issue performance/payment bonds should Bliss Products and Services, Inc. be awarded a project within their bond line. However as always, the surety reserves the right to perform normal underwriting at the time of any bond request, including, without limitation, prior review and approval of relevant contract documents, bond forms, project financing and all other pertinent underwriting factors.

We enjoy an excellent working relationship with Bliss Products and Services, Inc. and have found them to be professional in all of their undertakings. We are not aware of any bonding company involvement on any project that Bliss Products and Services, Inc. has bonded. We recommend them to you without reservation.


Please be advised that this letter is not pre-qualifying the client for Subcontractor Default Insurance. We accept no responsibility whatsoever as to the qualifying requirements of this client for the underwriting of Subcontractor Default Insurance.

Please let us know if you have any questions.

Sincerely,

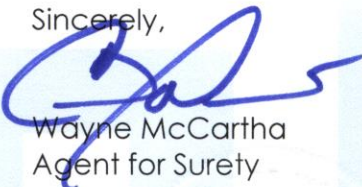

Wayne McCarthy
Agent for Surety

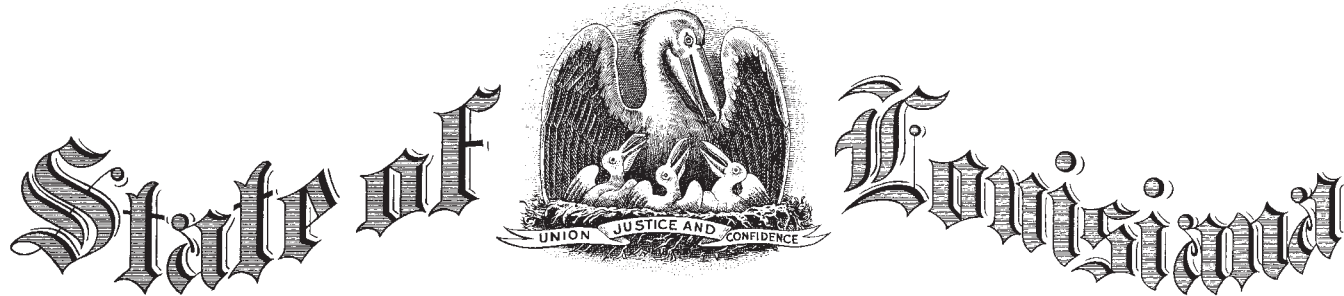

State Licensing Board for Contractors

This is to Certify that:

is duly licensed and entitled to practice the following classifications



Expiration Date:

License No:

Witness our hand and seal of the Board dated,
Baton Rouge, LA day of

W. B. M. M.
Director

See Mallett
Chairman

Andy D. D.
Treasurer

This License Is Not Transferrable

National Recreation and Park Association

Let it be known that

GREGG BLISS

has met the requirements of the standards set forth by the
National Certification Board
and is hereby granted certification as a



**Certified
Playground
Safety Inspector**

CHAIRPERSON

NRPA PRESIDENT AND CEO

March 23, 2021

DATE CERTIFIED

50894-0424

CERTIFICATION NUMBER

April 01, 2024

EXPIRATION DATE



A PLAYCORE Company

BLISS PRODUCTS AND SERVICES, INC.

Has successfully completed a course in techniques and procedures required for proper installation of Play & Park Structures playground equipment.

In recognition of the successful completion of this training and in acknowledgement of the satisfaction of
Play & Park Structures requirements for a certified installer,
Bliss Products and Services, Inc. is hereby designated an

OFFICIAL CERTIFIED INSTALLER

By receipt of this designation, **Bliss Products and Services, Inc.** agrees to install
Play & Park Structures Playground Equipment in accordance with **Play & Park Structures**
specifications and installation instructions.

This Designation is effective from February 8, 2021 to February 7, 2023
IN WITNESS WHEREOF, WE HAVE AFFIXED OUR SIGNATURE
This 8th day of February 2021.


Group President
Spencer Cheak


Vice President of Customer Service
Mike McWilliams

Chattanooga TN - New Corporate Headquarters



Since 1976, Play & Park Structure's mission has centered around developing products, programs, and services that enhance classroom learning, create environmental awareness, promote physical activity, and build communities.

Play & Park has an appropriate play solution for a full spectrum of needs and aesthetics, including parks, schools, early childhood centers, churches, and community centers. Whether your project calls for a traditional playground or a creatively themed play, the variety of styles and materials offered allows you to choose the perfect playground to complement your vision.

Play & Park Structures is committed to meeting and/or exceeding ASTM safety standards to help create safer play environments for children. By having the industry's best warranty, Play & Park Structures provides protection and assurance for your playground investment.



Ft. Payne, AL Southern Fulfillment Center

With Play & Park Structures being a PlayCore business unit, we have access to one of the best manufacturing facilities in the industry. Our facility is ISO 9001 and 14001 certified and our products meet all industry standards. With a more than 400,000 square facility that is well equipped to handle orders of large or small quantities, with the typical lead time on an order entered into the system being 24 to 45 days.

Play & Park Structures created the first Outdoor Creative Play & Learning System that brings standards-based activities to the playground and outdoor environments to support children's physical and mental development.

The design team continually advances the concept of play through unique designs, including traditional posts and platform playgrounds, deckless, continuous-play structures, as well as nature inspired playgrounds. In addition to aluminum, steel, and plastic components, we specialize in structures made from sustainably forested wood and recycled metal and plastic.





ISO 14001

We are proud to be ISO 14001 certified for our manufacturing facility in Fort Payne, Alabama, also referred to as the "Green Certification." ISO 14001 is an internationally recognized standard for environmental management, measurement, evaluation, and auditing. As an ISO 14001 certified company, Play & Park controls the environmental impact of our activities, products, and services by implementing an Environmental Management System (EMS) that meets international standards, but is specific to the play products being produced.



ISO 9001

An industry certification process issued by the International Organization for Standardization. It is used to measure manufacturing standards and to certify company compliance with quality control systems covering design, development, production, installation, inspection and testing.



ADA

Access Board (The United States Architectural and Transportation Barriers Compliance Board) has completed Accessibility Guidelines for Play Facilities as set forth in the Americans with Disabilities Act of 1990. The Final Report of the Regulatory Negotiation Committee is available via the internet.



IPEMA



In the interest of public playground safety, the International Playground Equipment Manufacturer's Association (IPEMA) provides a Third Party Certification Service whereby a designated independent laboratory, Detroit Testing Laboratory, Inc. (DTL), validates an equipment manufacturer's certification of conformance to ASTM F1487, Standard Consumer Safety Performance Specification for Playground Equipment for Public Use, except sections 7.1.1, 10 & 12.6.1; to CAN/CSA Z614, Children's Playspaces and Equipment, except clauses 9.8, 10 & 11, or both. The use of corresponding logo in Play & Park Structures catalog signifies that Play & Park Structures has received written validation from the independent laboratory that the product(s) associated with the use of the logo conforms to the requirements of the Indicated standard. Check the IPEMA website, www.ipema.org, to confirm product validation.



ASTM



ASTM International is an independent and world renowned developer of technical standards utilized in testing a multitude of products, ASTM's F15.29 committee met regularly for over a decade in the continual development of the F1487 Standard Consumer Safety Performance Specifications for Playground Equipment for Public Use. The original standard, F1487-93 was published in 1993 and subsequently replaced by the current version F1487-07a, published in May 2007.



CPSC

The Consumer Product Safety Commission (CPSC) is an independent agency within the United States Federal Government with the authority to inform the public of current product safety performance information and recommended practices. The CPSC first published their guidelines for public playgrounds in 1981 and have updated their publication several times since then. The current CPSC Handbook for Public Playground Safety, publication #325, is an excellent guide for owners and operators of public play environments.



ADA Approved Holes



- All Play & Park Structures decks and ramps have an ADA-compliant cluster punch to allow children of all abilities to play
- Transfer platforms feature large holes for gripping assistance when accessing structures

Our Plastics




- The color pigments used in our plastics have one of the highest ratings for light stability, providing the best color stability for color fastness
- Multiple color choices available for natural and modern settings

Our Decks



- Innovative curved bracing assures durable and sturdy decks
- Plastisol and Thermoplastic coating options available
- ADA compliant holes are used for all decks and ramps

Durability

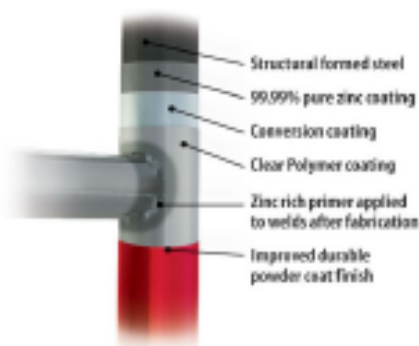

- Zinc Rich Primer is applied to welds and aids in rust prevention and is vandal resistant
- Factory-installed post caps provide a better fit and appearance

Hardware



- Tamper Resistant Hardware aids in the prevention of corrosion and helps reduce vandalism in our stainless steel hardware



Things we do today impact the world tomorrow. Play & Park Structures believes in sustainability and is committed to taking the necessary steps to ensure our children have a safer environment for play!

Be Environmentally Conscious Daily:

- Turn off the lights when you leave a room
- Buy energy-efficient florescent light bulbs
- Recycle at home and at work
- Use reusable canvas bags when going to the store
- Whenever possible, walk, ride a bike, or carpool

How we help!

Facility & Product Recycling Programs

Play & Park Structures believes that by being mindful of waste we will provide for a greener tomorrow

- Our facility recycles 100% of scrap metal, rotationally molded plastic, and paper
- Review our material content information for an outline of products that are recyclable and that contain pre and post-consumer recycled material
- Our employees are challenged with conserving paper by avoiding unnecessary office printing. Recycle bins for paper, aluminum, cardboard, and plastic are available to help divert trash from landfills



How you can help!

Be an environmentally conscious purchaser!

- Choose a play equipment manufacturer that is ISO 14001 certified
- When replacing an existing playground structure, contact your local recycling center for options
- Specify recyclable materials for your play structures
- Upon receipt of your playground, recycle or reuse all packaging materials
- Consider recycled surfacing options
- Plant trees around your playground to provide natural shade and raise children's awareness of the natural environment

ISO 14001 Certified



Play & Park Structures is proud to be ISO 14001 certified for its manufacturing facility in Fort Payne, Alabama. Also referred to as the 'Green Certification', ISO 14001 is an internationally recognized standard for environmental management, measurement, evaluation, and auditing. As an ISO 14001 certified company, Play & Park Structures controls the environmental impact of our activities, products, and services by implementing an Environmental Management System (EMS) that

meets international standards, but is specific to the play products being produced. Play & Park Structures received its certification from an SRI Registrar, an accredited registrar that issues quality, environmental, health & safety, and security management system registration certificates based on internationally known standards.

Playground customers have confirmed that they prefer to use manufacturers such as Play & Park Structures who are environmentally responsible.

Color Palettes


Choose or create your own!

Design your play structure with confidence and creativity using our pre-defined collection of colors or customize your own to add a meaningful touch to your play area. Custom selections can mix-and-match any way you like.

NEW!




Shamrock

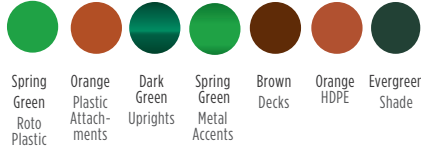


NEW!



Bubblegum

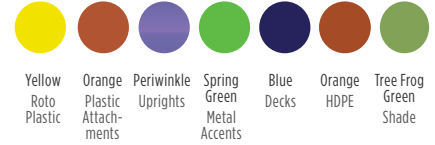


Spirited

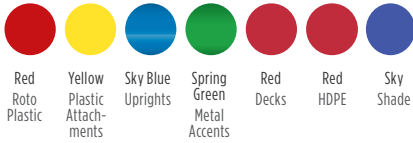


Basics



Refresh




Adventure

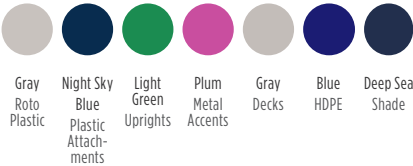


NEW!



Waterfall

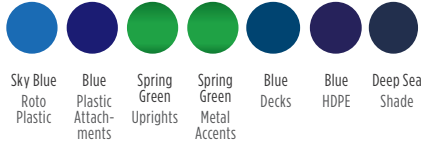


Earth




Inspire



Northwoods

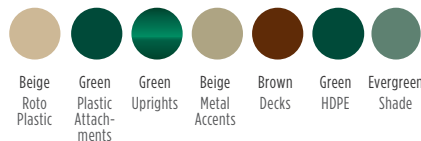

Energetic

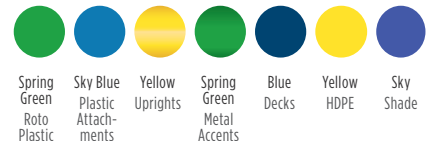

NEW!



Gingersnap



Orange Roto Plastic Sky Blue Plastic Attachments Champagne Uprights Orange Metal Accents Gray Decks Blue HDPE Cloud Shade



Clear Sky



Blue Roto Plastic Gray Plastic Attachments Sky Blue Uprights Orange Metal Accents Gray Decks Gray HDPE Cloud Shade



Limelight



Blue Roto Plastic Yellow Plastic Attachments Spring Green Uprights Spring Green Metal Accents Blue Decks Blue HDPE Tree Frog Green Shade



United



Blue Roto Plastic Blue Plastic Attachments White Uprights Red Metal Accents Red Decks Blue HDPE Deep Sea Shade



Nation's Best



Red Roto Plastic Blue Plastic Attachments White Uprights Blue Metal Accents Blue Decks Red HDPE Deep Sea Shade



Spring



Yellow Roto Plastic Spring Green Plastic Attachments Metallic Uprights Orange Metal Accents Blue Decks Spring Green HDPE Sky Shade

NEW!



Harmony



Sky Blue Roto Plastic Night Sky Blue Plastic Attachments Champagne Uprights Light Green Metal Accents Gray Decks Blue HDPE Deep Sea Shade

NEW!



Peacock



Periwinkle Roto Plastic Royal Purple Plastic Attachments Periwinkle Uprights Spring Green Metal Accents Blue Decks Spring Green HDPE Tree Frog Green Shade

NEW!



Savannah



Gray Roto Plastic Beige Plastic Attachments Burgundy Uprights Burgundy Metal Accents Gray Decks Black HDPE Azure Shade

Greenway



Gray Roto Plastic Light Green Plastic Attachments Starlight Black Uprights Spring Green Metal Accents Brown Decks Green HDPE Evergreen Shade

Natural



Beige Roto Plastic Beige Plastic Attachments Green Uprights Burgundy Metal Accents Brown Decks Beige HDPE Sand Shade

River Rock



Light Green Roto Plastic Gray Plastic Attachments Butter-scotch Uprights Champagne Metal Accents Gray Decks Green HDPE Evergreen Shade

Custom Color Options

HDPE Plastic

Available 1-color or 2-color for graphics



Plastisol Deck & Site Colors


Thermoplastic deck coating is available, ask your sales representative for more information.



Climber Cable Color



Fabric Shade & Canopy Color Options

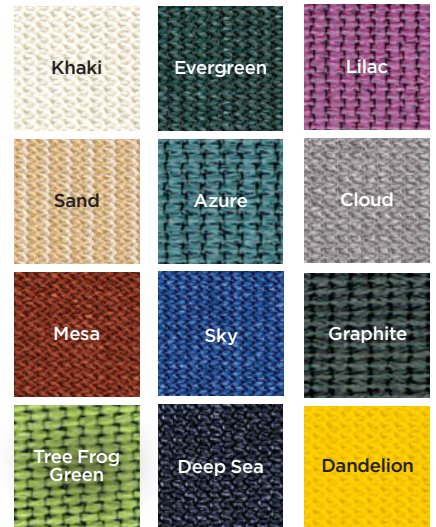

Metal Colors -Choose from 22 powder coat colors





A PLAYCORE Company

544 Chestnut Street
Chattanooga, TN 37402
Phone: 888-404-5737

Email: customerservice@playandpark.com

Play & Park Structures Warranties

Play & Park Structures provides warranties on all materials and workmanship for one year, excluding vandalism. In addition, Play & Park Structures offers:

Limited Lifetime Warranty* on:

- Supermax, Duramax, totMax, Boulderscapes, Skyline, and Horizons uprights
- Hardware

20 Year Limited Warranty on:

- Recycled Plastic Lumber

15 Year Limited Warranty on:

- Rotationally molded products
- Metal decks, pipes, rings, rails and loops

10 Year Limited Warranty on:

- Redwood and pressure treated wood
- Integrated shade products
- Site furnishings
- Fiberglass signs

5 Year Warranty on:

- Swing Seats
- Nylon-covered cable net climbers and components
- HDPE Panels

3 Year Warranty on:

- "C" Springs for spring bouncers

1 Year Warranty on:

- All other Play & Park Structures products including moving parts
- Nylon rope products
- HDPE components
- Powder coated parts

All warranties specifically exclude damage caused by vandalism; negligence, improper installation or improper use; changes in appearance resulting from weathering; scratches, dents or marring as a result of use.

Warranties are valid only if products are installed and maintained in accordance with Play & Park Structures instructions and use approved parts

At Play & Park Structures, we stand behind our product and are committed to the highest level of customer satisfaction.

For the purpose of this warranty, lifetime encompasses no specific term of years, but rather that Seller warrants to its original customer for as long as the original customer owns the Product and uses the Product for its intended purpose; that the Product and all parts will be free from defects in material and manufacturing workmanship.

DATE: 11/17/2021

Page: 6

BID NO.: 50-00136406

BID FORM
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO ✓

MAXIMUM ESCALATION PERCENTAGE REQUESTED _____ %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF _____.

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

8-10 weeks

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)

56059

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: Bliss Products and Services, Inc.

ADDRESS: 6831 S. Sweetwater Rd.

CITY, STATE: Lithia Springs, GA ZIP: 30122

TELEPHONE: (800) 248-2547 FAX: (660) 920-1915

EMAIL ADDRESS: info@blissproducts.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: 1

NUMBER: 2

NUMBER: _____

NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 115,450.52

AUTHORIZED SIGNATURE: Gregg Bliss

TITLE: President

Gregg Bliss

Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

DATE: 11/17/2021

INVITATION TO BID FROM JEFFERSON PARISH - continued

Page 7

BID NO.: 50-00136406

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	JOB	<p>LABOR & MATERIALS NECESSRY TO INSTALL A TOT LOT STRUCTURE AT GIRARD PLAYGROUND FOR THE JEFFERSON PARISH DEPARTMENT OF RECREATION</p> <p>0001 All labor, materials, equipment and necessary essentials to install a tot lot structure and safety surface at</p> <p>Girard Playground, 5300 Irving St. Metairie 70003.</p> <p>*** PLEASE SEE ATTACHED SPECIFICATIONS***</p>	115,450.52	115,450.52

Non-Public Works Bid

AFFIDAVIT

STATE OF Georgia

PARISH/COUNTY OF Douglas

BEFORE ME, the undersigned authority, personally came and appeared: Gregg
Bliss, (Affiant) who after being by me duly sworn, deposed and said that
he/she is the fully authorized President of Bliss Products
and services, Inc (Entity),
the party who submitted a bid in response to Bid Number 50-00136404, to the Parish of
Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required
attachment):


Choice A _____ Attached hereto is a list of all campaign contributions, including
the date and amount of each contribution, made to current or
former elected officials of the Parish of Jefferson by Entity,
Affiant, and/or officers, directors and owners, including
employees, owning 25% or more of the Entity during the two-year
period immediately preceding the date of this affidavit or the
current term of the elected official, whichever is greater. Further,
Entity, Affiant, and/or Entity Owners have not made any
contributions to or in support of current or former members of the
Jefferson Parish Council or the Jefferson Parish President through
or in the name of another person or legal entity, either directly or
indirectly.

Choice B ✓ there are **NO** campaign contributions made which would require
disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B  _____ There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

Gregg Bliss

Signature of Affiant

Gregg Bliss

Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME


ON THE 14 DAY OF DEC, 2021.

Allison McClesky
Notary Public

Allison McClesky
Printed Name of Notary

N/A
Notary/Bar Roll Number

My commission expires 3/14/2023.



CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF

INCORPORATED.

AT THE MEETING OF DIRECTORS OF Bliss Products and services, Inc.
INCORPORATED, DULY NOTICED AND HELD ON 12/14/2021,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT
WAS:

RESOLVED THAT Gregg Bliss, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.



SECRETARY-TREASURER

12/14/2021

DATE



Bond Number: SLA21740225

Contractor Information

Principal: Bliss Products and Services, Inc.

Address: 6831 S Sweetwater Rd Lithia Springs Georgia 30122 United States

Owner/Obligee Information

Bond Form: Bid Bond in accordance with Contract Specifications

Owner/Obligee: Jefferson Parish

Address: 200 Derbigny Street Gretna Louisiana 70053 United States

Bond Information

Surety: Merchants National Bonding, Inc.

Bid Date: 12/16/2021

Estimated Contract Price: 150,000.00

Time For Completion:

Liquidated Damages:

Estimated Work On Hand:

Amount of Bid Security: 7,500.00

Contract # or IFB #: 50-00136406

Description of Job: 50-00136406 / Provide and Install New Playground and Surfacing

Job Breakdown:

Electronic Bidding Information

Bid Security Percentage: 5

Bid Security Maximum: 7500

Owner Assigned Contractor Number: 272932

Primary Agency:

McCartha, Cobb & Associates, Inc.

Power of Attorney Limited to: Unlimited

Executed

Entered By: Kathryn McCartha-Powers - 12/16/2021 10:15:15 AM ET

Approved & Executed By:

Kathryn McCartha-Powers

Kathryn McCartha-Powers (Signed: 16-Dec-2021 10:15 AM EST (UTC-05:00))

[Signature Information](#)

Know all men by these presents that Merchants National Bonding, Inc., a Corporation duly organized under the laws of the State of Iowa, are held and firmly bound unto the above owner/obligee by this transmission. The surety agrees to waive the Statute of Fraud defense and further agrees that the owner/obligee is a third party beneficiary of the waiver for the purposes of enforcing this bid bond.

© S2000, Inc.

Document ID: [S2000-1001129082](#)