



Bid Number 50-00138342

**One-time Purchase of a Tractor Trailer Truck Model #HX620 for the
Jefferson Parish Department of Drainage**

Bid Due: JUNE 02, 2022 at 2:00 pm

ATTENTION VENDORS!!!

**Please review all pages and respond accordingly, complying with all provisions
in the technical specifications and Jefferson Parish Instructions for Bidders and
General Terms and Conditions. All bids must be received on the Purchasing
Department's eProcurement site by the bid due date and time.**

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Buyer Name: Donna M Evans, Buyer II
Buyer Email: DMEVANS@jeffparish.net
Buyer Phone: 504-364-2691**

DATE: 5/18/2022

Page: 6

BID NO.: 50-00138342

BID FORM
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO X

MAXIMUM ESCALATION PERCENTAGE REQUESTED _____ %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 26AUG2022

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES 15JAN2023

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: ITA TRUCK SALES AND SERVICE, LLC

ADDRESS: 2835 NW EVANGELINE THWY

CITY, STATE: LAFAYETTE, LA ZIP: 70507

TELEPHONE: (337) 234-9425 FAX: (337) 362-4925

EMAIL ADDRESS: jwharrison@ita-trucks.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____
NUMBER: _____
NUMBER: _____
NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 143,576.48

AUTHORIZED SIGNATURE: 

JERRY W. HARRISON
Printed Name

TITLE: DIRECTOR OF MUNICIPAL SALES

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00138342


SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	EA	<p>ONE TIME PURCHASE OF A TRACTOR TRAILER TRUCK MODEL #HX620 FOR THE JEFFERSON PARISH DEPARTMENT OF DRAINAGE</p> <p>0010 TRACTOR TRUCK MODEL#HX620 ONE TIME PURCHASE</p> <p>CONTACT:DAMIAN DENT PHONE:504-339-0688 EMAIL:DDENT@JEFFPARISH.NET</p>	<u>\$143,576.48</u>	<u>\$143,576.48</u>

Prepared For:
Jefferson Parish
Bruce Vosbein
200 Derbigny St.
Gretna, LA 70053-5850
(504)364 - 2678
Reference ID: JEFF TRACTOR

Presented By:
ITA-NOLA, LLC
J.W. Harrison
301 HORD
HARAHAN LA 70123 -
(504)733-7711

Thank you for the opportunity to provide you with the following quotation on a new International truck. I am sure the following detailed specification will meet your operational requirements, and I look forward to serving your business needs.

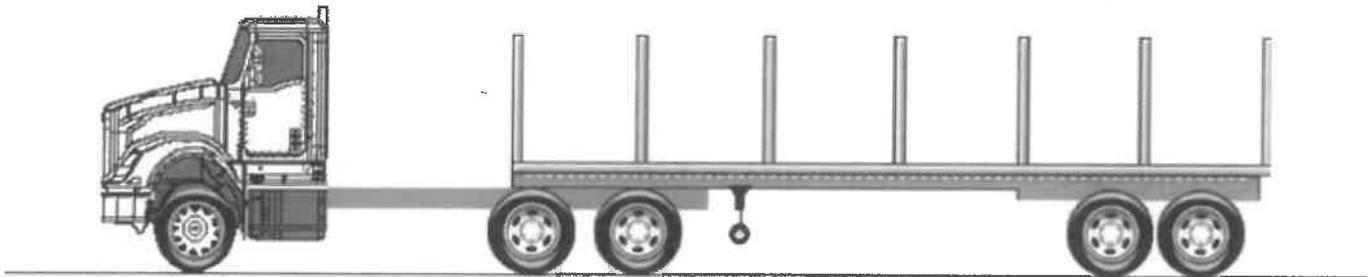

Model Profile
2024 HX620 SBA (HX620)

AXLE CONFIG:	6X4
APPLICATION:	Logging Tractor
MISSION:	Requested GCWR: 80000. Calc. GCWR: 115000. Calc. GVWR: 53200 Calc. Start / Grade Ability: 19.53% / 1.82% @ 55 MPH Calc. Geared Speed: 91.2 MPH
DIMENSION:	Wheelbase: 203.00, CA: 134.00, Axle to Frame: 65.00
ENGINE, DIESEL:	{Cummins X15 470 V} Productivity Series, EPA 2021, 470HP @ 1900 RPM, 1750 lb-ft Torque @ 950 RPM, 2000 RPM Governed Speed, 482 Peak HP (Max)
TRANSMISSION, AUTOMATIC:	{Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
CLUTCH:	Omit Item (Clutch & Control)
AXLE, FRONT NON-DRIVING:	{Meritor MFS-13-143A} Wide Track, I-Beam Type, 13,200-lb Capacity
AXLE, REAR, TANDEM:	{Meritor MT-40-14X-4DFR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, .433"(11mm) Wall Housing Thickness, R Wheel Ends Gear Ratio: 3.70
CAB:	Conventional, Day Cab
TIRE, FRONT:	(2) 11R24.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 473 rev/mile, 75 MPH, All-Position
TIRE, REAR:	(8) 11R24.5 Load Range H HDL2 DL+ (CONTINENTAL), 468 rev/mile, 75 MPH, Drive
SUSPENSION, REAR, AIR, TANDEM:	{Hendrickson HAS-402-55} 40,000-lb Capacity, 55" Axle Spacing, 9.5" Ride Height, with Shock Absorbers
PAINT:	Cab schematic 100LZ Location 1: 9219, Winter White (Std) Chassis schematic N/A

<u>Code</u>	<u>Description</u>
HX62000	Base Chassis, Model HX620 SBA with 203.00 Wheelbase, 134.00 CA, and 65.00 Axle to Frame.
1616	FRAME RAILS WITH TAPERED REAR
1AMS	CROSSMEMBER, FRAME TIE for Heavy Duty
1AND	AXLE CONFIGURATION {Navistar} 6x4
	<u>Notes</u>
	: Pricing may change if axle configuration is changed.
1CAG	FRAME RAILS Heat Treated Alloy Steel (120,000 PSI Yield); 10.250" x 3.610" x 0.375" (260.4mm x 91.7mm x 9.5mm); 456.0" (11582mm) Maximum OAL
1LTE	BUMPER, FRONT Contoured, Aluminum, Stainless Steel Clad, Heavy Duty
1VBC	TOW PIN, FRONT Heavy Duty; 150,000-lb. Total Capacity
1WXL	WHEELBASE RANGE 191" (485cm) Through and Including 236" (600cm)
2ASG	AXLE, FRONT NON-DRIVING {Meritor MFS-13-143A} Wide Track, I-Beam Type, 13,200-lb Capacity
3ADD	SUSPENSION, FRONT, SPRING Parabolic Taper Leaf, Shackle Type, 14,000-lb Capacity, with Shock Absorbers
4092	BRAKE SYSTEM, AIR Dual System for Tractor Applications
	<u>Includes</u>
	: BRAKE LINES Color and Size Coded Nylon
	: GLAD HANDS (2) One for Service and One for Emergency; Trailer Hoses from Cab
	: HAND CONTROL VALVE, AIR Mounted in Instrument Panel
	: HAND CONTROL VALVE, AIR Mounted on Steering Column
	: PARKING BRAKE CONTROL Yellow and Red Knobs, Located on Instrument Panel
	: PARKING BRAKE VALVE Combination Valve for Tractor and Trailer
	: QUICK RELEASE VALVE On Rear Axle for Spring Brake Release: 1 for Forward Rear Axle
	: TRACTOR PROTECTION VALVE
4AZS	AIR BRAKE ABS {Bendix AntiLock Brake System} 4-Channel (4 Sensor/4 Modulator) Electronic Stability Program, with Automatic Traction Control
4EDM	AIR DRYER {Bendix AD-HF} with Heater, Includes Pressure Protection Circuits, Safety Valve, Integral Purge Tank, Governor Pressure Settings 110 psi Cut-In/130 psi Cut-Out, Integrated PuraGuard Coalescing Filtration
4ETE	BRAKE CHAMBERS, FRONT AXLE {Haldex} 24 SqIn
4EXU	BRAKE CHAMBERS, REAR AXLE {Bendix EverSure} 30/30 SqIn Spring Brake
4LAG	SLACK ADJUSTERS, FRONT {Gunite} Automatic
4LGG	SLACK ADJUSTERS, REAR {Gunite} Automatic
4SPA	AIR COMPRESSOR {Cummins} 18.7 CFM
4VHW	AIR TANK LOCATION (2) Mounted Under Battery Box, Outside Left Rail, Under Cab; Perpendicular to Rail
4VKC	AIR DRYER LOCATION Mounted Inside Left Rail, Back of Cab
4WXR	DRAIN VALVE (2) {Berg} with Pull Chains, for Air Tanks
4XDH	BRAKES, REAR {Bendix Spicer ES-165-7L} Air S-Cam Type, Light Weight Fabricated Spider, Fabricated Shoe, Single Anchor Pin, Size 16.5" X 7", 20,000-lb Capacity per Axle
4XDK	BRAKES, FRONT {Bendix Spicer ES-165-5X} Air S-Cam Type, Heavy Duty Fabricated Spider, Fabricated Shoe, Single Anchor Pin, Size 16.5" X 5", 14,700-lb Capacity
4XEE	PARK BRAKE CHAMBERS, ADDITIONAL (2) Spring Brake Type

<u>Code</u>	<u>Description</u>
5710	STEERING COLUMN Tilting and Telescoping
5CAW	STEERING WHEEL 4-Spoke; 18" Dia., Black
5PSA	STEERING GEAR {Sheppard M100} Power
6DGU	DRIVELINE SYSTEM {Dana Spicer} SPL250 Main Driveline with SPL170 Interaxle Shaft, for 6x4
7BES	AFTERTREATMENT COVER Polished Aluminum
7BLY	EXHAUST SYSTEM Horizontal Aftertreatment System, Frame Mounted Right Side Under Cab, for Single Vertical Tail Pipe, Cab Mounted Right Side
7SAP	ENGINE COMPRESSION BRAKE {Cummins} Interbrake For Cummins Signature/ISX/X15 Engines; Furnished with Engine
7WBA	TAIL PIPE (1) Turnback Type, Bright
7WBS	MUFFLER/TAIL PIPE GUARD (1) Bright Stainless Steel
7WDM	EXHAUST HEIGHT 10'
8000	ELECTRICAL SYSTEM 12-Volt, Standard Equipment
	<u>Includes</u>
	: HAZARD SWITCH Push On/Push Off, Located on Instrument Panel to Right of Steering Wheel
	: HEADLIGHT DIMMER SWITCH Integral with Turn Signal Lever
	: PARKING LIGHT Integral with Front Turn Signal and Rear Tail Light
	: STARTER SWITCH Electric, Key Operated
	: STOP, TURN, TAIL & B/U LIGHTS Dual, Rear, Combination with Reflector
	: WINDSHIELD WIPER SWITCH 2-Speed with Wash and Intermittent Feature (5 Pre-Set Delays), Integral with Turn Signal Lever
	: WINDSHIELD WIPERS Single Motor, Electric, Cowl Mounted
8836	HORN, AIR (2) Single Bell, Organ Tone, Extra Long, Chrome
8GXJ	ALTERNATOR {Leece-Neville AV1160P2013} Brush Type, 12 Volt, 160 Amp Capacity, Pad Mount
8MSG	BATTERY SYSTEM {Fleetrite} Maintenance-Free, (3) 12-Volt 1980CCA Total, Top Threaded Stud
8RBZ	SPEAKER, AUXILIARY, CB RADIO with Jack for CB; Mounted Left Side Above Driver's Door
8RMV	SPEAKERS (2) 6.5" Dual Cone Mounted in Doors
8RNC	CB RADIO Accommodation Package, Header Mounted, Feeds from Accessory Side of Ignition Switch, Includes Power Source, Two Antennas and Antenna Bases with Wiring on Both Side Mirrors
8RPP	ANTENNA Shark Fin, Roof Mounted
8RPS	RADIO AM/FM/WB/Clock/Bluetooth/USB Input/Auxiliary Input
8VAY	HORN, ELECTRIC Disc Style
8VUP	BATTERY BOX COVER Aluminum, Universal Cover that Covers Both Battery Box & DEF Tank
8WBW	JUMP START STUD Remote Mounted
8WCK	POWER SOURCE, TERMINAL TYPE 2-Post
8WEZ	TURN SIGNAL SWITCH Self-Canceling
8WJN	BATTERY BOX Aluminum, with Plastic Cover, 30" Wide, 2-4 Battery Capacity, Mounted Left Side Under Cab
8WXB	HEADLIGHT WARNING BUZZER Sounds When Head Light Switch is on and Ignition Switch is in "Off" Position
8WXG	STARTING MOTOR {Mitsubishi Electric Automotive America 105P} 12-Volt, with Soft-Start
8XAH	CIRCUIT BREAKERS Manual-Reset (Main Panel) SAE Type III with Trip Indicators, Replaces All Fuses

<u>Code</u>	<u>Description</u>
8XNY	HEADLIGHTS Halogen
9AAB	LOGOS EXTERIOR Model Badges
9AAE	LOGOS EXTERIOR, ENGINE Badges
9ASE	FRONT END Tilting, Composite
9HCN	GRILLE Chrome Vertical Accent Bars, with Black Mesh
9WAC	BUG SCREEN Mounted Behind Grille
10060	PAINT SCHEMATIC, PT-1 Single Color, Design 100
10761	PAINT TYPE Base Coat/Clear Coat, 1-2 Tone
10AGB	COMMUNICATIONS MODULE Telematics Device with Over the Air Programming; Includes Five Year Data Plan and International 360
10EYC	FIFTH WHEEL, STATIONARY {Fontaine SL7FMA-D69-3} Cast Top Plate, 8.69" Above Top of Frame, Left Hand Release
10WPT	MUD FLAP HOLDER Spring Loaded, Painted Black, 45-Degree End, with Red and White Reflective Tape, Less Flaps
10WSX	MUD FLAPS, REAR Black Poly, with International Logo, Less Holders
11001	CLUTCH Omit Item (Clutch & Control)
12703	ANTI-FREEZE Red, Extended Life Coolant; To -40 Degrees F/ -40 Degrees C, Freeze Protection
12ETM	ENGINE, DIESEL {Cummins X15 470 V} Productivity Series, EPA 2021, 470HP @ 1900 RPM, 1750 lb-ft Torque @ 950 RPM, 2000 RPM Governed Speed, 482 Peak HP (Max)
12THT	FAN DRIVE {Horton Drivemaster} Two-Speed Type, Direct Drive, with Residual Torque Device for Disengaged Fan Speed
	<u>Includes</u> : FAN Nylon
12VCB	AIR CLEANER Dual Element, with Integral Pre-Cleaner, Engine Mounted
12VHZ	EMISSION, CALENDAR YEAR {Cummins X15} EPA, OBD and GHG Certified for Calendar Year 2022
12WGA	HOSE CLAMPS, RADIATOR HOSES , Mechanical Type; with Constant-Tension Functionality
12WTA	FAN DRIVE SPECIAL EFFECTS Fan Cooling Ring with Fan Shroud Effects, Engine Mounted
12WYZ	RADIATOR DRAIN & FILL FITTING SPECIAL; To Vacuum Out or Fill the Cooling System from the Bottom of Radiator, for Use with Quick-Connect Radiator Drain Tool or Shop Coolant Evacuation-Fill System
12WZE	CARB IDLE COMPLIANCE Federal, Does Not Comply with California Clean Air Idle Regulations
12XBC	RADIATOR Aluminum, Welded, Down Flow, Front to Back System, 1325 SqIn, with 806 SqIn Charge Air Cooler
	<u>Includes</u> : RADIATOR HOSES Premium, Rubber
12XCS	CARB EMISSION WARR COMPLIANCE Federal, Does Not Comply with CARB Emission Warranty
13AUT	TRANSMISSION, AUTOMATIC {Allison 4500 RDS} 5th Generation Controls, Wide Ratio, 5-Speed with Overdrive, with PTO Provision, Less Retarder, Includes Oil Level Sensor, On/Off Highway
13WET	TRANSMISSION SHIFT CONTROL Column Mounted Stalk Shifter, Not for Use with Allison 1000 & 2000 Series Transmission
13WHL	OIL COOLER, AUTO TRANSMISSION Remote Mounted

Code	Description
13WLM	TRANSMISSION OIL Synthetic; 63 thru 76 Pints
13WUC	ALLISON SPARE INPUT/OUTPUT for Rugged Duty Series (RDS) and Regional Haul Series (RHS), General Purpose Trucks, Construction, Package Number 223
13WVV	NEUTRAL AT STOP Allison Transmission Shifts to Neutral When Service Brake is Depressed and Vehicle is at Stop; Remains in Neutral Until Service Brake is Released
13WYU	SHIFT CONTROL PARAMETERS {Allison} 3000 or 4000 Series Transmissions, Performance Programming
14899	SUSPENSION AIR CONTROL VALVE Pressure Release Control In Cab
14GVU	AXLE, REAR, TANDEM {Meritor MT-40-14X-4DFR-P} Single Reduction, 40,000-lb Capacity, with Lube Oil Pump, .433"(11mm) Wall Housing Thickness, R Wheel Ends . Gear Ratio: 3.70
14UKZ	SUSPENSION, REAR, AIR, TANDEM {Hendrickson HAS-402-55} 40,000-lb Capacity, 55" Axle Spacing, 9.5" Ride Height, with Shock Absorbers
14WMJ	AXLE, REAR, LUBE {EmGard FE-75W-90} Synthetic Oil; 50 thru 64.99 Pints
15DXC	FUEL TANK (2) Non-Polished Aluminum, 24" Dia, 80 US Gal (303L); Total Capacity 160 US Gal (606L), with Dual Supply and Return Lines, Less Equalizer Line, Mounted Left and Right Side, Back of Cab
15LKU	FUEL/WATER SEPARATOR {Racor} Fuel Pre-Filter and Filter Base, Includes Water-In-Fuel Sensor
15LNA	FUEL HEATER {Cummins} Plumbing for Thermal Recirculation Valve (TRV) Mounted to Cummins X15 Engines, Thermostatically Controlled
15WCS	FUEL COOLER Less Thermostat; Mounted in Front of Cooling Module
15WDY	DEF TANK 15.9 US Gal (60L) Capacity, Frame Mounted Outside Left Rail, Under Cab
16030	CAB Conventional, Day Cab
	<u>Includes</u>
	: CAB REAR SUSPENSION Air
	: CLEARANCE/MARKER LIGHTS (5) LED Roof Mounted
	: COAT HOOK, CAB Located on Rear Wall, Centered Above Rear Window
	: CONSOLE, CENTER Includes Two Cup Holders and One Additional Storage Area
	: CONSOLE, OVERHEAD Molded Plastic with Dual Storage Pockets, Retainer Nets and CB Radio Pocket; Located Above Driver and Passenger
	: COURTESY LIGHT (2) Driver and Passenger Door Mounted
	: DOME LIGHT, CAB Rectangular, Door and Instrument Panel Mounted Switch Activated, Timed Theater Dimming, Center Mounted, Integral to Console
	: FLOOR COVERING Rubber, Black
	: GLASS, ALL WINDOWS Tinted
	: GRAB HANDLE, CAB INTERIOR (1) "A" Pillar Mounted, Passenger Side
	: GRAB HANDLE, CAB INTERIOR (4) "B" Pillar and Door Mounted, Two Each Side
	: READING LIGHT, CAB Located in Overhead Console
	: STORAGE POCKET, DOOR (2) Full Length, Driver and Passenger Door
16BAM	AIR CONDITIONER with Integral Heater and Defroster
	<u>Includes</u>
	: HOSE CLAMPS, HEATER HOSE Mubea Constant Tension Clamps
16GEG	GAUGE CLUSTER Premium Level; English with English Electronic Speedometer
	<u>Includes</u>
	: GAUGE CLUSTER DISPLAY: Base Level (3" Monochromatic Display), Premium Level (5" LCD Color Display); Odometer, Voltmeter, Diagnostic Messages, Gear Indicator, Trip Odometer, Total Engine Hours, Trip Hours, MPG, Distance to Empty/Refill for
	: GAUGE CLUSTER Speedometer, Tachometer, Engine Coolant Temp, Fuel Gauge, DEF Gauge, Oil Pressure Gauge, Primary and Secondary Air Pressure

<u>Code</u>	<u>Description</u>
	: WARNING SYSTEM Low Fuel, Low DEF, Low Oil Pressure, High Engine Coolant Temp, Low Battery Voltage (Visual and Audible), Low Air Pressure (Primary and Secondary)
16HGL	GAUGE, OIL TEMP, REAR AXLE
16HHE	GAUGE, AIR CLEANER RESTRICTION {Filter-Minder} with Black Bezel, Mounted in Instrument Panel
16HKT	IP CLUSTER DISPLAY On Board Diagnostics Display of Fault Codes in Gauge Cluster
16LWM	SEAT, DRIVER {ISRI} Series 400, Air Suspension, High Back, Mordura, Double Chamber Lumbar, Heat, Inboard Armrest, Suspension Cover, Fore/Aft Isolator, Cushion Extension, Seat Tilt, Memory Quickdown
16SDC	GRAB HANDLE, EXTERIOR (2) Chrome, Towel Bar Type, with Anti-Slip Rubber Inserts, for Cab Entry Mounted Left and Right Side at B-Pillar
16SNR	MIRRORS (2) C-Loop, Power Adjust, Heated, LED Clearance Lights, Bright Heads and Arms, 7.5" x 14" Flat Glass, Includes 7.5" x 7" Convex Mirrors, for 102" Load Width
	<u>Notes</u>
	: Mirror Dimensions are Rounded to the Nearest 0.5"
16SRM	SEAT, PASSENGER {National} Non Suspension, High Back with Integral Headrest, Mordura Cloth, with Fixed Back, with Under Seat Storage
16VKK	CAB INTERIOR TRIM Diamond, for Day Cab
16WJU	WINDOW, POWER (2) and Power Door Locks, Left and Right Doors, Includes Express Down Feature
16XDD	WINDOW, REAR Polycarbonate Plastic Window, Shatter Resistant
16XJP	INSTRUMENT PANEL Wing Panel
16XRX	MODESTY PANEL Painted
16XTM	ACCESS, CAB Aluminum, Driver & Passenger Sides, Two Steps per Door, for use with Day Cab or Sleeper Cab
16XWV	SUNSHADE, EXTERIOR Aerodynamic, Painted Roof Color, with Integral LED Clearance/Marker Lights
27DUP	WHEELS, FRONT {Accuride 50409} DISC; 24.5x8.25 Rims, Powder Coat Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
28DTD	WHEELS, REAR {Maxion 90542} DUAL DISC; 24.5x8.25 Rims, Painted Steel, 2-Hand Hole, 10-Stud, 285.75mm BC, Hub-Piloted, Flanged Nut, with Steel Hubs
29PAS	PAINT IDENTITY, REAR WHEELS Disc Rear Wheels; with Vendor Applied White Powder Coat Paint
7384225443	(2) TIRE, FRONT 11R24.5 Load Range H ECOPLUS HS3+ (CONTINENTAL), 473 rev/mile, 75 MPH, All-Position
7384225447	(8) TIRE, REAR 11R24.5 Load Range H HDL2 DL+ (CONTINENTAL), 468 rev/mile, 75 MPH, Drive
810004	FIFTH WHEEL LOCATION 04.0" Ahead of Rear Axle Centerline

Services Section:

40132	WARRANTY Standard for HX520, HX620, Effective with Vehicles Built January 1, 2021 or Later, CTS-2015B
40RBJ	SERVICES, TOWING {Navistar} Service Call to 48-Month/Unlimited Mileage to the Nearest Navistar Dealer for Navistar Warrantable Failure as Contract Defined; Includes Engine Failure if Supplier Declines Tow Coverage & ESC Supplied thru Navistar; \$550 (USA) Maximum Benefit per Incident

Body/Allied Equipment

<u>Code</u>	<u>Description</u>
-------------	--------------------

Goods Purchased

<u>Code</u>	<u>Description</u>
-------------	--------------------

Code

Description

COMMODITY SURCHARGE

<u>Description</u>	<u>(US DOLLAR)</u>	<u>Price</u>
Factory List Prices:		
Product Items	\$135,576.48	
Service Items	\$1,300.00	
Total Factory List Price Including Options:		\$136,876.48
Total Goods Purchased:		\$2,750.00
DOT INSPECTION, FUEL, DEF, SAFETY EQUIPMENT, P&D	\$850.00	
Total Preparation And Delivery:		\$850.00
Freight Charge	\$3,100.00	
Total Freight:		\$3,100.00
Total Factory List Price Including Freight:		\$143,576.48
Total Vehicle Price:		\$143,576.48
Total Sale Price:		\$143,576.48
Total Per Vehicle Sales Price:		\$143,576.48
Net Sales Price:		\$143,576.48

Please feel free to contact me regarding these specifications should your interests or needs change. I am confident you will be pleased with the quality and service of an International vehicle.

Approved by Seller:

Accepted by Purchaser:

Official Title and Date

Firm or Business Name

Authorized Signature

Authorized Signature and Date

This proposal is not binding upon the seller without Seller's Authorized Signature

Official Title and Date

The TOPS FET calculation is an estimate for reference purposes only. The seller or retailer is responsible for calculating and reporting/paying appropriate FET to the IRS.


The limited warranties applicable to the vehicles described herein are Navistar, Inc.'s standard printed warranties which are incorporated herein by reference and to which you have been provided a copy and hereby agree to their terms and conditions.

CERTIFICATE OF AUTHORITY

iTA TRUCK SALES & SERVICE, L.L.C.

The undersigned, the Certifying Officer of iTA Truck Sales & Service, L.L.C., a Louisiana limited liability company (the "Company"), hereby declares that:

1. The undersigned, Christopher D. Schouest is the President of the Company and is named in the Articles of Organization of the Company filed with the Louisiana Secretary of State as having authority to certify the membership of any member, the authenticity of any records of the Company, or the authority of any person to act on behalf of the Company.
2. The undersigned certifies that:
 - (a) JW Harrison is the Director Municipal Sales for the Company and duly authorized by the Company to execute and deliver on behalf of the Company any and all documents, contracts or amendments, he deems necessary or appropriate with respect to any transaction between the Company and
 - (b) The foregoing authority is in full force and effect and has not been revoked or rescinded.

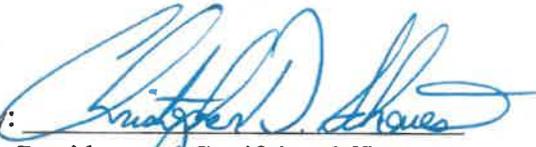By: 
President and Certifying Officer
iTA Truck Sales & Service, L.L.C.

Date: 9/27/2019

License No. N -2021-03451

2021-2023

Not Transferable

Louisiana Motor Vehicle Commission

This Certifies that

Jerry Wayne Harrison of Lafayette, LA

has been licensed by this Commission as a

MOTOR VEHICLE SALESMAN.

Employed by Motor Vehicle Dealer Licensee

N -2021-00295

31A Truck Sales & Service, L.L.C.

2835 Northwest Evangeline Thruway

Lafayette, LA 70507

pursuant to the laws of the State of Louisiana for the period ending October 31, 2023.

Louisiana Motor Vehicle Commission

Dated November 1, 2021



Executive Director

NOTE: This Certificate is to be retained by the Employer.
It is to be returned by the Employer to the Commission
Office at 3017 Kingman Street, Metairie, LA 70006, within
ten days of the termination of the Salesman's employment

Termination Date:



Non-Public Works Bid

AFFIDAVIT

STATE OF LOUISIANA

PARISH/COUNTY OF LAFAYETTE

BEFORE ME, the undersigned authority, personally came and appeared: JERRY W. HARRISON, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized Representative of ITA TRUCK SALES & SERVICE, LLC the party who submitted a bid in response to Bid Number 50-00138342, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B X there are NO campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B X There are NO debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.



Signature of Affiant

Jerry W. Harrison

Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 24th DAY OF May, 2022



Notary Public

Christopher D. Schouest

Printed Name of Notary

31539

Notary/Bar Roll Number

My commission expires At Death.

**WARRANTY SERVICE REPAIRS MUST BE INITIATED
WITHIN TWO (2) HOURS OF NOTIFICATION**

**A LOUISIANA'S STATE DEALER LICENSE IS REQUIRED
IN ACCORDANCE WITH LA RS 32:1254 ET SEQ. VENDOR
MUST PROVIDE A LOUISIANA DEALER'S LICENSE NUMBER
WITH YOUR BID**

WARRANTY: 1 YEAR UNLIMITED/5 YEAR POWERTRAIN

**MANUALS: (2) PARTS, (2) SERVICE MANUALS, (2) WIRING DIAGRAMS IF
MANUFACTURER STILL PROVIDES. IF NO MANUALS, CD'S WILL BE
ACCEPTEED**

**SAFETY: MUST MEET OR EXCEED ALL FEDERAL AND STATE SAFETY
STANDARD**

HX620



- ▶ Construction Dump
- ▶ Heavy Haul Tractor
- ▶ Crane
- ▶ Platform Stake



The HX620 is purpose-built to dominate some of the world's toughest jobs – on road or off. The maneuverable, 50-inch set-back, wide-track front axle and exceptional visibility helps the driver navigate crowded worksites with ease. Now equipped with International Diamond Logic® multiplex technology (the industry's most advanced electrical system), complicated applications can be seamlessly integrated for more consistent performance and increased equipment protection and crew safety. Plus, the clean CA frame rails, factory-installed lift axles and various moveable components allow TEMs to create the ideal solution for your specific needs.



HX620

KEY FEATURES:

- ▶ International® A26 or Cummins® X15 with up to 605 HP / 2,050 lb.-ft. of torque
- ▶ Available with functional dual external air cleaners that deliver heavy-duty filtration with long service life and easy maintenance
- ▶ Standard all-metal grille with bright surround and available bright grille bars
- ▶ The 3-piece sloped DCPD hood provides excellent visibility, superior strength and impressive durability
- ▶ Available, industry-leading 12.5" x 0.5" single frame rail delivers 3.5 million RBM while reducing corrosion
- ▶ Standard Huck-Spin frame and crossmember fasteners deliver superior clamping force that lasts
- ▶ Available 150,000 lb. capacity center tow pin provides assured strength in extreme recovery scenarios



Vehicles depicted above may contain optional equipment

120" BBC SET-BACK FRONT AXLE

GVWR

- ▶ 53,200 – 92,000 lbs.

Model/BBC/BA

- ▶ 119.2" BBC / 50.2" BA

Wheelbase Options

- ▶ 169 - 374"

Hood Design

- ▶ DCPD Hood, 3-piece Outer

Axle Configurations

- ▶ 6x4
- ▶ 8x6

Frames

- ▶ Yield: 120,000 PSI
- ▶ RBM: 2,037,600 – 4,854,000 in.-lbs.

Engine

- ▶ International A26:
 - HP: 370 – 500
 - Torque: 1,350 – 1,750 lb.-ft.
- ▶ Cummins X15:
 - HP: 430 – 605
 - Torque: 1,650 – 2,050 lb.-ft.

Transmission

- ▶ Eaton Manual: 8LL (10), 9ALL (11), 13 and 18-speed
- ▶ Eaton Automated Manual: 8LL (10), 9ALL (11), 13, and 18-speed UltraShiftPLUS™
- ▶ Allison Automatic: EYS, RDS, OFS

Front Axles

- ▶ Dana: 16,000 – 22,000 lbs.
- ▶ Meritor: 12,000-22,000 lbs

Front Suspensions

- ▶ Multi-Leaf: 14,000 – 23,000 lbs.
- ▶ Parabolic: 13,200 – 22,000 lbs.
- ▶ Slipper-type: 20,000 – 24,000 lbs.

Rear Axles

- ▶ Dana Tandem:
 - Single Speed: 40,000 – 52,000 lbs.
 - Two Speed: 46,000 lbs.
- ▶ Meritor Tandem: 40,000 – 58,000 lbs.
- Double Reduction: 58,000 – 70,000 lbs.
- ▶ Tridem: 53,000 lbs.

Rear Suspensions

- ▶ Chalmers: 40,000 – 52,000 lbs.
- ▶ Hendrickson RT: 40,000 – 65,000 lbs, R: 80,000 lbs.
- ▶ Hendrickson HAULMAX EX: 40,000-46,000 lbs.
- ▶ Hendrickson HAS: 40,000 – 46,000 lbs.
- ▶ Hendrickson PRIMAAX EX: 46,000 – 52,000 lbs.
- ▶ Hendrickson PRIMAAX EX Tridem: 69,000 lbs.

Exhaust

- ▶ Single or Dual Vertical Stacks
- ▶ Vertical After Treatment Device: Single Vertical Stack

Note: The information and conclusions contained are believed to be correct at time of publication, but do not necessarily apply to similar vehicles with different specifications or with production dates after the production of this publication. Vehicles with different specifications or later dates of production may yield different results. Vehicle specifications are subject to change without notice. TAD20006 11/2020 ©2020 NAVISTAR Inc. All rights reserved. All marks are trademarks of their respective owners.

Electrical

- ▶ Alternator:
 - Delco Remy: 165 – 300 Amp.
 - Leece-Neville: 160 – 240 Amp.
- ▶ Batteries
 - 1,980 - 3,800 CCAs

Fuel Tanks

- ▶ 60 - 240 Gallons, Single or Dual, Polished or Non-Polished
- ▶ LH Mounted Under Cab or Dual Under Cab or Back of Cab
- ▶ 24" or 26" Diameter

Split Fuel and Hydraulic Tanks

- ▶ 100 Gallon Tank, 50 Fuel / 50 Hydraulic Fluid
- ▶ 120 Gallon Tank, 80 Fuel / 40 Hydraulic Fluid

Braking and Control Systems

- ▶ Traction Control
- ▶ Electronic Stability Control (ESC)
- ▶ Bendix® Wingman® Fusion

Available Recovery Devices

- ▶ Center Tow Pin: 150,000 lbs.
- ▶ Tow Hooks: 80,000 lbs.
- ▶ HD Rear Tow Loop: 80,000 lbs.
- ▶ HD Rear Tow Hooks: 80,000 lbs.