



LED Area/Shoe Box/ Parking Light OT Series

CONSTRUCTION

- * Type III, Type IV, Type V.
- * Light Distributions
- * Available in 3000K, 4000K, 5000K.
- * Efficacy up to 170lm/W
- * Cutoff classification: Cutoff, no uplight pollution.




ELECTRICAL

- * Standard universal voltage (100-240/277Vac) input, 50/60Hz and 200-480V input, 50/60Hz optional.
- * L90 calculated life: 50,000+ hours.
- * Input Surge Protection: 6kV line-line, 10kV line-earth.

CERTIFICATIONS/LISTINGS



FIXTURE DIMENSION

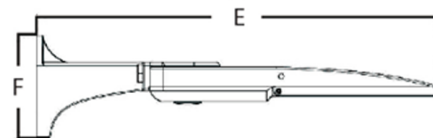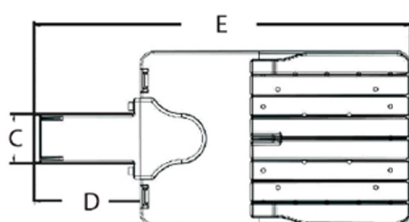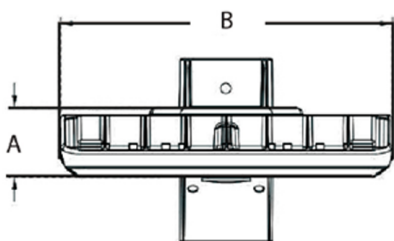

	A	B	C	D	E	F
75W-145W	2.2"	10.6"	3.0"	6.49"	23"	5.9"
180W-250W	2.2"	13.7"	3.0"	6.49"	26.7"	5.9"
300W-420W	3"	14"	3.0"	6.49"	30"	5.9"




ORDERING INFORMATION

WATT	VOLTAGE	LED CHIPS	SENSORS	CCT & CRI	DISTRIBUTION	BRACKETS	HOUSING	OPTION
<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>	<input type="text"/>
75WoT	NV=100-277V	L5=5050	00=Without Sensor	3070=3000K 70CRI	T3 = TYPE 3	A= Slip Fitter	BK=Black	SPD 10KV
115WoT	HV=347/480V		SN= PIR Motion Sensor	4070=4000K 70CRI	T4 = TYPE 4	B= Adjustable	BZ=Bronze	SPD 20KV
145WoT			PH=Photocell	5070=5000K 70CRI	T5= TYPE 5	Straight Mount	WH=White	
180WoT				3080=3000K 80CRI		C = Trunnion Mount	SG = Silver Grey	
200WoT				4080=4000K 80CRI		D = Slide and Lock Mount		
230WoT				5080=5000K 80CRI		E= Square Pole Mount		
300WoT						F= Round Pole Mount		
420WoT								

TECHNICAL SPECIFICATIONS

MODEL	WATTS	LUMEN OUTPUT 3000K/4000K/5000K	REPLACE HPS	FIXTURE DIMENSION	NW	III	BUG TYPE IV	V
AOK-75WoT	75W	13121LM	150W	23*11*2.2"	11lbs	B2-U0-G2	B3-U0-G2	B4-U0-G2
AOK-115WoT	115W	18689LM	200W	23*11*2.2"	11lbs	B3-U0-G2	B3-U0-G3	B4-U0-G2
AOK-145WoT	145W	24699LM	250W	23*11*2.2"	11lbs	B3-U0-G3	B3-U0-G3	B5-U0-G3
AOK-180WoT	180W	30870LM	400W	26.7*14*2.2"	12lbs	B3-U0-G3	B3-U0-G4	B5-U0-G4
AOK-200WoT	200W	33012LM	500W	26.7*14*2.2"	12lbs	B4-U0-G3	B4-U0-G4	B5-U0-G4
AOK-230WoT	230W	36162LM	600W	26.7*14*2.2"	12lbs	B4-U0-G3	B4-U0-G4	B5-U0-G4
AOK-300WoT	300W	43500LM	1000W	30*14*3.0"	23lbs	B4-U0-G4	B4-U0-G5	B5-U0-G4
AOK-420WoT	420W	60060LM	1200W	30*14*3.0"	23lbs	B4-U0-G5	B4-U0-G5	B5-U0-G5

PHOTOMETRY



ACCESSORIES ORDER SEPARATELY


Type A - Slip Fitter



Type B - Adjustable Arm Mount




Type C - U Shape Bracket

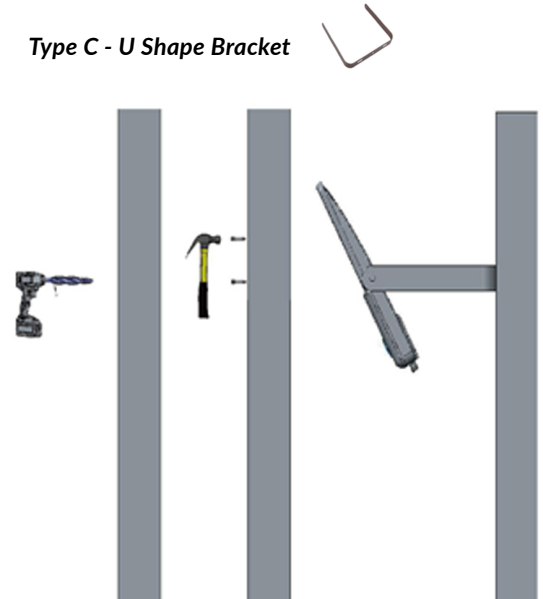

Designed for easy installation, simple, single-person installation is the key to make the oT Area Luminaire easy to work with, no matter the job site.

Type D - Slide & Lock Mount (for Square & Round Poles)

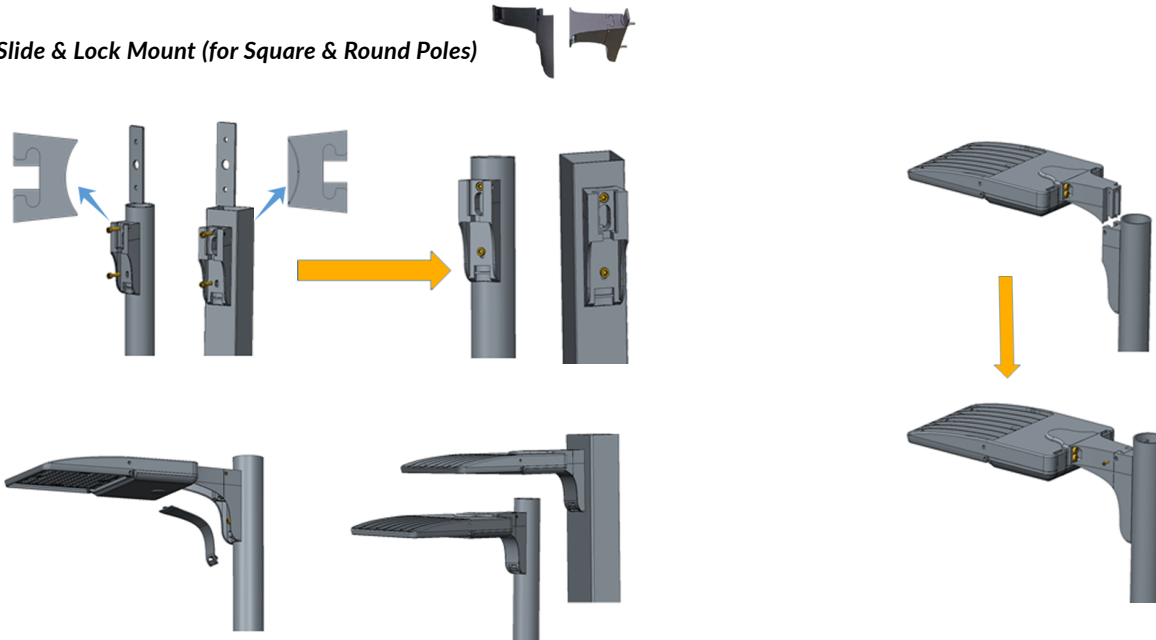

Type E/F - Direct Arm Mount (for Square & Round Poles)

