



D400-LED

Small Wall Pack

Client: _____
Project Name: _____

Order #: _____
Type: _____ Qty: _____

Performance Data

CRI
83

CCT
5000K

Projected Lifetime

L70 - 182,000 Hours;
L80 - 80,000 Hours

Dimming

0-10V dimming standard,
100% down to 10%

Operating Temperature

-40°C to +55°C Ambient

UL Listed

Suitable for dry, damp,
wet locations



DLC

Listed

UL

Listed

10 Yr

Warranty
Including Labor

USA

Buy American
Act Compliant

Description

The D400-LED small wall pack features a low-profile, compact design ideal for security, accent and perimeter lighting in areas such as building facades, entrance ways, garage doors, indoor parking garages, tunnels, overpasses and alleys. Available as a build-to-order fixture or in a Quickship model (see Page 3 for ordering code).

Features

- Traditional styling paired with next-generation LED performance at 111 lm/W
- Heavy duty two piece, die-cast aluminum housing.
- Type IV light distribution
- Silicone gasketing provides protection against moisture.
- Mounts directly to 3.5" octagon or 4" square outlet box.
- .5" NPS tapped holes provided in three locations for surface conduit entry or optional photo control.
- Dark bronze polyester powder coated finish for impact, corrosion and UV resistance.
- CSA listed for wet locations, IP55 rated
- Integral cast-in aluminum hinges permit complete removal of lens frame assembly without tools.
- Clear prismatic borosilicate glass refractor is thermal and shock resistant.
- DLC listed for utility rebates (see table on pg 3 for models listed)

D400-LED **25** **50** **U** **BZ** **Q** **G**

Ordering Information

A FIXTURE SERIES

D400-LED Small Wall Pack

B WATTAGE/LUMENS

25 25W/3000^{2,3}

C CCT

50 5000K³

D VOLTAGE

U 120-277V

E FINISH

BZ Bronze¹

F LENS TYPE

Q Prismatic Glass

G OPTION

T Photocell

M Mounting Plate⁴

G Wire Guard⁴

H Glare Shield⁴


¹ Standard for fixture

² Delivered Lumens (5000K)

³ DLC Listed Model (see table on Page 3 for models currently listed)

⁴ Shipped separately


Dimensions

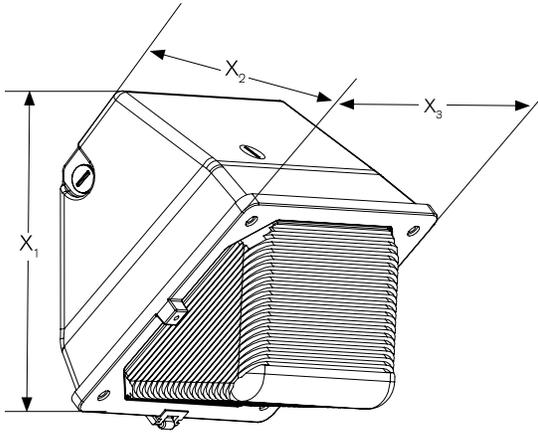


	Inches
X ₁	9.25
X ₂	8.75
X ₃	8.75

Photometrics

Model 30W 5000K

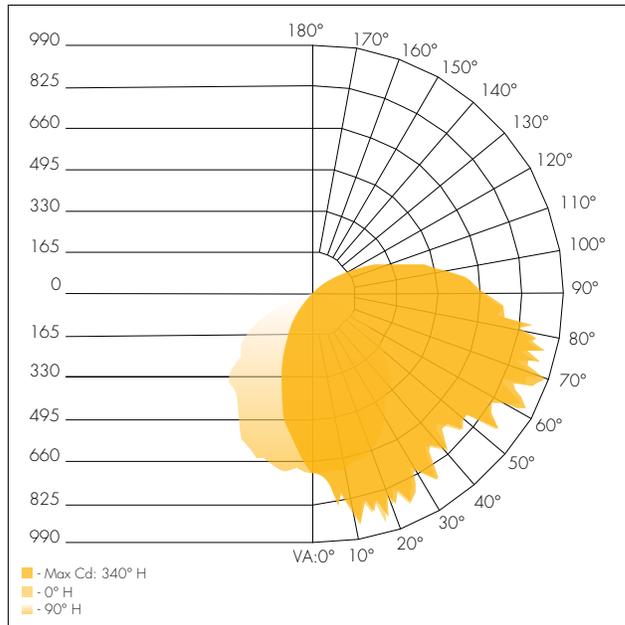

Isolux Plot

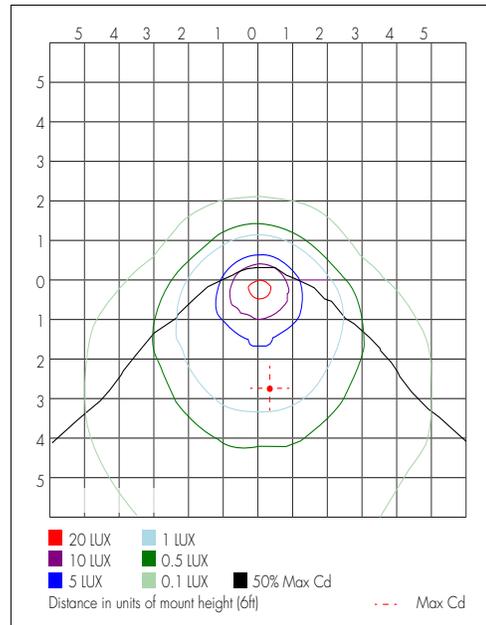

Zonal Lumen Summary

Zone	Lumens	% Luminaire
0-30	546.6	18.4%
0-40	872.3	29.3%
0-60	1,561.5	52.4%
60-90	952.2	32%
70-100	788.7	26.5%
90-120	393.9	13.2%
0-90	2,513.7	84.4%
90-180	464.7	15.6%
0-180	2,978.5	100%

Lumen Output

Lumen Chart

Nominal Wattage	System Wattage	5000K Lumens	Efficacy (lm/W)
25W	27	3000	111

DLC Listing

	25W
5000K	X

Quickship Model

D400-LED2550UBZQ

(25W, 5000K, 120-277V, Bronze, Glass Lens, No Options)