


- Use in a straight line pull only
- Never shock load
- Never side load
- Inspect eyebolts before each use

Item #0010

- Always apply load in a gradually increasing manner
- If used in angular lift, (up to 45°) reduce WLL by 30%
- Seat eyebolt properly
- Loads should always be applied to the "plane" of the eye.

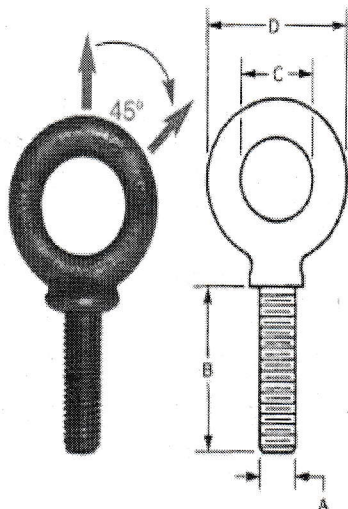

Eye Bolts – Regular Nut

- Forged Carbon Steel
- Hot Dip Galvanized
- Heavy Hex Nut

ITEM#	Size in inches Diam. x Shank A x B	Working Load Limit in lbs. (Straight Pull)	Approx. Weight Each in Pounds	Dimensions in Inches C D E		
EB142GR	1/4 x 2	500	.066	1.50	.50	1.00
EB144GR	1/4 x 4	500	.091	2.50	.50	1.00
EB516214GR	5/16 x 2 1/4	800	.133	1.50	.62	1.25
EB516414GR	5/16 x 4 1/4	800	.25	2.50	.62	1.25
EB38212GR	3/8 x 2 1/2	1,200	.243	1.50	.75	1.50
EB38412GR	3/8 x 4 1/2	1,200	.295	2.50	.75	1.50
EB386GR	3/8 x 6	1,200	.352	2.50	.75	1.50
EB122GR	1/2 x 2	2,200	.41	1.88	1.00	2.00
EB12314GR	1/2 x 3 1/4	2,200	.503	1.50	1.00	2.00
EB126GR	1/2 x 6	2,200	.661	3.00	1.00	2.00
EB128GR	1/2 x 8	2,200	.82	3.00	1.00	2.00
EB1210GR	1/2 x 10	2,200	.88	3.00	1.00	2.00
EB1212GR	1/2 x 12	2,200	1.14	3.00	1.00	2.00
EB584GR	5/8 x 4	3,500	1.03	2.00	1.25	2.50
EB586GR	5/8 x 6	3,500	1.18	3.00	1.25	2.50
EB588GR	5/8 x 8	3,500	1.35	3.00	1.25	2.50
EB5810GR	5/8 x 10	3,500	1.54	3.00	1.25	2.50
EB5812GR	5/8 x 12	3,500	1.67	4.00	1.25	2.50
EB5815GR	5/8 x 15	3,500	2.01	5.00	1.25	2.50
EB5818GR	5/8 x 18	3,500	2.18	6.00	1.25	2.50
EB5821GR	5/8 x 21	3,500	2.74	6.00	1.25	2.50
EB5824GR	5/8 x 24	3,500	2.84	6.00	1.25	2.50
EB34412GR	3/4 x 4 1/2	5,200	1.69	2.00	1.50	3.00
EB346GR	3/4 x 6	5,200	1.84	3.00	1.50	3.00
EB348GR	3/4 x 8	5,200	2.08	3.00	1.50	3.00
EB3410GR	3/4 x 10	5,200	2.35	3.00	1.50	3.00
EB3412GR	3/4 x 12	5,200	2.57	4.00	1.50	3.00
EB785GR	7/8 x 5	7,200	2.70	2.50	1.75	3.50
EB788GR	7/8 x 8	7,200	3.08	4.00	1.75	3.50
EB7812GR	7/8 x 12	7,200	4.00	4.00	1.75	3.50
EB16GR	1 x 6	10,000	4.21	3.00	2.00	4.00
EB19GR	1 x 9	10,000	4.68	4.00	2.00	4.00
EB112GR	1 x 12	10,000	5.40	4.00	2.00	4.00

Machinery Eye Bolts

- Forged Carbon Steel
- Self Colored

ITEM#	Size in inches Diam. x Shank A x B	Working Load Limit in lbs. (Straight Pull)	Approx. Weight Each in lbs.	Thread Size/ # per inch	C	D
EB141SM	1/4 x 1	650	.05	1/4 - 20	0.75	1.13
EB516118SM	5/16 x 1 1/8	1,200	.09	5/16 - 18	0.88	1.38
EB38114SM	3/8 x 1 1/4	1,550	.15	3/8 - 16	1.00	1.62
EB716138SM	7/16 x 1 3/8	2,000	.21	7/16 - 14	1.10	1.78
EB12112SM	1/2 x 1 1/2	2,600	.28	1/2 - 13	1.19	1.95
EB916158SM	9/16 x 1 5/8	3,200	.41	9/16 - 12	1.22	2.16
EB58134SM	5/8 x 1 3/4	5,200	.55	5/8 - 11	1.38	2.38
EB342SM	3/4 x 2	7,200	.96	3/4 - 10	1.50	2.76
EB78214SM	7/8 x 2 1/4	10,600	1.54	7/8 - 9	1.75	3.25
EB1212SM	1 x 2 1/2	13,300	2.38	1 - 8	2.00	3.76
EB118234SM	1-1/8 x 2-3/4	16,800	3.05	1-1/8 - 7	2.25	4.00
EB1143SM	1-1/4 x 3	21,000	3.99	1-1/4 - 7	2.50	4.50
FR112312SM	1-1/2 x 3-1/2	24,000	7.20	1-1/2 - 6	3.00	5.50