


- **Basic Data**

- Power consumption: 50 watts
- Led chip: Epistar, Cree and other brand
- Led number: 280 pieces of SMD 2835
- Dimension(mm): 600mm*1200mm Thickness: 12mm
- This cUL us including a dimension of 595-607mm by 1195-1217mm for Canadian market
- Weight: 8490 gram (without led driver box)
- Lifespan: 50000 hours
- PC cover: Frosted
- Power Factor: More than 99
- Can be dimmable

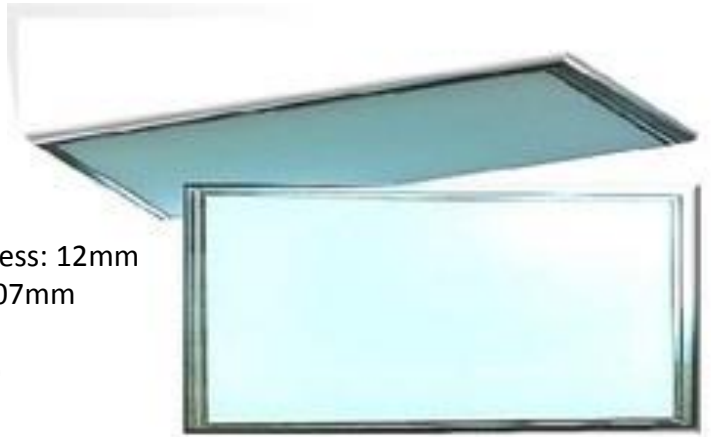


Technical Data

Product Number	Length (Inch)	Input Voltage (Volt)	Color Temperature	Bare Lamp Watt	Bare Lamp Lumens
ZY-P1-30W CDS / ZY-P1-30W CNS	1ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	30	3750
ZY-P1-40W CDS / ZY-P1-40W CNS	1ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P4-30W CDS / ZY-P4-30W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	30	3750
ZY-P4-40W CDS / ZY-P4-40W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P4-60W CDS / ZY-P4-60W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	60	7500
ZY-P7-40W CDS / ZY-P7-40W CNS	2ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P7-50W CDS / ZY-P7-50W CNS	2ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	50	6250
ZY-P7-75W CDS / ZY-P7-75W CNS	2ft by 4ft	AC100-277V	3000K-7000K	75	9375

Panel lights: DC 31V							
Product type	Part number	Color	CCT	Lumen	SIZE	Volt	Power
			(K)		(MM)	(V)	(W)
600*1200	ZY-P7-50W	Warm white	3102K	4593.50 lm	L600 W1200 H:12	DC 31V	50 W
		Neutral white	4813K	4677.70 lm			

Dimension

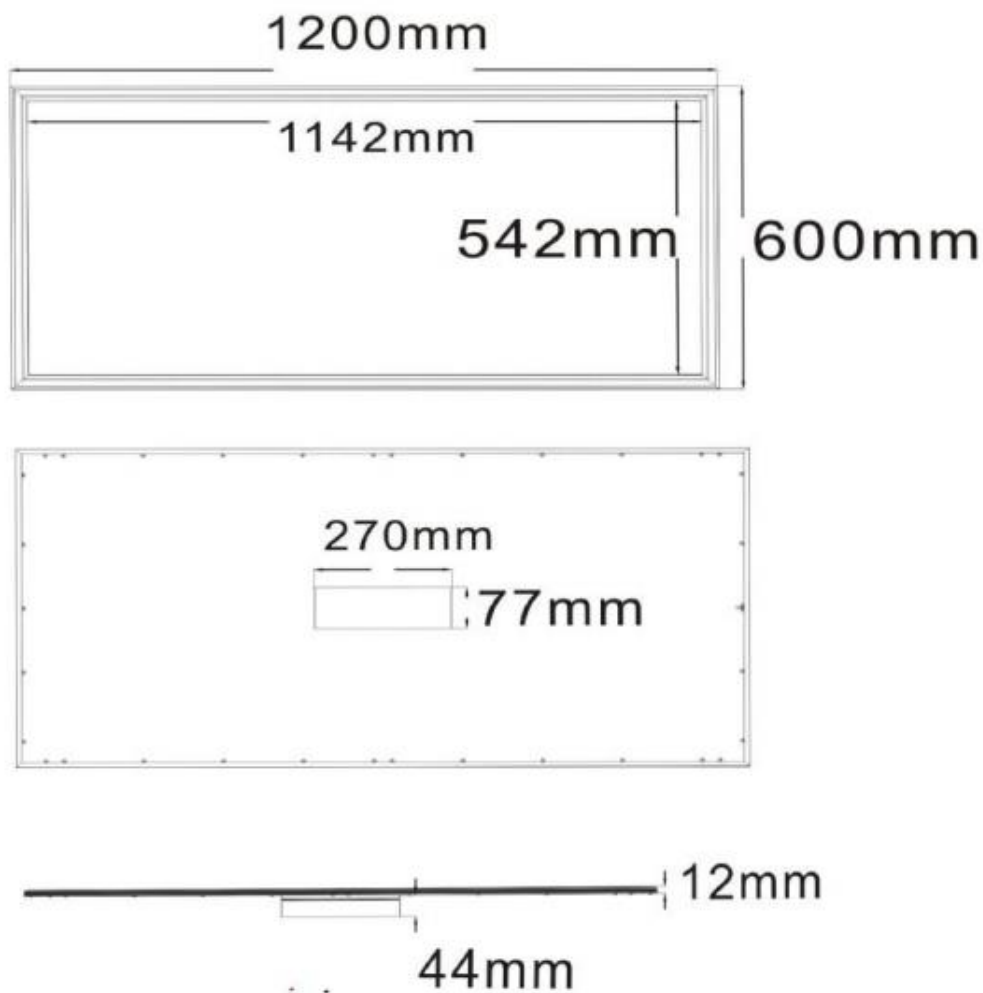

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

