



Estimate

Date	Estimate #
4/4/2019	4453

Name / Address
Jefferson Parish

Project

Item	Description	Qty	Price	Total
ULHB-150W-50K	Westgate 150w Highbay 19,500 lumens 5000k	28	140.08	3,922.24T
ULHB-PCR-100/150	Westgate 16" Polycarbonate Reflector	28	31.13	871.64T
ULHB-LOCKING-HOOK	Westgate Locking Hook for Hanging Highbays	28	5.00	140.00T
Loctite Liquid	290 loctite bottle	1	45.00	45.00T

		Subtotal	\$4,978.88
		Sales Tax (0.0%)	\$0.00
		Total	\$4,978.88



400 E. Cork St. Kalamazoo, MI 49001
 1-877-LED-5554 or 269-532-1313
www.LEDLightingWHOLESALEinc.com

ULHB DLC PREMIUM


120~277V

TECHNICAL SPECIFICATIONS:


- Housing: ACD12 aluminum heat sink, outdoor powder coating.
- Voltage: 120~277V AC; 60Hz AC
- Cord type: 6' SJTW 18/3 AWG cable
- Efficacy: 130LM/W
- CRI: >80
- Power Factor: ≥0.9
- Beam Angle: 110°
- THD: <20%
- 0~10V Dimming
- Operating Temp: -4°F to 122°F
- Aluminum LED Board: High conductive, waterproof, aging resistant, salt mist resistance, long-life
- 5-year warranty

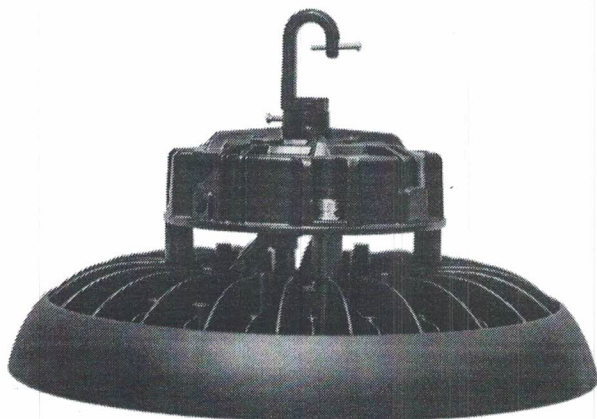


150W & 200W
5000K
Available in white

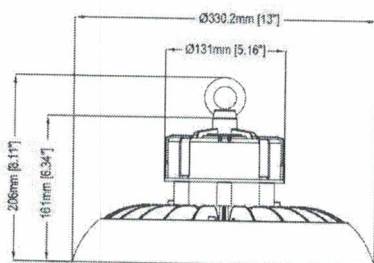

ULHB-100W

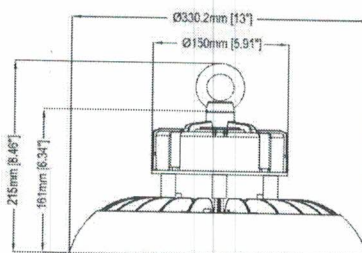

ULHB-150W

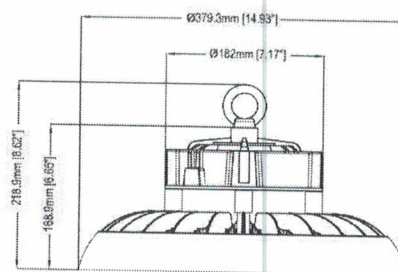


ULHB-200W/240W


LED HIGH-LUMEN UFO HIGH BAY

CATALOG NO.		WATTS	LUMENS	COLOR TEMP	REPLACEMENT RANGE	DIMENSIONS
BRONZE	WHITE					
ULHB-100W-50K	-	100W	13000LM	5000K	150~250 MH	13"(Diameter) x 8.11" (H)
ULHB-100W-40K	-	100W	13000LM	4000K	150~250 MH	
ULHB-100W-30K	-	100W	13000LM	3000K	150~250 MH	
ULHB-150W-50K	ULHB-150W-50K-WH	150W	19500LM	5000K	200~400 MH	13"(Diameter) x 8.46" (H)
ULHB-150W-40K	-	150W	19500LM	4000K	200~400 MH	
ULHB-150W-30K	-	150W	19500LM	3000K	200~400 MH	
ULHB-200W-50K	ULHB-200W-50K-WH	200W	26000LM	5000K	350~400 MH	14.93"(Diameter) x 8.62" (H)
ULHB-200W-40K	-	200W	26000LM	4000K	350~400 MH	
ULHB-200W-30K	-	200W	26000LM	3000K	350~400 MH	
ULHB-240W-50K	-	240W	31200LM	5000K	1000 MH	
ULHB-240W-40K	-	240W	31200LM	4000K	1000 MH	
ULHB-240W-30K	-	240W	31200LM	3000K	1000 MH	

ACCESSORIES FOR UFO HIGH BAYS




ULHB-PCR-100/150
ULHB-PCR-200/240/300



ULHB-ALR-100/150
ULHB-ALR-200/240/300



ULHB-90KIT-100/150
ULHB-90KIT-200/240/300



ULHB-WG-100/150
ULHB-WG-200/240/300




ULHB-SC-100/150
ULHB-SC-200/240/300




ULHB-PCC-100/150
ULHB-PCC-200/240/300



ULHB-SMB-100/150
ULHB-SMB-200/240/300



ULHB-SK
ULHB-SK-480V

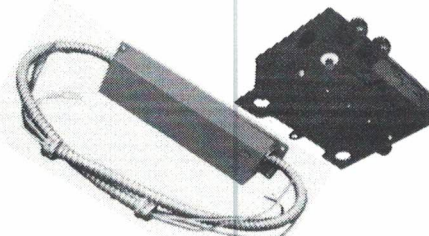



ULHB-EMK

ULHB SERIES ACCESSORIES

CATALOG NO.	DESCRIPTION
ULHB-PCR-100/150	Polycarbonate Reflector for 100W & 150W
ULHB-PCR-200/240/300	Polycarbonate Reflector for 200W & 240W & 300W
ULHB-ALR-100/150	Aluminum Reflector for 100W & 150W
ULHB-ALR-200/240/300	Aluminum Reflector for 200W & 240W & 300W
ULHB-90KIT-100/150	90° Degree Reflector and Glass Kit for 100W & 150W (Conversion from default 110° beam angle)
ULHB-90KIT-200/240/300	90° Degree Reflector and Glass Kit for 200W & 240W & 300W (Conversion from default 110° beam angle)
ULHB-WG-100/150	Wire Guard for 100W & 150W
ULHB-WG-200/240/300	Wire Guard for 200W & 240W & 300W
ULHB-SC-100/150	Safety Cable for 100W & 150W
ULHB-SC-200/240/300	Safety Cable for 200W & 240W & 300W
ULHB-PCC-100/150	Polycarbonate Cover for 100W & 150W (for ULHB-PCR-100/150 only) - Increases heat captured in the reflector. Not recommended when not necessary.
ULHB-PCC-200/240/300	Polycarbonate Cover for 200W & 240W & 300W (for ULHB-PCR-200/240/300 only) - Increases heat captured in the reflector. Not recommended when not necessary.
ULHB-SMB-100/150	Surface Mount Bracket for 100W & 150W
ULHB-SMB-200/240/300	Surface Mount Bracket for 200W & 240W & 300W
ULHB-SK	Ultrasonic Bi-Level (Dimming) Motion Sensor Kit for 120~277V UFO High Bays Includes special junction box (mounts on fixture), auxiliary cable & push-in connectors
ULHB-SK-480V	Ultrasonic Bi-Level (Dimming) Motion Sensor Kit for 480V UFO High Bays
ULHB-EMK	Emergency Battery Backup Kit for 120~277V UFO High Bays (All wattages) Emergency output power: 11W~28W, Emergency operation: ≥90 mins., Recharge: 48 Hrs. Includes special junction box with test button (mounts on fixture), auxiliary cables & splicers & push-in connector

Classic Low-Bay/Hi-Bay

CLASSIC HIGH BAY

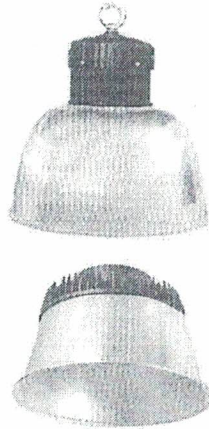

Reflectors Sold Separately
(Installation must include Reflector for DLC Listing)

Dimmable
150w & 220w

DLC

UL
LISTED

- Lumileds LUXEON 3030 LEDs
- Integral Cooling Fins Release Heat Efficiently
- Corrosion Resistant Die Cast Aluminum Housing
- Superior Architectural Bronze Powder Coat Finish
- Stainless Steel Hardware
- Eye-Hook Mount - M10 Thread
- Operation Temperature: -40°F to 131°F
- 50,000+ Hour LED Life Expectancy
- 150 & 220 Watt are Dimmable

- Input Voltage: 120/208/240/277 VAC
- Color Temperature: 5000K Cool White
- CRI: 84
- Light Pattern: 60° - 120° Beam Spread
- Power Factor: 0.97
- 60" Wire Whip for Easy Install
- IP65 (NEMA 4X) Dust & Water Tight
- cULus Listed for Wet Locations
- DLC Listed
- 5 Year Warranty

Cat. No.	Description	Delivered Lumens	Dimensions (Inches)			Weight (lbs)	Case Qty
			A	B	C		
50 Watt (Replaces 150W Metal Halide)							
71500	50 Watt Fixture (Reflector Sold Separately)	5,797	5-1/4	6-1/4	7-3/4	6	6
71501	60° Aluminum Reflector for 71500 Lo-Bay Fixture	5,797	13-1/4	6-1/4	12-1/2	1	10
71502	120° Aluminum Reflector for 71500 Lo-Bay Fixture	5,122	10-1/2	6-1/4	15-3/4	1	10
71503	12° Polycarbonate Prismatic Reflector for 71500	6,083	11-1/2	6-1/4	12-1/4	1	8
100 Watt (Replaces 400W Metal Halide)							
71505	100 Watt Fixture (Reflector Sold Separately)	12,117	7	6-1/2	8-1/8	9	4
71506	60° Aluminum Reflector for 71505 Lo-Bay Fixture	12,117	14-3/4	6-1/2	12-3/8	1	10
71507	120° Aluminum Reflector for 71505 Lo-Bay Fixture	10,709	20-7/8	6-1/2	11	1	10
71508	16° Polycarbonate Prismatic Reflector for 71505	11,383	16-1/8	7-1/8	17-3/4	1	8
*Dimmable 150 Watt (Replaces 600W Metal Halide)							
71510*	150 Watt Fixture (Reflector Sold Separately)	17,342	8-1/2	7-1/8	8-3/4	13	4
71511	60° Aluminum Reflector for 71510 Hi-Bay Fixture	17,342	16-1/2	7-1/8	13-1/2	1	10
71512	120° Aluminum Reflector for 71510 Hi-Bay Fixture	16,028	20-7/8	7-1/8	11-1/4	1	10
71508	16° Polycarbonate Prismatic Reflector for 71510	17,260	16-1/8	7-1/8	17-3/4	1	8
*Dimmable 220 Watt (Replaces 750W Metal Halide)							
71514*	220 Watt Fixture (Reflector Sold Separately)	27,223	12-1/2	6-3/4	10-1/2	28	1
71515	90° Aluminum Reflector for 71514 Hi-Bay Fixture	27,223	16-3/4	6-3/4	13-1/4	1	10


Malleable Crows Foot Fixture Hanger



- Crows Foot Fixture Hanger
- Malleable Iron

Cat. No.	Thread Size	Dimensions		Inner Box	Outer Box
		A	B		
18096	1/4"-20	1.00	1.10	25	250

* Fixture Hook



- High bay fixture hooks are used to hang light fixtures from multiple structural members -1/2" Long
- Preinstalled set screw helps prevent vibratory loosening in high-abuse areas
- 3/4" NPT Threads
- Malleable Iron

Cat. No.	Dimensions		Box Qty
	A	B	
18092	3.40	.95	50


Swivel Pendant - Malleable Round Fixture Hanger



- Swivel pendant mount allows high bays and other hanging fixtures to be mounted on a sloped ceiling
- Pivot ball that allows the installed fixture and pipe stem to swing 20 degrees from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Octagon electrical boxes

Cat. No.	Dimensions		Box Qty
	A	B	
18094	4.21	2.02	25

Malleable Square Fixture Hanger



- Used to support light fixtures, security cameras, exit signs, and a variety of electrical and electronic devices installed in industrial settings
- Pivot ball that allows the installed fixture and pipe stem to swing 20 degrees from vertical when subjected to occasional bumps or vibration
- Fits 3/4" conduit
- Includes reducer bushing to 1/2" with set screw
- Fits standard 4" Square electrical boxes

Cat. No.	Dimensions		Box Qty
	A	B	
18093	4.21	2.02	25

MORRIS

Fixture Supports

016