

LED T8 BYPASS SERIES

Work without ballast

Bypass Tube Description :

It is 2 foot all-plastic, shatterproof, light-weight LED T8 bypass tube 10W.

It can wire directly with 100-277V AC line voltage

It requires no ballast on the fixture.



Bypass Tube Feature :

Installation : Direct Wire(LED tube work without ballast)

Connection : One-End-Input or Two-End-Input

Tube Size : 2 foot (24 inch)

Power : 10 watts

LED Type : 2835

Tube housing : Plastic

Lens : Frosted/Clear

Illumination Angle : 310°

Led Driver : Internal

Dimming : non-dimmable

End Caps : G13 bi-pins


Lifespan : 50000 hours

Warranty : 5 Years


Certification : UL(E486821), DLC 4.2

Bypass Tube Installation :

1.One-End-Input : directly wire LED Tube in a fixture without ballast

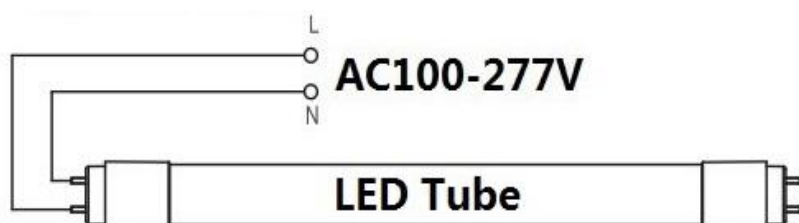

2.Two-End-Input : directly wire LED Tube in a fixture without ballast

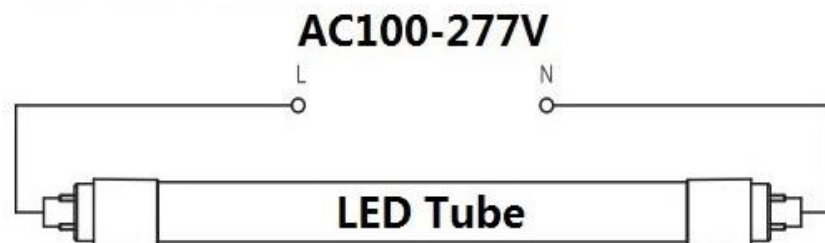

Bypass Tube Specification :

Model	CCT	Size	Watt	Lumen	End Cap	Connection	Input Voltage	PF	CRI
ORM-T8-2FT-10W-ID	5000K	2'	10W	1200	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-2FT-10W-ID	4000K	2'	10W	1200	G13	1 End 2 End	AC100-277V	≥0.9	≥80
ORM-T8-2FT-10W-ID	3000K	2'	10W	1200	G13	1 End 2 End	AC100-277V	≥0.9	≥80