




MORRIS CAT#: 71425C

LED Medium Classic WallPack 60W, 120-277V, 5000K Bronze

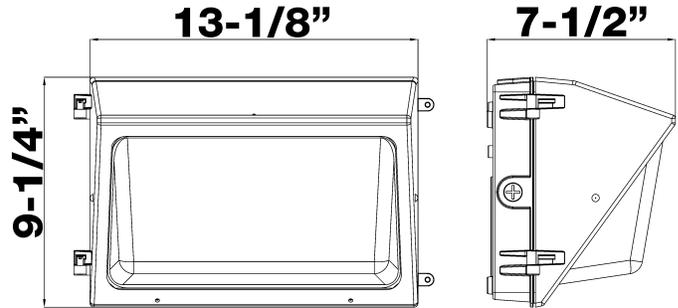


Features:

- Use in general lighting applications: Parking Lots & Building Security
- Die cast Aluminum Housing, polyester powder coating
- Aluminum Heat Sink, customized fin design for optimal heat dissipation
- Heat Resistant Directed Optics
- Polycarbonate Lens
- 4KV surge protector inside of power supply
- 5 Year Limited Warranty
- IP65 rated
- Certification: ETL/cETL
- Environment: Suitable for Wet Locations

Part#	Input/Wattage	Volts	Lumens	CCT	CRI	Dimming	Light Pattern	Lumens/Watt	DLC PRODUCT ID#:
71425C	60W	120-277	8,093	5000K	72	0-10V	Garage	135	PL83EVU4GX18

PHOTOMETRY

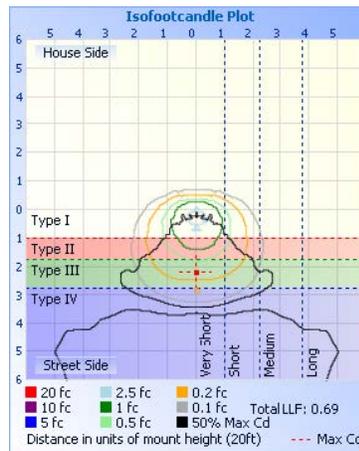



MORRIS CAT#: 71425C

LED Medium Classic WallPack 60W, 120-277V, 5000K Bronze

Technical Specifications:

Electrical:

Input Voltage: 120V-277V

Current: .33A@120V

Frequency: 50/60Hz

Power Factor: $\geq .9$

THD: 6%

Product Parameters:

Input Watts: 60W

Lumens: 8,093

Efficacy: 112 lumens per watt

50,000+ Hour L70 Life Span

CCT: 5000K (Cool White)

Chromaticity Measurements:

Beam Angle: 365° H X 256° V

BUG Rating: B1-U4-G5

CRI: 72

R9: -29

Component Specifications:

LED: Lumileds 3030

120-277V, 50-60Hz

Driver Output Volts: 50-70V

Driver Output Amps: 1200mA

4KV Surge Protection

Dimming: 0-10V

Operating Temperature:

Minimum Starting: -40°F to 131°F

Construction:

Housing: Aluminum Alloy

Powder Coated

IP Rating: IP65 suitable for wet locations

Lens Material: Heat Resistant Polycarbonate

Lens UV Resistant, Fire Resistant

Mounting: Hinged Spider Plate

Listings: ETL, DLC

Accessories:

Emergency Backup - CAT#: 71467B

LED Button Style Photocell - CAT#: 39100

LED Shutter Style Photocell - CAT#: 39102 LED

Pencil Style Photocell - CAT#: 39104

Semi-Cutoff Visor Bronze - CAT#: 71461B

Wire Guard - CAT#: 71460B

Warranty:

Morris Products carries a 5 year warranty from date of purchase against defects in materials and workmanship (assuming normal and proper usage).