

DATE: 9/12/2017

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00120980

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR: BASIC SUPPLY, LLC

BUYER: DMEVANS

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH	
INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES	<u>2-3 WEEKS</u>
INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK	_____
INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK	_____

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____
NUMBER: _____
NUMBER: _____
NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

*** ALL BIDDERS MUST COMPLETE SECTION BELOW ***	
FIRM NAME: BASIC SUPPLY, LLC	
SIGNATURE: (Must be signed here)	TITLE: MANAGER
PRINT OR TYPE NAME: JOHN ATKINSON	
ADDRESS: PO BOX 63066	
CITY, STATE: LAFAYETTE, LA	ZIP: 70596
TELEPHONE: () 337-769-0122	FAX: () 337-247-7699
EMAIL ADDRESS: charlotte@basicsupply.com	

TOTAL PRICE OF ALL BID ITEMS: \$ 1911.00

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00120980

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	6.00	EA	<p>ONE TIME PURCHASE OF LED LIGHTS</p> <p>0010 LED Canopy - 60 watt, 120-277 volt, 5000K 4998 Lumens dimmable 0-10V</p> <p>photoelectric motion sensor compatible IP65 rated, item number CDL2-60CW</p> <p>Tony F-CNPY-70WLED-LP-80</p>	97.00	582.00
2	6.00	EA	<p>0020 LED Non Cut-Off wall pack, 120W, Cool white 5000K, 7200 Lumens, dark</p> <p>Bronze, item number WML-120CW</p> <p>F-WP-70LED/50K-80</p>	109.00	654.00
3	3.00	EA	<p>0030 LED Flood Light I Pad Series 150W, Dark Bronze Aluminum Powder Coat finish 120-277 V Beam Angle 110 degree DIMMABLE 5000K, 16423 Lumens Knockout for Photocell or sensor, Manufacturer Warranty 7 years, Trunnion Mount item number LF3-150CW-TR</p> <p>F-ARL/150W/50K/TR-80</p>	225.00	675.00

LED Parking Lot/Area Lights - Trunnion Mount

SPEC SHEET



F-ARL/150W/50K/TR



F-ARL/300W/50K/TR



Outstanding Photometric Performance

Topaz's Area Lights feature uniform illumination, low-profile design, high efficacy, long lifespan, and easy installation. The one-piece die-cast aluminum housing with UV resistant powder coat finish offers outstanding corrosion protection. Ideal for use in various commercial environments such as auto dealerships, parking lots, walkways, roadways, campuses, façade lighting, grocery stores and other public areas.

FEATURES

- One piece die-cast aluminum housing with UV resistant polycarbonate optical lens
- Yoke/Trunnion mounting
- Suitable for mounting heights ranging from 18-36' in area lighting applications
- Silicone rubber gasket provides a weatherproof seal
- 0-10V Dimming

APPLICATIONS

- Parking lots
- Area lighting
- Illumination of areas of ingress
- Security lighting

LED Parking Lot/Area Lights - Trunnion Mount




SPEC SHEET

GENERAL SPECIFICATIONS

Voltage: 120-277V
Average Rated Life: 50,000 (L70)
CRI: >70
CCT: 5000K
NEMA Distribution: 7Hx7V
Lumens Per Watt (LPW):
 140 (300W), 133 (150W)
Ambient temp: -40°F to 113°F



EPA OF AREA LIGHT

Item							
	1	2 @90°	2 @120°	2@180°	3 @90°	3 @120°	4 @90°
150W	0.667	0.742	1.162	1.165	1.167	1.163	1.167
300W	0.847	0.996	1.629	1.634	1.636	1.632	1.636

SPECIFICATIONS / ORDER INFO

Item #	Order Code	UPC Code	Input Current Amps	Input Watts	Lumens	Equivalent Wattage*	DLC	Case Qty
F-ARL/150W/50K/TR	74474	751338018396	1.39-0.60	150	21,000	400W MH	Premium	1
F-ARL/300W/50K/TR	74475	751338018402	2.78-1.20	300	40,000	1,000W MH	Standard	1

NOMENCLATURE

Example: **F-ARL/150W/50K/TR**

F=Fixture / ARL=Area Light / 150W=150W / 50K=5000K / TR=Trunnion Mount

*Equivalent wattage dependent on fixture, reflectance and lumen maintenance of lamp

Specifications are subject to change without prior notice. This device complies with Part 15 of the FCC Rules. Operation is subject to the following two conditions: (1) this device may not cause harmful interference, and (2) this device must accept any interference received, including interference that may cause undesired operation.

FIVE (5) YEAR LIMITED WARRANTY: TOPAZ LIGHTING CORP. warrants to the original purchaser that all TOPAZ LED Outdoor Fixtures shall be free from defects of material and workmanship for a period of five (5) years from the date of purchase. TOPAZ LIGHTING CORP. will, at its option, repair or replace without charge a defective LED lamp that has not been misused, carelessly handled or improperly installed. Repair or replacement, as stated above, shall constitute the purchaser's exclusive warranty, which does not extend to transportation, installation, labor or any other consequential charges. www.topaz-usa.com





LED Outdoor Lighting

F-CNPY-45WLED-LP

Low Profile Canopy Light



- 0-10V Dimmable
- Die-Cast housing with UV resistant powder coat finish
- THD: <20%; Power Factor: >.9
- High impact polycarbonate diffuser
- Quick Mount installation, ceiling or pendant mount

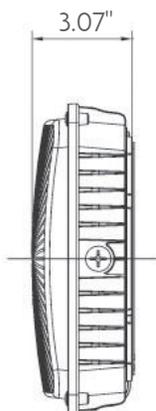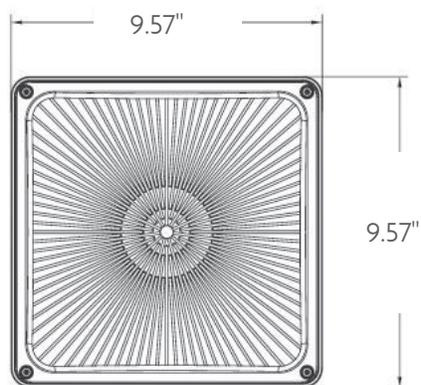

Item #	F-CNPY-45WLED-LP-80
Product Code	73464
UPC Code	751338001497
Input Power Watts	45
Input Current	520 mAmps
Volts	120-277V
Initial Lumens	4,200
Color Temp	5000K
CRI	>70
Average Rated Life	50,000 Hours (L70)
Operating Temperature	-25°C to 40°C
IES Type Distribution	VS
Equivalent Wattage	Up to 175W MH
Warranty	5 years

Specifications are subject to change without prior notice.



www.topaz-usa.com

NY Office: 925 Waverly Ave • Holtsville, NY 11742 • 800-666-2852 • Fax: 631-758-8026
CA Office: 225 Parkside Drive, San Fernando, CA 91340 • 888-551-2852 or 818-838-3123 • Fax: 888-690-2852 or 818-838-3102
FL Office: 2020 West 26th Street, Jacksonville, FL 32209 • 800-338-2852 • Fax: 772-778-5386

Job Name/Title: _____ Catalog Number _____
 Contractor: _____ Notes: _____

LED Outdoor Lighting

Semi-Cutoff Wall Pack with Photocell

Features

- Die-cast housing with UV resistant powder coat finish
- Bronze finish
- Polycarbonate lens with UV stabilizers
- -40°C to 45°C ambient rating
- Photocell 120-277VAC


Specs

- 120-277V
- 116 LPW (Lumens per watt)
- THD%: <20%
- Power Factor: 0.9
- Input Current Amps:
585mA @ 120V
260mA @ 277V
- 70 CRI
- 50,000 Average rated life
- Type IV IES Distribution



Applications

- Parking lots, area lighting, illumination of areas of egress, security lighting

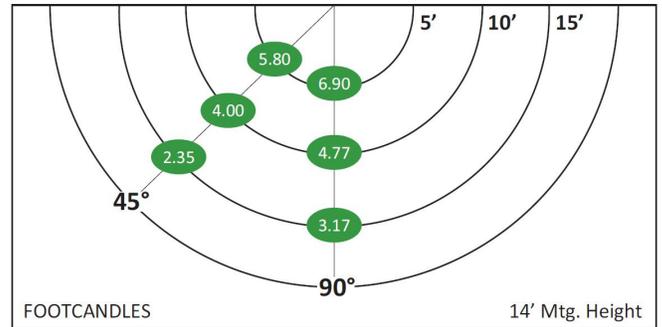

WALL PACK FOOTCANDLES ON THE GROUND							
Mtg. Hgt.	90°			45°			Avg. FCs 450 sq.ft.
	5'	10'	15'	5'	10'	15'	
14'	6.90	4.77	3.17	5.80	4.00	2.35	4.50
18'	4.20	3.60	2.57	3.75	2.88	2.00	3.17



Catalog Number	Product Code	UPC Code	Color Temp	Input Power Watts	Lumens	MH Equiv.*	Case Qty
F-WP-70LED/50K-80	74483	751338015623	5000K	70	8,100	250W	1

Specifications are subject to change without prior notice.

*Equivalent wattage shown depends on application and fixture