



The Ford Meter Box Company, Inc.

775 Manchester Avenue • P.O. Box 443, Wabash, Indiana U.S.A. 46992-0433
Phone: 260-563-3171 • Fax: 800-826-3487 • Overseas Fax: 260-563-0167 • www.fordmeterbox.com

August 14, 2013

NO-LEAD BRASS CERTIFICATION

This is to certify that *no-lead brass* curb stops, corporation stops, service line valves and fittings, and *other no-lead brass products*, as manufactured by The Ford Meter Box Company, Inc., Wabash, Indiana, with a “-NL” designation at the end of the catalog number shall contain no more than 0.09% lead by weight. The brass alloy used for all surfaces coming in contact with potable water shall meet the requirements of UNS/CDA number C89833 as listed in ANSI/AWWA C800 Standard and the products produced with this alloy shall meet the ANSI/NSF Standard 61 and/or ANSI NSF Standard 372 as applicable, complying with the Safe Drinking Water Act.

The material composition of UNS/CDA number C89833 shall be 86.0 - 91.0% Copper, 4.0 - 6.0% Tin, 0.09% max Lead, 2.0 - 6.0% Zinc and 1.7 - 2.7% Bismuth.

These products shall have the letters “NL” cast into the main body for proper identification.

Brass components that do not come in contact with potable water shall meet the requirements of AWWA C800, ASTM B62 and ASTM B584, using UNS/CDA number C83600.

Brass components, such as Pack joint, Grip joint and Quick Joint nut compression fittings, including but not limited to, Yoke Lock nut, Meter Swivel nut and Flare Copper nut and Union nuts, such as CSUN-3, or some adapters, including A12S, A12M, A12L and A34S (now cast only in red brass) that do not come in contact with potable water are not required to comply with the no-lead standard and shall meet the requirements of ASTM B62 and ASTM B584, using UNS/CDA number C83600. Brass saddles (in most states) are exempt from the no lead requirements.

Parties responsible for monitoring and maintaining proper water system design must exercise full responsibility in understanding and upholding the full intent and scope of applicable lead laws.

In addition, all brass goods designed to hold internal water pressure shall be individually tested by the manufacturer as an integral part of the production process to ensure that they meet the pressure requirements established by AWWA Standard C800. This requirement shall apply to each individual product; "batch" testing is not allowed.

THE FORD METER BOX COMPANY, INC.

Todd Hodson
Marketing Manager



CERTIFICATE



This is to certify that

The Ford Meter Box Co., Inc.

775 Manchester Avenue
Wabash, IN 46992
United States of America
Reference No. 10002505

815 Miles Parkway
Pell City, AL 35125
United States of America
Reference No. 10004466

has implemented and maintains a **Quality Management System**.

Scope:

The design and manufacture of waterworks valves, fittings, meter setting devices and water main installation and repair products.

Through an audit, documented in a report, it was verified that the management system fulfills the requirements of the following standard:

ISO 9001 : 2008

| | |
|--------------------------------|---------------|
| Certificate registration no. | 10002505 QM08 |
| Date of original certification | 1996-10-04 |
| Date of certification | 2014-08-30 |
| Valid until | 2017-08-29 |



UL DQS Inc.


Ganesh Rao
Managing Director



Accredited Body: UL DQS Inc., 1130 West Lake Cook Road, Suite 340, Buffalo Grove, IL 60089 USA

SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B11-xxx-NL style)



FEMALE IRON PIPE THREAD INLET BY FEMALE IRON PIPE THREAD OUTLET

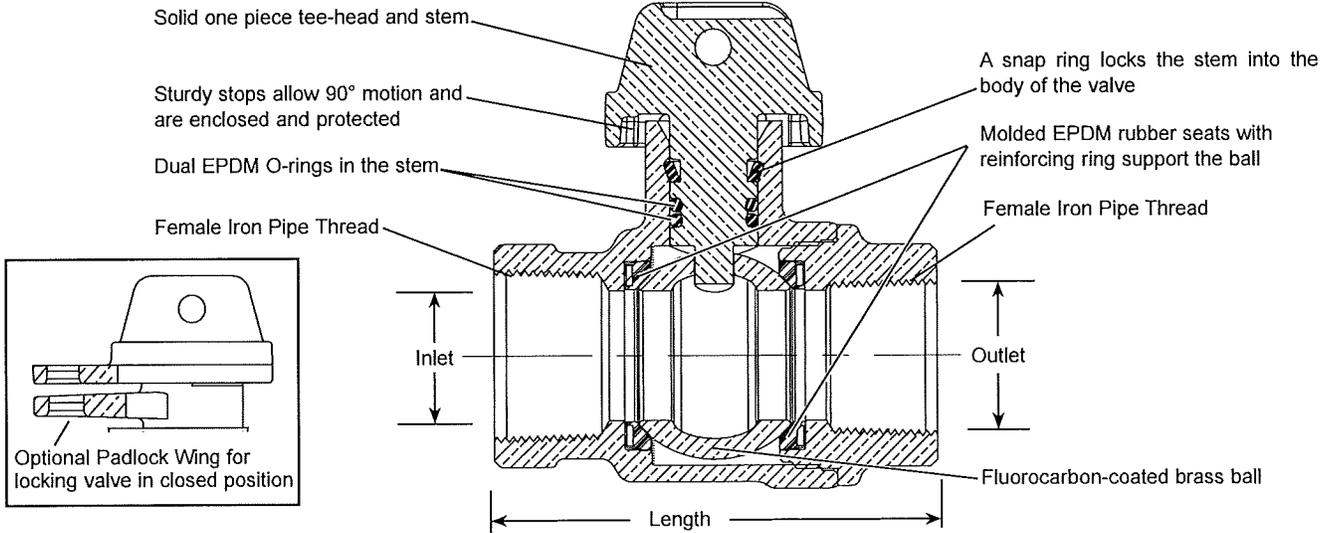


Image shown above is a B11-444-NL

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|------------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-1/64" | 1.5 | B11-333-NL | |
| 3/4" | 3/4" | 3/4" | 3-21/64" | 1.7 | B11-333W-3-33-NL | |
| 3/4" | 1" | 3/4" | 3-17/64" | 1.6 | B11-343-NL | |
| 3/4" | 1" | 1" | 3-25/64" | 1.6 | B11-344-NL | |
| 1" | 1" | 1" | 3-7/16" | 2.0 | B11-444-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 4-1/32" | 4.2 | B11-555-NL | |
| 1-1/4" | 1-1/2" | 1-1/2" | 4-11/32" | 4.4 | B11-566-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 4-15/32" | 4.8 | B11-666-NL | |
| 1-1/2" | 2" | 1-1/2" | 4-23/32" | 5.0 | B11-676-NL | |
| 1-1/2" | 2" | 2" | 5" | 8.0 | B11-677-NL | |
| 2" | 2" | 2" | 5-1/4" | 7.2 | B11-777-NL | |
| 2" | 2" | 2-1/2" | 5-45/64" | 7.6 | B11-778-NL | |
| 2" | 2-1/2" | 2-1/2" | 6-1/4" | 11.1 | B11-788-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Hole for attaching curb box rod or handle is provided in tee-head
- 300 PSI working pressure

Optional Padlock Wing for locking valve in closed position. Add "W" to part number
Optional full 360° tee-head rotation. Add "R" to part number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

01/27/17

Submitted By:

SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B41-xxx-NL style)



PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY FEMALE IRON PIPE THREAD OUTLET

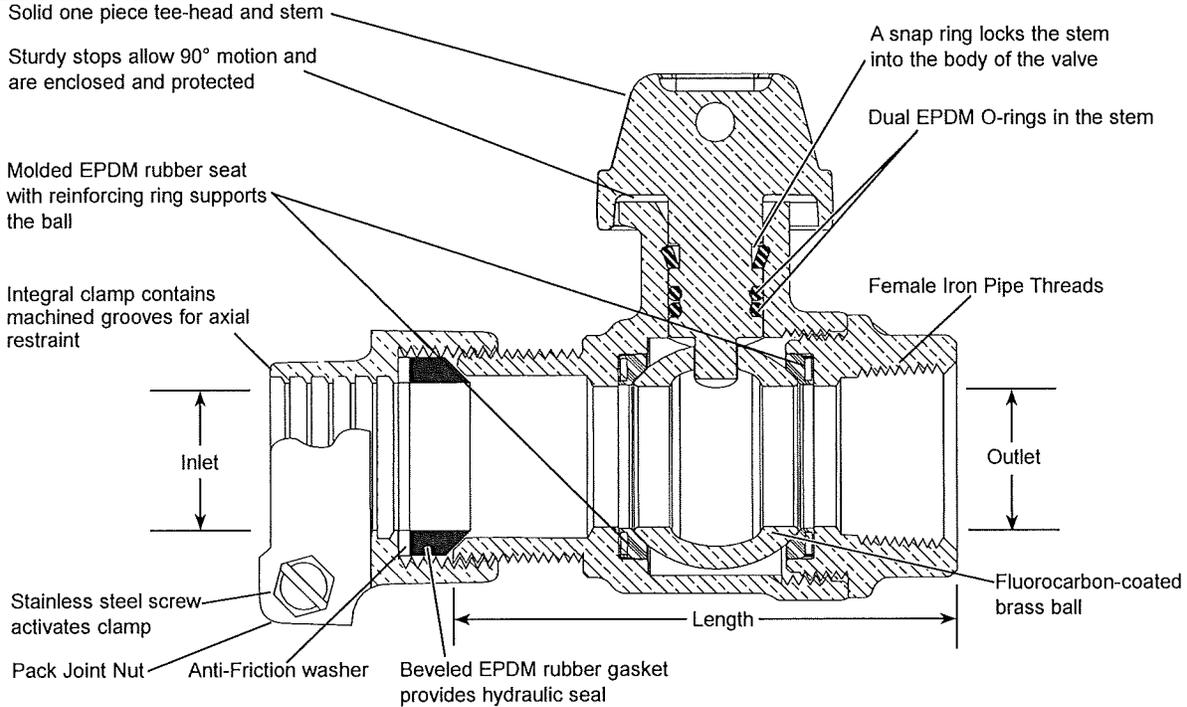


Image shown above is a B41-444-NL.

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-1/8" | 1.7 | B41-333-NL | |
| 3/4" | 3/4" | 1" | 3-25/64" | 1.8 | B41-334-NL | |
| 3/4" | 1" | 3/4" | 3-3/4" | 2.0 | B41-343-NL | |
| 3/4" | 1" | 1" | 3-7/8" | 2.4 | B41-344-NL | |
| 1" | 1" | 1" | 3-19/32" | 2.3 | B41-444-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 5-3/16" | 5.0 | B41-555-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 5-5/64" | 6.0 | B41-666-NL | |
| 2" | 2" | 2" | 6" | 9.0 | B41-777-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Hole for attaching curb box rod or handle is provided in tee-head
- 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

11/06/15


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Tee - (T440-xxx-NL style)



PACK JOINT FOR CTS TO PACK JOINT FOR CTS BY FEMALE AWWA TAPER THREAD SIDE OUTLET

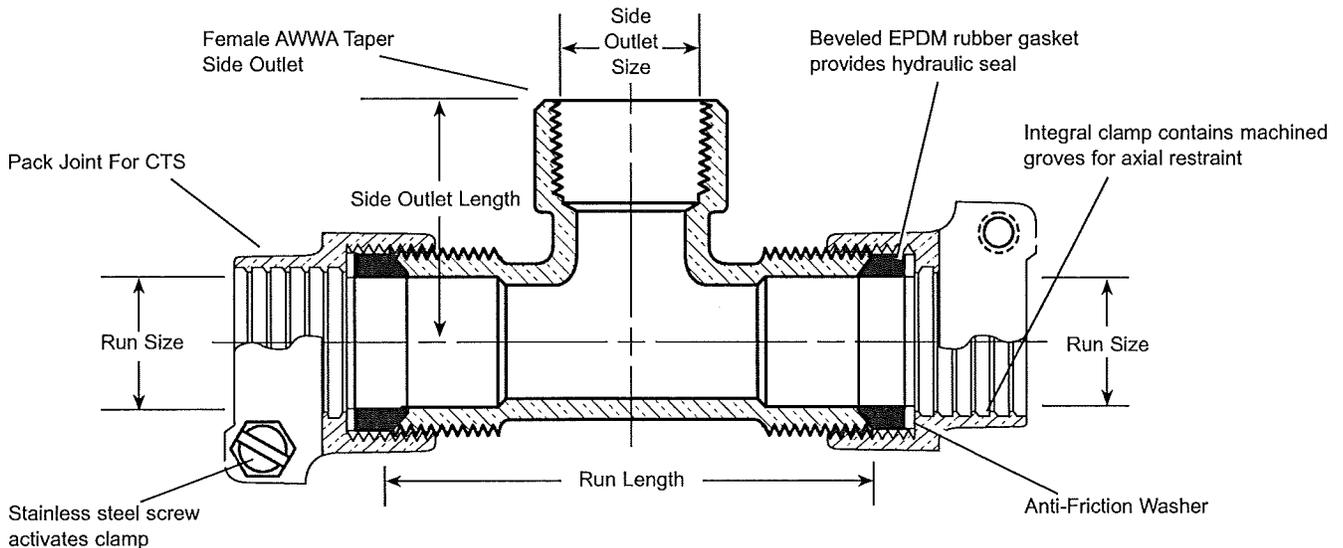

| BOTH ENDS (RUN SIZE) | SIDE OUTLET SIZE | RUN LENGTH | SIDE OUTLET LENGTH | APPROX Wt. LBS. | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------------|------------------|------------|--------------------|-----------------|-------------|---------------------|
| 1-1/2" | 3/4" | 4" | 1-11/16" | 3.2 | T440-663-NL | |
| 1-1/2" | 1" | 4" | 1-11/16" | 3.2 | T440-664-NL | |
| 2" | 3/4" | 4" | 2-3/8" | 4.6 | T440-773-NL | |
| 2" | 1" | 4" | 2-3/8" | 4.6 | T440-774-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/17/16


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Tee - (T441-xxx-NL style)



PACK JOINT FOR CTS TO PACK JOINT FOR CTS BY FEMALE IRON PIPE SIDE OUTLET

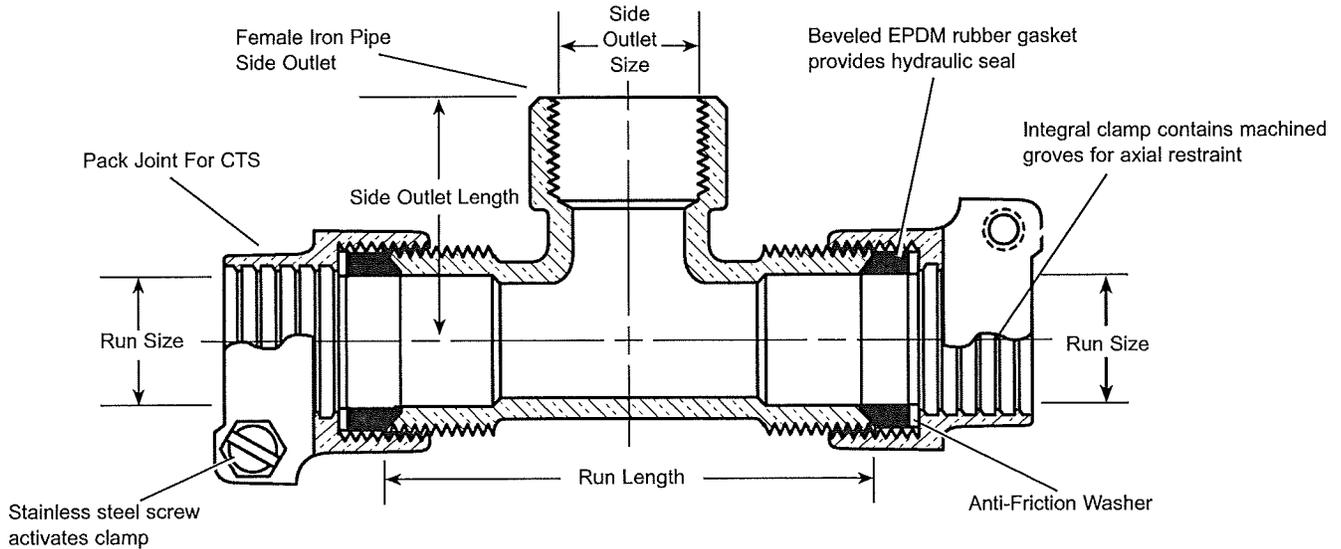

| BOTH ENDS (RUN SIZE) | SIDE OUTLET SIZE | RUN LENGTH | SIDE OUTLET LENGTH | APPROX Wt. LBS. | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------------|------------------|------------|--------------------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3-5/16" | 1-5/8" | 1.3 | T441-333-NL | |
| 3/4" | 1" | 3-5/8" | 1-7/8" | 1.4 | T441-334-NL | |
| 1" | 1" | 3-3/4" | 1-7/8" | 1.6 | T441-444-NL | |
| 1-1/2" | 3/4" | 4" | 1-11/16" | 3.3 | T441-663-NL | |
| 1-1/2" | 1" | 4" | 1-11/16" | 3.2 | T441-664-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/17/16


Submitted By:

SUBMITTAL INFORMATION

Straight Ball Meter Valves - (B43-xxxW-NL style)

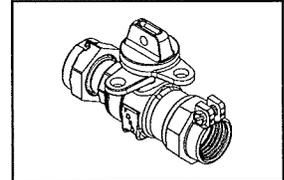

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER SWIVEL NUT OUTLET

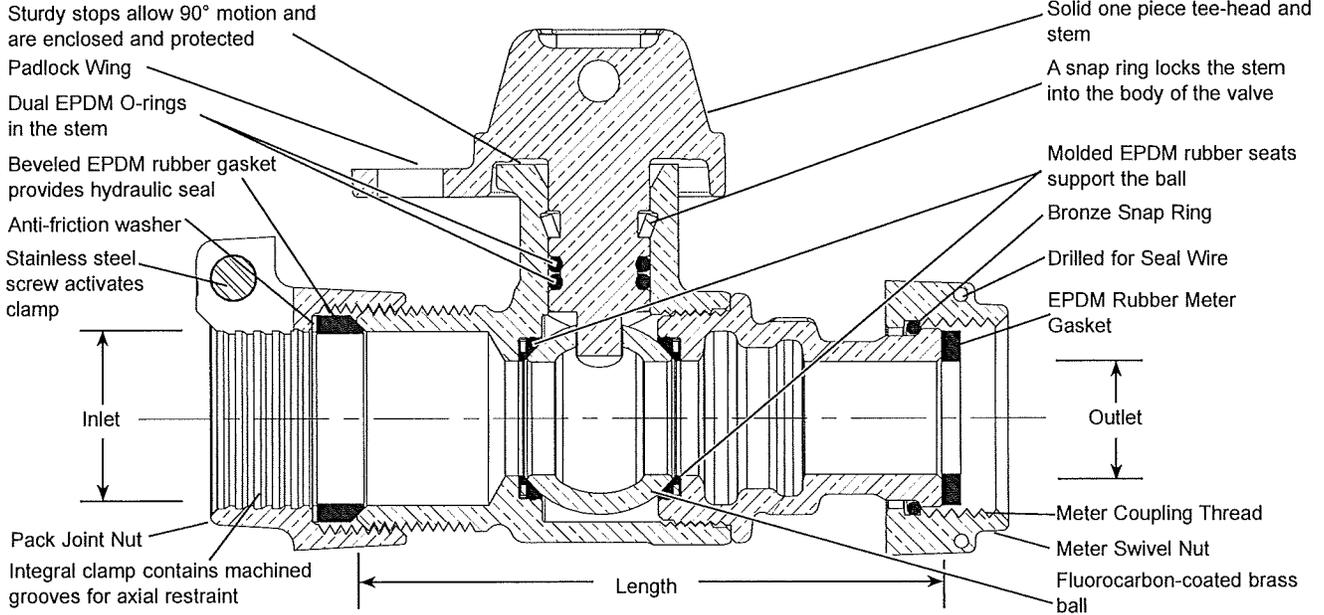

| VALVE SIZE | SERVICE LINE SIZE INLET | METER SIZE OUTLET | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|-------------------------|--------------------|----------|-----------------|-------------|---------------------|
| 5/8" | 5/8" | 5/8"x3/4" & 3/4" | 3-7/32" | 1.5 | B43-222W-NL | |
| 5/8" | 3/4" | 5/8" | 3-1/4" | 1.5 | B43-231W-NL | |
| 5/8" | 3/4" | 5/8"x3/4" & 3/4" | 3-1/4" | 1.6 | B43-232W-NL | |
| 3/4" | 3/4" | 5/8" | 4-1/32" | 2.1 | B43-331W-NL | |
| 3/4" | 3/4" | 5/8" x 3/4" & 3/4" | 3-57/64" | 2.2 | B43-332W-NL | |
| 3/4" | 3/4" | 1" | 3-37/64" | 2.3 | B43-334W-NL | |
| 3/4" | 1" | 5/8" x 3/4" & 3/4" | 3-29/32" | 2.3 | B43-342W-NL | |
| 3/4" | 1" | 1" | 3-39/64" | 2.4 | B43-344W-NL | |
| 1" | 1" | 1" | 4-35/64" | 2.9 | B43-444W-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Padlock Wing for locking valve in closed position
- Hole for attaching handle is provided in the tee-head
- 300 PSI working pressure

Optional Full 360° tee-head rotation. Add "R" to part number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

08/12/15


Submitted By:

SUBMITTAL INFORMATION

Ball Valve Curb Stop - (B44-xxx-NL style)

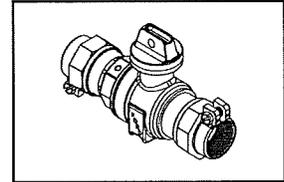

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET AND OUTLET

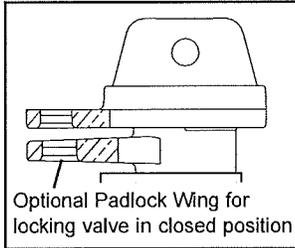

Optional Padlock Wing for locking valve in closed position

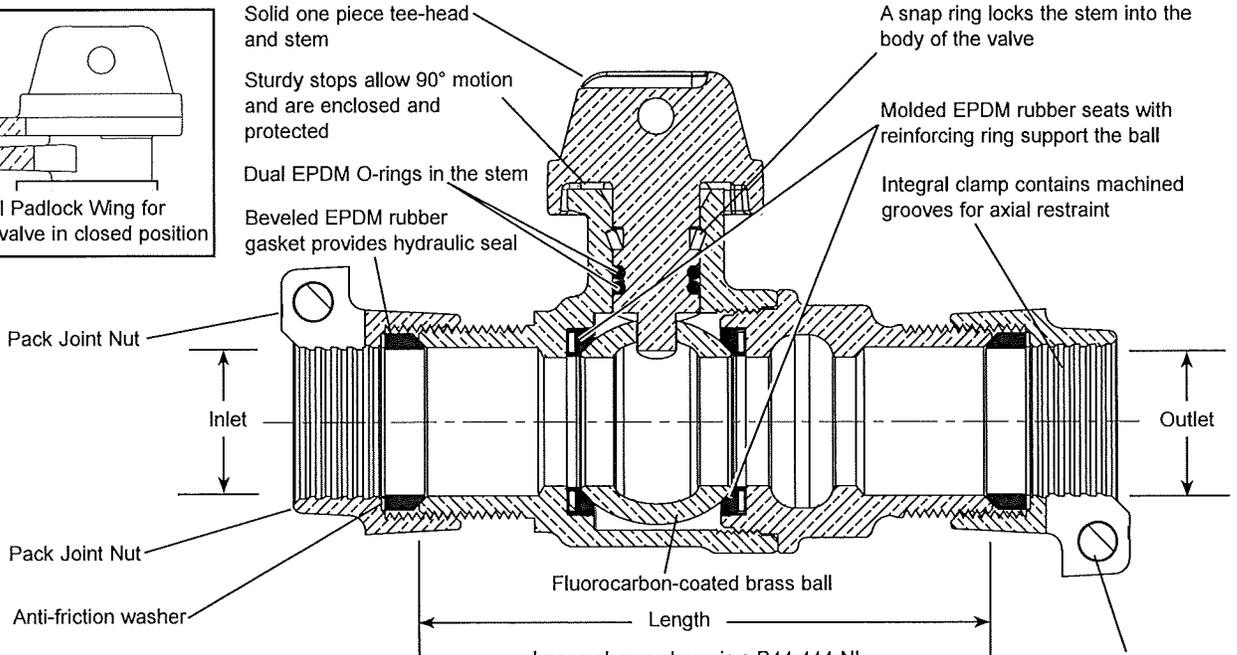


Image shown above is a B44-444-NL

| VALVE SIZE | INLET SIZE | OUTLET SIZE | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|----------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-45/64" | 2.1 | B44-333-NL | |
| 1" | 1" | 1" | 4-1/2" | 2.8 | B44-444-NL | |
| 1" | 1-1/4" | 1-1/4" | 5-9/64" | 4.0 | B44-455-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 6-21/64" | 6.0 | B44-555-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 5-45/64" | 7.3 | B44-666-NL | |
| 1-1/2" | 2" | 2" | 5-61/64" | 8.8 | B44-677-NL | |
| 2" | 2" | 2" | 6-47/64" | 11.5 | B44-777-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Hole for attaching curb box rod or handle is provided in tee-head
- 300 PSI working pressure

Optional Padlock Wing for locking valve in closed position. Insert "W" into part number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com


08/25/16

Submitted By:


Blank space for signature or name.

SUBMITTAL INFORMATION

Straight Ball Flange Meter Valves - (BF43-xxxW-NL style)

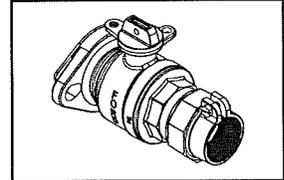

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER FLANGE OUTLET

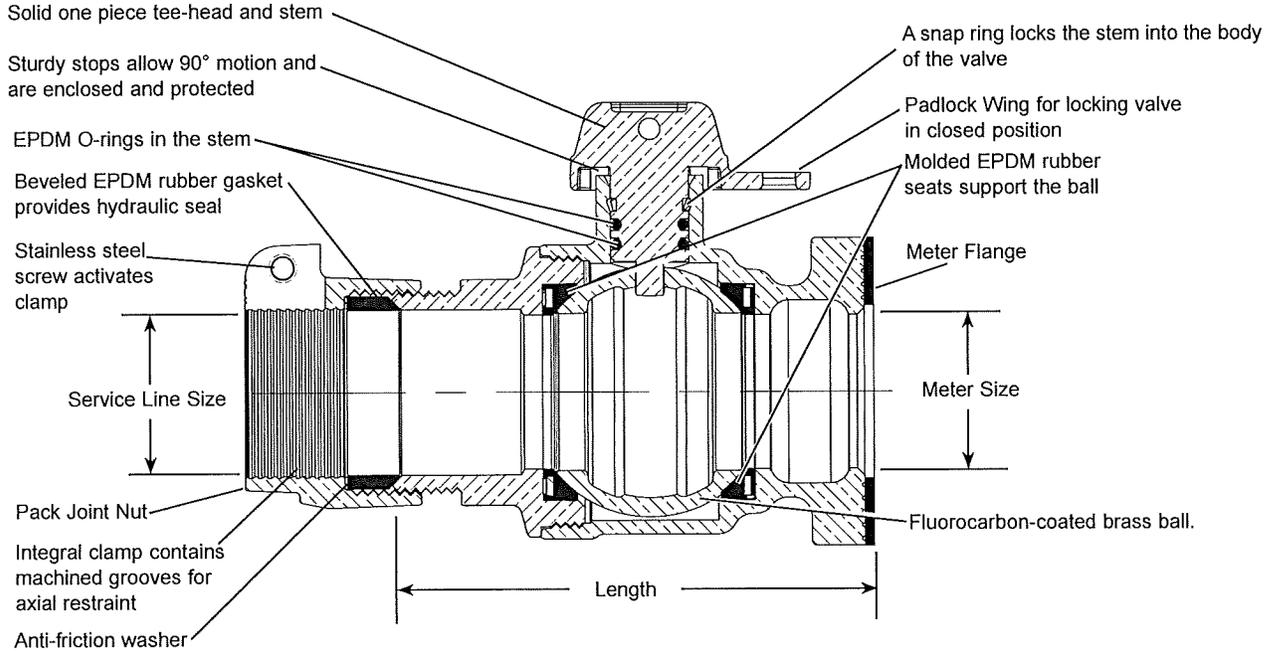

| VALVE SIZE | SERVICE LINE SIZE | METER SIZE | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|-------------------|---------------|----------|-----------------|--------------|---------------------|
| 1-1/2" | 1-1/2" | 1-1/2" | 5-23/64" | 8.0 | BF43-666W-NL | |
| 1-1/2" | 2" | 1-1/2" | 5-31/64" | 8.5 | BF43-676W-NL | |
| 2" | 2" | 1-1/2" and 2" | 6-13/64" | 10.9 | BF43-777W-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Valve is non-directional and is watertight with flow in either direction
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- Padlock wing for locking valve in closed position
- Hole for attaching handle is provided in the tee-head
- 300 PSI working pressure
- Furnished with flat EPDM drop-in meter gasket
- Slotted holes are standard on 2" Flanged Meter Valves, allowing 1-1/2" Flange Meter connection

Optional full 360° tee-head rotation. Add "R" to end of part number.

Optional Meter Support Brackets. Add "- MSB" to end of part number.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

09/25/15


Submitted By:

SUBMITTAL INFORMATION

Angle Ball Flange Meter Valves - (BFA43-xxxW-NL style)



PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER FLANGE OUTLET

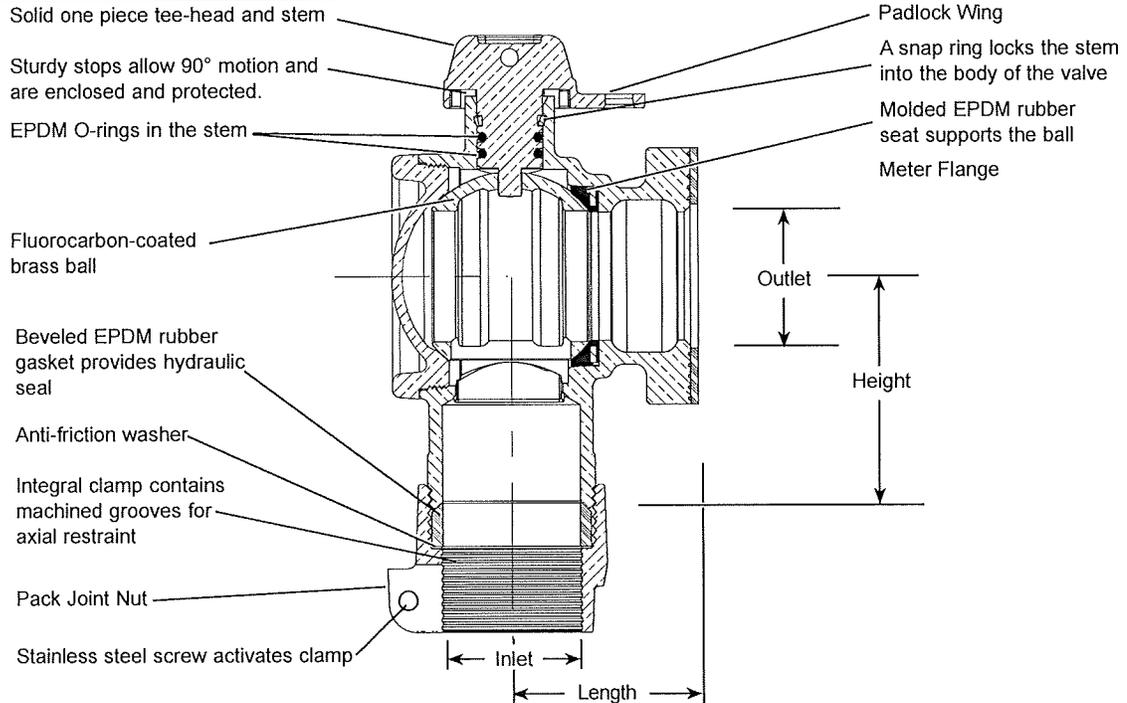

| VALVE SIZE | SERVICE LINE SIZE INLET | METER SIZE OUTLET | LENGTH | HEIGHT | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|-------------------------|-------------------|----------|----------|-----------------|---------------|---------------------|
| 1-1/2" | 1-1/2" | 1-1/2" | 2-1/2" | 3-13/32" | 7.8 | BFA43-666W-NL | |
| 2" | 2" | 2" | 2-13/16" | 3-5/8" | 10.8 | BFA43-777W-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS No. C89833)
 - The product has the letters "NL" cast into the main body for lead-free identification
 - Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
 - Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS No. C83600, 85-5-5-5)
 - Padlock Wing for locking valve in closed position
 - Hole for attaching handle is provided in the tee head
 - 300 PSI working pressure
 - Includes EPDM drop-in style meter gasket
 - Suitable for customer side shut off (outlet side of meter) up to 300 PSI
 - Slotted holes are standard on 2" Flanged Meter Valves, allowing 1-1/2" Flange Meter connection
- Optional:** Full 360° tee head rotation. Insert "R" into the part number. Example: BFA43-777WR-NL
 Meter support brackets. Insert "-MSB" into the part number
 Example: BFA43-777W-MSB-NL

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

03/28/14


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Coupling - (C14-xx-NL style)

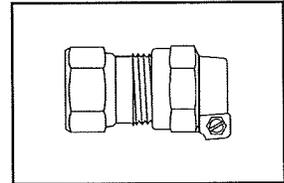

FEMALE IRON PIPE THREAD BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

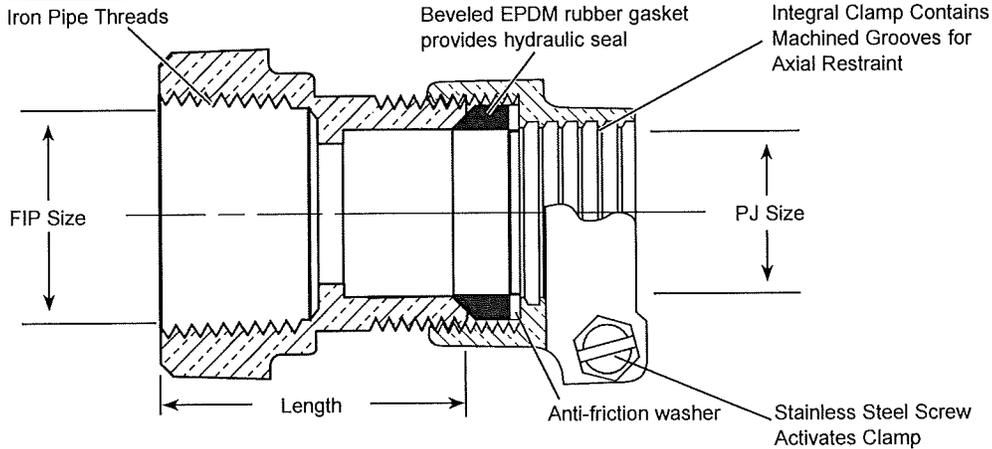

| DESCRIPTION | | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|--------------|----------|-----------------|-------------------|---------------------|
| FEMALE IRON PIPE | P.J. FOR CTS | | | | |
| 1/2" | 1/2" | 1-9/16" | 0.4 | C14-11-NL | |
| 1/2" | 3/4" | 1-5/16" | 0.5 | C14-13-NL | |
| 3/4" | 1/2" | 1-3/4" | 0.6 | C14-31-NL | |
| 3/4" | 3/4" | 1-5/16" | 0.6 | C14-33-NL | |
| 3/4" | 1" | 1-3/4" | 0.7 | C14-34-NL | |
| 3/4" | 1-1/4" | 1-7/8" | 1.3 | C14-35-NL | |
| 1" | 3/4" | 1-13/16" | 0.7 | C14-43-NL | |
| 1" | 1" | 1-7/8" | 0.9 | C14-44-NL | |
| 1" | 1-1/4" | 1-13/16" | 1.1 | C14-45-NL | |
| 1-1/4" | 1" | 1-13/16" | 0.9 | PJA4-44-C14-54-NL | |
| 1-1/4" | 1-1/4" | 1-15/16" | 1.4 | PJA4-45-C14-55-NL | |
| 1-1/4" | 1-1/2" | 2-1/8" | 1.7 | PJA4-46-C14-56-NL | |
| 1-1/2" | 1-1/2" | 2-7/16" | 2.3 | C14-66-NL | |
| 1-1/2" | 2" | 2-1/2" | 2.6 | C14-67-NL | |
| 2" | 1-1/2" | 3-1/4" | 2.5 | C14-76-NL | |
| 2" | 2" | 2-1/4" | 2.8 | C14-77-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Sleeve design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com


12/12/14

Submitted By:


Blank space for signature or name.

SUBMITTAL INFORMATION

Pack Joint Coupling - (C24-xx-NL style)



FLARE COPPER BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

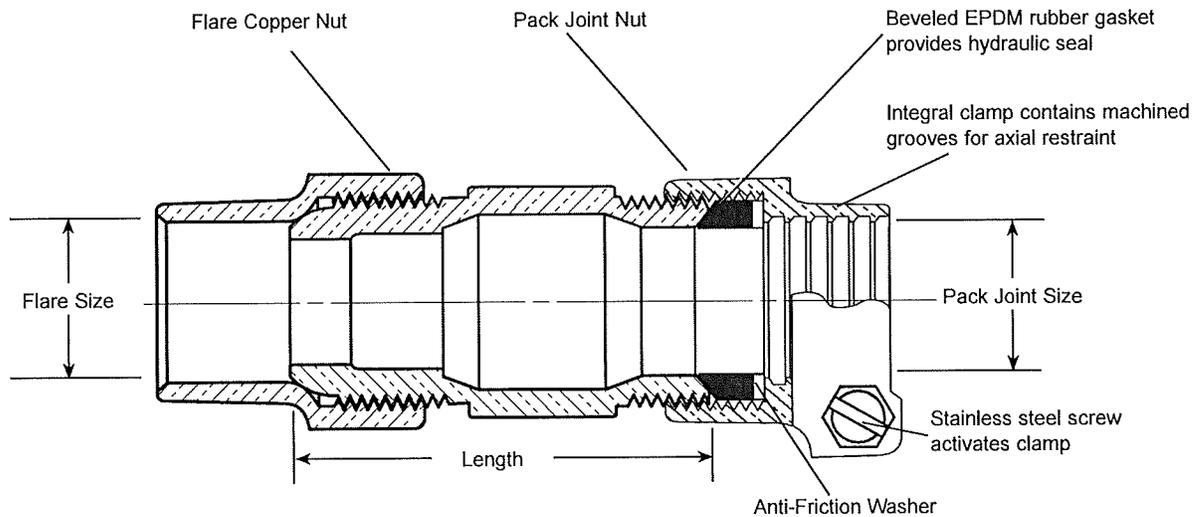

| DESCRIPTION | | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------|--------------|----------|-----------------|-------------|---------------------|
| FLARE COPPER | P.J. FOR CTS | | | | |
| 1/2" | 3/4" | 1-5/16" | 0.8 | C24-13-NL | |
| 3/4" | 3/4" | 2-1/2" | 1.0 | C24-33-NL | |
| 3/4" | 1" | 2-7/16" | 1.1 | C24-34-NL | |
| 1" | 1" | 2-13/16" | 1.8 | C24-44-NL | |
| 1" | 1-1/4" | 2-5/8" | 1.9 | C24-45-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Sleeve design provides larger, more rugged wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.


P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/13/16


Submitted By:

SUBMITTAL INFORMATION

Straight Meter Coupling - (C31-xx-NL style)

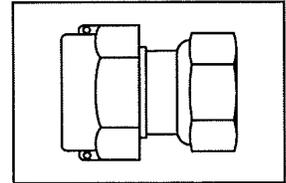

METER SWIVEL NUT BY FEMALE IRON PIPE THREAD

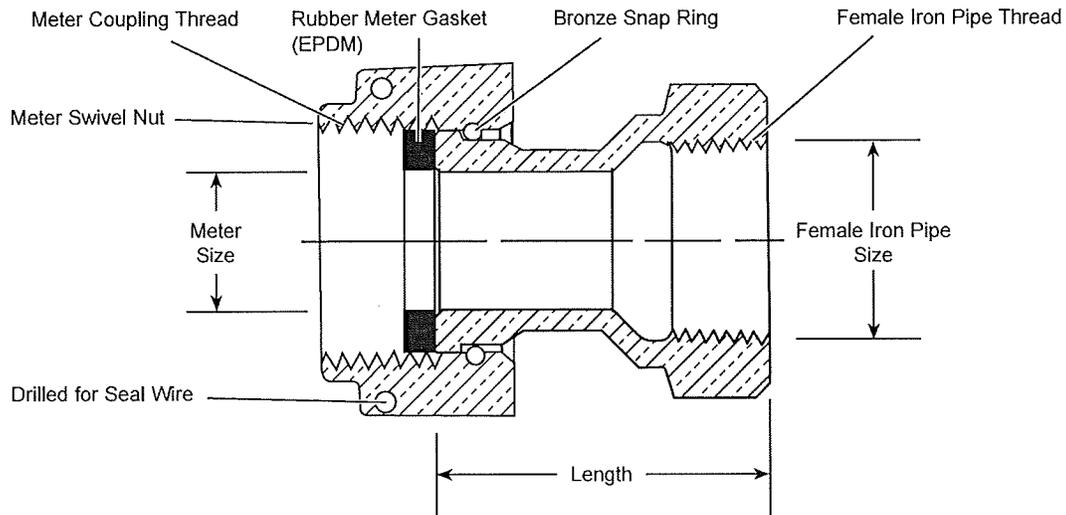

| METER SIZE | FIP SIZE | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------------|----------|----------|-----------------|-------------|---------------------|
| 5/8" | 3/4" | 1-15/16" | .6 | ▼ C31-13-NL | |
| 5/8"x3/4" AND 3/4" | 3/4" | 1-25/32" | .7 | ▼ C31-23-NL | |
| 5/8"x3/4" AND 3/4" | 1" | 1-15/16" | .8 | ▼ C31-24-NL | |
| 1" | 1" | 2-5/16" | 1.1 | ▼ C31-44-NL | |
| 1" | 1-1/4" | 2-5/16" | 1.1 | C31-45-NL | |

▼ Approved to ANSI/NSF Standard 61-2007a.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS C89833)
- The product has the letters "NL" cast into the body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B584, UNS C893600-85-5-5-5)
- Body design provides wrench flats to facilitate installation
- Conforms to AWWA C700 for Meter Threads

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

02/28/13


Submitted By:

SUBMITTAL INFORMATION

Straight Meter Coupling - (C34-xx-NL style)

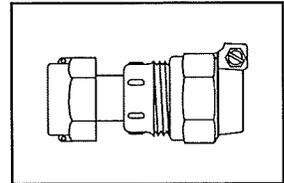

METER SWIVEL NUT BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

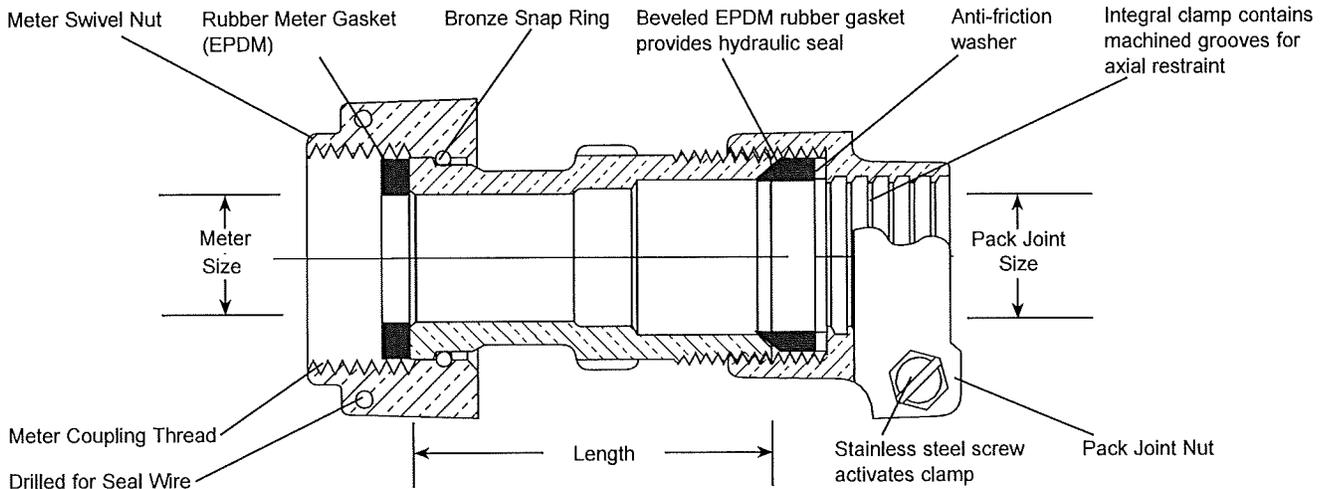

| METER SIZE | PACK JOINT SIZE | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------------|-----------------|---------|-----------------|-------------|---------------------|
| 5/8" | 1/2" | 2-3/16" | 0.8 | C34-11-NL | |
| 5/8" | 3/4" | 2-1/16" | 0.8 | C34-13-NL | |
| 5/8"x3/4" AND 3/4" | 1/2" | 2-1/2" | 0.9 | C34-21-NL | |
| 5/8"x3/4" AND 3/4" | 5/8" | 2-3/16" | 0.9 | C34-22-NL | |
| 5/8"x3/4" AND 3/4" | 3/4" | 2-3/16" | 0.8 | C34-23-NL | |
| 5/8"x3/4" AND 3/4" | 1" | 2" | 0.8 | C34-24-NL | |
| 1" | 1" | 2-1/2" | 1.2 | C34-44-NL | |
| 1" | 1-1/4" | 2-3/4" | 1.7 | C34-45-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Body design provides wrench lugs to facilitate installation
- Conforms to AWWA C700 for meter threads

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/20/16


Submitted By:

SUBMITTAL INFORMATION

Straight Meter Coupling - (C38-xx-xx-NL style C)

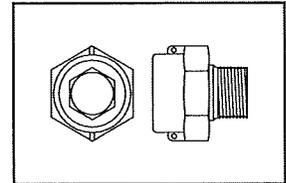

METER SWIVEL NUT BY MALE IRON PIPE THREAD

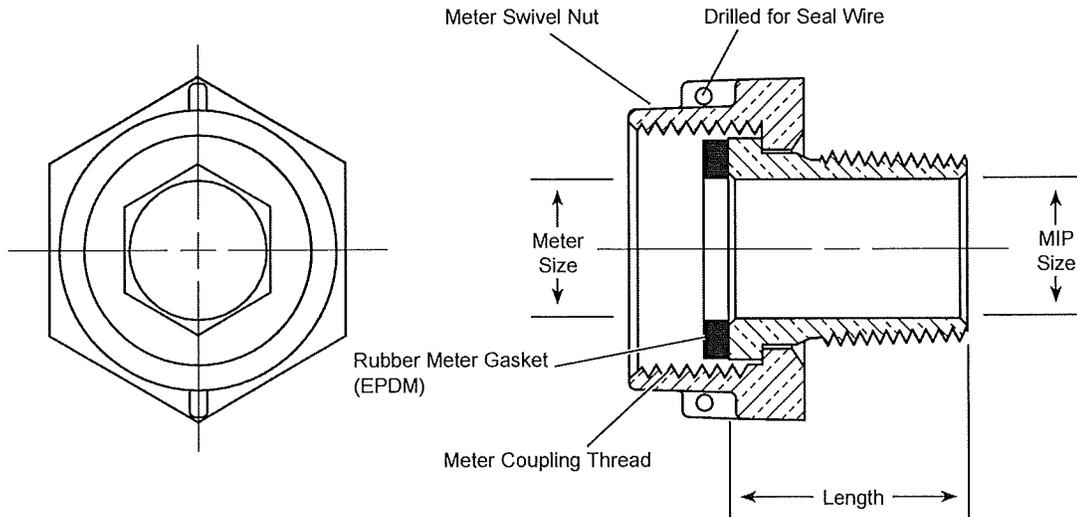

| METER SIZE | MIP SIZE | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|----------|---------|-----------------|-----------------|---------------------|
| 5/8"x3/4" & 3/4" | 1/2" | 1-5/8" | 0.5 | C38-21-1-625-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-7/16" | 0.4 | C38-23-1-437-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-1/2" | 0.4 | C38-23-1-5-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-5/8" | 0.4 | C38-23-1-625-NL | |
| 1" | 1" | 1-1/2" | 0.6 | C38-44-1-5-NL | |
| 1" | 1" | 2" | 0.7 | C38-44-2-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Style "C" Coupling is short body style with inside wrench hex
- Slip-on Meter Swivel Nut
- Conforms to AWWA C700 for Meter Threads

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

02/18/15


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Coupling - (C44-xx-NL style)

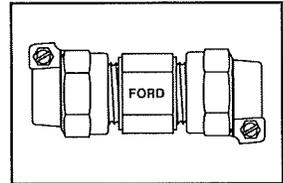

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS

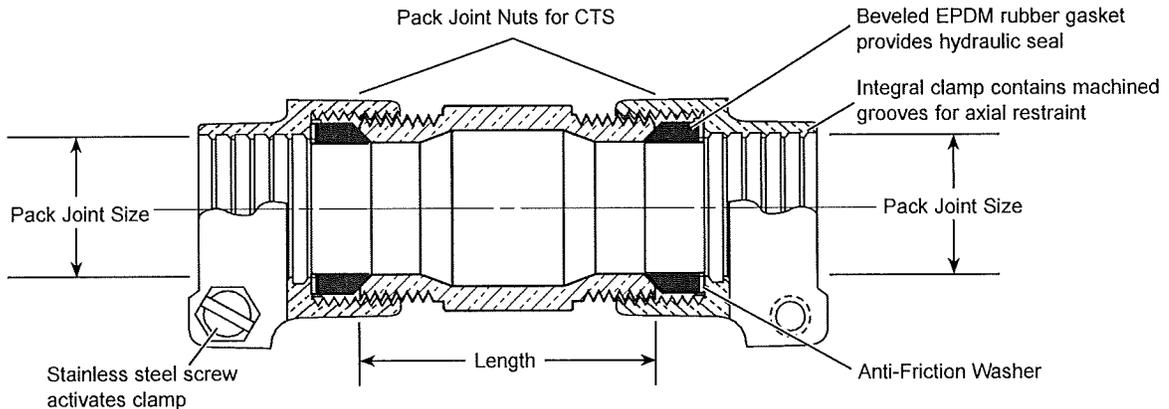

| DESCRIPTION | | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------|--------------|----------|-----------------|-------------|---------------------|
| P.J. FOR CTS | P.J. FOR CTS | | | | |
| 1/2" | 1/2" | 1-7/8" | .8 | C44-11-NL | |
| 1/2" | 5/8" | 2" | .9 | C44-12-NL | |
| 1/2" | 3/4" | 2" | .8 | C44-13-NL | |
| 1/2" | 1" | 2-5/16" | 1.0 | C44-14-NL | |
| 5/8" | 5/8" | 2-3/32" | 1.0 | C44-22-NL | |
| 5/8" | 3/4" | 2-3/32" | .9 | C44-23-NL | |
| 5/8" | 1" | 2-1/8" | 1.0 | C44-24-NL | |
| 3/4" | 3/4" | 2-3/32" | .9 | C44-33-NL | |
| 3/4" | 1" | 2-1/8" | 1.0 | C44-34-NL | |
| 1" | 1" | 2-1/4" | 1.1 | C44-44-NL | |
| 1" | 1-1/4" | 1-15/16" | 1.4 | C44-45-NL | |
| 1" | 1-1/2" | 2-5/8" | 2.1 | C44-46-NL | |
| 1-1/4" | 1-1/4" | 2-1/2" | 2.1 | C44-55-NL | |
| 1-1/4" | 1-1/2" | 3-1/4" | 2.8 | C44-56-NL | |
| 1-1/2" | 1-1/2" | 3-3/8" | 3.1 | C44-66-NL | |
| 1-1/2" | 2" | 2-15/32" | 3.6 | C44-67-NL | |
| 2" | 2" | 3-1/2" | 4.5 | C44-77-NL | |
| 2-1/2" | 2-1/2" | 4" | 7.1 | C44-88-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Sleeve design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

06/20/17


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Coupling - (C45-xx-NL style)

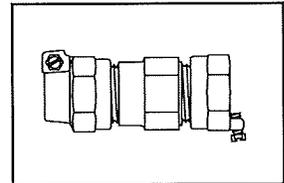

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) BY PACK JOINT FOR IRON PIPE

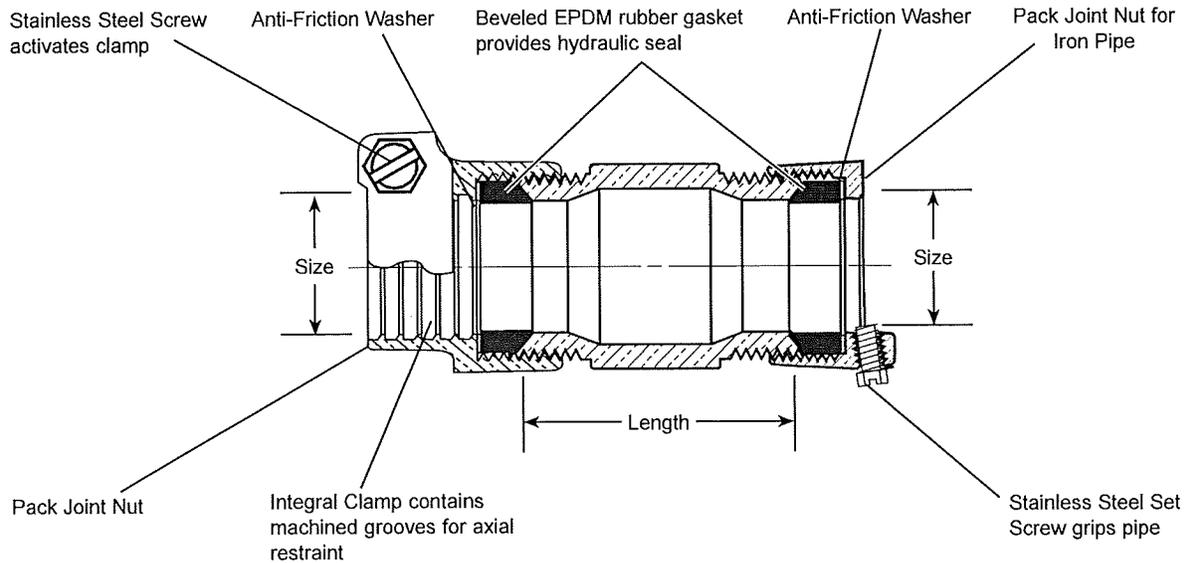

| DESCRIPTION | | LENGTH | APPROX WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------|-------------|----------|-------------------|----------------|------------------------|
| P.J. FOR CTS | P.J. FOR IP | | | | |
| 1/2" | 1/2" | 2" | 0.7 | C45-11-NL | |
| 1/2" | 3/4" | 2-5/16" | 0.8 | C45-13-NL | |
| 3/4" | 1/2" | 2-1/16" | 0.9 | C45-31-NL | |
| 3/4" | 3/4" | 2-1/8" | 0.9 | C45-33-NL | |
| 3/4" | 1" | 2-1/2" | 1.3 | C45-34-NL | |
| 1" | 3/4" | 2-1/4" | 1.0 | C45-43-NL | |
| 1" | 1" | 1-15/16" | 1.2 | C45-44-NL | |
| 1" | 1-1/4" | 2-9/16" | 1.6 | C45-45-NL | |
| 1-1/2" | 1-1/2" | 2-1/2" | 2.9 | C45-66-NL | |
| 2" | 2" | 3" | 4.2 | C45-77-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Sleeve design provides larger, more rugged wrench flats for proper installation.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com


10/17/16

Submitted By:


Blank space for signature or name.

SUBMITTAL INFORMATION

Pack Joint Coupling - (C84-xx-NL style)



MALE IRON PIPE BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

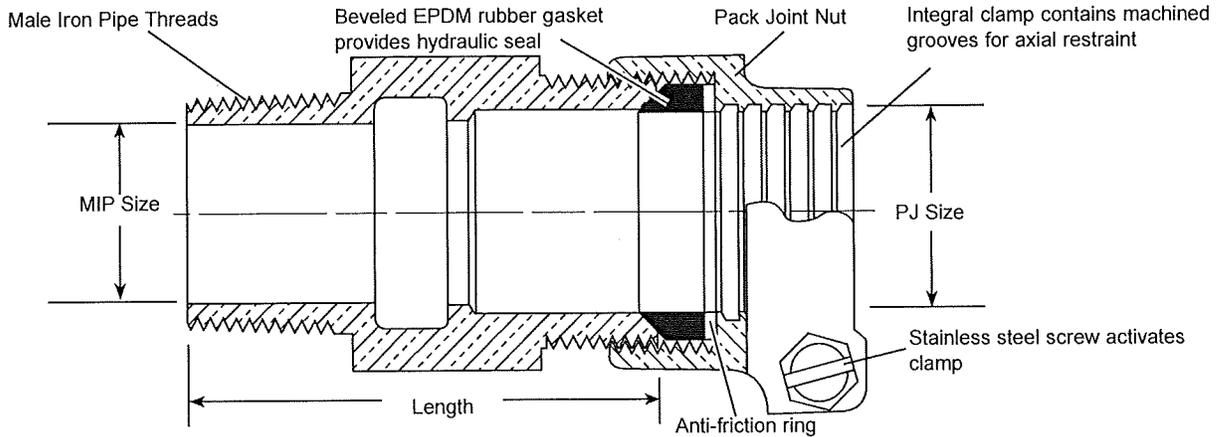

| DESCRIPTION | | LENGTH | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------|--------------|----------|-----------------|-------------|---------------------|
| MALE IRON PIPE | P.J. FOR CTS | | | | |
| 1/2" | 1/2" | 2" | 0.5 | C84-11-NL | |
| 1/2" | 5/8" | 2-1/16" | 0.8 | C84-12-NL | |
| 1/2" | 3/4" | 2-1/16" | 0.8 | C84-13-NL | |
| 3/4" | 1/2" | 2" | 0.8 | C84-31-NL | |
| 3/4" | 5/8" | - | 0.7 | C84-32-NL | |
| 3/4" | 3/4" | 2-1/4" | 0.6 | C84-33-NL | |
| 3/4" | 1" | 2-3/8" | 0.7 | C84-34-NL | |
| 1" | 5/8" | - | 0.7 | C84-42-NL | |
| 1" | 3/4" | 2-3/8" | 0.7 | C84-43-NL | |
| 1" | 1" | 2-9/16" | 0.8 | C84-44-NL | |
| 1" | 1-1/4" | 2-1/2" | 1.2 | C84-45-NL | |
| 1" | 1-1/2" | 2-9/16" | 1.8 | C84-46-NL | |
| 1-1/4" | 1" | 2-9/16" | 1.4 | C84-54-NL | |
| 1-1/4" | 1-1/4" | 2-9/16" | 1.4 | C84-55-NL | |
| 1-1/4" | 1-1/2" | 3-1/4" | 1.8 | C84-56-NL | |
| 1-1/2" | 1-1/2" | 3-1/4" | 2.0 | C84-66-NL | |
| 1-1/2" | 2" | 2-15/16" | 2.6 | C84-67-NL | |
| 2" | 2" | 3-1/4" | 3.1 | C84-77-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Sleeve design provides hexagonal wrench flats for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

02/09/15


Submitted By:

SUBMITTAL INFORMATION

Meter Flange - (CF31-xx-NL style)

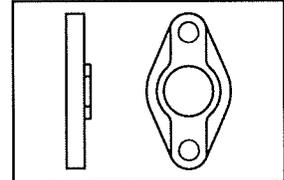

METER FLANGE BY FEMALE IRON PIPE THREAD

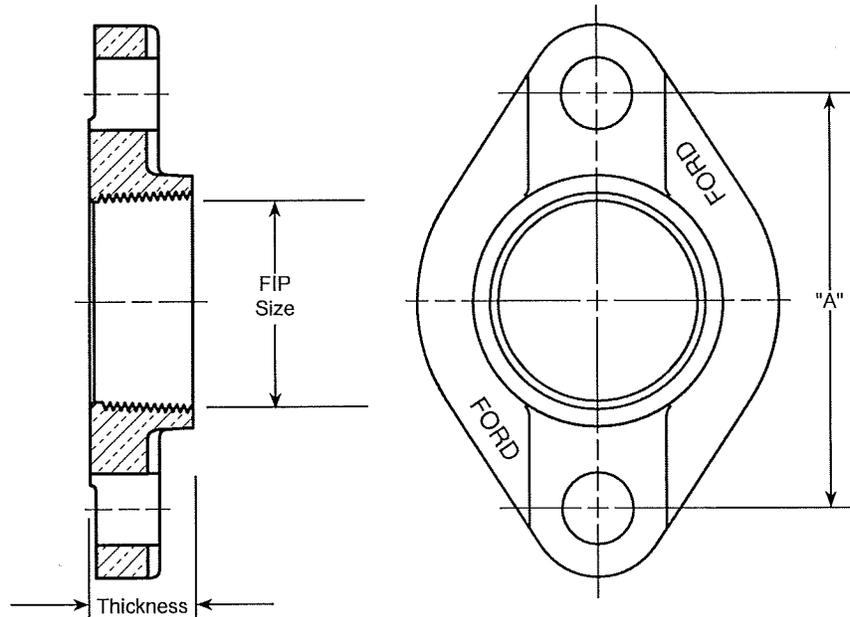

| DESCRIPTION | THICKNESS | APPROX. WT. LBS | PART NUMBER | BOLT HOLE DIAMETER | DIMENSION "A" | ✓ SUBMITTED ITEM(S) |
|---|-----------|-----------------|-------------|--------------------|---------------|---------------------|
| 1-1/2" Meter Flange x 1-1/2" Female IP | 1" | 2.4 | CF31-66-NL | 11/16" | 4" | |
| 1-1/2" Meter Flange x 2" Female IP Thread | 1" | 1.9 | CF31-67-NL | 11/16" | 4" | |
| 2" Meter Flange x 2" Female IP Thread | 1-1/8" | 3.0 | CF31-77-NL | 13/16" | 4-1/2" | |
| 2" Meter Flange x 2-1/2" Female IP Thread | 1-1/8" | 2.6 | CF31-78-NL | 13/16" | 4-1/2" | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Drop-in meter gaskets are included with all 1-1/2" and 2" meter flanges
- Optional slotted bolt holes on 2" flanges to accommodate 1-1/2" meters. Add "-SLOTTED" to end of catalog number.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

05/09/17


Submitted By:

SUBMITTAL INFORMATION

Meter Flange - (CF38-xx-x-NL style)

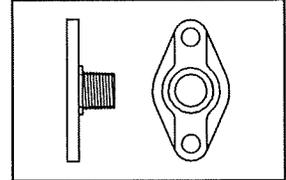

METER FLANGE BY MALE IRON PIPE THREAD

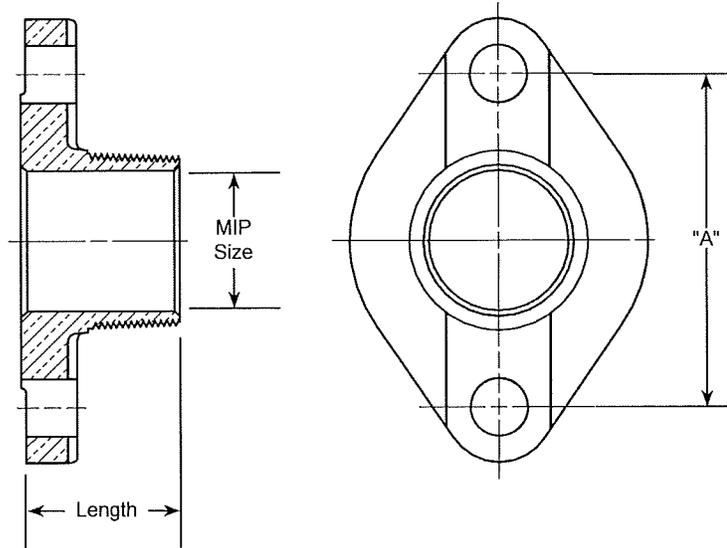

| DESCRIPTION | LENGTH | APPROX. WT. LBS | PART NUMBER | BOLT HOLE DIA. | DIMENSION "A" | ✓ SUBMITTED ITEM(S) |
|--|----------|-----------------|------------------|----------------|---------------|---------------------|
| 1-1/2" Meter Flange x 1-1/2" Male Iron Pipe Thread | 2" | 2.5 | CF38-66-2-NL | 23/32" | 4" | |
| 2" Meter Flange x 2" Male Iron Pipe Thread | 2-1/8" | 3.4 | CF38-77-2-125-NL | 13/16" | 4-1/2" | |
| 2" Meter Flange x 2" Male Iron Pipe Thread | 1-15/16" | 3.4 | CF38-77-1-937-NL | 13/16" | 4-1/2" | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Drop-in meter gaskets are included with all 1-1/2" and 2" Meter Flanges

Optional slotted bolt holes on 2" flanges to accommodate 1-1/2" meters. Add "-SLOT" to end of catalog number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

07/16/15


Submitted By:

SUBMITTAL INFORMATION

Expansion Connection - (EC-23-OR-H2-NL style)



DUAL CARTRIDGE EXPANSION CONNECTION (HANDWHEEL TYPE)

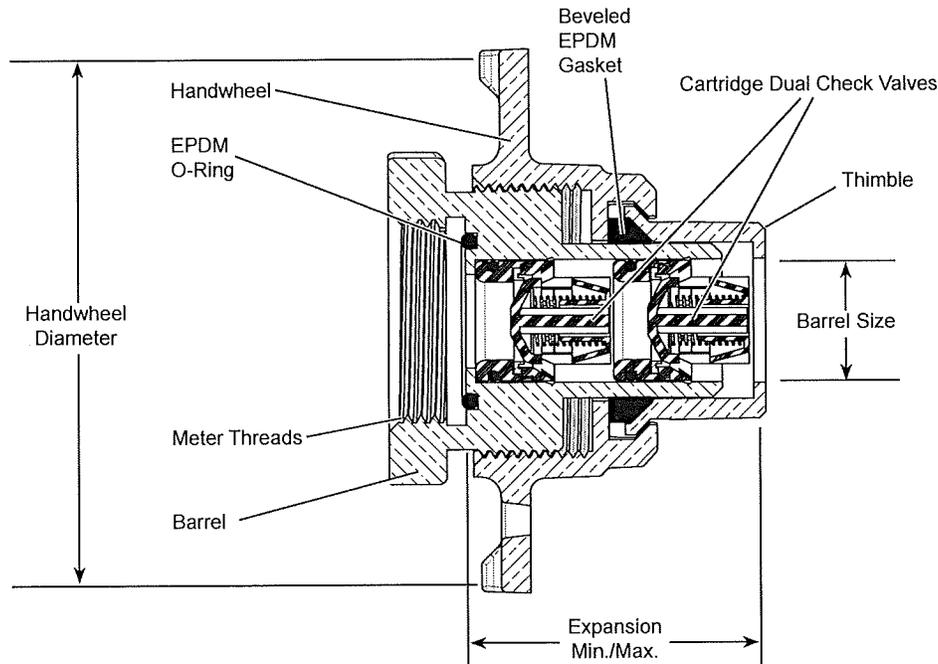

| Meter Size | Barrel Size | Handwheel Diameter | Expansion | | Approx. Wt. Lbs. | Catalog Number | ✓ Submitted Item(s) |
|--------------------|-------------|--------------------|-----------|--------|------------------|----------------|---------------------|
| | | | Min. | Max. | | | |
| 5/8" x 3/4" & 3/4" | 3/4" | 3-1/2" | 1-3/4" | 2-1/8" | 1.0 | EC-23-OR-H2-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Expansion Connection attaches to the meter; together, they are installed as an expandable unit
- Meter and Expansion Connection unit can be installed or removed with one hand, without a wrench
- Enhanced security when the expansion connection is removed along with the meter
- Thimble nose piece does not rotate after contact with the rubber yoke end gasket, no "walking out"
- 150 maximum working water pressure
- 180-degrees Fahrenheit maximum (constant) temperature
- Dual cartridges prevent back-siphonage
- Replacement cartridges available

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.


P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

07/16/15

Submitted By:

SUBMITTAL INFORMATION

Ballcorp Corporation Stops - (FB1000-xx-NL style)

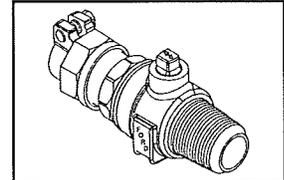

AWWA/CC TAPER THREAD INLET BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

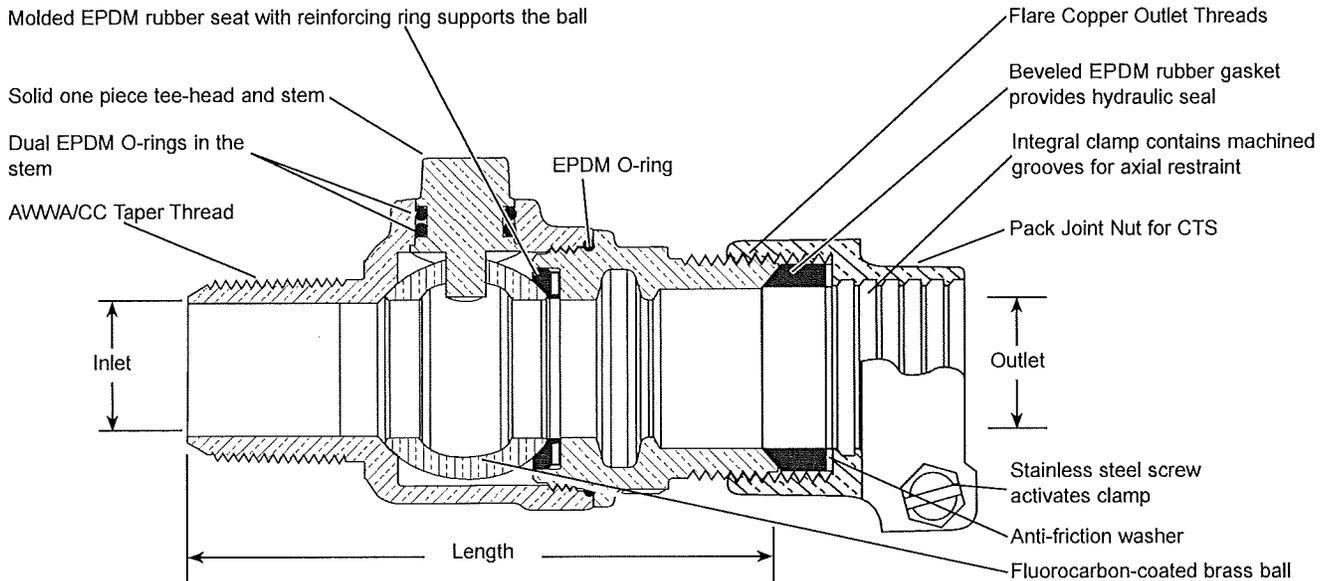


Image shown above is an FB1000-4-NL

| VALVE SIZE | INLET SIZE | OUTLET SIZE | VALVE LENGTH | BODY OUTLET THREADS | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|--------------|---------------------|-----------------|--------------|---------------------|
| 3/4" | 3/4" | 3/4" | 4-19/64" | 3/4" Flare Copper | 2.1 | FB1000-3-NL | |
| 3/4" | 3/4" | 1" | 4-7/16" | 1" Flare Copper | 2.1 | FB1000-34-NL | |
| 1" | 1" | 1" | 4-1/2" | 1" Flare Copper | 2.6 | FB1000-4-NL | |
| 1" | 1" | 1-1/4" | 4-5/16" | 1-1/4" Flare Copper | 2.8 | FB1000-45-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 5-25/32" | 1-1/4" Flare Copper | 4.6 | FB1000-5-NL | |
| 1-1/4" | 1-1/4" | 1-1/2" | 5-39/64" | 1-1/2" Flare Copper | 5.2 | FB1000-56-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 6-13/32" | 1-1/2" Flare Copper | 6.3 | FB1000-6-NL | |
| 1-1/2" | 1-1/2" | 2" | 6-29/64" | 2" Flare Copper | 7.4 | FB1000-67-NL | |
| 2" | 2" | 2" | 7-1/2" | 2" Flare Copper | 11.5 | FB1000-7-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

06/02/17

Submitted By:

SUBMITTAL INFORMATION

Ballcorp Corporation Stops - (FB1100-x-NL style)

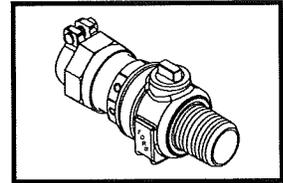

MALE IRON PIPE THREAD INLET BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) OUTLET

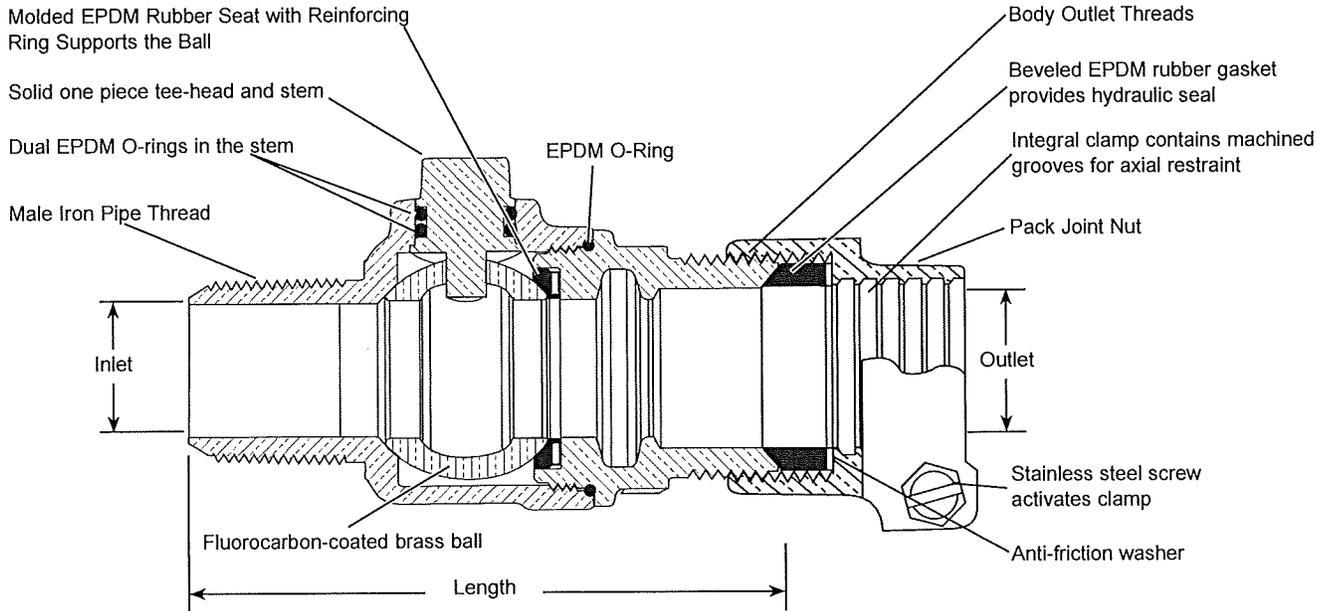


Image shown above is an FB1100-4-NL.

| VALVE SIZE | INLET SIZE | OUTLET SIZE | VALVE LENGTH | BODY OUTLET THREADS | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|--------------|---------------------|-----------------|--------------|---------------------|
| 3/4" | 3/4" | 3/4" | 4-19/64" | 3/4" Flare Copper | 1.6 | FB1100-3-NL | |
| 3/4" | 3/4" | 1" | 4-7/16" | 1" Flare Copper | 1.8 | FB1100-34-NL | |
| 1" | 1" | 1" | 4-1/2" | 1" Flare Copper | 2.2 | FB1100-4-NL | |
| 1" | 1" | 1-1/4" | 4-5/16" | 1-1/4" Flare Copper | 3.3 | FB1100-45-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 5-25/32" | 1-1/4" Flare Copper | 4.5 | FB1100-5-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 6-25/64" | 1-1/2" Flare Copper | 6.1 | FB1100-6-NL | |
| 1-1/2" | 1-1/2" | 2" | 6-25/64" | 2" Flare Copper | 8.3 | FB1100-67-NL | |
| 2" | 2" | 2" | 7-1/2" | 2" Flare Copper | 9.8 | FB1100-7-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

05/17/16

Submitted By:

SUBMITTAL INFORMATION

Ballcorp Corporation Stops - (FB1600-x-NL style)

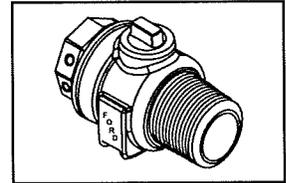

AWWA/CC TAPER THREAD INLET BY FEMALE IRON PIPE OUTLET

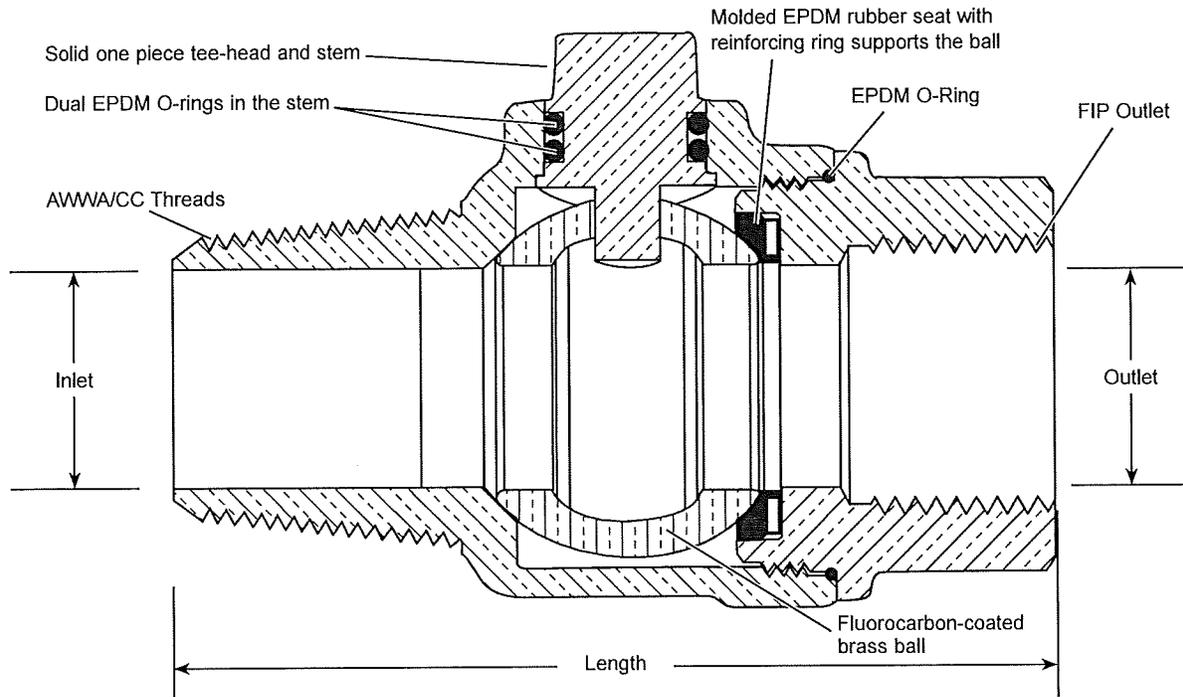


Image shown above is an FB1600-4-NL.

| VALVE SIZE | INLET SIZE | OUTLET SIZE | VALVE LENGTH | BODY OUTLET THREADS | APPROX. Wt. LBS. | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|------------|-------------|--------------|---------------------|------------------|--------------|---------------------|
| 3/4" | 3/4" | 3/4" | 3-17/32" | 3/4" FIP | 1.5 | FB1600-3-NL | |
| 3/4" | 3/4" | 1" | 3-51/64" | 1" FIP | 1.7 | FB1600-34-NL | |
| 1" | 1" | 1" | 3-49/64" | 1" FIP | 2.3 | FB1600-4-NL | |
| 1-1/4" | 1-1/4" | 1-1/4" | 4-1/2" | 1-1/4" FIP | 3.2 | FB1600-5-NL | |
| 1-1/2" | 1-1/2" | 1-1/2" | 5-3/32" | 1-1/2" FIP | 4.3 | FB1600-6-NL | |
| 2" | 2" | 2" | 5-7/8" | 2" FIP | 6.8 | FB1600-7-NL | |
| 2" | 2" | 2-1/2" | 6-3/8" | 2-1/2" FIP | 7.5 | FB1600-78-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Ends are integral or secured with adhesive to prevent unintentional disassembly
- 300 PSI working pressure

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.

P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com


02/08/17

Submitted By:


Blank space for signature or name.

SUBMITTAL INFORMATION

Angle Key Flange Meter Valves - (FV43-xxxW-NL style)

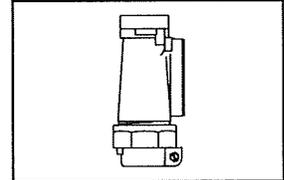

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) INLET BY METER FLANGE OUTLET

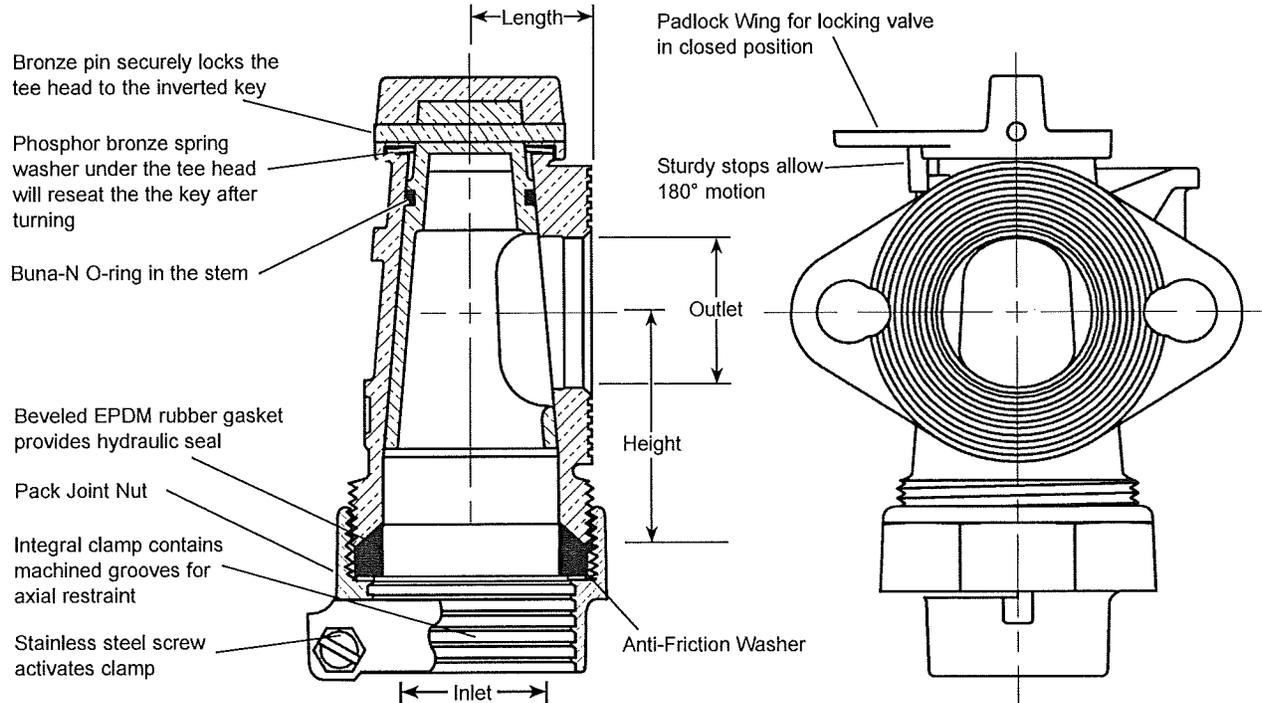

| VALVE SIZE | SERVICE LINE SIZE INLET | METER SIZE OUTLET | LENGTH | HEIGHT | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------|-------------------------|-------------------|--------|----------|-----------------|--------------|---------------------|
| 1-1/2" | 1-1/2" | 1-1/2" | 1-1/4" | 2-15/16" | 6.5 | FV43-666W-NL | |
| 2" | 2" | 1-1/2" & 2" | 1-1/2" | 3-1/8" | 9.4 | FV43-777W-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Padlock wing for locking valve in closed position
- Flat drop-in gaskets included
- Slotted holes are standard on 2" Flanged Angle Meter Valves, allowing 1-1/2" flange meter connection
- Meets 80 PSI working pressure requirements of AWWA Standard C800

Optional Meter Support Brackets. Add "-MSB" to end of part number

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/12/16


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Ell Coupling - (L14-xx-NL style)

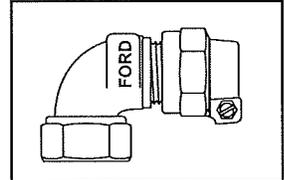

FEMALE IRON PIPE THREAD BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

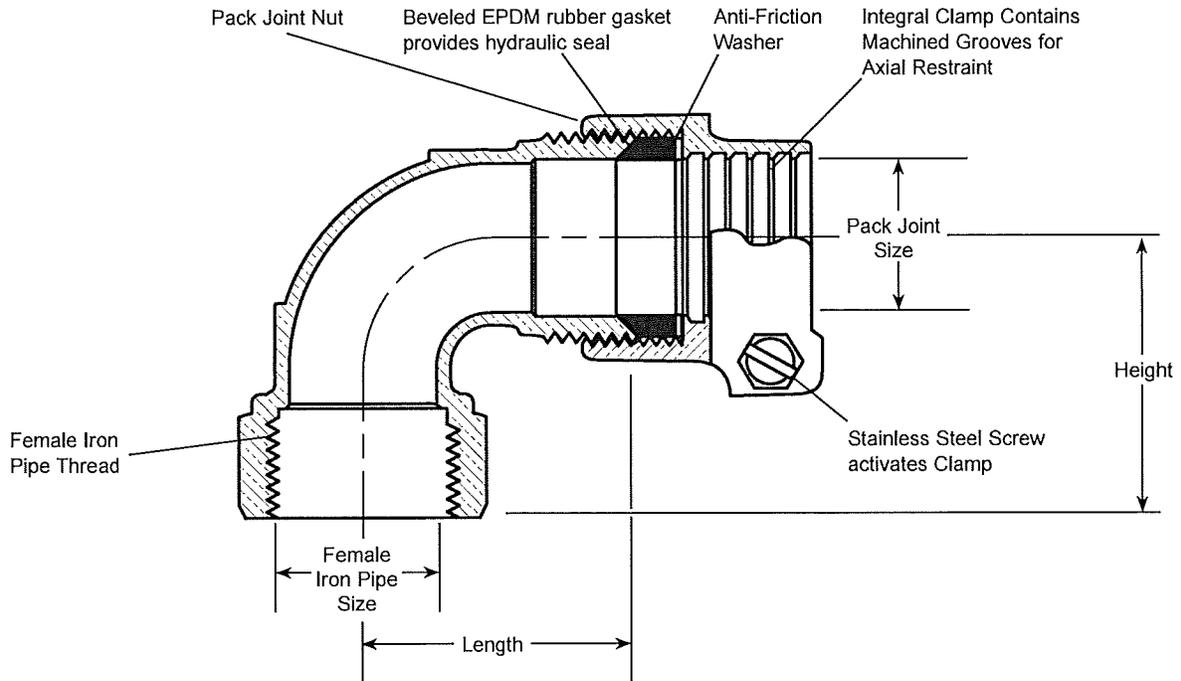

| DESCRIPTION | | LENGTH | HEIGHT | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|--------------|---------|----------|-----------------|-------------|---------------------|
| FEMALE IRON PIPE | P.J. FOR CTS | | | | | |
| 3/4" | 3/4" | 1-1/2" | 1-13/16" | 1.0 | L14-33-NL | |
| 1" | 3/4" | 1-3/4" | 1-7/8" | 0.9 | L14-43-NL | |
| 1" | 1" | 2-5/16" | 1-7/8" | 1.4 | L14-44-NL | |
| 1-1/4" | 1" | 2-5/16" | 1-7/8" | 1.2 | L14-54-NL | |
| 1-1/2" | 1-1/2" | 2-3/4" | 2-7/8" | 3.3 | L14-66-NL | |
| 2" | 2" | 3-1/4" | 3-7/16" | 6.7 | L14-77-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/13/16


Submitted By:

SUBMITTAL INFORMATION

Angle Meter Coupling - (L31-xx-NL style)

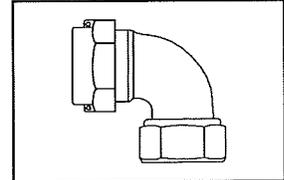

METER SWIVEL NUT BY FEMALE IRON PIPE THREAD

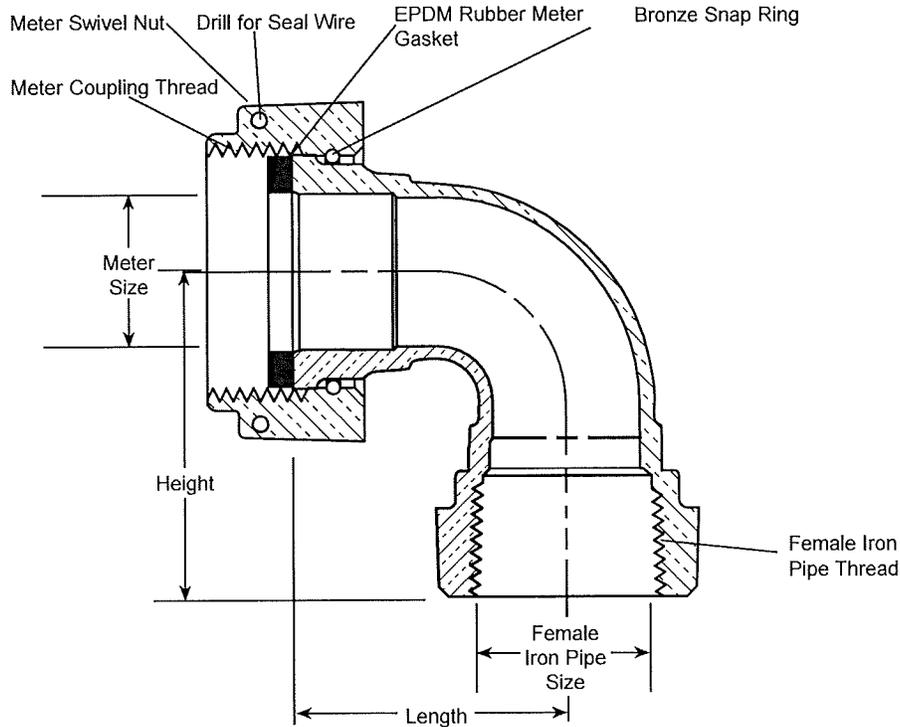

| DESCRIPTION | | LENGTH | HEIGHT | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|----------|----------|----------|-----------------|-------------|---------------------|
| METER SIZE | FIP SIZE | | | | | |
| 5/8" | 3/4" | 1-9/16" | 1-11/16" | .8 | L31-13-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-9/16" | 1-5/8" | .9 | L31-23-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-9/16" | 1-5/8" | 1.0 | *L31-23D-NL | |
| 5/8"x3/4" & 3/4" | 1" | 1-9/16" | 2" | 1.0 | L31-24-NL | |
| 1" | 1" | 1-15/16" | 1-7/8" | 1.2 | L31-44-NL | |

* D = Test / Drain Valve on side of body

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (UNS C89833)
- The product has the letters "NL" cast into the body for proper identification
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B-62 and ASTM B584, UNS C893600-85-5-5-5)
- Conforms to AWWA C700 for Meter Threads
- Body design provides wrench flats to facilitate installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

02/27/13


Submitted By:

SUBMITTAL INFORMATION

Angle Meter Coupling - (L34-xx-NL style)

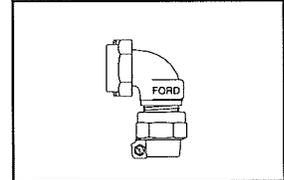

METER SWIVEL NUT BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

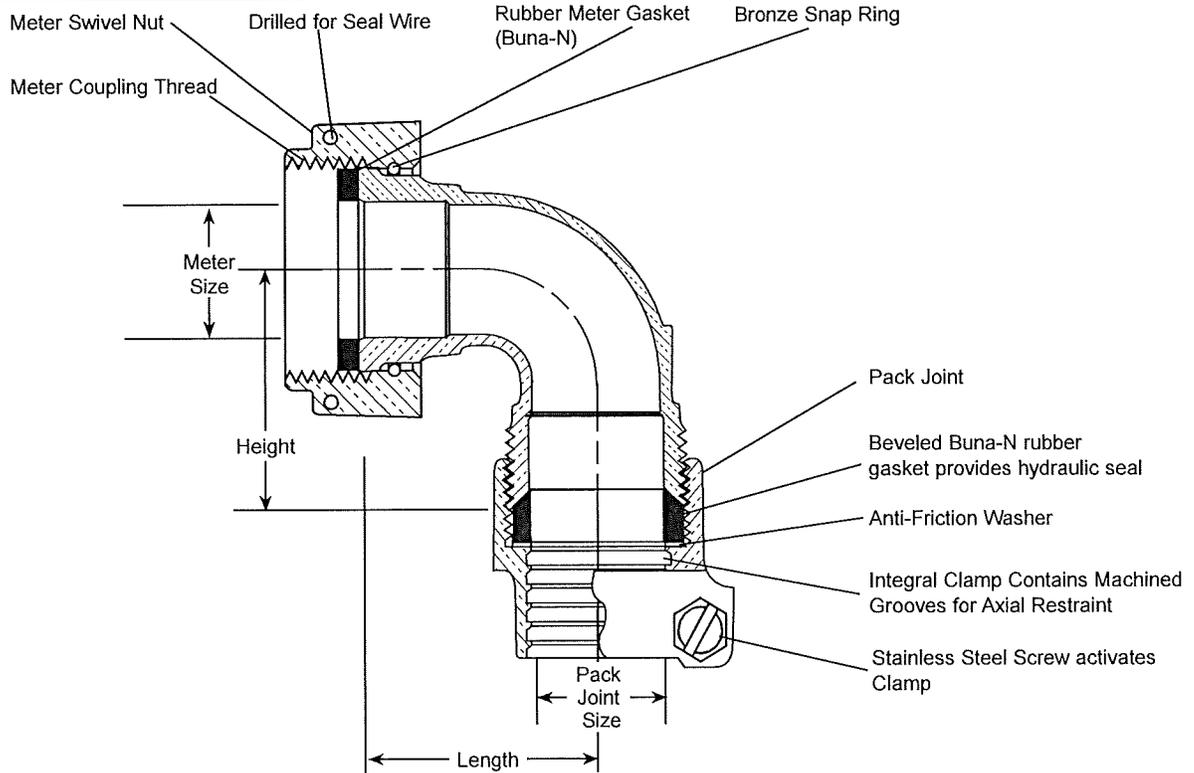

| DESCRIPTION | | LENGTH | HEIGHT | APPROX. WT. LBS. | PART NUMBER | ✓ SUBMITTED ITEMS |
|------------------|--------------|----------|----------|------------------|-------------|-------------------|
| METER SIZE | P.J. FOR CTS | | | | | |
| 5/8" | 3/4" | 1-3/8" | 1-9/16" | 0.8 | L34-13-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 1-9/16" | 1-15/16" | 1.0 | L34-23-NL | |
| 5/8"x3/4" & 3/4" | 1" | 1-9/16" | 1-53/64" | 1.1 | L34-24-NL | |
| 1" | 1" | 1-15/16" | 1-15/16" | 1.2 | L34-44-NL | |
| 1" | 1-1/4" | 2" | 2-1/16" | 0.9 | L34-45-NL | |

Ford recommends insert stiffeners when using plastic pipe or tubing

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Conforms to AWWA C700 for meter threads.
- Body design provides wrench flats to facilitate installation.

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

Submitted By:


02/23/17

SUBMITTAL INFORMATION

Angle Meter Coupling - (L38-xx-NL style)

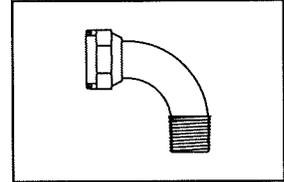

METER SWIVEL NUT BY MALE IRON PIPE THREAD

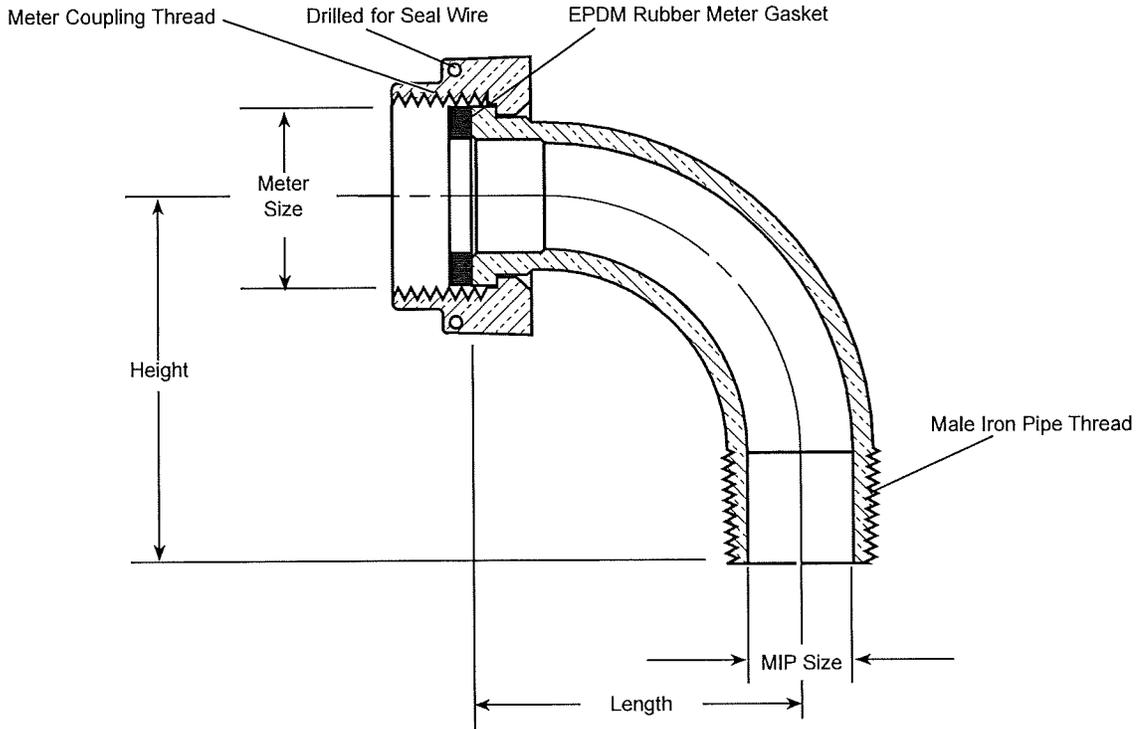

| DESCRIPTION | | HEIGHT | LENGTH | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|------------------|----------|---------|----------|-----------------|-------------|---------------------|
| METER SIZE | MIP SIZE | | | | | |
| 5/8" | 1/2" | 1-1/2" | 2-3/8" | 0.5 | L38-11-NL | |
| 5/8"x3/4" & 3/4" | 3/4" | 2-1/4" | 2-1/2" | 0.8 | L38-23-NL | |
| 5/8"x3/4" & 3/4" | 1" | 1-9/16" | 1-13/16" | 0.7 | L38-24-NL | |
| 1" | 1" | 2" | 2-9/16" | 1.1 | L38-44-NL | |
| 1-1/2" | 1-1/2" | 3" | 3-1/2" | 3.0 | L38-66-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Conforms to AWWA C700 for meter threads

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com


10/12/16

Submitted By:


Blank space for the submitter's name and signature.

SUBMITTAL INFORMATION

Pack Joint Ell Coupling - (L44-xx-NL style)

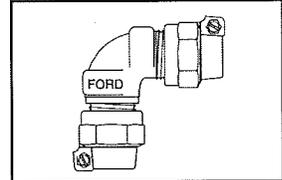

PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS

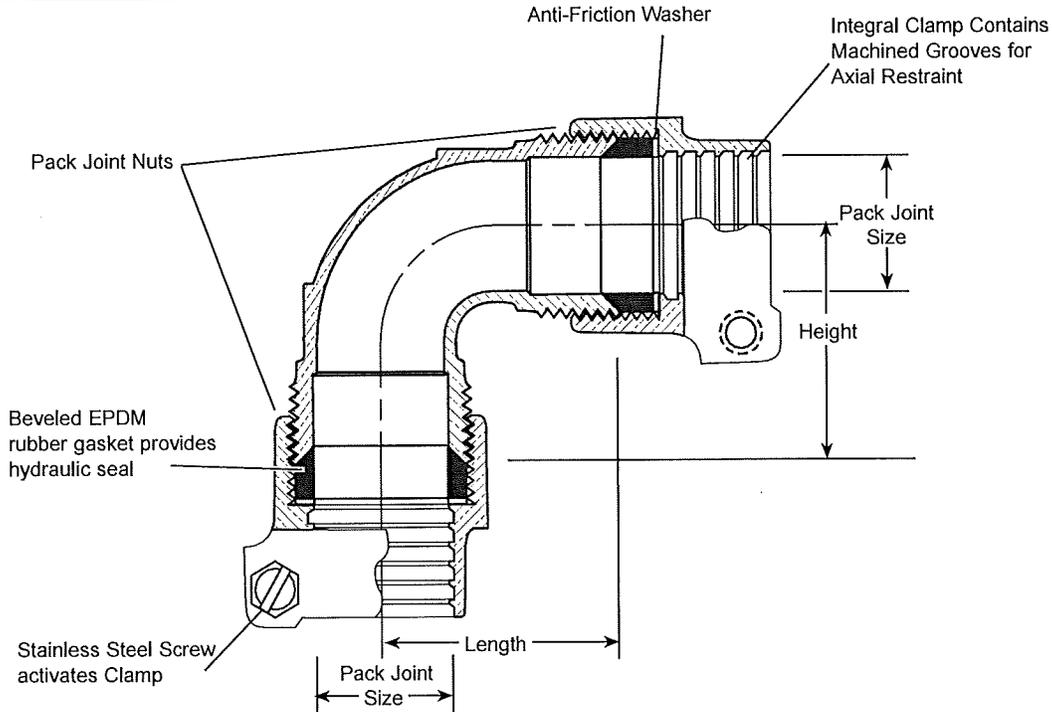

| DESCRIPTION | | LENGTH | HEIGHT | APPROX. Wt. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|--------------|--------------|----------|----------|-----------------|-------------|---------------------|
| P.J. FOR CTS | P.J. FOR CTS | | | | | |
| 3/4" | 3/4" | 1-5/8" | 1-5/8" | 1.0 | L44-33-NL | |
| 3/4" | 1" | 1-3/4" | 1-3/4" | 1.1 | L44-34-NL | |
| 1" | 1" | 2" | 2" | 1.3 | L44-44-NL | |
| 1-1/4" | 1-1/4" | 2" | 2" | 2.3 | L44-55-NL | |
| 1-1/2" | 1-1/2" | 2-7/16" | 2-7/16" | 3.6 | L44-66-NL | |
| 2" | 2" | 3-11/16" | 3-11/16" | 9.3 | L44-77-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/12/16


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Ell Coupling - (L84-xx-NL style)

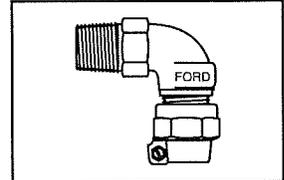

MALE IRON PIPE THREAD BY PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS)

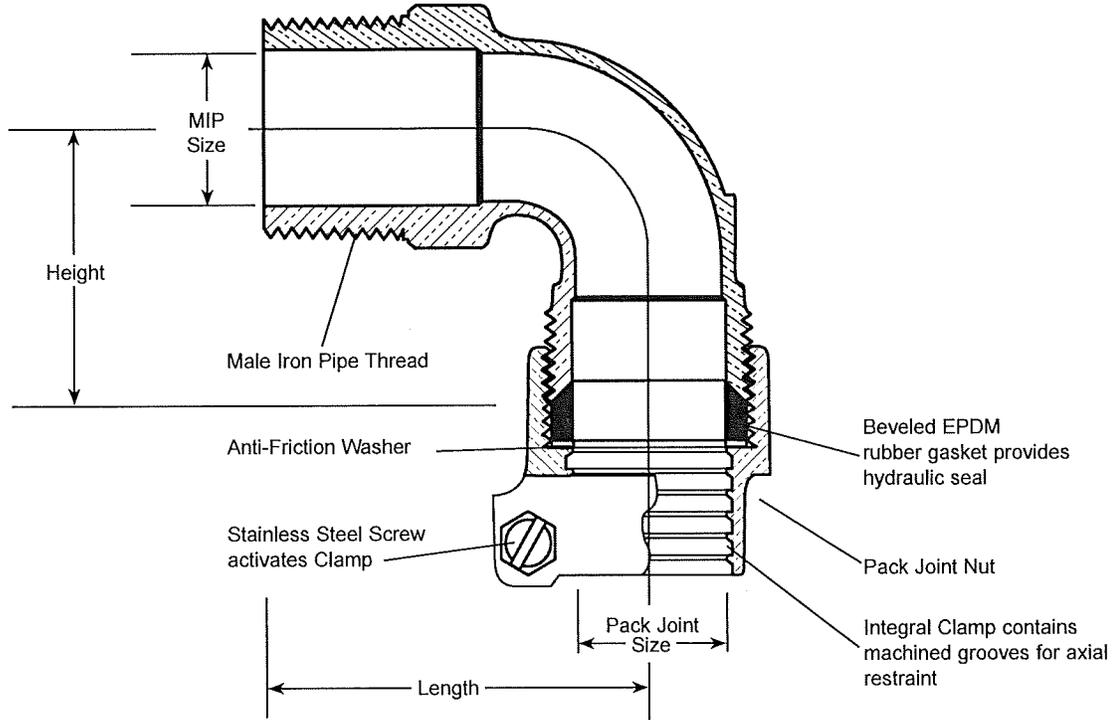

| DESCRIPTION | | LENGTH | HEIGHT | APPROX. WT. LBS | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------|--------------|--------|----------|-----------------|-------------|---------------------|
| MALE IRON PIPE | P.J. FOR CTS | | | | | |
| 3/4" | 3/4" | 2" | 1-11/16" | 0.8 | L84-33-NL | |
| 3/4" | 1" | 2" | 1-5/8" | 0.8 | L84-34-NL | |
| 1" | 1" | 2-1/2" | 1-7/8" | 1.1 | L84-44-NL | |
| 1-1/2" | 1-1/2" | 2-1/2" | 2-1/2" | 2.5 | L84-66-NL | |
| 2" | 2" | 2-7/8" | 3-1/8" | 3.8 | L84-77-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/13/16



Submitted By:

SUBMITTAL INFORMATION

Pack Joint Compression Nut - (NG-D4 style)

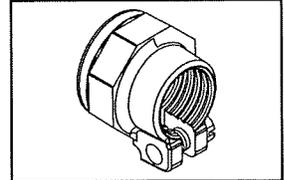

3/4" CTS PACK JOINT NUT ASSEMBLY

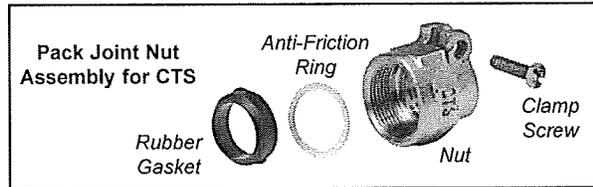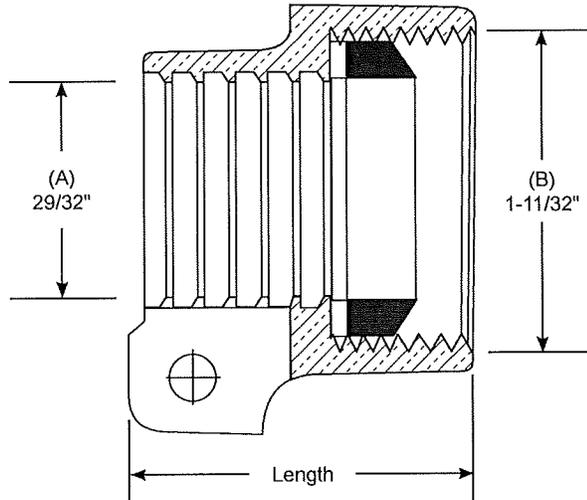

| CONNECTION SIZE | LENGTH | DIMENSIONS A | DIMENSIONS B | APPROXIMATE Wt. LBS. | PRODUCT NUMBER | ✓ SUBMITTED ITEM(S) |
|-----------------|---------|--------------|--------------|----------------------|----------------|---------------------|
| 3/4" | 1-5/16" | 29/32" | 1-11/32" | 0.3 | NG-D4 | |

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Design provides wrench flats to facilitate installation
- EPDM rubber gasket, per ASTM, D2000, ANSI/NSF Standard 61 approved
- Anti-friction ring assists proper gasket compression

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

11/09/11



Submitted By:

SUBMITTAL INFORMATION

Pack Joint Compression Nut - (NG-F4 style)

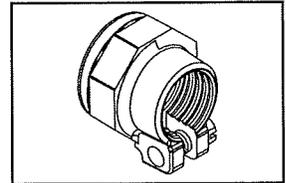

1" CTS PACK JOINT NUT ASSEMBLY

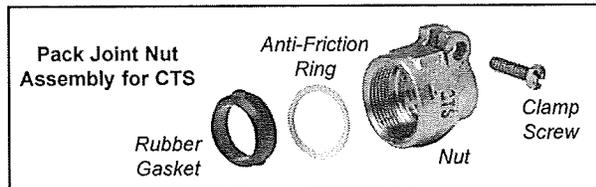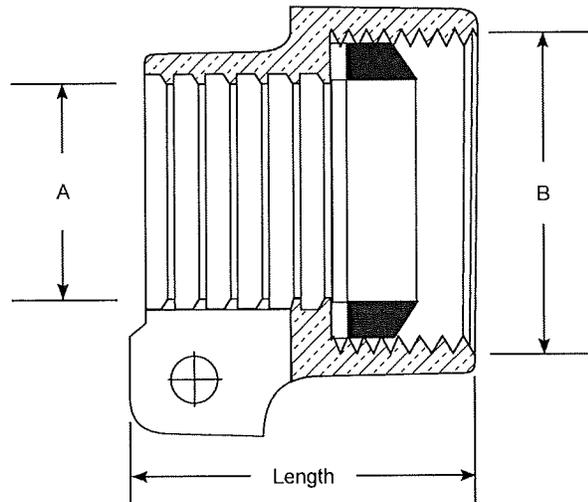

| CONNECTION SIZE | LENGTH | DIMENSIONS A | DIMENSIONS B | APPROXIMATE Wt. LBS. | PRODUCT NUMBER | ✓ SUBMITTED ITEM(S) |
|-----------------|---------|--------------|--------------|----------------------|----------------|---------------------|
| 1" | 1-5/16" | 1-5/32" | 1-9/16" | 0.4 | NG-F4 | |

FEATURES

- All brass conforms to AWWA Standard C800 (ASTM B-62 and ASTM B-584, UNS NO C83600 - 85-5-5-5)
- Design provides wrench flats to facilitate installation
- EPDM rubber gasket, per ASTM, D2000, ANSI/NSF Standard 61 approved
- Anti-friction ring assists proper gasket compression

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
<http://www.fordmeterbox.com>

11/09/11


Submitted By:

SUBMITTAL INFORMATION

Pack Joint Tee - (T444-xxx-NL style)

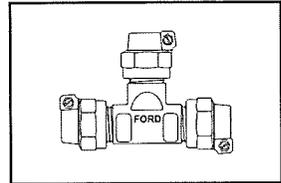

PACK JOINT FOR CTS TO PACK JOINT FOR CTS BY PACK JOINT FOR CTS

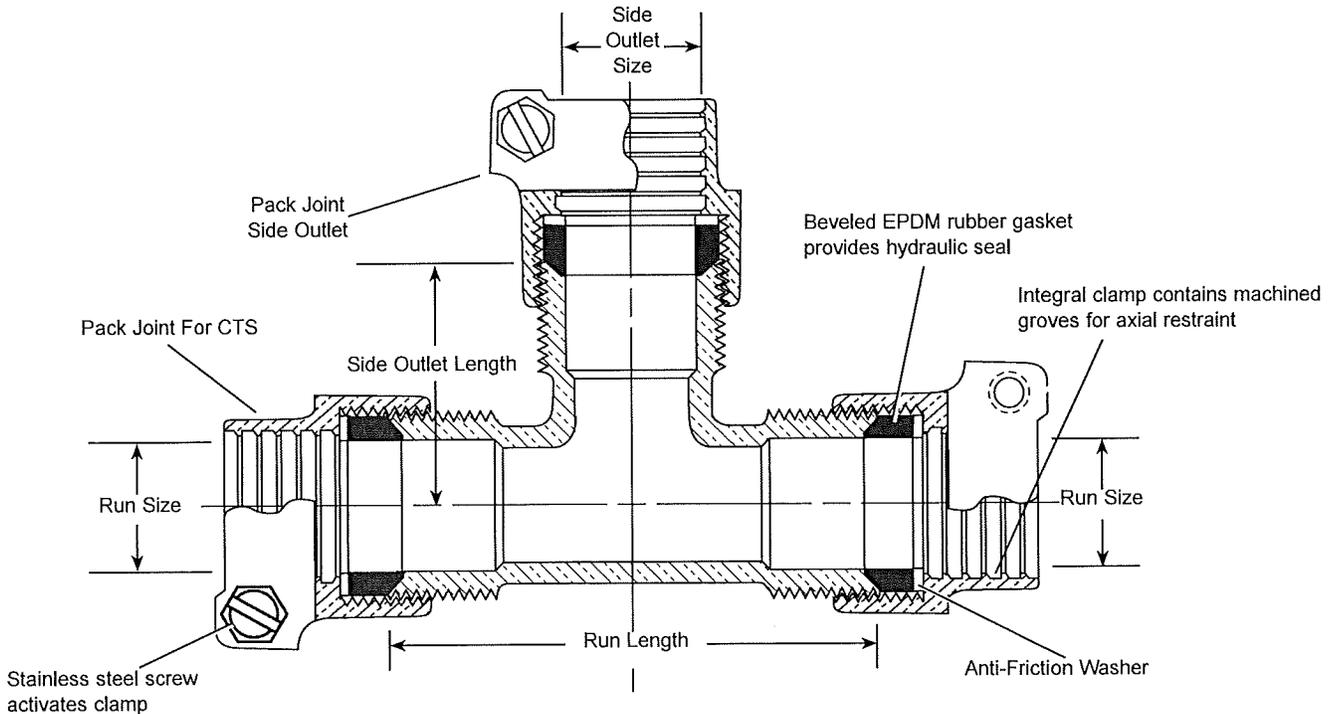

| BOTH ENDS (RUN SIZE) | SIDE OUTLET SIZE | RUN LENGTH | SIDE OUTLET LENGTH | APPROX Wt. LBS. | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|----------------------|------------------|------------|--------------------|-----------------|-------------|---------------------|
| 3/4" | 3/4" | 3-5/16" | 1-5/8" | 1.4 | T444-333-NL | |
| 3/4" | 1" | 3-5/8" | 1-15/16" | 1.6 | T444-334-NL | |
| 1" | 3/4" | 3-1/2" | 1-3/4" | 1.6 | T444-443-NL | |
| 1" | 1" | 3-3/4" | 1-15/16" | 1.9 | T444-444-NL | |
| 1" | 1-1/4" | 3-3/4" | 1-13/16" | 2.3 | T444-445-NL | |
| 1" | 1-1/2" | 3-27/32" | 2-3/32" | 3.0 | T444-446-NL | |
| 1-1/2" | 1-1/2" | 4-3/4" | 2-3/8" | 4.6 | T444-666-NL | |
| 2" | 1" | 5-1/8" | 2-7/16" | 6.1 | T444-774-NL | |
| 2" | 2" | 7-3/8" | 3-11/16" | 13.4 | T444-777-NL | |

Note: Ford recommends insert stiffeners when using plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com


04/26/16

Submitted By:


Blank space for signature.

SUBMITTAL INFORMATION

Multi-Service "Y" - (Y11-474-NL style)



SINGLE FEMALE IRON PIPE THREAD INLET BY FOUR FEMALE IRON PIPE THREAD OUTLETS

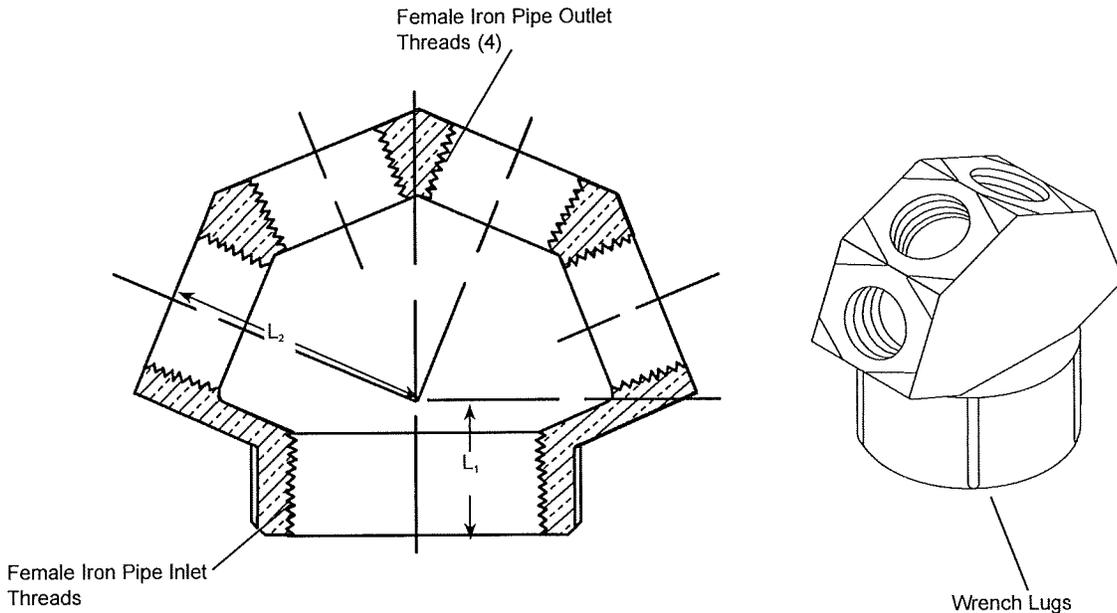

| INLET THREAD SIZE | OUTLET THREAD SIZE | LENGTH (L ₁) | LENGTH (L ₂) | APPROX Wt. LBS. | CATALOG NUMBER | ✓ SUBMITTED ITEM(S) |
|-------------------|--------------------|--------------------------|--------------------------|-----------------|----------------|---------------------|
| 2" | Four 1" | 1-1/4" | 2-7/16" | 3.2 | Y11-474-NL | |

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)
- Body design provides wrench lugs for proper installation

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.




The Ford Meter Box Company, Inc.
P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
Phone: 260-563-3171 / Fax: 800-826-3487
Overseas Fax: 260-563-0167
www.fordmeterbox.com

10/17/16


Submitted By:

SUBMITTAL INFORMATION

Pack Joint 'Y' Branch - (Y44-xxx-NL style)



PACK JOINT FOR COPPER OR PLASTIC TUBING (CTS) BOTH ENDS

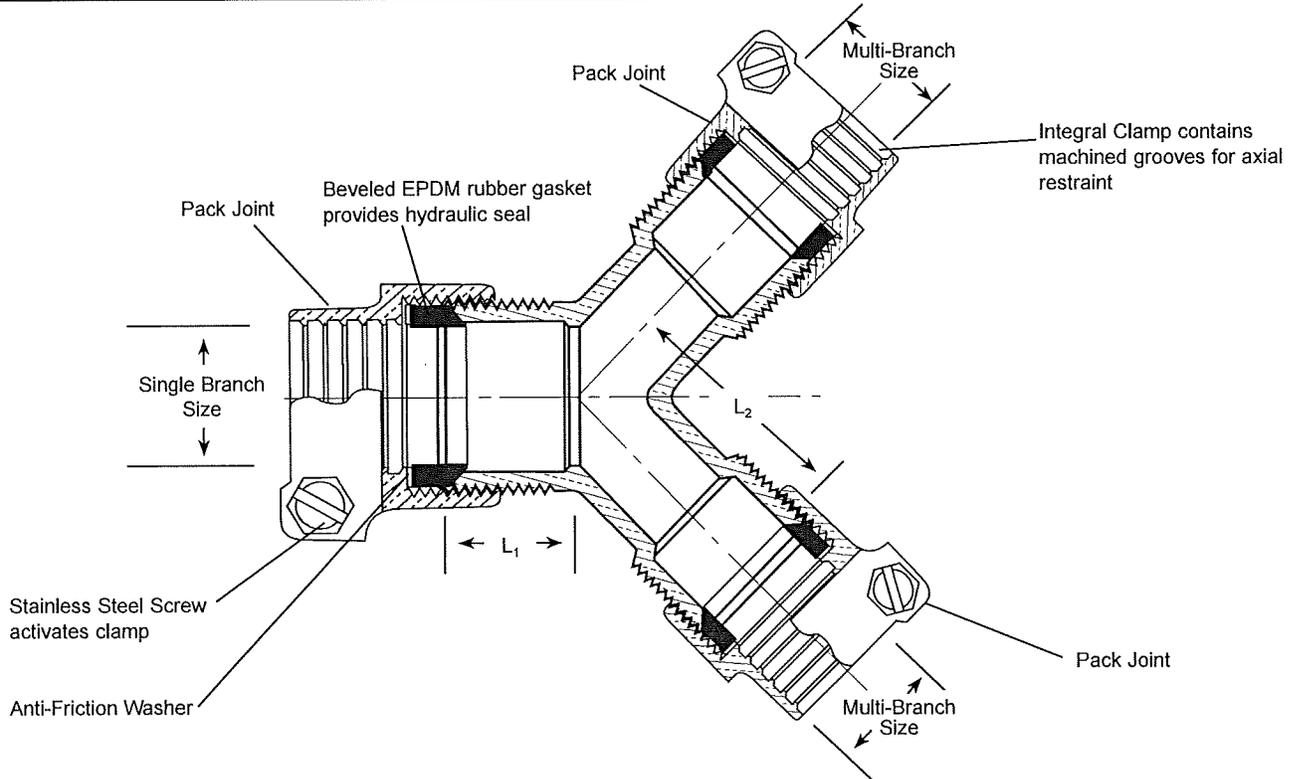

| SINGLE BRANCH END | MULTI-BRANCH END | SINGLE BRANCH LENGTH (L ₁) | MULTI-BRANCH LENGTH (L ₂) | APPROX. WT. LBS. | PART NUMBER | ✓ SUBMITTED ITEM(S) |
|-------------------|------------------|--|---------------------------------------|------------------|-------------|---------------------|
| 3/4" | Two - 3/4" | 1-3/32" | 2-3/64" | 1.5 | Y44-233-NL | |
| 1" | Two - 3/4" | 1-1/16" | 2" | 2.0 | Y44-243-NL | |
| 1-1/2" | Two - 3/4" | 1-3/8" | 2-7/8" | 3.1 | Y44-263-NL | |
| 1-1/2" | Two - 1" | 1-5/8" | 2-3/4" | 3.1 | Y44-264-NL | |
| 2" | Two - 1" | 1-3/16" | 3-1/8" | 3.7 | Y44-274-NL | |

Note: Ford recommends using insert stiffeners with plastic pipe or tubing.

FEATURES

- All brass that comes in contact with potable water conforms to AWWA Standard C800 (ASTM B584, UNS C89833)
- The product has the letters "NL" cast into the main body for lead-free identification
- Certified to NSF/ANSI Standard 61 and NSF/ANSI Standard 372 where applicable
- Brass components that do not come in contact with potable water conform to AWWA Standard C800 (ASTM B62 and ASTM B584, UNS C83600, 85-5-5-5)

The Ford Meter Box Company considers the information in this submittal form to be correct at the time of publication. Item and option availability, including specifications, are subject to change without notice. Please verify that your product information is current.



The Ford Meter Box Company, Inc.
 P.O. Box 443, Wabash, Indiana U.S.A. 46992-0443
 Phone: 260-563-3171 / Fax: 800-826-3487
 Overseas Fax: 260-563-0167
 www.fordmeterbox.com

10/17/16

Submitted By:



December 18, 2013

To our valued customer:

We hereby certify that to the best of our knowledge and belief all brass nipples manufactured by Merit Brass Company in Cleveland, Ohio conform to specification ASTM B687-88.


Nipples are threaded with American Standard taper pipe threads (NPT) in accordance with screw-threaded standard for Federal Services Handbook H-28.


Brass nipples have a weighted average lead content of $\leq .25\%$ and are in compliance with lead content requirements for lead free plumbing as defined by the U.S. Safe Drinking Water Act.

Sincerely,

Alan Lipp,

Chief Operating Officer



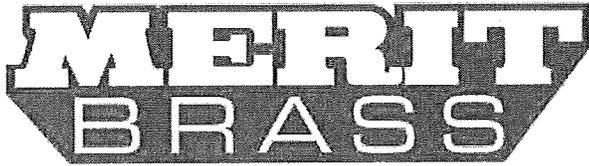

DIRECTING THE FLOW OF *Quality*

TO OUR VALUED CUSTOMER:

We hereby certify that to the best of our knowledge and belief that the domestic lead-free fittings supplied to us by Lee Brass and New England Union Company comply with the following standards:

| | |
|------------------|---|
| DIMENSION | SPECIFICATIONS ANSI/ASME B16.14, B15.15, B16.18 MSS-SP-106 (FLANGES) A-A-5961 (UNION) |
| THREADS | ANSI/ASME B1.20.1 |
| MATERIAL | ASTM 584-06a (C89833) LEAD FREE Cu = 87.0-91.0% Sn = 4.0-6.0% Pb = 0.10% (Max.) Zn = 2.0-4.0% Ni = 1.0% (Max.) P = 0.05% (Max.) Si = 0.005% (Max.) Al = 0.005% (Max.) S = 0.08% (Max.) Fe = 0.3% (Max.) Sb = 0.25% (Max.) Bi = 1.7-2.7% |

Please consider this letter official notification that these fittings meet all applicable state and federal lead-free requirements, and are also certified by NSF to NSF/ANSI 61 Annex G.

Regards,

Charlene Urban
Purchasing
Merit Brass Company




ISO 9001
GB/SA Global
Certificate No. 8378

P.O. Box 43127 • One Merit Drive • Cleveland, OH 44143

Phone: 216 261 9800 • Toll Free: 800 726 9800 • Fax: 800 726 9880 • www.meritbrass.com • www.mbwebXpress.com



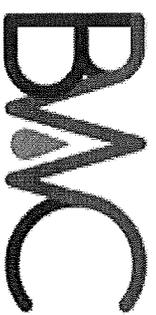

**BUY WHOLESAL
COMPANY, LLC**

NSF Certified & Compliant Waterworks Wholesaler

[Home](#)

[About](#)

[Products](#)

[Cor](#)

ABOUT BUY WHOLESAL COMPANY, LLC

SERVING THE WATERWORKS INDUSTRY SINCE 1985

Buy Wholesale Company, LLC is a family owned and operated business for over 32 years. Karl Knapp the founder started out in the plumbing industry in 1974. He and

his wife decided the time was right to start their own business in 1985 in the waterworks industry. Our customers are like our family. Some of our customers have been with us since the beginning. We know in today's hectic schedules you need product quick and the bottom line is to make our customers happy. We strive to always ship purchase order the day they are received. We are a wholesale

manufacturer, and distributor of municipal plumbing product in the great state of Texas. We stock a deep and diversified inventory, and dedicated to providing excellence in customer service and the finest-quality products to our customers. We believe in assisting our clients in a professional manner, with flawless regard to accuracy, promptness, and courtesy by delivering quality products and service of unmatched value. Our experienced staff is committed to providing you not only with excellent service and product knowledge that will exceed your expectations. Buy Wholesale Company, LLC provides the supplies you need, when you need them, in stock and at the right price. We service all 48 states. We look forward to hearing from

L 208

2" X 1/8"

Leather

Buy Wholesale Company, made in the USA gasket, Rubber washer



Plugs - Water Flow - Cut Off

| Part# | Description | Material |
|--------|--------------|----------|
| FP5 ★ | 5/8" x 1/16" | Fiber |
| FP 3 | 3/4" x 1/16" | Fiber |
| FP 1 ★ | 1" x 1/16" | Fiber |



GASKETS & METER WASHERS
 ALL GASKETS - MADE IN THE USA

1-1/2" & 2" Drop-In Flange Gaskets

| Part# | Description | Material |
|----------|----------------|-----------------|
| MFDI 15 | 1-1/2" x 1/8" | Neoprene Rubber |
| MFDI 15R | 1-1/2" x 1/8" | Red Rubber |
| MFDI 15C | 1-1/2" x 1/8" | Cloth Inserted |
| MFDI1516 | 1-1/2" x 1/16" | Neoprene Rubber |
| MFDI 2 ★ | 2" x 1/8" | Neoprene Rubber |
| MFDI 2R | 2" x 1/8" | Red Rubber |

3/4" Meter Washer - fits 3/4" Water Meter Coupling

| Part# | Description | Material |
|-------|---|----------------|
| R 308 | 3/4" x 1/8"  | Rubber |
| R 316 | 3/4" x 1/16" | Rubber |
| R 332 | 3/4" x 1/32" | Rubber |
| F 308 | 3/4" x 1/8" | Fiber |
| F 316 | 3/4" x 1/16" | Fiber |
| F 332 | 3/4" x 1/32" | Fiber |
| R308C | 3/4" x 1/8" | Cloth Inserted |
| L 308 | 3/4" x 1/8" | Leather |
| L316 | 3/4" x 1/16" | Leather |

1" Meter Washer - fits 1" Water Meter Coupling

| Part# | Description | Material |
|-------|---|----------|
| R 108 | 1" x 1/8"  | Rubber |
| R 116 | 1" x 1/16" | Rubber |
| R 132 | 1" x 1/32" | Rubber |
| F 108 | 1" x 1/8" | Fiber |
| F 116 | 1" x 1/16" | Fiber |

6.28



"Y" BRANCH CONNECTIONS

Rev. 8-04



H-15342

Two branch
*Inlets: Copper flare nut
*Outlet: F.I.P. thread

1"x2"



H-10070



Two branch-short body
Inlets: M.I.P. thread
Outlet: M.I.P. thread

3/4"x1"

NOTE: Minimum length of copper tubing "gooseneck" is: 3/4" size-30", 1" size-40".

‡Requires minimum ordering quantity. Contact MUELLER Customer Service Center for minimum ordering requirements and availability.

*Inlets and outlet can be reversed.

**See page 6.29 for tubing that can be used with this connection.

MUELLER "Y" Branch Connections are manufactured and tested in accordance with ANSI/AWWA C800.