



CENTRALBIDDING
FROM CENTRAL AUCTION HOUSE

**5000126129 TWO YEAR CONTACT FOR A SUPPLY OF PETROLEUM
PRODUCTS, KEROSENE, VARSOL FOR THE JEFFERSON PARISH
DEPARTMENT OF FLEET MANAGEMENT.**
Jefferson Parish Government

Project documents obtained from www.CentralBidding.com
10-Apr-2019 11:30:29 AM



Bid Number 50 - 126129

Two year contract for a supply of petroleum products, kerosene, varsol for the Jefferson Parish Department of Fleet Management.

April 30, 2019 at 2:00 pm

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received in the Purchasing Department by the bid due date and time.

**Jefferson Parish Purchasing Department
Temporary Location:
Paul D. Connick Sr., Emergency Operations & Communications Center
910 3rd Street,
Gretna, LA 70053
Donna Reamey
Dreamey@jeffparish.net
504-364-2684**

SPECIFICATIONS FOR BID # 50-00126129

This is for a Two (2) year contract.

A contract for a supply of Petroleum Products, Kerosene, Varsol, etc. (55 gallon containers) for the Jefferson Parish Department of Fleet Management

Products must be delivered within seventy-two (72) hours of order placement.

DATE: 4/10/2019
BID NO.: 50-00126129

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 1

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

BUYER: DREAMERY@jeffparish.net

BIDS WILL BE RECEIVED IN THE WEST BANK PURCHASING DEPT, Paul D. Connick, Sr. Emergency Operations and Communications Center at - 910 3rd Street, Gretna, LA 70053 2:00 PM, 4/30/2019 AND PUBLICLY OPENED THEREAFTER. For convenience, bidders may also submit bids in the East Bank Purchasing Department, Suite 404, Jefferson Parish Joseph S. Yenni Building, 1221 Elmwood Park Blvd., Jefferson LA 70123. However, if submitting bids on the day of bid opening, bidders must submit at the West Bank location only. All bids will be publicly opened at the West Bank location.

At no charge, bidders may also submit via Jefferson Parish's electronic procurement page by visiting www.jeffparishbids.net to register for this free site. Additional instructions are included in the text box highlighting electronic procurement.

LATE BIDS WILL NOT BE ACCEPTED

Unless submitting via online (see Page 3), each bid must be submitted in a sealed envelope bearing on the outside; the name of the Bidder, his address, and the name of the project for which the bid is submitted and the bid number.

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well be in compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647.

Jefferson Parish adheres to the Louisiana Code of Governmental Ethics, contained in Louisiana Revised Statutes Annotated, R.S. 42:1101, et seq. Vendor/Proposer by this submission, warrants that there are no "conflicts of interest" related to this procurement that would violate applicable Louisiana Law. Violation of the Louisiana Code of Governmental Ethics may result in rescission of contract, permit or licenses, and the imposition of fines and/or penalties, without contractual liability to the public in accordance with applicable law.

All vendors submitting bids should register as a Jefferson Parish vendor if not already yet registered. Registration forms may be downloaded from <http://purchasing.jeffparish.net> and by clicking on Vendor Information. Current W-9 forms with respective Tax Identification numbers and vendor applications may be submitted at any time; however, if your company is not registered and/or a current W-9 form is not on file, vendor registration is mandatory. Further, a current W-9 form and respective Tax Identification number must be supplied upon contract execution, should you be awarded a contract and/or issued purchase order. Failure to do so may result in delay of payment.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing via email to the buyer's email address as indicated above, no later than Five (5) working days prior to the bid opening. Bid numbers should be mentioned in all requests. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated. Vendors must not alter the bid forms. Doing so will cause the bid to be rejected.

A corporate resolution or written evidence of the individual signing the bid having such authority must be submitted with the bid. Failure to comply will cause bid to be rejected. For corporate entities, such written evidence may be a printout of the Louisiana Secretary of State's website listing the signatory as an officer. Such printout shall be included with the bid submission. Bids submitted by Owners or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. This documentation must be submitted with the bid. Failure to do so will result in bid rejection.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. SPLIT AWARDS MADE TO SEVERAL VENDORS WILL ONLY BE GRANTED TO THOSE DEEMED RESPONSIVE AND RESPONSIBLE.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

PROTESTS: Only those vendors that submitted a bid in response to this solicitation may submit a protest in writing to the Director of the Purchasing within 48 hours of bid opening. The Purchasing Director will review it in connection with the Parish Attorney's Office which will then respond in writing as soon as possible.

PREFERENCE: Unless federal funding is directly spent by Jefferson Parish for this purchase, preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA – R.S. 38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and Parish taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's specifications (ANSI A17.1-1961).

Jefferson Parish and its partners as the recipients of federal funds are fully committed to awarding a contract(s) to firm(s) that will provide high quality services and that are dedicated to diversity and to containing costs. Thus, Jefferson Parish strongly encourages the involvement of minority and/or woman-owned business enterprises (DBE's, including MBE's, WBE's and SBE's) to stimulate participation in procurement and assistance programs.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications.

Advertised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This electronic procurement system allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Bidders are encouraged to submit electronically using this free service; while the website accepts various file types, one single PDF file containing all appropriate and required bid documents is preferred. Bidders submitting uploaded images of bid responses are solely responsible for clarity. If uploaded images/documents are not legible, then bidder's submission will be rejected. Please note all requirements contained in this bid package for electronic bid submission.

Please visit our E-Procurement Page at www.jeffparishbids.net to register and view Jefferson Parish solicitations. For more information, please visit the Purchasing Department page at <http://purchasing.jeffparish.net>.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 dated 12/09/09. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.

10,12,13,15

1. All bidders must attend the MANDATORY pre-bid conference and will be required to sign in and out as evidence of attendance. In accordance with LSA R.S. 38:2212(I), all prospective bidders shall be present at the beginning of the MANDATORY pre-bid conference and shall remain in attendance for the duration of the conference. Any prospective bidder who fails to attend the conference or remain for the duration shall be prohibited from submitting a bid for the project.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.
4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. All bidders must comply with the requirements stated in the attached "Standard Insurance Requirements" sheet attached to this bid solicitation. Prior to contract executions/purchase order issuance, the successful bidder will be required to provide final insurance certificates which shall name Jefferson Parish as an additional insured in accordance with the instructions in the aforementioned "Standard Insurance Requirements" sheet.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. All sureties must be in original format (no copies) If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations on warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits Required; This applies to all solicitations for construction, alteration or demolition of public buildings or projects, in conformity with the provisions contained in LSA-RS 38:2212.9, LSA-RS 38:2212.10, LSA-RS 38:2224, and Sec 2-923.1 of the Jefferson Parish Code of Ordinances. For bidding purposes, all bidders must submit with bid submission COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits, including: Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit, Debt Disclosures Affidavit and E-Verify Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits Required in conformity with the provisions contained in LSA - RS 38:2224 and Sec 2-923.1 of the Jefferson Parish Code of Ordinances. For bidding purposes, all bidders must submit with bid submission COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits, including: Non-Collusion Affidavit, Debt Disclosures Affidavit and Campaign Contribution Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled NON PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
16. The ensuing contract for this bid solicitation may be eligible for FEMA reimbursement and/or Federal funding/reimbursement. As such, the referenced appendix will be applicable accordingly and shall be considered a part of the bid documents. All applicable certifications must be duly completed, signed and submitted with bid submission. Failure to submit applicable certifications with bid submission will result in bid rejection.
17. For this project, the Contractor shall not pay any state or local sales or use taxes on materials and equipment which are affixed and made part of the immovable property of the project or which permanently incorporated in the project (hereinafter referred to as "applicable materials and equipment"). All purchases of applicable materials or equipment shall be made by the contractor on behalf of and as the agent of Jefferson Parish (Owner), a political subdivision of the State of Louisiana. No state and local sales and use taxes are owned on applicable materials and equipment under the provisions of Act 1029 of the 1991 Regular Session - Louisiana Revised Statute 47:301(8)(c). Owner will furnish contractor a certificate form which certifies that Owner is not required to pay such state or local sales and use taxes, and contractor shall furnish a copy of such certificate to all vendors or suppliers of the applicable materials and equipment

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission: and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to Jefferson Parish Code of Ordinances Section 2-155.10(19). By submitting a bid, vendor acknowledges this and will abide by all provisions of the referenced Jefferson Parish Code of Ordinances.

See Page 1 for Conflicts of Interest Statement

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO

MAXIMUM ESCALATION PERCENTAGE REQUESTED N/A %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF term of contract

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

48 hours or less ARO

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)

N/A

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: Gulf Coast Oil & Supply, LLC.

ADDRESS: 45 Cognille Drive

CITY, STATE: Belle Chasse, LA ZIP: 70037
(cell)

TELEPHONE: (504) 433-2049 504-453-9047 FAX: (504) 433-2050

EMAIL ADDRESS: PhilO@gcoilandsupply.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: Addendum #1 4/23/19 PWA

NUMBER: _____

NUMBER: _____

NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 41,151.⁰⁰

AUTHORIZED SIGNATURE: Phil Oestricher

Phil Oestricher

Printed Name

TITLE: President

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	5.00	DRUM	<p>TWO YEAR CONTRACT FOR A SUPPLY OF PETROLEUM PRODUCTS, KEROSENE, VARSOL FOR THE JEFFERSON PARISH DEPARTMENT OF FLEET MANAGEMENT.</p> <p>0001 - CROWN 85W140 GL5- 55 GALLON DRUM PETROLEUM PRODUCTS</p> <p>(MORE OR LESS)(AS PER SPECS BELOW) GRAVITY, API-25.5 FLASH, COC.F-375 POUR, PT., F-0 VISCOSITY CST AT 40 C-310 CST AT 100C-24.7 SSU AT 100 F-1668 STRAIGHT MINERAL GEAR LUBRICANT MEETING API GL5 SPECIFICATIONS.</p>	\$490.00	\$2450.00
				<i>All Fleet 85W140 GL5</i>	
2	2.00	DRUM	<p>0002 - CROWN ATF DERON/MERON 55 GAL. DRUM, PETROLEUM PRODUCTS</p> <p>SYNTHETIC (MORE OR LESS)(AS PER SPECS BELOW) FLASH F-360 POUR F-(30) VISCOSITY CST AT 40 C-39.7 SCT AT 100C-6.2 SSU AT 100F-204 SSU AT 210F-47.1 VISCOSITY INDEX-102 USED IN ALLISON POWERSHIFT AND MODEL CL(8)T700 AUTOMATIC TRANSMISSIONS AND OTHER EQUIPMENT REQUIRING EITHER TYPE C-1, TYPE C-2, OR TYPE C-3 HYDRAULIC TRANSMISSION FLUID.</p>	\$530.00	\$1060.00
				<i>Duramax Global Full Synthetic ATF</i>	
3	5.00	DRUM	<p>0003 - CROWN HYDRAULIC A.W.46 55 GALLON DRUM</p> <p>PETROLEUM PRODUCTS CROWN HYDRAULIC A.W.46 (MORE OR LESS)(AS PER SPECS BELOW) FLASH, F-441 POUR, F-0 VISCOSITY CST AT 40 C-43.3 SSU AT 100F-155 VISCOSITY INDEX-95 ISO VG-46 FOAM ASTM D-892 SEW. I,II,III OXIDATION STABILITY ASTM D-942 HRS-1000+ HYDROLYTIC STABILITY ASTM D-2619 RUST PROTECTIONS ASTM D-655 A & B VANE PUMP TEST ASTM D-2882 35V Q 25 VANE PUMPM TEST.</p>	\$295.00	\$1475.00
				<i>All Fleet Premium AW46 (5000 Hour Product)</i>	
4	2.00	DRUM	<p>0004 - CROWN HYDRAULIC A.W.32 LLDR, 55 GALLON DRUM</p>	\$268.00	\$536.00
				<i>All Fleet Premium AW32 (5000 Hour Product)</i>	

REVISED AS PER ADDENDUM # 1

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			<p>PETROLEUM PRODUCTS</p> <p>HYDRAULIC OIL (MORE OR LESS)(AS PER BELOW SPECS) FLASH, F-432 POUR, F-0 VISCOSITY CST AT 40 C-30.1 SSU AT 100F-155 VISCOSITY INDEX-95 ISO VG-32 FOAM ASTM D-892 SEQ I,II,III OXIDATION STABILITY ASTM D-943-1000+ HYDROLYTIC STABILITY ASTM D-2619 POINT PETROLEUM ASTM D-665A & B VANE PUMP TEST ASTM D-2882 35V Q 25 VAN PUMP TEST</p>		
5	10.00	DRUM	<p>0005 - CROWN UTF 55 GALLON DRUM PETROLEUM PRODUCTS FLD.</p> <p>LLDR (MORE OR LESS)(AS PER SPECS BELOW) FLASH, COC F-392 PORE, PT., F-(-25) VISCOSITY CST AT 40 C-57.8 CST AT 100C-9.1 SSU AT 100F-272 SSU AT 210F-55.7 VISCOCITY INDEX-135 PREMIUM UNIVERSAL LUBRICANT FOR ALL TRACTORS THAT REQUIRE A SINGLE OIL FOR LUBRICATION OF TRANSMISSION. DIFFERENTIAL AND DRIVE GEARS. IT CAN BE USED AS POWER BRAKE, POWER TAKE-OFF AND POWER STEERING FLUID WHERE MINERAL OILS ARE RECOMMENDED. MEETS SPECS FOR AC POWER FLUID 821. ALLISON C1, C2, C3, C4 CATERPILLARE T02, FORD/NEW HOLLAND ESNM2C41B, ESNMC248-B, ESNB2C53C, ESNM2C77A, ESNM2C868, ESNM2C124A,B,C,D CASE INTERNATIONALS JIC 185, JIC 145, JIC 144, JIC 143, MS 1205, MS 1204, MS 1210 (TCH), MS 1206)POWER GRATE PTE) JOHN DEERE J20A (JY GARD), J1145 (303 FLUID), J146, J21A.</p>	<p><i>\$310.00</i></p> <p><i>\$3100.00</i></p> <p><i>All Fleet Premium THF</i></p>	
6	3.00	DRUM	<p>0006 - CROWN ATF DEXRON/MERCON LLDR 55 GAL. DRUM, PETROLEUM PRODUCTS</p> <p>SYNTHETIC (MORE OR LESS)(AS PER BELOW SPECS) COLOR-RED GRAVITY, API-29.5 FLASH, POINT F-360 POUR, PTX, F-(-40) VISCOSITY C-P, AT(-40) C-40,000 CST AT 40C-37 CST AT 100C-7.4 SSU AT 100F-190 SSU AT 210F-51</p>	<p><i>\$525.00</i></p> <p><i>\$1575.00</i></p> <p><i>Ducamur Global Full Synthetic ATF</i></p>	

REVISED AS PER ADDENDUM # 1

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
7	20.00	DRUM	<p>VISCOSITY INDEX-160 PHOSPHORUS % MASS-050 CALCIUM % MASS-013 MEETS TRANSMISSION FLUID REQUIREMENTS FOR ALL ALLISON AUTOMATIC TRANS. ALLISON C3 & C4 AND CATERPILLARE T02 GM DEXROMM II, AMERICAN MORTORS, CHRYSLER AND MERCON, ESP-M2C 166H AS ESP-M2C133C.</p> <p>0007 - CROWN HD 15 W40 MOTOR OIL, 55 GAL. DRUM, PETROLEUM PRODUCTS</p> <p>FULL SYNTHETIC-DELIVERED IN TOTES (MORE OR LESS)(AS PER BELOW SPECS) GRAVITY, API-28.4 FLASH, COC, F-399 POUR, PT., F(-17) VISCOSITY CST AT 40C-120.5 CST AT 100C-15.4 VISCOSITY INDEX-136 ASH(SULFATE),% MAX-8 TBS (ASTM D-2896)-9 D-664-7.5 ZINC % MASS-13 CALCIUM % MASS-02 MEETS API CC, CD, CD-11, CE, SG & API SAE OIL REQUIREMENTS FOR GASOLINE ENGINES. MEETS SHEAR STABILITY REQUIREMENTS OF CCMC (CED-L-14-T74) AS MEASURED IN ASTM D-3945 SHEAR STABILITY TESTS. ALSO MEETS VISCOSITY GRADE FOR CUMMINGS, DDC SERIES 60, NAVISTAR, INTERNATIONAL, AND MACK TRUCK ENGINES.</p>	<p>\$687.50</p> <p>All Fleet Full Synthetic 5W40 CK4 HD</p>	<p>\$13,750.00</p>
8	2.00	DRUM	<p>0008 - CROWN 5W,30, LLDR 55 GAL. DRUM, PETROLEUM PRODUCTS</p> <p>SYNTHETIC (AS PER BELOW SPECS) GRAVITY, API-30.0 FLASH, COC, F-410 POUR, F(-22) VISCOSITY CST AT 40 C-70 CST AT 100C-10.2 VISCOSITY INDEX-146 ASH (SULFATED)-81 ZINC % MASS-09 MAGNESIUM % MASS-13 COPPER PPM-100 API LEVEL-SG UNILUSE API DIESEL ENGINE CATEGORY CC.</p>	<p>\$410.00</p> <p>Duremax 5W30 Full Synthetic Dexos</p>	<p>\$820.00</p>
9	14.00	DRUM	<p>0009 - CROWN K-1 KEROSENE, 55 GALLON CONTAINER</p>	<p>\$260.00</p> <p>K-1 Kerosine</p>	<p>\$3640.00</p>
10	2.00	EA	<p>0010 - CROWN 55 GALLON CONTAINER MINERAL SPIRITS</p>	<p>\$300.00</p> <p>Mineral Spirits</p>	<p>\$600.00</p>

REVISED AS PER ADDENDUM # 1

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
11	2.00	DRUM	0011 - CROWN ISO 46 HYDRAULIC OIL 55 GALLON DRUM PETROLEUM PRODUCTS PRODUCT CODE: 65209 VISCOSITY @ 40 DEGREE C, CST 46.00 @ 100 DEGREE C, CST 6.8 @ 100 DEFREE F, SUS 237 2 210 DEFREE F, SS 449 VISCOSITY INDEX 102 GRAVITY DEGREE API @ 60 DEGREE 29.5 FLASH POINT, COC, DEGREE F 420 POUR POINT, DEGREE F-20 COPPER CORROSION 1A EMULSION TEST @ 130 DEGREE F 30 MINUTES MAX PASS RUST TEST PASS- TURBINE OIL STABILITY TEST, HOURS 3000 PLUS	\$310.00 <i>All Fleet Premium AW46 (5000 + Hours Product)</i>	\$620.00
12	2.00	DRUM	0012 - CROWN ISO 68 55 GALLON DRUM PETROLEUM PRODUCTS PRODUCT CODE: 65211 VISCOSITY: @ 40 DEGREE C, CST 68. @ 100 DEGREE C, CST 8.3 @ 100 DEGREE F, SUS 353 @ 210 DEGREE F, SUS 554.2 VISCOSITY INDEX 97 GRAVITY DEGREE API @ 60 DEGREE 28.5 FLASH POINT, COC, DEGREE F 440 POUR POINT, DEGREE F-20 COPPER CORROSION 1A EMULSION TEST @ 1130 DEGREE F 30 MINUTES PASS REST TEST PASS TURBINE OIL STABILITY TEST, HOURS 3000 PLUS.	\$260.00 <i>All Fleet AW 68</i>	\$520.00
13	5.00	DRUM	0013 - CROWN HI-TEMP 2 55 GAL DRUM CONTAINER PRODUCT CODE 70311 COLOR: BLUE SOAP TYPE: LITHIUM COMPLEX BASE OIL VISCOSITY @ 40 DEGREE C, CST 150 @ 100 DEGREE C, CST 14.5 NLGI CLASSIFICATION CG/LB DROPPING POINT DEGREE F 536 WATER WASHOUT WT % LOSS @ 175 DEGREE F 6.8 TIMKEN OK LOAD, LBS 45 RUST TEST PASS	\$735.00 <i>All Fleet Hi Temp EP2 Grease</i>	\$3675.00

REVISED AS PER ADDENDUM # 1

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
14	20.00	GL	<p>WORKED PENETRATION, DMM @ 77 DEGREE F 60 STROKES 280 BOMB OXIDATION 100 HOURS @ 210 DEGREE F, PSI DROP 5 MAX</p> <p>0014 - ILC MULTIGRADE, 5W20 MOTOR OIL IS A HIGH QUALITY MORTOR OIL THAT PROVIDES ANTI-WEAR PROTECTION AND PROTECTION AGAINST SLUDGE AND DEPOSIT FORMATION. <u>SYNTHETIC</u> ILC MULTIGRAD 5W20 MOTOR OIL IS THE HIGHEST API QUALITY OIL RECOMMENDATION FOR GASOLINE POWERED VEHICLES. TYPICAL TEST DATA: SAE GRADE 5W20 API GRAVITY @ 60 DEGREE 33.6 VISCOSITY: CST @ 40 DEG. C 47.0 CST @ 100 DEG. C 8.3</p>	<p><i>\$9.50</i></p> <p><i>Duramax 5w20 Full Synthetic Motor Oil</i></p>	<p><i>\$190.00</i></p>
15	2.00	DRUM	<p>0015 - TORQUE DRIVE SYNTHETIC TRANSMISSION FLUID-55 GALLON DRUM</p> <p>PHYSICAL DATA: KINEMATIC VISCOSITY @ 100 C, CST (ASTM-D-445) TORQUE DRIVE: 7.4 BROOKFIELD VISCOSITY @ -40 C (CP) TORQUE DRIVE: 8411 VISCOSITY INDEX (ASTM D 2270) TORQUE DRIVE:170 DENSITY @ 60 F (LB/GAL) TORQUE DRIVE: 7.038 FLASH POINT C (F) (ASTM D 92) TORQUE DRIVE: 230 (446) POUR POINT C (F) (ASTM D 97) TORQUE DRIVE: -55 (-67) FOUR BALL WEAR TEST (ASTM D-4172B: 40 KG 75C, 1200 RPM 1 HR) MM TORQUE DRIVE: 0.45 COPPER CORROSION (150 C, 3HR) TORQUE DRIVE: 1B</p> <p>SPECTROGRAPHIC ANALYSIS: BORON (PPM) TORQUE DRIVE: 133 CALCIUM (PPM) TORQUE DRIVE: 28 PHOSPHOROUS (PPM) TORQUE DRIVE: 230</p> <p>RECOMMENDED FOR USE IN APPLICATIONS SPECIFYING ALLISON TES-295, TES-389 OR C-4, DEXRON III, MERCON, VOITH 55.6336.X X(G-1363)ZF-TE-ML14C TORQUE DRIVE: SYNTHETIC</p>	<p><i>\$800.00</i></p> <p><i>HD ATF Full Synthetic Meeting All Specs listed</i></p>	<p><i>\$1600.00</i></p>
16	2.00	DRUM	<p>0016 - 75-140 SYNTHETIC GEAR OIL-55 GALLON DRUM</p> <p>REVISED AS PER ADDENDUM # 1</p>	<p><i>\$920.00</i></p> <p><i>AllFleet 75w140 Full Synthetic</i></p>	<p><i>\$1840.00</i></p>

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
17	5.00	DRUM	0017 - CAM 2 BLUE BLOOD 0W40 ELITE <u>FUL</u>	\$ 740. ⁰⁰	\$ 3700. ⁰⁰ P.O.
18	1.00	EA	0018 - DELIVERY CHARGE PRODUCTS MUST BE DELIVERED WITHIN SEVENTY-TWO (72) HOURS OF ORDER PLACEMENT.	CAM 2 Blue Blood 0w40 Elite \$0 Full Synthetic \$0	\$0
				* NO Delivery Fee *	

REVISED AS PER ADDENDUM # 1

CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF
Gulf Coast Oil & Supply, LLC
INCORPORATED.

AT THE MEETING OF DIRECTORS OF Gulf Coast Oil & Supply, LLC
INCORPORATED, DULY NOTICED AND HELD ON April 23, 2019,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT
WAS:

RESOLVED THAT Phil Oestricher, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT. THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.



SECRETARY-TREASURER
President / Owner
April 23, 2019

DATE

**State of
Louisiana
Secretary of
State**



COMMERCIAL DIVISION
225.925.4704

Fax Numbers
225.932.5317 (Admin. Services)
225.932.5314 (Corporations)
225.932.5318 (UCC)

Name	Type	City	Status
GULF COAST OIL & SUPPLY, L.L.C.	Limited Liability Company	BELLE CHASSE	Active

Previous Names

Business: GULF COAST OIL & SUPPLY, L.L.C.
Charter Number: 41619887K
Registration Date: 8/26/2014

Domicile Address

45 COQUILLE DRIVE
BELLE CHASSE, LA 70037

Mailing Address

632 BLUEBONNET DRIVE
BELLE CHASSE, LA 70037

Status

Status: Active
Annual Report Status: In Good Standing
File Date: 8/26/2014
Last Report Filed: 7/31/2018
Type: Limited Liability Company

Registered Agent(s)

Agent:	PHIL OESTRIECHER
Address 1:	632 BLUEBONNET DRIVE
City, State, Zip:	BELLE CHASSE, LA 70037
Appointment Date:	8/26/2014

Officer(s)

Additional Officers: No

Officer:	PHILIP OESTRIECHER
Title:	Member, Manager
Address 1:	632 BLUEBONNET DRIVE
City, State, Zip:	BELLE CHASSE, LA 70037

Officer:	CHAD BENOIT
Title:	Member

Non-Public Works Bid Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit

Non-Public Works Bid

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF Plaquemine

BEFORE ME, the undersigned authority, personally came and appeared: _____

Phil Oestricher, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized President / Owner of Gulf Coast Oil & Supply, LLC. (Entity), the party who submitted a bid in response to Bid Number 50-126129, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B there are **NO** campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.




Signature of Affiant

Phil Oestricher

Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 23 DAY OF April, 2019.

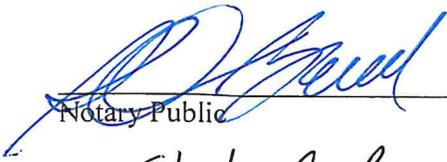

Notary Public

Stephen C. Braud

Printed Name of Notary

#3412 / #43754

Notary/Bar Roll Number

My commission expires N/A For Life.



STEPHEN C. BRAUD
Notary Public
Parish of Plaquemines
State of Louisiana
Commission Issued For Life
Bar Roll #3412, Notary ID #43754

Louisiana Secretary of State R. Kyle Ardoin

SEARCH FOR LOUISIANA NOTARIES

A practicing notary in a parish may notarize in reciprocal parishes without additional bonding or examination.

You can also download information about all notaries on file. For more information, see Notary Bulk Data.

Print

Notary Search - Detail

Name: MR. STEPHEN C. BRAUD
Address: 8114 HWY. 23, SUITE 101
BELLE CHASSE, LA 70037
Phone: (504) 394-9841
Notary ID Number: 43754
Parish: PLAQUEMINES with STATEWIDE JURISDICTION
Agency: N/A
Notary Type: Attorney
Bar Roll #: 3412
Status: Active
Commission Date: 06/14/1979
Oath Date: 06/11/1979
Surety Expiration Date: Not Required
Annual Report Current: Not Applicable

[Back to Search Results](#)

[New Search](#)

STANDARD INSURANCE REQUIREMENTS FOR BIDDING PURPOSES

All required insurance under this bid shall conform to Jefferson Parish Resolution No. 113646 or No. 113647, as applicable. Contractors may not commence any work under any ensuing contract unless and until all required insurance and associated evidentiary requirements thereto have been met, along with any additional specifications contained in the **Invitation to Bid**. Except as where otherwise precluded by law, the Parish Attorney or his designee, with the concurrence of the Director of Risk Management or his designee, may agree on a case-by-case basis, to deviate from Jefferson Parish's standard insurance requirements, as provided in this Section. Vendors requesting deviation therefrom shall submit such requests in writing, along with compelling substantiation, to the Purchasing Department prior to the bid's due date. Any changes to the insurance requirements will be reflected in the bid specifications and addenda. Prior to contract execution and at all times thereafter during the term of such contract, contractors must provide and continuously maintain all coverages as required by the foregoing Resolutions, and the contract documents. Failure to do so shall be grounds for suspension, discontinuation or termination of the contract.

For bidding purposes, bidders must submit with bid submission a current (valid) insurance certificate evidencing the required coverages. Failure to comply will cause bid to be rejected. The current insurance certificate will be used for proof of insurance at time of evaluation. Thereafter, and prior to contract execution, the low bidder will be required to provide final insurance certificates to the Parish which shall name **the Jefferson Parish, its Districts Departments and Agencies under the direction of the Parish President and the Parish Council** as additional insureds regarding negligence by the contractor for the Commercial General Liability, Workmen's Compensation Insurance and the Comprehensive Automobile Liability policies. Additionally, said certificates should reflect the name of the Parish Department receiving goods and services and reference the respective Jefferson Parish bid number.

JEFFERSON PARISH REQUIRED STANDARD INSURANCE

WORKER'S COMPENSATION INSURANCE

As required by Louisiana State Statute, exception; Employer's Liability, Section B shall be \$1,000,000 per occurrence when Work is to be over water and involves maritime exposures to cover all employees not covered under the State Worker's Compensation Act, otherwise this limit shall be no less than \$500,000 per occurrence.

Note: If your company is not required by law to carry workmen's compensation insurance, i.e. not a Louisiana company, sole employee of the company, then bidders must request a workmen's compensation insurance declaration affidavit prior to the bid opening date. This insurance declaration affidavit must be fully completed, signed, properly notarized and submitted with the bid. A scanned copy may be submitted with the bid; however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being

rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.

COMMERCIAL GENERAL LIABILITY

Shall provide limits not less than the following: \$1,000,000.00 Combined Single Limit per Occurrence for bodily injury and property damage.

COMPREHENSIVE AUTOMOBILE LIABILITY

Bodily injury liability \$1,000,000.00 each person; \$1,000,000.00 each occurrence.
Property Damage Liability \$1,000,000.00 each occurrence.

Note: This category may be omitted if bidders do not/will not utilize company vehicles for the project or do not possess company vehicles. Bidder must request an automobile insurance declaration affidavit prior to the bid opening date. This insurance declaration affidavit must be fully completed, signed, properly notarized and submitted with the bid. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid; however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.

DEDUCTIBLES

No insurance required shall include a deductible not greater than \$10,000.00. The cost of the deductible shall be borne by the contractor.

NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney's Office with the concurrence of the Director of Risk Management.

UMBRELLA LIABILITY COVERAGE

An umbrella policy or excess may be used to meet minimum requirements.

FOR CONSTRUCTION AND RENOVATION PROJECTS:

The following are required unless otherwise specified in the bid. Such insurance is due upon contract execution.

1) **OWNER'S PROTECTIVE LIABILITY**

To be for the same limits of liability for bodily injury and property damage liability established for commercial general liability.

2) **BUILDER'S RISK INSURANCE**

The contractor shall maintain Builder's Risk Insurance at his own expense to insure both the owner (Parish of Jefferson) and contractor as their interest may appear.



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

January 2019

CHANGES TO JEFFERSON PARISH BIDDING PROCEDURES

- **As of January 9, 2019, due to water damage in our main office of 200 Derbigny Street, Suite 4400, Gretna, LA 70053 is closed. Westbank Purchasing Department has temporarily relocated to Paul D. Connick, Sr., Emergency Operations & Communications Center, 910 3rd Street, Gretna, LA 70053. All hand delivered bids and advertised bid openings will be held at this location at the set date and time on the individual Invitation to Bid.**
- **As of November 13, 2018, for all advertised (2:00 pm) bids, the bid tabulation will be released to the vendors 14 days from the bid opening date.**

Other continued changes:

- Bid submissions can be delivered to the Joseph S. Yenni Building, 1221 Elmwood Park Blvd., Suite 404, Jefferson, LA 70123. Bidders may submit bid submission to the East Bank location, pending authorization in each bid package. **Bidders should carefully read and must respond accordingly per the requirements of the bid packages. NOTE: Bidders submitting bids on the day of bid opening, bidders must submit at the West Bank location only.**
- For all advertised sealed bids, written evidence of signature authority must be included with bid submission.
- Current W9 Forms and vendor applications may be submitted at any time; however, if your company is not registered and/or a current W-9 form is not on file, a current W-9 form must be supplied upon contract execution, should you be awarded a contract and/or issued a purchase order.
- **Proof of insurance in the form of a current certificate evidencing coverages is required with bid submission from all bidders.** Bidders must read the insurance requirement attachment included in each bid package for specific instructions. Upon contract execution, successful bidder must produce final insurance certificates in accordance with Jefferson Parish insurance requirements.

Bidders should reference the "Additional Requirements" section of the bid instructions and/or the "Important Notice to Bidders" included in the bid package for specific requirements to respond accordingly.

For more information, please call Jefferson Parish Purchasing at 504-364-2678.

Joseph S. Yenni Building – 1221 Elmwood Park Blvd., Ste. 404, Jefferson, LA 70123
Office 504.364.2678
General Government Bldg. – 200 Derbigny St – Suite 4400 - Gretna, LA 70053
Office 504.364.2678
Email: Purchasing@jeffparish.net Website: www.jeffparish.net

CERTIFICATE OF LIABILITY INSURANCE

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer any rights to the certificate holder in lieu of such endorsement(s).

PRODUCER USI Southwest P.O. Box 2868 Houma, LA 70361 985 868-2436	CONTACT NAME: Amanda Theriot
	PHONE (A/C, No, Ext): 985 868-2436 FAX (A/C, No): 985-868-2465 E-MAIL ADDRESS: amanda.theriot@usi.com
INSURED Gulf Coast Oil & Supply, LLC 632 Bluebonnet Drive Belle Chasse, LA 70037	INSURER(S) AFFORDING COVERAGE NAIC #
	INSURER A : Scottsdale Insurance Company 41297
	INSURER B : Progressive Paloverde Ins Co 44695
	INSURER C :
	INSURER D :
	INSURER E :

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER:			ENS0003487	09/16/2018	09/16/2019	EACH OCCURRENCE \$ 1,000,000
							DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000
							MED EXP (Any one person) \$ 5,000
							PERSONAL & ADV INJURY \$ 1,000,000
							GENERAL AGGREGATE \$ 2,000,000
							PRODUCTS - COMP/OP AGG \$ 2,000,000
							OTHER: \$
B	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input checked="" type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> NON-OWNED AUTOS ONLY			032741119	03/11/2019	09/11/2019	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000
							BODILY INJURY (Per person) \$
							BODILY INJURY (Per accident) \$
							PROPERTY DAMAGE (Per accident) \$
							OTHER: \$
	UMBRELLA LIAB <input type="checkbox"/> OCCUR EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED RETENTION \$						EACH OCCURRENCE \$
							AGGREGATE \$
							OTHER: \$
	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? Y / N (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below			N/A			PER STATUTE OTH-ER
							E.L. EACH ACCIDENT \$
							E.L. DISEASE - EA EMPLOYEE \$
							E.L. DISEASE - POLICY LIMIT \$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)
Any request for special coverages which are specifically required by contract or minimum insurance requirements should be forwarded to this office for review.

COMMERCIAL GENERAL LIABILITY:
 Policy includes automatic Additional Insured, Waiver of Subrogation, and Primary Insurance endorsements
 (See Attached Descriptions)

CERTIFICATE HOLDER The Parish of Jefferson, its Districts, Departments and Agencies 4901 Jefferson Hwy, Suite A Jefferson, LA 70121	CANCELLATION SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS. AUTHORIZED REPRESENTATIVE <i>Tania L. Rivest</i>
---	--

DESCRIPTIONS (Continued from Page 1)

that provide this status to the Certificate holder, only when there is a written contract between the named insured and the certificate holder that requires such status, and only with regard to work performed on behalf of the named insured

Contract# 55-16799, The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and Parish Council



CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)
04/29/2019

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER Bowles & Associates, Inc. 2804 Belle Chasse Hwy Gretna, LA 70053	CONTACT NAME:	
	PHONE (A/C, No, Ext): 504-362-0922	FAX (A/C, No): 504-362-8722
INSURED Gulf Coast Oil & Supply, LLC 101 Herman Dr Belle Chasse, LA 70037	E-MAIL ADDRESS:	
	INSURER(S) AFFORDING COVERAGE	
	INSURER A: Stonetrust	
	INSURER B:	
	INSURER C:	
	INSURER D:	
INSURER E:		
INSURER F:		

COVERAGES CERTIFICATE NUMBER: REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSR	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
	GENERAL LIABILITY <input type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input type="checkbox"/> OCCUR GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC						EACH OCCURRENCE \$ DAMAGE TO RENTED PREMISES (Ea occurrence) \$ MED EXP (Any one person) \$ PERSONAL & ADV INJURY \$ GENERAL AGGREGATE \$ PRODUCTS - COMP/OP AGG \$ \$
	AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> ALL OWNED AUTOS <input type="checkbox"/> HIRED AUTOS <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> NON-OWNED AUTOS						COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
	UMBRELLA LIAB <input type="checkbox"/> OCCUR EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED RETENTION \$						EACH OCCURRENCE \$ AGGREGATE \$ \$
A	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	Y/N		WCV 008894400-4	10/14/18	10/14/19	<input checked="" type="checkbox"/> WC STATUTORY LIMITS <input type="checkbox"/> OTHER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (Attach ACORD 101, Additional Remarks Schedule, if more space is required)

The Parish of Jefferson its Districts, Departments and Agencies under the direction of the parish president and the parish council.
Additional insured status is provided to the certificate holder as required by signed written contract between the named insured and the certificate holder and only with regard to work performed on behalf of the named insured. . Bid No. 50-00120161.

CERTIFICATE HOLDER THE PARISH OF JEFFERSON, ITS DISTRICTS DEPARTMENTS AND AGENCIES 4901 JEFFERSON HWY SUITE A JEFFERSON , La 70121	CANCELLATION SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.
	AUTHORIZED REPRESENTATIVE 

#28648

Form W-9
 (Rev. August 2013)
 Department of the Treasury
 Internal Revenue Service

**Request for Taxpayer
 Identification Number and Certification**

Give Form to the requester. Do not send to the IRS.

Name (as shown on your income tax return)
Gulf Coast Oil & Supply, L.L.C.
 Business name/disregarded entity name, if different from above

Check appropriate box for federal tax classification:
 Individual/sole proprietor C Corporation S Corporation Partnership Trust/estate
 Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=partnership) ▶ **S**
 Other (see instructions) ▶

Exemptions (see instructions):
 Exempt payee code (if any) _____
 Exemption from FATCA reporting code (if any) _____

Address (number, street, and apt. or suite no.)
101 Herman Drive
 City, state, and ZIP code
Belle Chasse, LA 70037

Requester's name and address (optional)

List account number(s) here (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on the "Name" line to avoid backup withholding. For individuals, this is your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the Part I instructions on page 3. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN* on page 3.

Note. If the account is in more than one name, see the chart on page 4 for guidelines on whose number to enter.

Social security number								
			-					

Employer identification number									
4	7	-	1	6	5	7	3	6	7

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me), and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding, and
- I am a U.S. citizen or other U.S. person (defined below), and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

Certification Instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions on page 3.

Sign Here Signature of U.S. person ▶  Date ▶ **8/26/14**

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Future developments. The IRS has created a page on IRS.gov for information about Form W-9, at www.irs.gov/w9. Information about any future developments affecting Form W-9 (such as legislation enacted after we release it) will be posted on that page.

Purpose of Form

A person who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) to report, for example, income paid to you, payments made to you in settlement of payment card and third party network transactions, real estate transactions, mortgage interest you paid, acquisition or abandonment of secured property, cancellation of debt, or contributions you made to an IRA.

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN to the person requesting it (the requester) and, when applicable, to:

- Certify that the TIN you are giving is correct (or you are waiting for a number to be issued).
- Certify that you are not subject to backup withholding, or
- Claim exemption from backup withholding if you are a U.S. exempt payee. If applicable, you are also certifying that as a U.S. person, your allocable share of any partnership income from a U.S. trade or business is not subject to the

withholding tax on foreign partners' share of effectively connected income, and

- Certify that FATCA code(s) entered on this form (if any) indicating that you are exempt from the FATCA reporting, is correct.

Note. If you are a U.S. person and a requester gives you a form other than Form W-9 to request your TIN, you must use the requester's form if it is substantially similar to this Form W-9.

Definition of a U.S. person. For federal tax purposes, you are considered a U.S. person if you are:

- An individual who is a U.S. citizen or U.S. resident alien,
- A partnership, corporation, company, or association created or organized in the United States or under the laws of the United States,
- An estate (other than a foreign estate), or
- A domestic trust (as defined in Regulations section 301.7701-7).

Special rules for partnerships. Partnerships that conduct a trade or business in the United States are generally required to pay a withholding tax under section 1446 on any foreign partners' share of effectively connected taxable income from such business. Further, in certain cases where a Form W-9 has not been received, the rules under section 1446 require a partnership to presume that a partner is a foreign person, and pay the section 1446 withholding tax. Therefore, if you are a U.S. person that is a partner in a partnership conducting a trade or business in the United States, provide Form W-9 to the partnership to establish your U.S. status and avoid section 1446 withholding on your share of partnership income.



CENTRALBIDDING
FROM CENTRAL AUCTION HOUSE

**5000126129 TWO YEAR CONTACT FOR A SUPPLY OF PETROLEUM
PRODUCTS, KEROSENE, VARSOL FOR THE JEFFERSON PARISH
DEPARTMENT OF FLEET MANAGEMENT.**
Jefferson Parish Government

Project documents obtained from www.CentralBidding.com
23-Apr-2019 03:58:12 PM



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

April 23, 2019

ADDENDUM # 1

Bid No.: 50-00126129

Bid Opening Date: 04/30/2019

For: Two year contract for a supply of Petroleum Products, kerosene, varsol for the Jefferson Parish Department of Fleet Management.

REMOVE PAGES 6 THRU 11 OF THE BID FORM. REPLACE WITH ATTACHED REVISED AS PER ADDENDUM # 1 PAGES.

This was to answer vendor questions:

1).Line 7: the Crown HD 15w40 Motor Oil states synthetic. Is that a full synthetic or a semi-synthetic?

Answer: Full Synthetic 15W40.

2). Cam 2 BlueBlood Elite F50W40- is this a typo on the weights or is it a F50w40.

Answer: This was a typo it is Cam 2 Blue Blood 0W40 Elite Ful.

Sincerely,

Donna Reamey

Donna Reamey; Buyer II
Jefferson Parish Purchasing Department

Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form as indicated. Failure to do so will result in bid rejection.

This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.



Global Full Synthetic Multi-Vehicle ATF


DuraMAX® Global Full Synthetic ATF is specially formulated with a unique combination of synthetic base stocks and an advanced additive technology to ensure peak performance in automatic transmissions. This premium quality product meets or exceeds the frictional and wear requirements of most automatic transmissions regardless of age.

Benefits of DuraMAX Global Full Synthetic ATF include:

- Protection against wear and transmission shudder
- Resistance to thickening due to high temperatures
- Friction stability to maintain smooth consistent shift performance

DuraMAX Global Full Synthetic ATF is recommended for a wide range of applications, including GM DEXRON®-VI, Ford MERCON®, Toyota WS, Toyota T-IV, Honda Z-1, Honda DW-1, Hyundai/Kia/Mitsubishi SP-II, SP-III, SP-IV, JWS 3309, 3324, Audi/VW G-052-162-A1 / A2, G-055-025-A2, TL 521 62, LT 71141, BMW 5 HP LT 71141, LA2634, BMW/Mini 83 22 0 402 413 9, Volvo 97340, 97341, Subaru ATF, ATF HP, Nissan/Infiniti MATIC D, J, K, S, Scion, Mazda ATF M III, MW and many more.

See page 2 for a listing of all recommended applications.

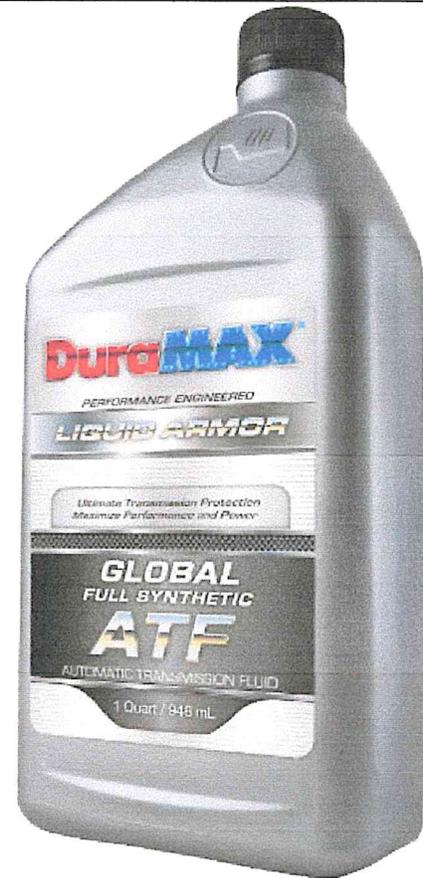

CATEGORY	TEST METHOD	TYPICAL VALUE
Gravity, °API	ASTM D287	35.6
Specific Gravity @ 60°F (15.6°C)	ASTM D4052	0.8468
Viscosity @ 40°C cSt	ASTM D445	28.56
Viscosity @ 100°C cSt	ASTM D445	5.797
Viscosity Index	ASTM D2270	151
Pour Point °C (°F)	ASTM D5950	-51 (-60)
Brookfield Viscosity at -40°C, cP	ASTM D2893	10,300
Color	ASTM D1500	Red

www.Reladyne.com

WD.LV010.07312018

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 Reladyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com





Global Full Synthetic Multi-Vehicle ATF

DuraMAX Global Full Synthetic Multi-Vehicle ATF is DEXRON® VI approved and suitable for use in the following applications:

Acura ATF-Z1	Ford MERCON® V
Aisin Warner AW-1	Ford MERCON® SP (*See page 3)
Aisin Warner JWS 3309	Ford MERCON® LV (approved)
Aisin Warner JWS 3324	Ford WSS M2C 922 A1, 924-A (XT-8-QAW) (JWS 3309)
Aisin Warner M315 A-1	Ford M2C138CJ, M2C166H
Aisin Warner T IV	Fuso ATF-II, SPIII, ATF-A4
Allison C-4	GM Type A
Allison C-3	GM T IV
Allison TES-389	Hino Blue Ribbon ATF
American Motors (MS9602)	Honda DW-1
American Motors (MS7176-E)	Honda ATF-Z1
AS 68 RC (T IV)	Hyundai/Kia Red 1, SP-II, III
ATF Red 1, Red 1K	Hyundai/Kia SP-IV (M, RR)
Audi G 052 025	Hyundai JWS-9638, 3314
Audi G 052 162	Isuzu Bescom ATF II, III
Audi G 055 025	Jaguar ATF 3403 M115
Audi 5HP LT 71141 (ZF 5 HP 18FL/19FL/24A)	Jaguar LT 71141, ZF5HP24
Audi 5HP (ZF 5 HP 30)	Jaguar JLM 20238
Audi G-052-162-A1 / A2	JASO M315 1-A
Audi G-055-025-A2(JWS 3309)	JASO 1A-LV, 2A-02
BMW ETL-7045, 7045E (83 22 0 026 922)	JWS 3309 (T IV)
BMW LA2634	JWS 3324 (WS)
BMW LT 71141	Lexus JWS 3309
BMW 5 HP (ZF 5 HP 30)	Kia ATF SP-II, III, IV, IVM,Red1
BMW 5 HP LT 71141	MAN 339F
BMW ETL-7045, 7045E	MAN 339 V1
BMW ETL-8072B(83 22 0 024 359)	MAN 339 V2
BMW MINI 83 22 0 402 413 9 (JWS 3309)	MAN 339 Z1
Caterpillar Powershift TO-2	MAN 339 Z2
Chrysler Mopar AS 68 RC (T IV)	MAN 339 Z3
Chrysler 8 and 9 speed transmissions	Mazda ATF-M III
Daewoo LT 71141	Mazda ATF-M V
Daihatsu AMMIX ATF D-II, D-III SP	Mazda D-II, FZ, FI, SI, NI
DEXRON®	Mercedes Benz 236.1
DEXRON®-II, IID, IIE	Mercedes Benz 223.2
DEXRON®-IIIF, IIIG, IIIH	Mercedes Benz 236.5
DEXRON® VI (approved)	Mercedes Benz 236.6
Esso LT 71141	Mercedes Benz 236.7
Fiat, Typo T IV, JWS 3309	Mercedes Benz 236.9
Ford FNR5	Mercedes Benz 236.10
Ford MERCON® (XT-2-QDR, XT-2-QSM SYN)	Mercedes Benz 236.8

www.RelaDyne.com

WD.LV010.07312018

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com





Global Full Synthetic Multi-Vehicle ATF

Mercedes Benz 236.12
Mercedes Benz 236.41
Mercedes Benz ZF 4 HP20
Mini Cooper T-IV
Mitsubishi SP-II, SP-III, SP IV, J2
Mitsubishi SK, AW, J3, PA
NAG 1 (Jeep Cherokee)
NAG 2 (Chrysler)
Nissan Matic-D, J, K
Nissan Matic-S
Opel (All Vehicles)
Peugeot ZF 4 HP20
Porsche ATF 3403 M115
Porsche LT 71141
Porsche T IV (JWS 3309)
Saab T IV
Saturn T IV
Scion (All Vehicles)
Shell 3403, M115
Shell LA2634
Subaru ATF, ATF-HP
Subaru ATF 5AT, Dexron II
Suzuki AT OIL 5D06, ATF 2326, 2384K, 3314, 3317
Suzuki ATF 3309
Texaco ETL-7045E

Texaco ETL-8072B
Texaco N402
Toyota D-II, D-III
Toyota T-III & T-IV
Toyota WS (JWS 3324)
Vickers M2950-S, I-286-S
Voith Turbo 55.6335.3X
Voith 55.6336.XX (G1363)
Volvo 97340
Volvo 97341
VW G 052 025
VW G 052 162
VW G 055 025 A2
VW 5HP LT 71141 (Audi G-052-162-A1 / A2)
VW 5HP (ZF 5 HP 30)
VW TL 521 62
ZF TE-ML 02F, TE-ML 03D, TE-ML 04D, TE-ML 09, TE-ML 11A, TE-ML 14A, TE-ML 14B, TE-ML 14C, TE-ML 16L, ZF TE-ML 17C
ZF TE-ML 03D, 04D, 05L, 09, 11B, 14A, 16L, 17C
ZF TE-ML 14B
ZF TE-ML 14C
ZF all 3 & 4 speed transmission
ZF 5 HP 18FL / 19FL / 24A

*Full Synthetic Low Viscosity Multi-Vehicle ATF is Suitable for MERCON® SP except in these applications:

- 2005 Jaguar XK8/XKR
- 2005–2008 Jaguar S-Type
- 2005–2008 Jaguar XJ
- 2005–2008 Range Rover
- 2005–2008 Land Rover Discovery
- 2005–2008 Lincoln Navigator
- 2006–2008 Jaguar XK/XKR
- 2006–2008 Range Rover Sport
- 2006–2008 - Ford Explorer
- 2007–2008 - Ford Expedition

See <https://www.fcsdchemicalsandlubricants.com/main/quickref/atf.pdf> for details on Ford Fluids

Always check your owner's manual to determine the proper automatic transmission fluid for your vehicle. Do not use in high pressure systems in the vicinity of flames, sparks, and hot surfaces. Use only in well ventilated areas. Keep container closed. This product is not suitable for dual clutch transmissions (DCT) or continuously variable transmissions (CVT). Please consult with your RelaDyne associate for more details with regards to products for those applications. This product is Compatible for use with high viscosity applications outside of warranty without causing harm to the transmission; however, the viscosity profile does not meet the specification requirements and may be subject to regulation in some countries and states in the U.S. such as California.

www.Reladyne.com

WD.LV010.07312018

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 RelaDyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com



KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid



PRODUCT DESCRIPTION

KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid is a premium transmission fluid designed for outstanding performance and extended service life in heavy duty applications.

APPLICATIONS

KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid is a premium heavy duty fluid that has been specifically designed to meet the stringent performance requirements of the Allison TES-295 specification. In addition, this advanced product exceeds many other current original equipment manufacturers' specifications for automatic transmission fluids, including some of the latest OEM specifications from heavy duty transmission manufacturers such as ZF, Voith and Volvo, as well as some automotive specifications from GM, Ford, Chrysler, Toyota, Mitsubishi and others.

KLONDIKE Heavy Duty Full Synthetic ATF is an ideal transmission fluid for use in applications where heavy duty performance and maximum service life are desired.



FEATURES AND BENEFITS

KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid is formulated with premium full synthetic base stocks and technologically advanced additives; base components specifically tested for very high fluid performance and component protection. High performance chemistry offers outstanding anti-shudder durability, friction stability, shift quality, anti-wear protection, fluid oxidation resistance, as well as outstanding low and high temperature operation characteristics. Oxidation resistant additives minimize the formation of deposits, sludge, varnish, and foam ensuring maximum fluid life and outstanding component durability. Advanced friction modifiers combined with an optimized viscosity formulation have been proven to show improvements in fuel economy.

KLONDIKE Heavy Duty Full Synthetic ATF contains advanced viscosity control chemistry and has demonstrated stay-in-grade performance in excess of 240,000 km's (150,000 miles) of on-road service. Such advanced performance ensures very long service life and helps to maximize the return on investment of heavy duty vehicle assets. This formulation has been extensively field tested to demonstrate its compatibility in a wide variety of automatic transmissions.

KLONDIKE Heavy Duty Full Synthetic ATF provides value through the following benefits:

- **Full synthetic** - premium synthetic base oils ensure high performance and operating efficiency.
- **Advanced additive chemistry** - smooth, consistent shifting performance with positive lockup.
- **Premium protection** - maintains its properties at high temperatures, while under extreme loads, or in severe operating conditions.
- **All climate application** - highly stable at extreme temperatures for year-round protection and performance.
- **Extended service life** - retains frictional and viscosity properties and protects against oxidation, rust, and corrosion far beyond traditional fluids.
- **Compatibility** - ideal for top-up or complete replacement for OEM fluids.



KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid

SPECIFICATIONS AND APPLICATIONS

KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid is compatible with and may be used as a top-up or complete replacement fluid where the following specifications or product applications are listed:

- ATF Type A-Suffix A
- Allison C3, C4 (TES-228), TES-295, TES-389
- Aisin Warner A-1, 3309
- Audi/VW ZF, 5HP19FL, 5HP24A, LT7114, G-052-162-A1/A2, G055-005-A2, G052-025(09M), G052-990(09A), G052-025-A2
- BMW ZF, 5HP18FL, 5HP24, 5HP30, LT 71141, LA 2634, ETL-7045E, 8072B
- Caterpillar TO-2
- Chrysler / Jeep / American Motors ATF +3 / ATF +4, MOPAR AS68RC ATF
- Daewoo LT71141
- Esso LT71141
- Ford M, MV, M2C138-CJ, M2C166H, MC2C924-A
- GM DII / II-E / III / IIIG / IIHH, GM 9986195, Strasbourg, 12378515 (Transynd)
- Hyundai / Kia SP-II, SP-III, SP-IV
- Honda ATF – Z1, DW-1 (except in CVTs)
- Idemitsu K17, Jatco 3100PL085
- JASO 1A (M315-2006)
- Jaguar M1375.4, ATF 3403 M115, JWS 3309
- Land Rover -Texaco N402
- Mazda ATF M-III, M-V, FNR5
- Mini Cooper T-IV (except in CVTs)
- Mercedes ZF 4HP20, MB 236.1; 2; 3(PSF); 5(C-4), 6, 7, 8, 9, 10
- Nissan / Infiniti Matic D, J, K
- Peugeot ZF 4HP20
- Porsche ZF 5HP19FL, ATF 3403-M115, T-IV
- Saab 3309
- Subaru ATF, ATF-HP
- Shell 3403, 3353, LA2634
- Suzuki ATF 3317
- Texaco ETL-7045E, ETL-0872B, N402
- Toyota / Lexus / Scion Type T, T-II, T-III, T-IV (US PN 88900925, Canada PN 22689186)
- Voith H55.6335.XX(G607), Turbo, ZF, Comat, ZF TE-ML 03D, 04D, 09, 11, 16L, 17C, DIWA 5, DIWA 6, DIWA Hybrid
- Volvo 97340, 1161521, 1161540, T-IV, STD 1273.41

Other suitable applications may apply. Contact KLONDIKE for more information.

Not for use as CVT fluid, in Type F applications, or where Power Steering Fluids for Honda are specified.



KLONDIKE Heavy Duty Full Synthetic Automatic Transmission Fluid

TYPICAL TECHNICAL PROPERTIES

PROPERTY	HD FULL SYN ATF
Gravity, ° API	35.42
Sp.Gravity @ 15.6°C	0.847
Viscosity @ 40° C. cSt	34.8
Viscosity @ 100° C. cSt	7.35
Viscosity Index	>184
Pour Point °C	-51
Flash Point °C	220
Brookfield Viscosity @ -40° C. cP	8,000
Color, D-1500	Red

All stated physical properties are typical of standard production and may vary.

HEALTH AND SAFETY

This product is not expected to have adverse health implications when used for its intended application. For detailed information on safe handling of this product, refer to its Material Safety Data Sheet (MSDS). To obtain an MSDS on this or any other KLONDIKE product, please visit www.klondikelubricants.com or call 1-877-293-4691. When disposing of used product, be responsible to the environment.

BRAVING THE FORCE OF MOVEMENT

KLONDIKE stands for robust, reliable, high quality products tailored to suit the requirements of the on- and off-road heavy duty, automotive and industrial markets. Our solutions span from trend-setting retail lubricants through small-batch custom formulations to large bulk orders ready for immediate delivery.

The extensive KLONDIKE product range includes premium oils, lubricants, greases, chemicals and specialty fluids formulated with virgin base oils and protective inhibitors. Designed to handle the most extreme climates and operating conditions, the KLONDIKE products protect and extend the life of your equipment, optimize performance and improve productivity while meeting and exceeding industry standards and specifications.

KLONDIKE Lubricants Corporation

Toll-free 1-877-293-4691

info@klondikelubricants.com
www.klondikelubricants.com





FULL SYNTHETIC 5W-40 CK-4

CK-4 HEAVY DUTY DIESEL ENGINE OIL

ALLFLEET® Full Synthetic 5W-40 CK-4 is a technologically advanced heavy-duty diesel engine oil that provides unsurpassed protection and performance, including the following benefits:

- Our best cold temperature performance
- Superior extended drain capability
- Meets or exceeds the requirements of OEMs



ENGINEERING AND INNOVATION FOR EXTRA PROTECTION

ALLFLEET® advanced oil technology improves oil properties over time, retaining viscosity, friction and anti-wear benefits, even in today's hotter engines, reducing the need for thicker oil. This is exactly the kind of protection called for in today's engines that deliver greater horsepower and better fuel economy.

The latest ALLFLEET® Full Synthetic Heavy Duty Diesel Engine Oils are specially engineered and formulated to provide:

PERFORMANCE

- Unsurpassed protection for extended drain intervals.
- Improved fuel economy. Reduces fuel costs without sacrificing engine protection and performance.
- Extended oil drain intervals. Fuel economies can be gained when following engine manufacturer recommendations and in conjunction with scheduled oil analysis.

STRENGTH

- Enhanced friction reduction¹. ALLFLEET provides a very strong oil film to prevent metal-to-metal contact between rotating parts, delivering up to 53% better wear protection.²
- Unsurpassed wear protection. The latest generation API CK-4 ALLFLEET engine oils provide increased protection against harmful engine and bearing wear due to cavitation, because they improve oil aeration.

DURABILITY

- Better oxidation and deposit control. ALLFLEET technology stands up to high heat and stress to protect as well on the last day as it does on the first day. Up to 83% better oxidation control and 63% better deposit control.²
- Formulated with higher starting TBN (10). Provides added oxidation control and protection against acid buildup that can cause rust and corrosion.

¹ To measure friction reduction benefits, engineers used the ball-on-disk traction test.

² Compared to new limits of API CK-4 requirements.



FULL SYNTHETIC 5W-40 CK-4

APPLICATIONS

- This product and grade is a fuel economy and mixed fleet engine oil recommended for naturally aspirated and turbocharged four-stroke diesel engines in which the API CK-4 service categories are recommended. It is formulated for engines operating under severe service and a wide range of cold and hot temperatures.
- It is backward compatible for CJ-4 and older API service categories.
- Approved by or meets requirements of major OEMs such as Cummins, Detroit Diesel, Mack/Volvo, Paccar, Navistar, Caterpillar, and others.

TYPICAL PROPERTIES

Calcium, wt. %	ASTM D5185	0.082
Cold Cranking Simulator at (°C), cP	ASTM D5293	6535 (-30)
Color	ASTM D1500	2.5
Gravity, °API	ASTM D287	33.57
High Temperature / High Shear Vis at 150°C, cP	ASTM D5481	3.5
Magnesium, wt. %	ASTM D5185	0.116
Molybdenum, wt. %	ASTM D5185	0.007
Nitrogen, wt. %	ASTM D4629	0.124
Noack Volatility, % loss	ASTM D6375	12
Phosphorus, wt. %	ASTM D5185	0.115
Pour Point °C (°F)	ASTM D5950	-45°C (-49°F)
Pumping Viscosity at (°C), cP	ASTM D4684	24,113 (-35)
Specific Gravity @ 60°F (15.6°C)	ASTM D4052	0.8572
Sulfated Ash, wt. %	ASTM D874	0.99
Sulfur, wt. %	ASTM D4951	0.314
TBN, mgKOH/g	ASTM D2896	10
Viscosity @ 100°C cSt	ASTM D445	14.76
Viscosity @ 40°C cSt	ASTM D445	87.75
Viscosity Index	ASTM D2270	177
Zinc, wt. %	ASTM D5185	0.127



FULL SYNTHETIC 5W-40 CK-4

INDUSTRY/OEM SPECIFICATIONS

API CJ-4	Approved
API CK-4	Approved
API SN	Approved
ACEA E9, E7, E4, E2	Meets Requirements
API CI-4 PLUS, CI-4, CH-4, CG-4, CF-2, CF	Meets Requirements
API SH, SG, SF, SE, SD, SC	Meets Requirements
API SL	Meets Requirements
API SM	Meets Requirements
CAT ECF-3, ECF-2, ECF-1-A	Meets Requirements
CHRYSLER/FIAT MS-10902	Meets Requirements
CID A-A-52306, MIL-PRF-2104G	Meets Requirements
CUMMINS 20086	Meets Requirements
CUMMINS CES 20081, 20077, 20076	Meets Requirements
DETROIT DIESEL 93K218, 93K215, 93K214	Meets Requirements
DETROIT DIESEL 93K222	Meets Requirements
FORD WSS-M2C171-E	Meets Requirements
FORD WSS-M2C171-E	Meets Requirements
FORD WSS-M2C171-F1	Meets Requirements
GLOBAL DHD-1	Meets Requirements
JASO DH-2	Meets Requirements
MACK EO-O PREMIUM PLUS, EO-N PREMIUM PLUS 03, EO-M PLUS, AND PRIOR	Meets Requirements
MACK EOS-4.5	Meets Requirements
MAN 3275, 270	Meets Requirements
MAN 3575	Meets Requirements
MB 228.3, 228.31	Meets Requirements
MTU 2.1	Meets Requirements
MTU TYPE I, TYPE II	Meets Requirements
RENAULT RLD-4	Meets Requirements
VOLVO VDS-4, 3, 2	Meets Requirements
VOLVO VDS-4.5	Meets Requirements
ALLISON C-4	Suitable for Use




Premium AW Hydraulic Oils

22, 32, 46, 68

ALLFLEET® Premium AW Hydraulic Oil is a high viscosity index, anti-wear hydraulic oils blending from superior quality base stocks. It is available in five viscosity grades to comply with most industrial applications. All grades are formulated according to the ISO viscosity grade classification

ALLFLEET AW Hydraulic Oils contain additive systems which impart characteristics most desired in these types of oils:

- Excellent thermal stability – ALLFLEET Premium AW Hydraulic Oils contain the latest thermally stable zinc-type additives, virtually eliminating the formation of heat-related sludging in electro-hydraulic servos associated with conventional zinc-types oils.
- Excellent rust protection.
- Excellent anti-wear protection to pumps, motors, valves, and other hydraulic circuit components.
- Excellent antifoam protection.
- Excellent hydraulic stability in the presence of water will not contribute to the formation of corrosive reactants or metal-etching acids.

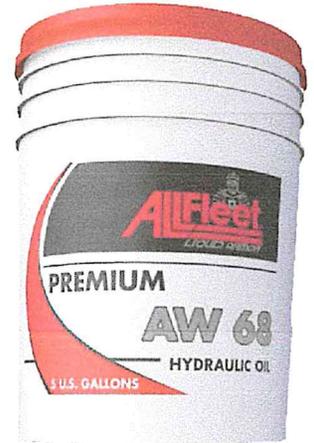

ALLFLEET Premium AW Hydraulic Oils may be recommended for applications when a premium quality, antiwear hydraulic oil is required by equipment manufacturers. The oils meet the rigorous performance requirements including Denison HF-0 and HF-2; Cincinnati Milicron P-68, P-69, and P-70; VickersM-2950-S and 1-286-S; and passes Vickers 35VQ25 Pump Test.

ALLFLEET Premium AW Hydraulic Oils provide excellent vane pump wear and protection. Extremely low pump part weight losses were encountered in the ASTM-D-2882 Vane Pump Wear Tests. Piston pump performance is also outstanding. No evidence of wear or distress was observed at the end of the 100-hour (5000psi) Denison P-46 Axial Piston Pump Test.

ISO Viscosity Grade	22	32	46	68
Viscosity @ 40 °C, cSt	22.59	30	42.7	62.9
Viscosity @ 100 °C, cSt	4.48	5.26	6.57	8.43
Viscosity, SUS @ 210 °F	36.6	43.9	48.2	54.6
Viscosity Index	110	106	105	104
API Gravity	34.17	31.2	30.4	29.7
Flash Point: °C		220	226	235
Pour Point: °C	-45	-36	-33	-30
Color (ASTM-D 1500)	0.5	0.5	1.0	1.5
Oxidation (ASTM-D943)	4000+	>5000	>5000	>5000
Total Acid # (ASTM-D974)	0.5	0.5	1.0	1.5
(ASTM-D665A)	PASS	PASS	PASS	PASS

www.RelaDyne.com

XX.039.052518

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com






Premium High Temp 2 Grease

Features:

- Premium quality lithium complex multi-purpose grease
- Fully additive treated: EP/anti-wear, rust and oxidation inhibited
- Water insoluble and water washout resistant
- An exceptionally versatile multi-purpose grease
- Superior wheel bearing and chassis performance
- NLGI Service Classification GC-LB
- Superior protection to lubricate a wide variety of severe duty automotive, trucking, industrial, mining and construction equipment

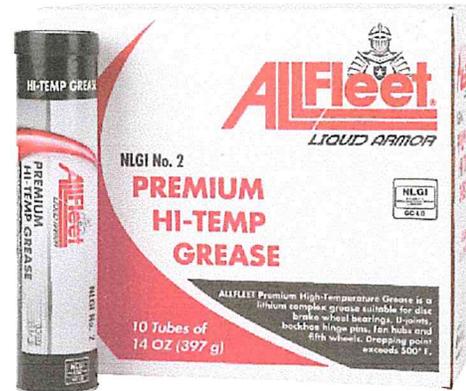

TYPICAL PROPERTIES

NLGI CONSISTENCY NUMBER
THICKENER
TEXTURE
COLOR, OBSERVED
WORKED 60 PENETRATION, D-217
DROPPING POINT, D-2265 °F (°C)
NLGI CLASSIFICATION
RUST PREVENTION, D-1743, RATING
FOUR-BALL EP WELD POINT, D-2596, KGF
APPROXIMATE TEMPERATURE RANGE, °F (°C)
CHARACTERISTICS OF BASE OIL: VISCOSITY, CST AT 40°C

TYPICAL VALUES

2
Lithium Complex
Smooth, Adhesive
Red
265-295
500 (260)
GC-LB
Pass
315
-10 to 325 (-23 to 163)
150

www.Reladyne.com

XX.184.051718

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 Reladyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com






Full Synthetic Motor Oil

5W-30

DuraMAX® Full Synthetic 5W-30 Motor Oil is our purest and most advanced formulation. It delivers unsurpassed protection and performance, including the following benefits:



- DuraMAX® Full Synthetic 5W-30 Motor Oil meets or exceeds GM dexos1™ Gen 2 specifications for worldwide warranty requirements for all GM automotive gasoline engines currently in use. The oils are fully licensed by GM.
- Engineered to improve fuel mileage and to maximize horsepower and acceleration.
- Longer and better engine protection than conventional oils due to strong and uniform synthetic base oils and advanced molecules that provide a strong film barrier to control friction, resist wear and keep metal surfaces from coming into contact.
- Created for extreme hot and cold driving conditions: stop and go, frequent short trips, heavy loads and dusty conditions.
- Meets or exceeds dexos1™ Gen 2, API SN Plus and ILSAC GF-5 requirements.

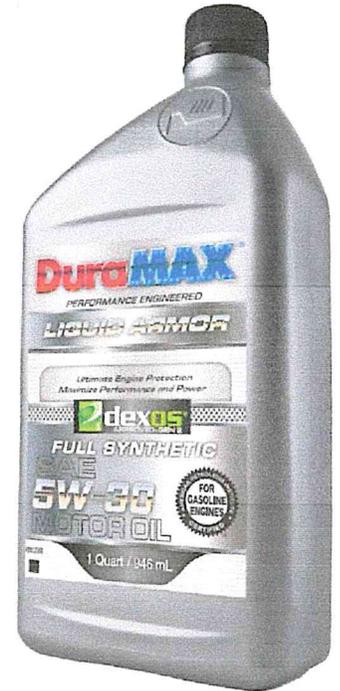

Formulated for Today's Engine Designs

OEMs continue to evolve engine designs that demand more from motor oil. One brand has evolved right alongside - DuraMAX®. It provides unsurpassed protection, even in our lightest viscosities, and protects better than the thick oils of the past. DuraMAX® advanced oil chemistry actually improves oil properties through time, retaining viscosity, friction and anti-wear benefits, in spite of severe engine temperatures.

Benefits

Performance

- Controls friction and wear more than 80% better than the latest API requirements (based on Sequence IV Wear test).
- Improved fuel economy. Reduces fuel costs without sacrificing engine protection and performance. Also improves acceleration.
- Extended oil drain intervals. Engineered to handle the most extreme conditions.
- 100% pure synthetic oils. Contains uniform molecules that provide the best, longest-lasting engine protection and performance.

www.RelaDyne.com

XX.003.052218

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.
©2018 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com





Full Synthetic Motor Oil

5W-30

Strength

- Provides a strong oil film to avoid metal-to-metal contact, even under extreme stress.
- Unsurpassed wear protection. Advanced molecules bond together to avoid metal-to-metal contact of rotating engine.
- Enhanced friction reduction. DuraMAX® oils react to heat to produce a critical friction-reducing barrier that protects metal surfaces. (To measure friction reduction benefits, engineers used the ball-on-disk traction test.)

Durability

- Stands up to the heat and shearing so it extends oil life.

Applications

- Gasoline-fueled and flex-fuel passenger cars, light trucks and sport utility vehicles, including gasoline-electric hybrids, especially when operating under severe conditions.
- Formulated to protect turbochargers and emission control system catalysts.
- Formulated for use in vehicles operating on ethanol-containing fuels up to E85.

INDUSTRY/OEM SPECIFICATIONS

API SN Plus	Approved
dexos1™ Gen 2	Approved
ILSAC GF-5	Approved
API SH, SG, SF, SE, SD, SC	Meets Requirements
API SL	Meets Requirements
API SM	Meets Requirements
Chrysler MS-6395	Meets Requirements
GM 4718M	Meets Requirements
GM 6094M	Meets Requirements
ILSAC GF-4	Meets Requirements

www.RelaDyne.com

XX.003.052218

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com





Full Synthetic Motor Oil

5W-30

TYPICAL PROPERTIES

Boron, wt. %	ASTM D5185	0.023
Calcium, wt. %	ASTM D5185	0.135
Cold Cranking Simulator at (°C), cP	ASTM D5293	4400 (-30)
Color	ASTM D1500	3
Flash Point, °C	ASTM D92	227
Flash Point, °F	ASTM D92	441
Foam Seq. III (Tendency/Stability), mL	ASTM D892 (Opt. A)	0/0
Foam Seq. II (Tendency/Stability), mL	ASTM D892 (Opt. A)	10/0
Foam Seq. I (Tendency/Stability), mL	ASTM D892 (Opt. A)	0/0
Gravity, °API	ASTM D287	34.93
High Temperature Foaming, static foam	ASTM D6082 (Opt A)	15/0
High Temperature / High Shear Vis at 100°C, cP	ASTM D6616	6.9
High Temperature / High Shear Vis at 150°C, cP	ASTM D5481	3.2
Magnesium, wt. %	ASTM D5185	0.059
Molybdenum, wt. %	ASTM D5185	0.0079
Nitrogen, wt. %	ASTM D4629	0.104
Noack Volatility, % loss	ASTM D6375	12
Phosphorus, wt. %	ASTM D5185	0.076
Pour Point °C (°F)	ASTM D5950	-45°C (-49°F)
Pumping Viscosity at (°C), cP	ASTM D4684	15,000 (-35)
Shear Stability, Final Viscosity in cSt	ASTM D6278	9.4
Specific Gravity @ 60°F (15.6°C)	ASTM D4052	0.8502
Sulfated Ash, wt. %	ASTM D874	0.9
Sulfur, wt. %	ASTM D4951	0.3
TBN, mgKOH/g	ASTM D2896	7.9
Viscosity @ 100°C cSt	ASTM D445	10.91
Viscosity @ 40°C cSt	ASTM D445	62.09
Viscosity Index	ASTM D2270	169
Zinc, wt. %	ASTM D5185	0.085

www.Reladyne.com

XX.003.052218

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 Reladyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com





Full Synthetic Motor Oils

0W-20, 5W-20, 5W-30, 10W-30


DuraMAX Full Synthetic Motor Oils are advanced formula 100% full synthetic fully licensed API SN Plus-RC and ILSAC GF-5 multi-grade engine oils designed for vehicles operating under severe driving or extreme temperature conditions. Compared to conventional motor oils, they provide improved engine cleanliness and high temperature deposit protection. These products also help reduce oil consumption and provide exceptional cold flow properties.

Benefits

- Advanced wear, varnish and sludge protection
- Superior protection against thermal breakdown
- Outstanding resource conserving performance
- Excellent protection from deposits at all operating temperatures
- Excellent anti-wear, anti-foaming, anti-rust and corrosion protection
- Excellent cold cranking capabilities
- Excellent protection against accelerated oil consumption

Industry Specifications

- API Service SN Plus-RC (0w20, 5w20, 5w30, and 10w30)
- ILSAC GF-5 (0w20, 5w20, 5w30, and 10w30)
- MIL-L-46152D (0w20, 5w20, 5w30, and 10w30)
- GM 6094M (0w20, 5w20, 5w30, and 10w30)
- Ford M2C153H, M2C930-A (5w20), M2C929-A (5w30)
- DaimlerChrysler MS10797 (5w20), 10796 (5w30), 10798 (10w30), MS6395
- Meets the requirements of Honda, Acura, Toyota, Lexus, Nissan, Infiniti, Kia, and Hyundai as well as most import and domestic models requiring SAE motor oil

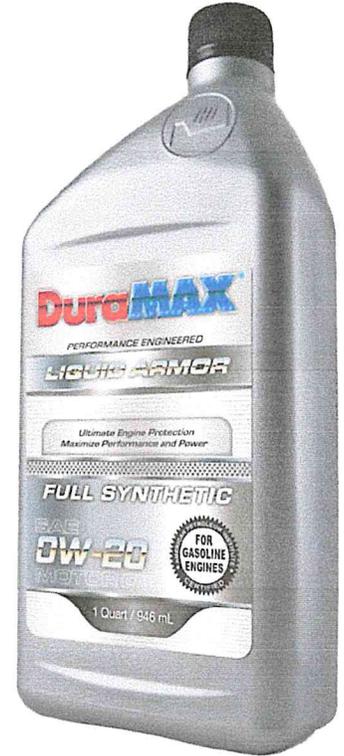

TYPICAL PROPERTIES

Viscosity @ 40°C cSt	44.5	47.57	60.48	63.72
Viscosity @ 100°C cSt	8.46	8.55	10.42	10.29
Viscosity Index	170	159	162	149
API Gravity at 60°F	35.52	34.95	34.85	34.05
Flash Point °C	216	225	240	250
Cold Crank Simulation, mPa/s	6100	3900	3900	4000
Noack Volatility, %	13.1	13.8	12.0	11.0

www.Reladyne.com

XX.004.052218

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.
©2018 Reladyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com






Universal Tractor Hydraulic Fluid

ALLFLEET® Universal Tractor Hydraulic Fluid is a premium quality tractor hydraulic fluid blended from highly refined base stocks and formulated for long-term service under severe conditions. It is designed for use in equipment utilizing a common pump or requiring a single fluid for final drive, transmission, differential power take-off (PTO) units and wet brake systems.

ALLFLEET Universal Tractor Hydraulic Oil J20-C, through the use of premium quality base stocks and up to date additive technology, is formulated to provide the highest levels of protection available. ALLFLEET Universal Tractor Hydraulic Oil J20-C has been specifically formulated to meet the above applications resulting in one fluid for many transmission/torque converter and hydraulic fluid requirements. Equipment manufacturer recommendations and conventional guides to lubricant selection should be followed to determine the suitability of ALLFLEET Universal Tractor Hydraulic Oil J20-C for a specific application.

Features

- Excellent extreme pressure (EP) properties
- Excellent oxidation resistance and corrosion protection
- Excellent anti-foam properties
- Excellent anti-rust properties
- Excellent anti-wear properties
- Excellent low temperature performance characteristics
- Helps maintain seals and gaskets used in modern tractors

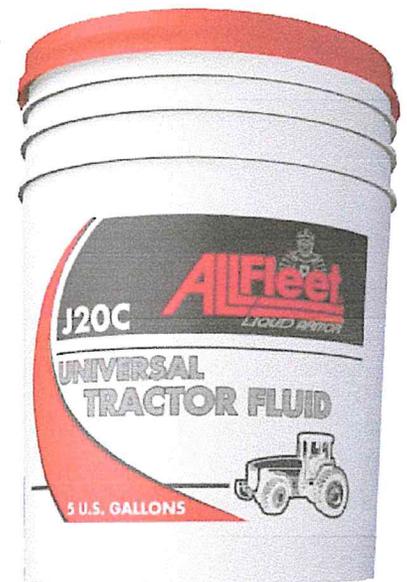

Typical Properties

Typical Properties	
Product Code	95243UTHF00
API	GL-4
Brookfield Viscosity, D-2893 cPat-18 °C	3,000
Viscosity @ 100 °C, sSt	9.63
Viscosity @ 40 °C, sSt	58.36
Pour Point: °C	-42
Viscosity Index	149
API Gravity	32
Flash Point, COC, °C.	222

www.Reladyne.com

XX.028.052418

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 Reladyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.Reladyne.com





Universal Tractor Hydraulic Fluid

Manufacturer Spec Data	
Allison	C-(3&4)
Caterpillar	Power shift transmission specifying Cat TO-2
Denison	(Pump only) HF-(0 thru 2)
Deutz	Hydr Trans Fluid
Deutz-Allis	HTF(PF821); 821XL
Ford-New Holland	M2C134 - (A thru D), M2C86 - (A thru C), M2C86-(A&B), M2C77-A, M2C53-A, M2C48-(B&C), M2C41-B & M2C159
Fiat-Hesston	AF-87
I.H.C.	B-5 & B-6 Hytran
J.I. Case/Case International	MS-1204, 1205, 1206 (Powergard PFT), 1207(Hy-Tran Plus), 1209 (Hy-Tran Plus), 1210, JIC-143, 144, 145 (TCH Fluid), & 185 (TFD Fluid)
John Deere	J14(A,B,C, JDT303), J20(A,B,C Hy-Gard), J21A, & J27 (10W or 30)
Kubota	Universal Transhydraulic Fluid (UTD)
Landini	Tractor Hydr Fluid
Massey-Ferguson	M1110, M1127 A&B, 1129A Permatran, 1135 Permatran III, 1139, 1141, 1143, & 1145
Oliver	Type 55, Type 5J, & Q1802
Renk	Bus Automatic Trans Fluid
Sperry Vickers/Eaton	I-280-S & M2950S
Steiger	Hydr Trans Fluid
Sauer Sunstrand/Danfoss	Hydro Static Trans Fluid
Versatile	Gear & Hydr Trans Fluid
Volvo	(including latest wet-brake requirements)
White	Q-1766, Q-1766B (UTHF), Q-1826, Q1802, Q-1705, Q-1722
ZF Transmissions	TEML03 & TEMPL06



Full Synthetic Premium Gear Lubricants

ALLFLEET® Synthetic Gear Lubricants are fully synthetic, multipurpose, use in modern passenger vehicles, commercial and heavy-duty gear lubricant applications. These Synthetic Gear Lubricants have low pour and channel points. These properties permit the products to flow readily to lubricated surfaces, including sub-zero temperatures. A high viscosity index provides maximum protection over a wide range of temperatures. In addition to extending the life of differential parts, these low temperature properties also provide the potential for fuel savings by reducing the drag normally encountered when using conventional petroleum-based lubricants and by permitting more of the engine horsepower to be transmitted to the drive wheels. ALLFLEET® Synthetic Gear Lubricants separate readily from water.

FEATURES

ALLFLEET® Synthetic Gear Lubricants are recommended for applications where heat, water and extended drain intervals contribute to severe service. These applications include farm equipment and heavy construction equipment. ALLFLEET® Synthetic Gear Lubricants are recommended for use in heavy duty and automotive differentials and industrial gearing, where API GL-5, limited slip applications are suggested.

- Better operating performance and improved fuel mileage
- Compatible with typical automotive seals
- Enhanced friction reduction properties
- Extended drain intervals through the resistance to oxidation
- Good resistance of foam
- Increased gear life through extremely high film strength and superior low-temperature
- Longer seal life
- Outstanding protection against low speed/high torque wear and high-speed scoring
- Performance, exhibiting excellent demulsibility and shear stability
- Reduce wear and longer component life
- Reduced wear and ease of start-up



APPLICATIONS

- Heavy Duty axles, manual transmissions and final drives requiring API GL-5 and MT-1
- Modern passenger vehicles
- On-highway light and heavy-duty trucks, busses and vans
- Off-highway industries including hypoid and worm gears operating under conditions where high speed/shock load, high speed/low torque, and/or low speed/high torque conditions prevail
- Differentials, final drives, transfer cases and other gear applications where lubricants meeting MIL-PRF-2105E, API Service GL-5, EP gear lubricants are recommended
- Equipment such as winch reduction gears and crawler vehicle propulsion gear drives that are exposed to severe low temperatures
- Use as a companion with ALLFLEET® Synthetic 50W Gear Oil in transmissions for maximum drive train life and fuel economy.

www.RelaDyne.com

ZXP.090418

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2019 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com





Full Synthetic Premium Gear Lubricants

SPECIFICATIONS

ALLFLEET Full Synthetic Gear Oils are recommended for use where the following fluids and applications are called for:

- American Gear Manufacturers (AGMA) Standard 250.03 (80w140)
- API Service Category GL-5 and MT-1
- Arvin Meritor O-76B, O-80 (80w140)
- Arvin Meritor O-76N (75w90)
- Chrysler MS-8985 (75w140)
- DANA SHAES 256, REV. A, +429 (80w140)*
- DANA SHAES 256, Rev. C, +429 (75w90 & 80w140) *
- Flender BA 7302 Table R1 (75w90)
- Ford M2C-192A (75w140)
- Ford WSL-M2C192-A (75w140)
- General Electric D50E9C (80w140)
- GM 12346140 (75w140)
- GMW 16445, Dexron® (75w90)
- Harnischfeger (P&H) 474 (80w140) *
- International (Navistar) TMS-6816 *
- MACK GO-J (80w140)
- Mack GO-J Plus (75w90)
- MAN Nutzfahrzeuge 342 type M2 (75w90)
- MB-235.8 (75w90)
- SAE J2360; former U.S. Military Specification MIL-L-2105D and MIL-PRF-2105E
- Scania STO 1:0 (80w140)
- Scania STO 2:0 A (75w190)
- U.S Steel 224
- Voith Turbo 132.00374401/132.00374402 (75w90)
- Volvo 97312 (75w90)
- ZF TE-ML 05B/16F/21B (75w90 & 80w140)
- ZF TE-ML 07A/08 (75w90)
- ZF TE-ML 12B (75w90)
- ZF TE-ML 12M (80w140)
- ZF TE-ML 17B (75w90)
- ZF TE-ML 19C (75w90)

* with additional booster will meet that specific claim

TYPICAL PROPERTIES

TEST	75W80	75W85	75W90	75W140	80W140
Vis @ 100°C (cSt)	8.09	11.5	17.81	25.07	28.61
Vis @ 40°C (cSt)	42.54	66.05	114.52	153.8	217.03
Viscosity Index	167	171	173	197	170
Spec Gravity @60°F	.8561	.8581	.8591	.8458	.8571
Flash COC (°C)	210	212	210	212	212
Pour Point (°C)	-45	-44	-42	-45	-39
Foam Test -D892	Pass	Pass	Pass	Pass	Pass
Cooper Corrosion D-130	1A	1A	1A	1A	1A
FZG Stage Pass	12	12	12	12	12
Brookfield Vis @-26°C					45491
Brookfield Vis @-40°C	23795	34000	84882	94980	
Color	1.5	1.5	1.5	1.5	1.5

www.RelaDyne.com

ZXP.090418

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2019 RelaNyne® | 8280 Montgomery Rd. Suite 101 | Cincinnati, OH 45236 | www.RelaDyne.com





Gear Lubricant Limited Slip

ALLFLEET™ GL-5 GEAR OILS

ALLFLEET Gear Lubricant Limited Slip oils are multi-service EP gear lubricants manufactured from high quality base stocks and superior additive technology. They are recommended for use in gearboxes, manual transmissions, bearings, gear reducers and many other applications where an API Service classification GL-5 gear lubricant is specified. ALLFLEET™ GL-5 Gear Oils can be used for make-up of Limited Slip/Positive Traction rear axles.

Directions: Consult owner's manual for instructions and correct viscosity grade.

Industry Specifications

- API Mt – 1
- APL GL – 5
- MIL-PRF-2 105E
- PG-2 Limited Slip
- MACK GO-J



TEST	GL-5 80W-90	GL-5 85W-140
VISCOSITY, CST @ 40°C	151	360
VISCOSITY, CST @ 100°C	15.36	28.74
VISCOSITY INDEX	96	109
API GRAVITY @ 60°F	27.79	27.21
FLASH, COC, °C (°F)	219 (426)	203 (398)
POUR, °C	-29 (-20)	-14 (7)



Gear Lubricant

Multi-Purpose 80w90, 85w140

ALLFLEET Multi-Purpose Gear Lubricants are premium quality transmission oils blended from highly refined high Viscosity Index base stocks. Premium quality ALLFLEET Multi-Purpose Gear Lubricants, through the combination of highly refined base oils and up-to-date additive technology, are more economical than oils of lesser quality and lower initial cost. Equipment life may be longer and more trouble-free, and maintenance cost and downtime may be significantly reduced through the use of ALLFLEET Multi-Purpose Gear Lubricants in conjunction with a dedicated preventive maintenance program.

ALLFLEET Multi-Purpose Gear Lubricants are available in 2 multi-viscosity grades to comply with most automotive and truck applications. Listed below are the typical physical and chemical characteristics of ALLFLEET Multi-Purpose Gear Lubricants. Equipment manufacturer recommendations and conventional guides to lubricant selection should be followed to determine the best gear lubricant for a specific application.

FEATURES

ALLFLEET Multi-Purpose Gear Lubricants contain additive systems which impart characteristics most desired in these types of lubricants:

- Excellent chemical stability
- Excellent thermal stability
- Excellent rust protection
- Excellent corrosion protection
- Excellent anti-foam protection
- Excellent load-carrying ability
- Excellent oxidation resistance
- Excellent sludge formation resistance

APPLICATIONS

ALLFLEET Multi-Purpose Gear Lubricants may be recommended for the following applications:

- When API GL-5, GL-4 or GL-3 gear oils are required
- When MANN 342M-2 gear oils are required
- When MIL-L-2105D gear oils are required
- In all domestic automobile differentials and some manually shifted transmissions
- In oil lubricated wheel bearings

SAE Grade:	80W-90	85W-140
Product Code:	952658090MP	9526585140M
Viscosity, cP @ °C	120,000(-26)	60,000(-12)
Viscosity, cSt @ 40 °C	137	375
Viscosity, cSt @ 100 °C	14	26.5
Viscosity Index	99	95
Gravity, API	29.5	25
Pour Point, °C(°F)	-30(-20)	-15(+5)
Channel Point, °C(°F)	-36(-35)	-23(-9)

www.RelaDyne.com

XX.022.052518

Always confirm that the product selected is consistent with the original equipment manufacturer's recommendation for the equipment operating conditions and maintenance practices.

©2018 RelaDyne® | 8280 Montgomery Rd. Suite 101| Cincinnati, OH 45236 | www.RelaDyne.com



PRODUCT BULLETIN

CAM2® Blue Blood Elite 0W-40 Full Synthetic

API SN Plus

Product # 405

CAM2 Blue Blood ELITE Full Synthetic Motor Oil with Engine DETOX, Fast Action Additives is the premium choice for preventative maintenance in vehicles that operate under severe driving and temperature conditions. It is designed to provide protection against LSPi events in high RPM engines that experience extreme heat. It can be used in virtually all services for all gasoline engines, domestic and foreign. It is fully compatible with virtually all other synthetic and petroleum based engine oils.

CAM2 Blue Blood ELITE Full Synthetic Motor Oil provides the ultimate protection against wear, sludge/ deposit build-up, while improving fuel economy. **CAM2 Blue Blood ELITE Full Synthetic Motor Oil** meets or exceeds API SN Plus. It is suitable for passenger cars, light trucks, powerboats, and other stationary and mobile equipment that require API licensed SN Plus, SN, SM, SL, SJ, SF, etc.

CAM2 Blue Blood ELITE Full Synthetic Motor Oil 0W-40 is designed especially for turbo-charged and high RPM engines which experience high heat. They provide quick flow to critical parts at start up to reduce wear. It has shown excellent performance in high performance applications such as FCA US (formerly Daimler-Chrysler) SRT applications requiring MS-12633 rated engine oils such as the SRT Viper, Viper GT3-R, Grand Cherokee SRT, Challenger SRT, and Charger SRT.

FEATURES

- Excellent protection from deposits at all operating temperatures.
- Excellent anti-wear, anti-foaming, anti-rust and corrosion protection
- Excellent cold cranking capabilities
- Excellent protection against accelerated oil consumption

CAM2 Blue Blood

Blue Blood ELITE delivers up to **11X's** better wear protection than the industry standard




Blue Blood ELITE protects against deposits in your engine nearly **40% better** than the industry standard



APPLICATIONS

CAM2 Blue Blood ELITE Full Synthetic Motor Oil 0W-40, may be recommended for the following uses:

- When API SN Plus oils are required
- When former MIL-L-46152D oil performance level is required
- ACEA A3/B3-16
- MS-12633 (formerly MS-10725)
- GM 6094M
- FIAT 9.55535-M2
- MB 229.3/229.5
- VW 502.00/503.01/505.00
- PORSCHE A40
- Nissan Genuine Performance

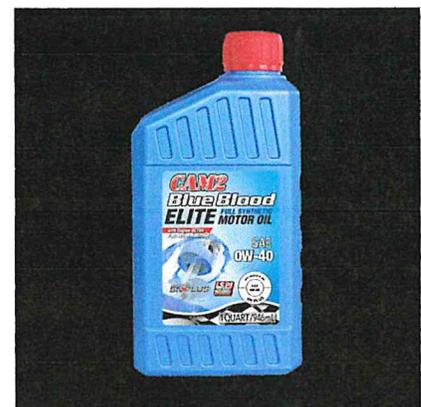

See Technical Data on pg 2.

TYPICAL PROPERTIES

Blue Blood Elite 0W-40 API SN Plus

Product Code	405
SAE Grade	0W-40
Viscosity @ 40°C, cSt	83.5
Viscosity @ 100°C, cSt	14.5
Viscosity Index	182
Pour Point, °C	-37
HTHS @ 150°C	3.5
Flash Point, °C (COC)	238
NOACK Volatility	<15%

The above characteristics are typical of current production. While production will conform to CAM2's specification, slight variations may occur and do not affect performance.

Special Handling, Notices, or Warnings

Avoid contact with skin. Rinse with soap and water immediately after skin contact.

This product is unlikely to present and significant health hazards.

Dispose of used oil properly.

BID REJECTION FORM

Bid number: 50-126129

Vendor Name: SUN COAST RESOURCES

Reasons for


Rejection: DID NOT TURN IN PAGE 5 OF BID FORM.

which ~~result~~ results in no signature
or Acknowledged addendum.

REVIEWED BY:

Buyer Name: Donna Reamey

Date: 5/2/2019

Chief Buyer: 

Date: 5/3/19



JEFFERSON PARISH

BID DUE DATE:
APRIL 30, 2019 2PM

BID FOR:
2 YEAR CONTRACT FOR SUPPLY OF
PETROLEUM PRODUCTS, KEROSENE, VARSOL

BID NUMBER/PROJECT:
50-00126129

JEFFERSON PARISH
PAUL D CONNICK, SR. EMERGENCY OPERATIONS &
COMMUNICATIONS CENTER
910 3RD STREET
GRETN, LA 70053

BY:
SUN COAST RESOURCES, INC.
C/O NATIONAL SALES AND SUPPLY
6405 CAVALCADE, BUILDING 1
HOUSTON, TX 77026
NATIONAL@SUNCOASTRESOURCES.COM
713-429-6702 DIRECT

Non-Public Works Bid Affidavit Instructions

- **Affidavit is supplied as a courtesy to Affiants, but it is the responsibility of the affiant to insure the affidavit they submit to Jefferson Parish complies, in both form and content, with federal, state and parish laws.**
- **Affidavit must be signed by an authorized representative of the entity or the affidavit will not be accepted.**
- **Affidavit must be notarized or the affidavit will not be accepted.**
- **Notary must sign name, print name, and include bar/notary number, or the affidavit will not be accepted.**
- **Affiant MUST select either A or B when required or the affidavit will not be accepted.**
- **Affiants who select choice A must include an attachment or the affidavit will not be accepted.**
- **If both choice A and B are selected, the affidavit will not be accepted.**
- **Affidavit marked N/A will not be accepted.**
- **It is the responsibility of the Affiant to submit a new affidavit if any additional campaign contributions are made after the affidavit is executed but prior to the time the council acts on the matter.**

Instruction sheet may be omitted when submitting the affidavit

Non-Public Works Bid

AFFIDAVIT

STATE OF Texas

PARISH/COUNTY OF Harris

BEFORE ME, the undersigned authority, personally came and appeared: _____
Lisa L. Smith, (Affiant) who after being by me duly sworn, deposed and said that
he/she is the fully authorized Corporate Secretary of Sun Coast Resources, Inc. (Entity),
the party who submitted a bid in response to Bid Number 50-126129, to the Parish of
Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B X there are **NO** campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B X There are NO debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

Lisa L. Smith
Signature of Affiant

Lisa L. Smith
Printed Name of Affiant


SWORN AND SUBSCRIBED TO BEFORE ME
ON THE 15th DAY OF April, 2019.

Barbara Manuel
Notary Public

Barbara Manuel
Printed Name of Notary

2920334
Notary/Bar Roll Number

My commission expires 3/29/23.

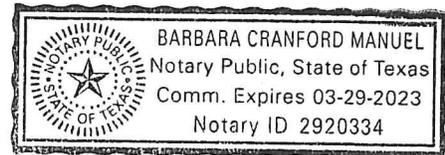


CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF
Sun Coast Resources, Inc.
INCORPORATED.

AT THE MEETING OF DIRECTORS OF Sun Coast Resources, Inc.
INCORPORATED, DULY NOTICED AND HELD ON _____,
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT
WAS:

RESOLVED THAT Terri Bateman, BE AND IS HEREBY
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE
A TRUE AND CORRECT COPY OF AN
EXCERPT OF THE MINUTES OF THE ABOVE
DATED MEETING OF THE BOARD OF
DIRECTORS OF SAID CORPORATION, AND
THE SAME HAS NOT BEEN REVOKED OR
RESCINDED.

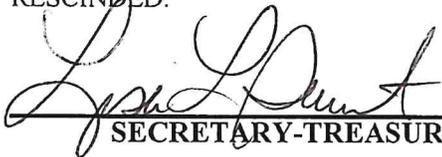

SECRETARY-TREASURER

4-15-19

DATE



JEFFERSON PARISH

Department of Purchasing

Michael S. Yenni
Parish President

Renny Simno
Director

April 23, 2019

ADDENDUM # 1

Bid No.: 50-00126129

Bid Opening Date: 04/30/2019

For: Two year contract for a supply of Petroleum Products, kerosene, varsol for the Jefferson Parish Department of Fleet Management.

REMOVE PAGES 6 THRU 11 OF THE BID FORM. REPLACE WITH ATTACHED REVISED AS PER ADDENDUM # 1 PAGES.

This was to answer vendor questions:

1).Line 7: the Crown HD 15w40 Motor Oil states synthetic. Is that a full synthetic or a semi-synthetic?

Answer: Full Synthetic 15W40.

2). Cam 2 BlueBlood Elite F50W40- is this a typo on the weights or is it a F50w40.

Answer: This was a typo it is Cam 2 Blue Blood 0W40 Elite Ful.

Sincerely,

Donna Reamey

Donna Reamey, Buyer II
Jefferson Parish Purchasing Department

Bidders must acknowledge all addenda on the bid form. Bidder acknowledges receipt of this addendum on the bid form as indicated. Failure to do so will result in bid rejection.

This addendum is a part of the contract documents and modifies the original bidding documents and specifications. The contents of this addendum shall be included in the contract documents. Changes made by this addendum shall take precedence over the documents of earlier date.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	5.00	DRUM	TWO YEAR CONTRACT FOR A SUPPLY OF PETROLEUM PRODUCTS, KEROSENE, VARSOL FOR THE JEFFERSON PARISH DEPARTMENT OF FLEET MANAGEMENT. 0001 - CROWN 85W140 GL5- 55 GALLON DRUM PETROLEUM PRODUCTS	\$770.00	\$3,850.00
Total Transmission MDL 80w-90			(MORE OR LESS)(AS PER SPECS BELOW) GRAVITY, API-25.5 FLASH, COC.F-375 POUR, PT., F-0 VISCOSITY CST AT 40 C-310 CST AT 100C-24.7 SSU AT 100 F-1668 STRAIGHT MINERAL GEAR LUBRICANT MEETING API GL5 SPECIFICATIONS.		
2	2.00	DRUM	0002 - CROWN ATF DERON/MERON 55 GAL. DRUM, PETROLEUM PRODUCTS	\$1,100.00	\$2,200.00
Total Fluidmatic MV			SYNTHETIC (MORE OR LESS)(AS PER SPECS BELOW) FLASH F-360 POUR F-(30) VISCOSITY CST AT 40 C-39.7 SCT AT 100C-6.2 SSU AT 100F-204 SSU AT 210F-47.1 VISCOSITY INDEX-102 USED IN ALLISON POWERSHIFT AND MODEL CL(8)T700 AUTOMATIC TRANSMISSIONS AND OTHER EQUIPMENT REQUIRING EITHER TYPE C-1, TYPE C-2, OR TYPE C-3 HYDRAULIC TRANSMISSION FLUID.		
3	5.00	DRUM	0003 - CROWN HYDRAULIC A.W.46 55 GALLON DRUM	\$594.00	\$2,970.00
Total Azolla ZS 46			PETROLEUM PRODUCTS CROWN HYDRAULIC A.W.46 (MORE OR LESS)(AS PER SPECS BELOW) FLASH, F-441 POUR,F-0 VISCOSITY CST AT 40 C-43.3 SSU AT 100F-155 VISCOSITY INDEX-95 ISO VG-46 FOAM ASTM D-892 SEW. I,II,III OXIDATION STABILITY ASTM D-942 HRS-1000+ HYDROLYTIC STABILITY ASTM D-2619 RUST PROTECTIONS ASTM D-655 A & B VANE PUMP TEST ASTM D-2882 35V Q 25 VANE PUMPM TEST.		
4	2.00	DRUM	0004 - CROWN HYDRAULIC A.W.32 LLDR, 55 GALLON DRUM	\$594.00	\$1,188.00
Total Azolla ZS 32					
REVISED AS PER ADDENDUM # 1					

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			<p>PETROLEUM PRODUCTS</p> <p>HYDRAULIC OIL (MORE OR LESS)(AS PER BELOW SPECS) FLASH, F-432 POUR, F-0 VISCOSITY CST AT 40 C-30.1 SSU AT 100F-155 VISCOSITY INDEX-95 ISO VG-32 FOAM ASTM D-892 SEQ I,II,III OXIDATION STABILITY ASTM D-943-1000+ HYDROLYTIC STABILITY ASTM D-2619 POINT PETROLEUM ASTM D-565A & B VANE PUMP TEST ASTM D-2882 35V Q 25 VAN PUMP TEST</p>		
5	10.00	DRUM	0005 - CROWN UTF 55 GALLON DRUM PETROLEUM PRODUCTS FLD.	\$660.00	\$6,660.00
<p>Total Dynatrans MP</p>					
			<p>LLDR (MORE OR LESS)(AS PER SPECS BELOW) FLASH, COC F-392 PORE, PT., F-(-25) VISCOSITY CST AT 40 C-57.8 CST AT 100C-9.1 SSU AT 100F-272 SSU AT 210F-55.7 VISCOCITY INDEX-135 PREMIUM UNIVERSAL LUBRICANT FOR ALL TRACTORS THAT REQUIRE A SINGLE OIL FOR LUBRICATION OF TRANSMISSION. DIFFERENTIAL AND DRIVE GEARS. IT CAN BE USED AS POWER BRAKE, POWER TAKE-OFF AND POWER STEERING FLUID WHERE MINERAL OILS ARE RECOMMENDED. MEETS SPECS FOR AC POWER FLUID 821. ALLISON C1, C2, C3, C4 CATERPILLARE T02, FORD/NEW HOLLAND ESNM2C41B, ESNMC248-B, ESNB2C53C, ESNM2C77A, ESNM2C868, ESNM2C124A,B,C,D CASE INTERNATIONS JIC 185, JIC 145, JIC 144, JIC 143, MS 1205, MS 1204, MS 1210 (TCH), MS 1206)POWER GRATE PTE) JOHN DEERE J20A (JY GARD), J1145 (303 FLUID), J146, J21A.</p>		
6	3.00	DRUM	0006 - CROWN ATF DEXRON/MERCON LLDR 55 GAL. DRUM, PETROLEUM PRODUCTS	\$1,100.00	\$3,300.00
<p>Total Fluidmatic MV</p>					
			<p>SYNTHETIC (MORE OR LESS)(AS PER BELOW SPECS) COLOR-RED GRAVITY, API-29.5 FLASH, POINT F-360 POUR, PTX, F-(-40) VISCOSITY C-P, AT(-40) C-40,000 CST AT 40C-37 CST AT 100C-7.4 SSU AT 100F-190 SSU AT 210F-51</p> <p>REVISED AS PER ADDENDUM # 1</p>		

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
7	20.00	DRUM	<p>VISCOSITY INDEX-160 PHOSPHORUS % MASS-050 CALCUIM % MASS-013 MEETS TRANSMISSION FLUID REQUIREMENTS FOR ALL ALLISON AUTOMATIC TRANS. ALLISON C3 & C4 AND CATERPILLARE T02 GM DEXROMM II, AMERICAN MORTORS, CHRYSLER AND MERCON, ESP-M2C 166H AS ESP-M2C133C.</p> <p>0007 - CROWN HD 15 W40 MOTOR OIL, 55 GAL. DRUM, PETROLEUM PRODUCTS</p>	\$1,210.00	\$24,200.00
<p>Total Rubia Optima 1500 5W-40</p>			<p>FULL SYNTHETIC-DELIVERED IN TOTES (MORE OR LESS)(AS PER BELOW SPECS) GRAVITY, API-28.4 FLASH, COC, F-399 POUR, PT., F(-17) VISCOSITY CST AT 40C-120.5 CST AT 100C-15.4 VISCOSITY INDEX-136 ASH(SULFATE),% MAX-8 TBS (ASTM D-2896)-9 D-664-7.5 ZINC % MASS-13 CALCUIM % MASS-02 MEETS API CC, CD, CD-11, CE, SG & API SAE OIL REQUIREMENTS FOR GASOLINE ENGINES. MEETS SHEAR STABILITY REQUIREMENTS OF CCMC (CED-L-14-T74) AS MEASURED IN ASTM D-3946 SHEAR STABILITY TESTS. ALSO MEETS VISCOSITY GRADE FOR CUMMINGS, DDC SERIES 60, NAVISTAR, INTERNATIONAL, AND MACK TRUCK ENGINES.</p> <p>0008 - CROWN 5W,30, LLDR 55 GAL. DRUM, PETROLEUM PRODUCTS</p>	\$990.00	\$1,980.00
8	2.00	DRUM	<p>SYNTHETIC (AS PER BELOW SPECS) GRAVITY, API-30.0 FLASH, COC, F-410 POUR, F(-22) VISCOSITY CST AT 40 C-70 CST AT 100C-10.2 VISCOSITY INDEX-146 ASH (SULFATED)-81 ZINC % MASS-09 MAGNESIUM % MASS-13 COPPER PPM-100 API LEVEL-SG UNILUSE API DIESEL ENGINE CATEGORY CC.</p>		
<p>Total Quartz 9000 Future</p>			<p>0009 - CROWN K-1 KEROSENE, 55 GALLON CONTAINER</p>	\$440.00	\$6,160.00
9	14.00	DRUM			
10	2.00	EA	<p>0010 - CROWN 55 GALLON CONTAINER MINERAL SPIRITS</p>	\$473.00	\$946.00
<p>REVISED AS PER ADDENDUM # 1</p>					

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
11	2.00	DRUM	0011 - CROWN ISO 46 HYDRAULIC OIL 55 GALLON DRUM PETROLEUM PRODUCTS PRODUCT CODE: 65209 VISCOSITY @ 40 DEGREE C, CST 46.00 @100 DEGREE C, CST 6.8 @100 DEFREE F, SUS 237 2 210 DEFREE F, SS 449 VISCOSITY INDEX 102 GRAVITY DEGREE API @ 60 DEGREE 29.5 FLASH POINT, COC, DEGREE F 420 POUR POINT, DEGREE F-20 COPPER CORROSION 1A EMULSION TEST @ 130 DEGREE F 30 MINUTES MAX PASS RUST TEST PASS- TURBINE OIL STABILITY TEST, HOURS 3000 PLUS	\$594.00	\$1,188.00
12	2.00	DRUM	0012 - CROWN ISO 68 55 GALLON DRUM PETROLEUM PRODUCTS PRODUCT CODE: 65211 VISCOSITY: @ 40 DEGREE C, CST 68. @ 100 DEGREE C, CST 8.3 @ 100 DEGREE F, SUS 353 @ 210 DEGREE F, SUS 554.2 VISCOSITY INDEX 97 GRAVITY DEGREE API @ 60 DEGREE 28.5 FLASH POINT, COC, DEGREE F 440 POUR POINT, DEGREE F-20 COPPER CORROSION 1A EMULSION TEST @ 1130 DEGREE F 30 MINUTES PASS REST TEST PASS TURBINE OIL STABILITY TEST, HOURS 3000 PLUS.	\$594.00	\$1,188.00
13	5.00	DRUM	0013 - CROWN HI-TEMP 2 55 GAL DRUM CONTAINER PRODUCT CODE 70311 COLOR: BLUE SOAP TYPE: LITHIUM COMPLEX BASE OIL VISCOSITY @ 40 DEGREE C, CST 150 @ 100 DEGREE C, CST 14.5 NLGI CLASSIFICATION CG/LB DROPPING POINT DEGREE F 536 WATER WASHOUT WT % LOSS @ 175 DEGREE F 6.8 TIMKEN OK LOAD, LBS 45 RUST TEST PASS	\$1,500.00	\$7,500.00
Total Multis Complex EP-2					
REVISED AS PER ADDENDUM # 1					

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
14	20.00	GL	<p>WORKED PENETRATION, DMM @ 77 DEGREE F 60 STROKES 280 BOMB OXIDATION 100 HOURS @ 210 DEGREE F, PSI DROP 5 MAX</p> <p>0014 - ILC MULTIGRADE, 5W20 MOTOR OIL IS A HIGH QUALITY MORTOR OIL THAT</p>	\$9.28	\$185.60
Total Quartz 7000			<p>PROVIDES ANTI-WEAR PROTECTION AND PROTECTION AGAINST SLUDGE AND DEPOSIT FORMATION. SYNTHETIC ILC MULTIGRAD 5W20 MOTOR OIL IS THE HIGHEST API QUALITY OIL RECOMMENDATION FOR GASOLINE POWERED VEHICLES.</p> <p>TYPICAL TEST DATA: SAE GRADE 5W20 API GRAVITY @ 60 DEGREE 33.6 VISCOSITY: CST @ 40 DEG. C 47.0 CST @ 100 DEG. C 8.3</p>		
15	2.00	DRUM	<p>0015 - TORQUE DRIVE SYNTHETIC TRANSMISSION FLUID-55 GALLON DRUM</p>	\$1,100.00	\$2,200.00
Total Fluidmatic MV			<p>PHYSICAL DATA: KINEMATIC VISCOSITY @ 100 C, CST (ASTM-D-445) TORQUE DRIVE: 7.4 BROOKFIELD VISCOSITY @ -40 C (CP) TORQUE DRIVE: 8411 VISCOSITY INDEX (ASTM D 2270) TORQUE DRIVE:170 DENSITY @ 60 F (LB/GAL) TORQUE DRIVE: 7.038 FLASH POINT C (F) (ASTM D 92) TORQUE DRIVE: 230 (446) POUR POINT C (F) (ASTM D 97) TORQUE DRIVE: -55 (-67) FOUR BALL WEAR TEST (ASTM D-4172B: 40 KG 75C, 1200 RPM 1 HR) MM TORQUE DRIVE: 0.45 COPPER CORROSION (150 C, 3HR) TORQUE DRIVE: 1B</p> <p>SPECTROGRAPHIC ANALYSIS: BORON (PPM) TORQUE DRIVE: 133 CALCIUM (PPM) TORQUE DRIVE: 28 PHOSPHOROUS (PPM) TORQUE DRIVE: 230</p> <p>RECOMMENDED FOR USE IN APPLICATIONS SPECIFYING ALLISON TES-295, TES-389 OR C-4, DEXRON III, MERCON, VOITH 55.6336.X X(G-1363)ZF-TE-ML14C TORQUE DRIVE: SYNTHETIC</p>		
16	2.00	DRUM	<p>0016 - 75-140 SYNTHETIC GEAR OIL-55 GALLON DRUM</p>	NO BID	NO BID
REVISED AS PER ADDENDUM # 1					

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00126129

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
17	5.00	DRUM	0017 - CAM 2 BLUE BLOOD 0W40 ELITE FUL	NO BID	NO BID
18	1.00	EA	0018 - DELIVERY CHARGE PRODUCTS MUST BE DELIVERED WITHIN SEVENTY-TWO (72) HOURS OF ORDER PLACEMENT.	\$400.00*	\$400.00*
* If less than 200 gallons are ordered a \$400.00 delivery charge will be added.					
REVISED AS PER ADDENDUM # 1					

**Jefferson Parish Purchasing Department
Bid# 50-126129
Exceptions Page**

1. Non-Public Works Bid (page 6)

Bidder requests these sections be stricken in their entirety, Bidder does not provide performance or payment bonds for bids.

2. Deductibles (page 2)

Bidder requests this section be amended to read as follows:

~~“No insurance required shall include a deductible not greater than \$10,000.00.~~ The cost of the deductible shall be borne by the contractor.

~~NOTE: If the vendor requires a change in deductibles, the request must be submitted in writing to the Purchasing Department prior to the due date of the bid. Such request shall be reviewed by the Parish Attorney’s Office with the concurrence of the Director of Risk Management.”~~

Request for Taxpayer Identification Number and Certification

Give Form to the
requester. Do not
send to the IRS.

Go to www.irs.gov/FormW9 for instructions and the latest information.

1 Name (as shown on your income tax return). Name is required on this line; do not leave this line blank.
Sun Coast Resources, Inc.

2 Business name/disregarded entity name, if different from above

3 Check appropriate box for federal tax classification of the person whose name is entered on line 1. Check only one of the following seven boxes.

Individual/sole proprietor or single-member LLC

C Corporation

S Corporation

Partnership

Trust/estate

Limited liability company. Enter the tax classification (C=C corporation, S=S corporation, P=Partnership) ▶ _____

Note: Check the appropriate box in the line above for the tax classification of the single-member owner. Do not check LLC if the LLC is classified as a single-member LLC that is disregarded from the owner unless the owner of the LLC is another LLC that is not disregarded from the owner for U.S. federal tax purposes. Otherwise, a single-member LLC that is disregarded from the owner should check the appropriate box for the tax classification of its owner.

Other (see instructions) ▶ _____

4 Exemptions (codes apply only to certain entities, not individuals; see instructions on page 3):

Exempt payee code (if any) _____

Exemption from FATCA reporting code (if any) _____

(Applies to accounts maintained outside the U.S.)

5 Address (number, street, and apt. or suite no.) See instructions.
6405 Cavalcade St.

6 City, state, and ZIP code
Houston, TX 77026-4315

7 List account number(s) here (optional)

Requester's name and address (optional)

Part I Taxpayer Identification Number (TIN)

Enter your TIN in the appropriate box. The TIN provided must match the name given on line 1 to avoid backup withholding. For individuals, this is generally your social security number (SSN). However, for a resident alien, sole proprietor, or disregarded entity, see the instructions for Part I, later. For other entities, it is your employer identification number (EIN). If you do not have a number, see *How to get a TIN*, later.

Note: If the account is in more than one name, see the instructions for line 1. Also see *What Name and Number To Give the Requester* for guidelines on whose number to enter.

Social security number

			-					
--	--	--	---	--	--	--	--	--

or

Employer identification number


7	6	-	0	1	4	3	4	8	3
---	---	---	---	---	---	---	---	---	---

Part II Certification

Under penalties of perjury, I certify that:

- The number shown on this form is my correct taxpayer identification number (or I am waiting for a number to be issued to me); and
- I am not subject to backup withholding because: (a) I am exempt from backup withholding, or (b) I have not been notified by the Internal Revenue Service (IRS) that I am subject to backup withholding as a result of a failure to report all interest or dividends, or (c) the IRS has notified me that I am no longer subject to backup withholding; and
- I am a U.S. citizen or other U.S. person (defined below); and
- The FATCA code(s) entered on this form (if any) indicating that I am exempt from FATCA reporting is correct.

Certification instructions. You must cross out item 2 above if you have been notified by the IRS that you are currently subject to backup withholding because you have failed to report all interest and dividends on your tax return. For real estate transactions, item 2 does not apply. For mortgage interest paid, acquisition or abandonment of secured property, cancellation of debt, contributions to an individual retirement arrangement (IRA), and generally, payments other than interest and dividends, you are not required to sign the certification, but you must provide your correct TIN. See the instructions for Part II, later.

Sign Here Signature of U.S. person ▶  Date ▶ 1/2/19

General Instructions

Section references are to the Internal Revenue Code unless otherwise noted.

Future developments. For the latest information about developments related to Form W-9 and its instructions, such as legislation enacted after they were published, go to www.irs.gov/FormW9.

Purpose of Form

An individual or entity (Form W-9 requester) who is required to file an information return with the IRS must obtain your correct taxpayer identification number (TIN) which may be your social security number (SSN), individual taxpayer identification number (ITIN), adoption taxpayer identification number (ATIN), or employer identification number (EIN), to report on an information return the amount paid to you, or other amount reportable on an information return. Examples of information returns include, but are not limited to, the following.

- Form 1099-INT (interest earned or paid)

- Form 1099-DIV (dividends, including those from stocks or mutual funds)
- Form 1099-MISC (various types of income, prizes, awards, or gross proceeds)
- Form 1099-B (stock or mutual fund sales and certain other transactions by brokers)
- Form 1099-S (proceeds from real estate transactions)
- Form 1099-K (merchant card and third party network transactions)
- Form 1098 (home mortgage interest), 1098-E (student loan interest), 1098-T (tuition)
- Form 1099-C (canceled debt)
- Form 1099-A (acquisition or abandonment of secured property)

Use Form W-9 only if you are a U.S. person (including a resident alien), to provide your correct TIN.

If you do not return Form W-9 to the requester with a TIN, you might be subject to backup withholding. See What is backup withholding, later.