

DATE: 10/15/2018

INVITATION TO BID  
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00124527

**JEFFERSON PARISH**

PURCHASING DEPARTMENT  
P.O. BOX 9  
GRETN, LA. 70054-0009  
504-364-2678

VENDOR:

BUYER: SFOLSE

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

**DELIVERY: FOB JEFFERSON PARISH**

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

5-7 DAYS

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

**Gas And Supply**

**Jimmy Gibbs**

Phone 504-392-2400

Fax 504-392-1500

[jimmy.gibbs@gasandsupply.com](mailto:jimmy.gibbs@gasandsupply.com)

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) \_\_\_\_\_

**\*\*\* ALL BIDDERS MUST COMPLETE SECTION BELOW \*\*\***

FIRM NAME:

I.W.S. GAS AND SUPPLY

SIGNATURE:

(Must be signed here)

Jimmy Gibbs

TITLE:

SALES

PRINT OR TYPE NAME:

JIMMY GIBBS

ADDRESS:

111 BURAS DR.

CITY, STATE:

BELLE CHASSE, LA.

ZIP:

70037

TELEPHONE:

504 392-2400

FAX:

504 392-1500

EMAIL ADDRESS:

JIMMY.GIBBS@GASANDSUPPLY.COM

TOTAL PRICE OF ALL BID ITEMS: \$ 1514.16

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00124527

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			STOCK SUPPLIES FOR THE JEFFERSON PARISH PUBLIC WORKS DEPARTMENT		
1	6.00	EA	0010 - BIT, DRILL, 3/4 IN X 1/2 IN REDUCED SHANK, HIGH SPEED STEEL, SNAP-ON <i>NORSEMAN 29280</i> #CSE485A SK# 00-0200040	<i>13.38</i>	<i>80.28</i>
2	10.00	EA	0020 - BIT, DRILL, 1/2 IN X 12 IN LENGTH, 3/8 IN SHANK, FOR METAL, PVC OR WOOD,  DEWALT #DW1614G SK# 00-0200190	<i>13.00</i>	<i>130.00</i>
3	4.00	EA	0030 - BOLT, EYE, 7/8 IN UNC BY 5 IN SHANK LENGTH, GALVANIZED, 10600# WORKING  LOAD LIMIT, CROSBY G-291 #1043695 SK# 00-0271720	<i>N/B</i>	<i>—</i>
4	4.00	EA	0040 - PUNCH, CENTER, 5/16 IN, 4-1/2 IN LONG, KLEIN #66311, MSC #53780433 <i>PROTO 5415/16 S2</i> SK# 00-0305960	<i>3.36</i>	<i>13.44</i>
5	4.00	EA	0050 - PUNCH, DRIFT, 1/4 IN X 11 IN LONG ARMSTRONG #70-197-1/4 <i>PROTO 596 1/2 S2</i> SK# 00-0305980	<i>8.63</i>	<i>34.52</i>
6	48.00	EA	0060 - NOZZLE, HOSE, PISTOL GRIP, SOLID METAL BODY, 3/4 IN HOSE THREADS, GILMOUR <i>DIXON CSN75</i> #573 SK# 00-0480190	<i>5.04</i>	<i>241.92</i>
7	6.00	EA	0070 - HOIST, CHAIN, MANUAL (NON-LEVER), TEN FOOT LIFT, 1-1/2 TON, JET # 101708 SMH-1- 1/2T-10 SK# 00-058608A	<i>169.00</i>	<i>1014.00</i>
<p style="text-align: center;">Gas And Supply Jimmy Gibbs Phone 504-392-2400 Fax 504-392-1500 jimmy.gibbs@gasandsupply.com</p>					

# Reduced Shank

## SILVER & DEMING - 1/2" REDUCED SHANK

### Type 130-AGM -Metric

1/2" Reduced Shank Silver & Deming  
135° Split Point Magnum Super Premium,  
3-Flats on Shank

- Special Hi-Molybdenum tool steel.
- One piece solid construction
- Body and clearance are gold surface treated for maximum lubricity.
- Recommended for use in work hardening grades of stainless steel and other hard metal drilling applications.



#### METRIC

Part No.	Dia. MM	Overall Length Inches	Part No.	Dia. MM	Overall Length Inches
25500	14.0	6	25520	20.0	6
25502	15.0	6	25522	21.0	6
25504	16.0	6	25524	22.0	6
25510	17.0	6	25530	23.0	6
25512	18.0	6	25532	24.0	6
25514	19.0	6	25534	25.0	6

Qty. per package 1

Qty. per package 1

### Type 131-AG

3/4" Reduced Shank Silver & Deming  
Magnum Super Premium - 135° Split Point

- These are high performance, close tolerance, tight runout spec. tools designed for drilling with Bridgeport style or other production machines with 3/4" chucks.
- Precision ground point, body and drill diameter for accuracy and high performance.
- Recommended for use in work hardening grades of stainless steel and other hard metal drilling applications.



#### FRACTIONAL

Part No.	Diameter Inches	Flute Length Inches	Overall Length Inches	Qty. per/pack
29741	13/16	3-1/4	5-1/2	1
29781	7/8	3-1/4	5-1/2	1
29821	15/16	3-1/4	5-1/2	1
29861	1	3-1/4	5-1/2	1
29901	1-1/8	3-1/2	5-27/32	1
29941	1-1/4	3-1/2	5-7/8	1
29961	1-3/8	3-1/2	5-29/32	1
29981	1-1/2	3-1/2	5-15/16	1

### Type 130

1/2" Reduced Shank Silver & Deming  
118° point - General Purpose

- This general purpose 118° point high-speed steel drill is recommended for use in drilling equipment with 1/2" chucks.
- Type 130 drills may be used in power applications such as drill presses where a short rigid drill is required.



#### FRACTIONAL

Part No.	Diameter Inches	Overall Length Inches	Qty. per/pack
29130	33/64	6	1
29140	17/32	6	1
29150	35/64	6	1
29160	9/16	6	1
29170	37/64	6	1
29180	19/32	6	1
29190	39/64	6	1
29200	5/8	6	1
29210	41/64	6	1
29220	21/32	6	1
29230	43/64	6	1
29240	11/16	6	1
29250	45/64	6	1
29260	23/32	6	1
29270	47/64	6	1
29280	3/4	6	1
29290	49/64	6	1
29300	25/32	6	1
29310	51/64	6	1
29320	13/16	6	1
29330	53/64	6	1
29340	27/32	6	1
29350	55/64	6	1
29360	7/8	6	1
29370	57/64	6	1
29380	29/32	6	1
29390	59/64	6	1
29400	15/16	6	1
29410	61/64	6	1
29420	31/32	6	1
29430	63/64	6	1
29440	1"	6	1
29450	1-1/16	6	1
29460	1-1/8	6	1
29470	1-5/32	6	1
29480	1-3/16	6	1
29490		6	1

Gas And Supply

Jimmy Gibbs

Phone 504-392-2400

Fax 504-392-1500

jimmy.gibbs@gasandsupply.com

METRIC

Twist Drills - Silver & Deming - 1/2" Reduced Shank



## STARTING PUNCHES

- › Similar to drift punches, but with wider points and heavier, shorter body.
- › Application: to align holes in two or more pieces of metal through which a bolt or screw is to be inserted.
- › Application: for installing and removing pins and shafts.
- › One-piece design for strength and durability.
- › Reverse taper to help prevent binding.

Product #	Tip Width (in) (A)	Shank Width (in) (B)	Overall Length (in) (L)	Weight (lbs)
J503/16S2	1/16	1/4	4-1/8	0.03
J501/4S2	3/32	1/4	5	0.06
J505/16S2	1/8	5/16	5-1/8	0.10
J503/8S2	3/16	3/8	5-5/8	0.17
J507/16S2	7/32	7/16	6	0.24
J501/2S2	1/4	1/2	6-1/2	0.33

ASME B107.48



CENTER, STARTING, & PRICK PUNCHES

## CENTER PUNCHES

- › Application: metal working layout. Provides a broad dent in marking intersecting center lines, hole locations, and pilot drill starting point.
- › One-piece design for strength and durability.

Product #	Shank Width (in) (B)	Overall Length (in) (L)	Weight (lbs)
J411/4S2	1/4	4-3/4	0.05
J415/16S2	5/16	4-5/8	0.09
J413/8S2	3/8	4-7/8	0.14
J417/16S2	7/16	5-1/4	0.19
J411/2S2	1/2	5-5/8	0.29
J415/8S2	5/8	6-1/4	0.45

ASME B107.48



Gas And Supply  
Jimmy Gibbs  
Phone 504-392-2400  
Fax 504-392-1500  
jimmy.gibbs@gasandsupply.com

## PRICK PUNCHES

- › Application: sheet metal work for scribing and for punching starting holes for sheet metal screws.
- › One-piece design for strength and durability.
- › Reverse taper to help prevent binding.

Product #	Shank Width (in) (B)	Overall Length (in) (L)	Weight (lbs)
J441/4S2	1/4	4-3/4	0.06
J445/16S2	5/16	5	0.09
J443/8S2	3/8	5-1/4	0.14

ASME B107.48



## 7 PIECE DRIFT PUNCH SET

Product #: J96AS2

Contents	Description	Tip Width (in) (A)	Shank Width (in) (B)	Overall Length (in) (L)
J961/4S2	Punch, Drift 3/32"	3/32	1/4	10
J965/16S2	Punch, Drift 1/8"	1/8	5/16	10
J963/8S2	Punch, Drift 3/16"	3/16	3/8	10
J967/16S2	Punch, Drift 7/32"	7/32	7/16	10
J961/2S2	Punch, Drift 1/4"	1/4	1/2	10
J965/8S2	Punch, Drift 5/16"	5/16	5/8	10
J963/4S2	Punch, Drift 3/8"	3/8	3/4	10
J25TR29C	Tool Roll, 7 Pockets			

Weight (lbs): 3.46




## 5 PIECE DRIFT PUNCH SET

Product #: J96BS2

Contents	Description	Tip Width (in) (A)	Shank Width (in) (B)	Overall Length (in) (L)
J965/16S2	Punch, Drift 1/8"	1/8	5/16	10
J963/8S2	Punch, Drift 3/16"	3/16	3/8	10
J961/2S2	Punch, Drift 1/4"	1/4	1/2	10
J965/8S2	Punch, Drift 5/16"	5/16	5/8	10
J967/16S2	Punch, Drift 7/32"	7/32	7/16	10
J25TR30C	Tool Roll, 5 Pockets			

Weight (lbs): 2.30

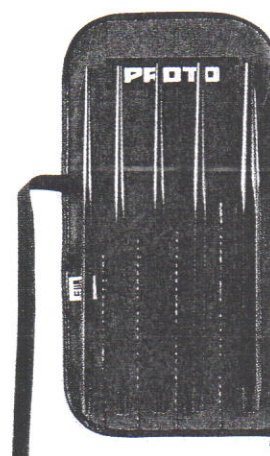

## DRIFT PUNCHES

- › Application: to align holes in two or more pieces of metal through which a bolt or screw is to be inserted.
- › Application: for installing and removing pins and shafts.
- › One-piece design for strength and durability.
- › Reverse taper to help prevent binding.

Product #	Tip Width (in) (A)	Shank Width (in) (B)	Overall Length (in) (L)	Weight (lbs)
J961/4S2	3/32	1/4	10	0.12
J965/16S2	1/8	5/16	10	0.19
J963/8S2	3/16	3/8	10	0.28
J967/16S2	7/32	7/16	10	0.37
J961/2S2	1/4	1/2	10	0.49
J965/8S2	5/16	5/8	10	0.70
J963/4S2	3/8	3/4	10	1.02

ASME B107.48



Gas And Supply  
Jimmy Gibbs  
Phone 504-392-2400  
Fax 504-392-1500  
[jimmy.gibbs@gasandsupply.com](mailto:jimmy.gibbs@gasandsupply.com)

## Washdown Nozzles

### Sweeper Nozzle



Thread Size	Discharge	Length	Brass	
			Previous Part #	Part #
3/4" GHT	3/16"	2"	500SN2	PSN76

### Flexible Water Nozzle

**Feature:**

- bends for water flow, shuts off when released



Thread Size	Part #
3/4" GHT	8005

### Brass / Rubber Power Flow Water Nozzle

**Features:**

- all metal body and handle
- curved design to fit the contour of your hand
- overmold for comfortable handling
- built in flow control to regulate the amount of water flow
- locking feature to make extended watering easy
- large easy-turn dial




Thread Size	Part #
3/4" GHT	PNB75GHT

### Insulated Water Nozzles

**Features:**

- clip locks to any spray pattern
- industrial strength nylon handle
- rubber handle guard
- GHT thread on head
- heavy duty brass valve and adjusting nut
- for use with hot water up to 140°F (60°C)

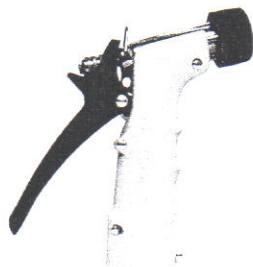

Thread Size	Chrome Plated Zinc
	Part #
3/4" GHT	SN75

### Pistol-Grip Water Nozzle

**Features:**

- clip locks to any spray pattern
- easy squeeze on/off lever
- brass valve and adjusting nut
- stainless steel spring with lifetime packing
- rubber handle guard



Gas And Supply  
Jimmy Gibbs  
Phone 504-392-2400  
Fax 504-392-1500  
[jimmy.gibbs@gasandsupply.com](mailto:jimmy.gibbs@gasandsupply.com)

Thread Size	Zinc Metallized
	Part #
3/4" GHT	CSN75

### Twist Nozzles

**Feature:**

- maximum operating pressure 150 PSI (water only)



Thread Size	Length	Extruded Brass	
		Previous Part #	Part #
3/4" GHT	4"	---	BTN75
	4"	---	500AN4 <sup>1</sup>
	6 3/4"	500-AN7	500AN7 <sup>1</sup>

<sup>1</sup> imported