



www.NoRamp.com
PATENTED TILT TRAILERS

ELIMINATE INJURIES! ■ SAVE TIME & MONEY! ■ AVOID EQUIPMENT DAMAGE!



STANDARD FEATURES

2024 MODELS	RS-9	U-12	U-12W	U-14	U-19	U-23	U-23GN	U-24	U-24GN
Maximum Payload	1,950 lbs.	4,500 lbs.	4,250 lbs.	10,000 lbs.	10,000 lbs.	9,500 lbs.	9,500 lbs.	15,000 lbs.	15,000 lbs.
Axle Rating	3,500 lbs.	1 x 7,000 lbs.	1 x 7,000 lbs.	2 x 7,000 lbs.	2 x 7,000 lbs.	2 x 7,000 lbs.	2 x 7,000 lbs.	3 x 7,000 lbs.	3 x 7,000 lbs.
Trailer Weight	1,050 lbs	2,500 lbs	2,750 lbs	3,600 lbs	4,000 lbs	4,500 lbs	4,500 lbs	5,400 lbs	6,000 lbs
Overall Width	94"	82"	102"	102"	102"	102"	102"	102"	102"
Overall Length	14'	15' 7"	15' 7"	19' 6"	23' 8"	27' 4"	33' 9/16"	28' 4"	34' 8"
Loading Surface Area	72" x 9'	60" x 10'10"	80" x 10'	80" x 14'	80" x 18'	80" x 22'	80" x 22'	80" x 23'	80" x 23'
Deck Surface	Treated Pine	Treated Pine	Treated Pine	Treated Pine	Treated Pine	Treated Pine	Hardwood	Hardwood	Hardwood
Lifting Device	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist	Hydraulic w/ Elec. Assist
Suspension	Single Axle Torsion	Single Axle Torsion	Single Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Twin Axle Torsion	Tri-Axle Torsion	Tri-Axle Torsion
Electric Brakes	Optional	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Wheel Size	14"	16"	16"	16"	16"	16"	16"	16"	16"
Hitch Size	2"	2 - 5/16"	2 - 5/16"	2 - 5/16"	2 - 5/16"	2 - 5/16"	Gooseneck	Pintle	Gooseneck
Systems & Storage Box	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Lighting	LED	LED	LED	LED	LED	LED	LED	LED	LED
Welded D-Rings	N/A	4	4	6	6	6	6	6	6
Banjo Hole Cut Outs	A Multitude of	(4) 2/Side-Frt & Rear	(4) 2/Side-Frt & Rear	(4) 2/Side-Frt(& Rear	4) 2/Side-Frt & Rear	(4) 2/Side-Frt & Rear	4) 2/Side-Frt & Rear	(4) 2/Side-Frt & Rear	(4) 2/Side-Frt & Rear
Battery	Group 31	Group 31	Group 31	Group 31	Group 31	Group 31	Group 31	Group 31	Group 31
Stake Bed Pockets	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Safety Lock	N/A	Standard	Standard	Standard	Standard	Standard	Standard	Standard	Standard
Warranty	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year	1 Year

FEATURES & BENEFITS

NO RAMP ADVANTAGES

- Eliminate Injuries caused by heavy ramps such as pulled back muscles, smashed feet, and severed fingers that lead to worker comp claims or lawsuits.
- Save Time & Money as loading/unloading can be done with-or-without tow vehicle being attached.
- Avoid Equipment damage as low approach angle protects equipment from damage caused by falling off ramps during loading and unloading.

LOW APPROACH TILT TRAILER ANGLE

- Ability to load any low clearance equipment quickly and safely due to low approach angle.
- Applications: Skid Steers, Scissor Lifts, Fork Lifts, Construction, Farming, Industrial Cleaning Equipment, plus so much more...

LOCKING MECHANISM

- For assured safety of load, in case of accidental hydraulic line damage.

GOOSENECK

- Our Twin Axle U-23 and Tri-Axle U-24 are available in Goosenck configurations.

LED RUBBER MOUNTED LIGHTING

- Better visibility for safety, and low voltage draw for battery life.

AUXILIARY RECEIVER

- Used for winch mount and other needs.

EASY ACCESS GREASE ZERKS

- Deck side grease zerks for axle pins, and fender hinges.

PROTECTED WIRE HARNESS

- Harness runs through 3" steel center channel reducing maintenance costs and lighting failures.

BUILT-IN THEFT PREVENTION

- Lower trailer, engage safety lock, lock systems box, and prevent theft.

ENCLOSURES

- All U-Series Trailers are available with aluminum enclosures.

TORSION AXLE

- Superior ride and long life

ADJUSTABLE COUPLER

- Allows for any truck in the fleet to do the towing.

NO JACK NEEDED FOR TIRE CHANGES

- Reduces time with added safety. Break lug nuts loose, apply blocks under each rear corner of trailer, and lower unit to raise tires off the ground.

STAKE BED POCKETS WITH RUB RAIL

- Provides additional tie down locations, framing-or-racking opportunity, and added main frame strength.

15' EXTENSION CORD CONTROL MODULE

- Allows for activation of trailer at the systems box, or up to 15' away.

AMP METER W/BATTERY LIFE INDICATOR

- To confirm charging from tow vehicle, and show battery charge status.

SYSTEMS BOX MECHANICAL COVER

- Protects Battery, Pump/Motor from carelessly thrown in tie down staps and tools.

AVAILABLE OPTIONS


- Custom Colors
- Wireless Remote Key Fob
- Spare Tire
- Spare Tire Rack
- Aluminum Custom Wheels
- Mobile D-Rings
- Pintel Hitch
- Winch Plate
- Winch
- Solar Trickle Charger
- 10amp On-Board Battery Charger
- Hardwood Decking
- Diamond Plate Steel Decking
- Electric/Hydraulic Jack Stand
- Drum Surge Brakes
- 8', 12', 16', and 20' Secure Mobile Storage Containers



Visit NoRamp.com to See NoRamp in Action ■ Phone: (574) 206-1331

This sign is based on the latest product information available at the time of publication. NoRamp reserves the right to make changes in standard features, options, prices, colors, materials, equipment, specifications, and models at any time without notice or prior obligation. ©2016-2023 NoRamp Trailers, LLC. All Rights Reserved.

SPECS

Maximum Payload	10,000 lbs.
Axle Rating	2 x 7,000 lbs.
Trailer Weight	4,000
Overall Width	102"
Overall Length	23' 8"
Loading Surface Area	80" x 18'
Deck Surface	Treated Pine
Lifting Device	Hydraulic w/Elec. Assist
Suspension	Twin Axle Torsion
Electric Brakes	Standard
Wheel Size	16"
Hitch Size	2 - 5/16"
Systems & Storage Box	Standard
Lighting	LED
Welded D-Rings	6
Banjo Hole Cut Outs	(4) 2/Side-Frt & Rear
Battery	Group 31
Stake Bed Pockets	Standard
Safety Lock	Standard
Warranty	1 Year

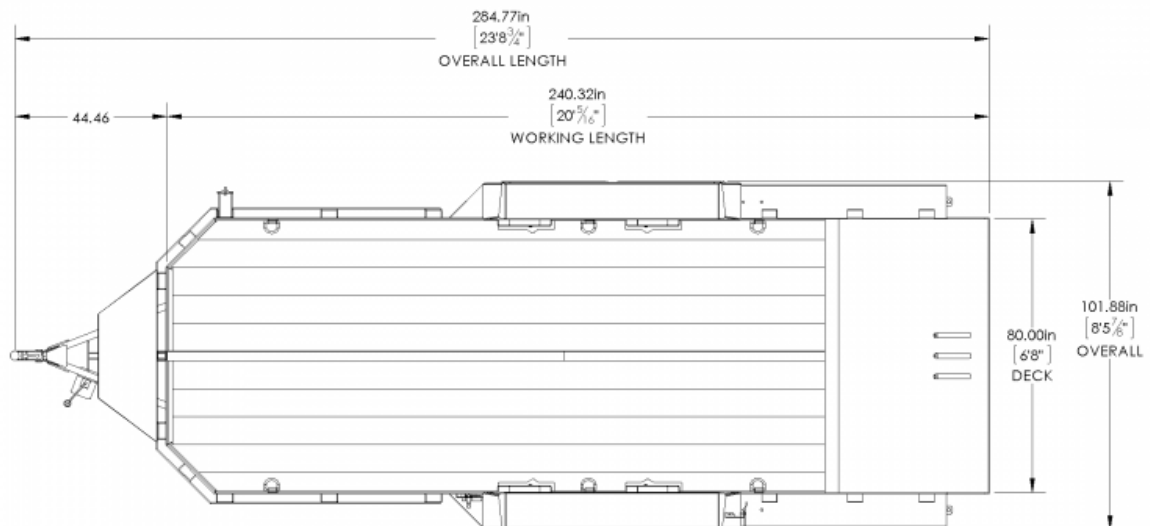

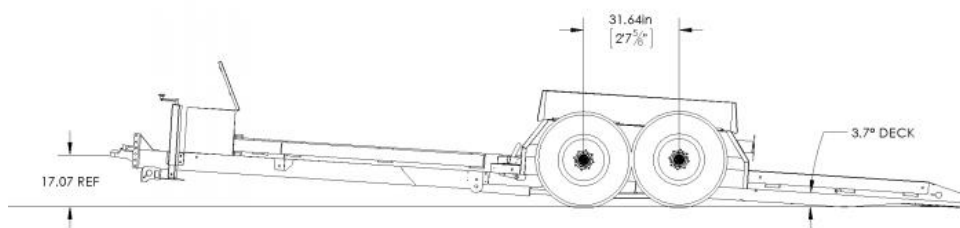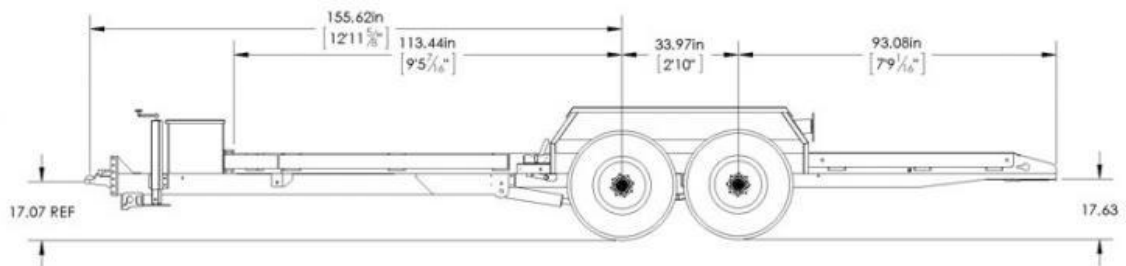

I have attached a quote for our No Ramp U-19, which is the closest to the requested.

Our No Ramp trailers differ from the requested utility trailer as our whole trailer drops down, eliminating the need for ramps. I've attached some prints to help illustrate this.

I've also attached specifications and our current brochure, and listed some other notable differences below.

- GVWR: 14,000lbs
- Payload: 10,000lbs
- Deck width: 80"
- Deck length 18' (usable)
- Axles/Suspension: 7k Torsion

We also offer a U-23 which offers 22' of deck length, let me know if you would like that quoted.