


DuraVane Lubricated Rotary Vane Pump

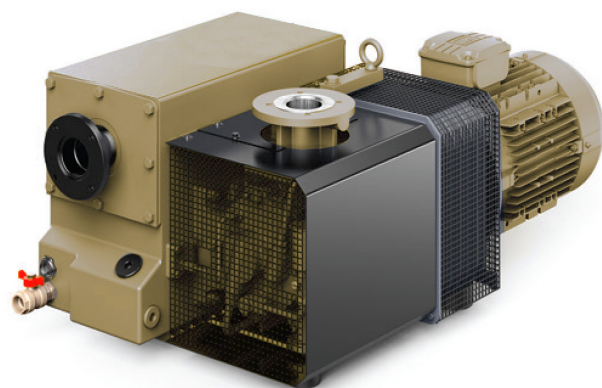

duravane 

Duravane oil lubricated rotary vane pumps are single-stage pumps with an integrated closed loop oil recirculation system.

- Heavy duty construction
- Compact design, small footprint
- High-tech vane material provides long vane life
- Gas ballast valve is standard
- Low noise & vibration level
- Low maintenance
- Air-cooled design
- High efficiency multi-stage exhaust filter removes 99.9% of exhaust smoke
- Direct drive
- Simple to install
- Optimized oil retention system

Performance Characteristics

Model: RVL125HS

Displacement: 130 ACFM/ 220 m³h

Final pressure: 0.08 Torr / 29.9 "HgV

Motor: 7.5 HP / 5.5 kW

Voltage: 200/220-230/380-460V - 3ph

Speed: 1800 RPM

Noise level(at 3ft): 73 dBA

Oil Type: Duratex 68


Oil reservoir cap.: 5.3-9.5 QTs / 5.0-9.0 Ltrs

Weight: 419 lbs / 190 kg

L x W x H 42" x 21" x 16.4"

Inlet conn. : 2"

Discharge conn. : 2"

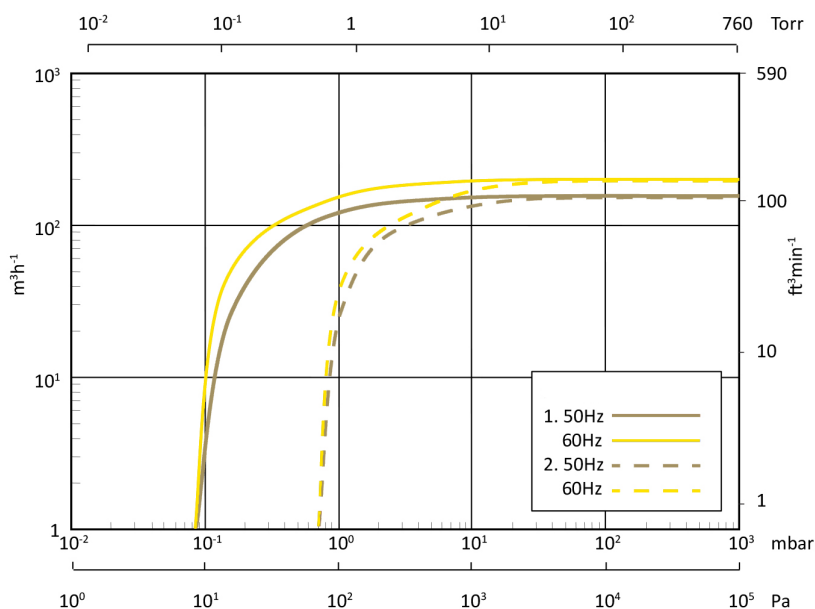

1. Without gas ballast 2. With gas ballast

DEDICATED. DEPENDABLE. DYNAMIC. DEKKER.

dekkervacuum.com