

DATE: 6/15/2020

INVITATION TO BID  
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00131311

## JEFFERSON PARISH

PURCHASING DEPARTMENT  
P.O. BOX 9  
GRETN, LA. 70054-0009  
504-364-2678

VENDOR:

BUYER: MBUTTERY

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

## DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES \_\_\_\_\_

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK \_\_\_\_\_

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK \_\_\_\_\_

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) \_\_\_\_\_

## \*\*\* ALL BIDDERS MUST COMPLETE SECTION BELOW \*\*\*

FIRM NAME:

Bayou Lighting &amp; Electrical Supply

SIGNATURE:

(Must be signed here)

Mark Van Camp

TITLE:

President

PRINT OR TYPE NAME:

Mark Van Camp

ADDRESS:

7501 Westbank Exp

CITY, STATE:

Marrero, LA 70072

ZIP:

TELEPHONE:

(504) 347-0228

FAX:

( )

EMAIL ADDRESS:

mark@bayoulighting.com

TOTAL PRICE OF ALL BID ITEMS: \$ 18,845.75

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00131311

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			PURCHASE OF ELECTRICAL STOCK ITEMS FOR THE PUBLIC WORKS DEPARTMENT OF SEWERAGE EAST BANK WAREHOUSE		
1	1.00	EA	0001 - Starter, soft start, 360 amps, Cutler Hammer catalog no. S801V36P3B,  style no. 92EA10229G0003G, replacement: Eaton S811+V36P3S with PSG240F, 3PH 500VAC Power Supply and EMS39, transient protector (0861250) <i>S801V47P30</i>	<i>4,000.00</i>	<i>4,000.00</i>
2	100.00	LF	0002 - Conduit, 1-1/4 in, flexible liquid-tight, with ground wire,  type U.L., Gray <i>620524 Madison</i> (0875240)	<i>3.60 ft</i>	<i>360.00</i>
3	5.00	EA	0003 - Elbow, PVC, schedule 40 electrical conduit, sweep 90 degree,  1-1/4 in (0879770)	<i>2.25</i>	<i>11.25</i>
4	30.00	EA	0004 - Strap, 1-hole, stainless steel, for 3/4 in rigid conduit,  Appleton no. CL-75 (0880040)	<i>2.25</i>	<i>67.50</i>
5	5.00	EA	0005 - Cover, round, 4 in lampholder, aluminum weathertite, 3-1/2 in with  1 plug, Steel City no. Y3 <i>WRC3 Westgate</i> (0880560)	<i>3.00</i>	<i>15.00</i>
6	20.00	EA	0006 - Connector, cable, nonmetallic sheathed (romex), die cast zinc, two  screw, 3/4 in KO, 10-3 to 8-2 cable, <i>L104 Madison</i> Appleton no. C-750 (087796B)	<i>2.00</i>	<i>40.00</i>
7	12.00	EA	0007 - Starter, size 1, 3 pole, 120 volt, new in factory box,  Westinghouse no. A200MICAC, Easton no. A200M1CAC (0861600)	<i>435.00</i>	<i>5,220.00</i>
8	10.00	EA	0008 - Starter, size 2, 120 volt, with base and type B overload relay, new in	<i>750.00</i>	<i>7,500.00</i>

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00131311

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			factory box, Cutler Hammer/Westinghouse no. A200M2CAC (0861610)		
9	1,250.00	FT	0009 - Wire, romex, 12/2 with ground, type NMB12/2WGRD, 250 ft per carton,  PVC jacket (0882760)		
10	3.00	EA	0010 - Flange, slip-on, 8 in, 8-hole, 150 LB mild steel, EDP no. 2548000  (0076180)		
11	36.00	EA	0011 - Shackle, anchor, 1/2 in, with screw pin, 3000 LB working load limit  316 stainless, Fastenal no. 74659 (0271090) 60316050	26.00	936.00
12	14.00	EA	0012 - Bolt, eye 3/4 in-10 unc-2A thread size, 2.00 in shank, 5000lb capacity,  meets ASTM A 489 and ANSI B 18.15, Proto No. 94027, Grainger no. 19L134 (0275070) 60615021	48.00	672.00
13	12.00	EA	0013 - Bushing, galvanized, schedule 40, domestic, 1-1/2 in X 1 in., (0290300) LBB10	2.00	24.00
			Please have items shipped to:  Public Works East Bank Warehouse 4901 Jefferson Hwy Suite C Jefferson, LA 70121		




## Catalog Number Selection

Table 1. S801 Open Soft Starters Catalog Numbering System

<b>S 801 N 66 N 3 S</b>																					
<b>S</b> = IT. Soft Starter	<b>B</b> = Level Sensing																				
<b>801</b> = Non-combination Soft Starter	<b>D</b> = Inside the Delta																				
<table border="1"> <thead> <tr> <th colspan="2">Ampacity Rating</th></tr> </thead> <tbody> <tr><td>N37 = 37 amps</td><td>U50 = 500 amps <sup>②</sup></td></tr> <tr><td>N66 = 66 amps</td><td>V36 = 360 amps</td></tr> <tr><td>R10 = 105 amps</td><td><u>V42 = 420 amps</u></td></tr> <tr><td>R13 = 135 amps</td><td>V50 = 500 amps</td></tr> <tr><td>T18 = 180 amps</td><td>V65 = 650 amps</td></tr> <tr><td>T24 = 240 amps</td><td>V72 = 720 amps</td></tr> <tr><td>T30 = 304 amps</td><td>V85 = 850 amps</td></tr> <tr><td>U36 = 360 amps</td><td>V10 = 1000 amps</td></tr> <tr><td>U42 = 420 amps</td><td></td></tr> </tbody> </table>		Ampacity Rating		N37 = 37 amps	U50 = 500 amps <sup>②</sup>	N66 = 66 amps	V36 = 360 amps	R10 = 105 amps	<u>V42 = 420 amps</u>	R13 = 135 amps	V50 = 500 amps	T18 = 180 amps	V65 = 650 amps	T24 = 240 amps	V72 = 720 amps	T30 = 304 amps	V85 = 850 amps	U36 = 360 amps	V10 = 1000 amps	U42 = 420 amps	
Ampacity Rating																					
N37 = 37 amps	U50 = 500 amps <sup>②</sup>																				
N66 = 66 amps	V36 = 360 amps																				
R10 = 105 amps	<u>V42 = 420 amps</u>																				
R13 = 135 amps	V50 = 500 amps																				
T18 = 180 amps	V65 = 650 amps																				
T24 = 240 amps	V72 = 720 amps																				
T30 = 304 amps	V85 = 850 amps																				
U36 = 360 amps	V10 = 1000 amps																				
U42 = 420 amps																					
	<b>W</b> = Without CIM (Control Interface Module)																				
	<b>3</b> = 3-Pole Device																				
	<b>N</b> = No Options																				
	<b>P</b> = Pump Control																				
	<b>V</b> = 690 Volt Option <sup>①</sup>																				

<sup>①</sup> Not available on U-Frame.

<sup>②</sup> U-Frame 500 Amp unit does not have IEC Certification.




65 mm, Catalog Number S801N



110 mm, Catalog Number S801R



200 mm, Catalog Number S801T



290 mm, Catalog Number S801V

## FLEXIBLE CONDUIT LIQUID-TIGHT NON-UL VF - STEEL



Flexible metallic raceway for protection of electrical conductors from liquids, abrasion and weather where UL and other agency approval is not required

**Material:** Hot Dipped Galvanized Low Carbon Steel Core, PVC Jacket

**Features:** Mechanical and moisture protection for conductors. Sunlight resistant. Flame retardant jacket. Very flexible.

**Notes:** General purpose use -20°C to 60°C

ITEM#	TRADE SIZE	LENGTH (feet)	PACKING	INNER QTY	MASTER QTY
610130	3/8"	100	COIL	N/A	100
610160	3/8"	1000	REEL	N/A	1000
610230	1/2"	100	COIL	N/A	100
610245	1/2"	500	REEL	N/A	500
610260	1/2"	1000	REEL	N/A	1000
610330	3/4"	100	COIL	N/A	100
610345	3/4"	500	REEL	N/A	500
610430	1"	100	COIL	N/A	100
610441	1"	400	REEL	N/A	400
610524	1-1/4"	50	COIL	N/A	50
610540	1-1/4"	200	REEL	N/A	200
610624	1-1/2"	50	COIL	N/A	50
610635	1-1/2"	150	REEL	N/A	150
610724	2"	50	COIL	N/A	50
610730	2"	100	REEL	N/A	100
610822	2-1/2"	25	COIL	N/A	25
610922	3"	25	COIL	N/A	25
612022	3-1/2"	25	COIL	N/A	25
611022	4"	25	COIL	N/A	25

## FLEXIBLE CONDUIT LIQUID-TIGHT UL NON-METALLIC TYPE B



Flexible non-metallic raceway for protection of electrical conductors from liquids, abrasion and weather

**Material:** Integral and Rigid PVC

**Certifications:** UL Listed, CSA Listed

**Features:** Resists corrosion, abrasion, oil, water, acid, sunlight and rough environments. For outdoor use. Approved for direct burial.

**Notes:** UL Rating 80°C Dry, 60°C Wet, 70° Oil Resistant. CSA -18°C to 70°C.



ITEM#	TRADE SIZE	LENGTH (feet)	PACKING	INNER QTY	MASTER QTY
600130	3/8"	100	COIL	N/A	100
600230	1/2"	100	COIL	N/A	100
600260	1/2"	1000	REEL	N/A	1000
600330	3/4"	100	COIL	N/A	100
600346	3/4"	700	REEL	N/A	700
600430	1"	100	COIL	N/A	100
600445	1"	500	REEL	N/A	500
600524	1-1/4"	50	COIL	N/A	50
600624	1-1/2"	50	COIL	N/A	50
600724	2"	50	COIL	N/A	50

## FLEXIBLE CONDUIT LIQUID-TIGHT UL - STEEL



Flexible metallic raceway for protection of electrical conductors from liquids, abrasion and weather

**Material:** Hot Dipped Galvanized Low Carbon Steel Core, PVC Jacket

**Certifications:** UL Listed, CSA Listed

**Features:** UL bonded strip 3/8" - 1-1/4" for grounding. Liquid-tight. Flame retardant jacket.



ITEM#	TRADE SIZE	LENGTH (feet)	PACKING	INNER QTY	MASTER QTY
620130	3/8"	100	COIL	N/A	100
620160	3/8"	1000	REEL	N/A	1000
620230	1/2"	100	COIL	N/A	100
620245	1/2"	500	REEL	N/A	500
620260	1/2"	1000	REEL	N/A	1000
620330	3/4"	100	COIL	N/A	100
620345	3/4"	500	REEL	N/A	500
620360	3/4"	1000	REEL	N/A	1000
620430	1"	100	COIL	N/A	100
620441	1"	400	REEL	N/A	400
620524	1-1/4"	50	COIL	N/A	50
620540	1-1/4"	200	REEL	N/A	200
620624	1-1/2"	50	COIL	N/A	50
620635	1-1/2"	150	REEL	N/A	150
620724	2"	50	COIL	N/A	50
620730	2"	100	REEL	N/A	100
620822	2-1/2"	25	COIL	N/A	25
620922	3"	25	COIL	N/A	25
622022	3-1/2"	25	COIL	N/A	25
621022	4"	25	COIL	N/A	25

## COMPUTER BLUE CONDUIT UL LIQUID-TIGHT



Flexible metallic raceway for protection of electrical conductors from liquids, abrasion and weather, under raised floors in data processing areas

**Material:** Steel Core, PVC Jacket

**Certifications:** UL Listed, CSA Listed

**Features:** UL bonded strip 3/8" - 1-1/4" for grounding. Liquid-tight. Flame retardant jacket. Suitable for use in raised computer room floors per NEC 645.5(D). Approved for direct burial applications, concrete and earth burial. Listed for use in hazardous locations.



ITEM#	TRADE SIZE	LENGTH (feet)	PACKING	INNER QTY	MASTER QTY
640230	1/2"	100	COIL	N/A	100
640245	1/2"	500	REEL	N/A	500
640330	3/4"	100	COIL	N/A	100
640345	3/4"	500	REEL	N/A	500
640430	1"	100	COIL	N/A	100
640524	1-1/4"	50	COIL	N/A	50





# STAINLESS STEEL ONE HOLE STRAPS



## APPLICATION

- Used to mount conduit systems flat against walls and other surfaces to provide extra support
- Stainless steel plates to be used as clamp back spacers are available; contact factory for details
- Manufactured in stainless steel to help prevent corrosion
- Can be installed using ordinary hand tools and require little maintenance or repair
- Provided in a bright, polished finish that does not require touch up or painting

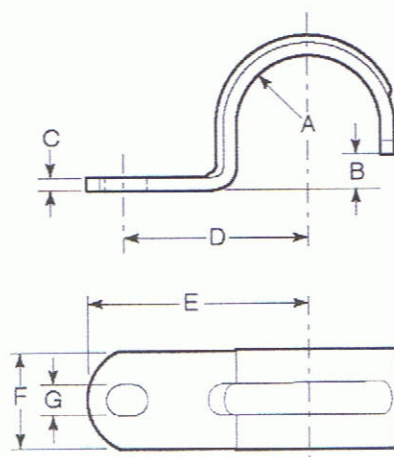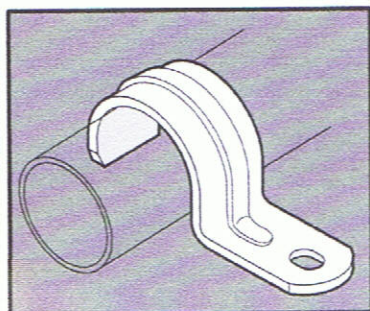

## PRODUCT DETAILS

### Material:

316 SS

### Standards:

ASTM A240

### Country of Origin:

100% Made in USA


Part Number	Size	Weight/ 100 (lbs.)	Dimension (in.)						
			A	B	C	D	E	F	G
3050	½ in.	4	0.42	0.25	.060	0.94	1.36	0.63	0.25
3075	¾ in.	5	0.53	0.25	.075	1.03	1.56	0.75	0.25
3100	1 in.	8	0.66	0.38	.090	1.25	1.81	0.88	0.37
3125	1-¼ in.	12	0.83	0.33	.105	1.50	2.00	0.88	0.37
3150	1-½ in.	15	0.95	0.47	.105	1.88	2.50	1.02	0.44
3200	2 in.	24	1.19	0.48	.120	2.13	2.75	1.14	0.56
3250	2-½ in.	43	1.44	0.55	.150	2.56	3.31	1.25	0.56
3300	3 in.	47	1.75	0.81	.150	2.88	3.63	1.25	0.56
3350	3-½ in.	66	2.00	1.76	.179	3.25	4.00	1.25	0.56
3400	4 in.	72	2.25	1.83	.179	3.50	4.25	1.25	0.56



**GIBSON STAINLESS**  
& SPECIALTY INC

© 2018 GIBSON STAINLESS & SPECIALTY, INC. - REV 3/2085


PO BOX 847, GREENSBURG, PA 15601  
PHONE: 1-800-945-4316 • FAX: 724-838-1544  
WEB: GIBSONSTAINLESS.COM



#60316050 1/2" Anchor Shackle, 316SS

A- 1/2" B- 0.63" C- 0.82"

D- 1.83" WLL- 3,000lbs

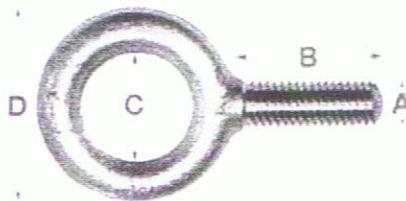

#60615021 3/4" x 2" Eyebolt, 316SS

A- 3/4" B- 2.00"

[Quoted text hidden]

[Quoted text hidden]

# Bayou

Lighting & Electrical Supply


From Mark Van Camp



WRC-1



WRC-2



WRC-3

## Technical Specs

- :: Dimensions: 4" diameter
  - :: Hole sizes: 1/2" & blank (flat)
  - :: Color: gray; also available in white on selected items only; blank cover available in galvanized steel
- PRODUCT FEATURES:
- :: Powder-coated finish
  - :: Weather protection and scratch resistant
  - :: Retail-ready packaging (shrink-wrapped with barcode)
  - :: Foam gaskets and installation hardware included



## REDUCING BUSHINGS STEEL

Reduces the size of internal female threads

**Material:** Steel

**Certifications:** cULus Listed



ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LRB-2	3/4" x 1/2"	100	1000	LRB-9	1-1/2" x 3/4"	10	50
LRB-3	1" x 1/2"	50	250	LRB-10	1-1/2" x 1"	10	100
LRB-4	1" x 3/4"	50	500	LRB-11	1-1/2" x 1-1/4"	10	100
LRB-5	1-1/4" x 1/2"	25	125	LRB-14	2" x 1"	10	50
LRB-6	1-1/4" x 3/4"	25	100	LRB-15	2" x 1-1/4"	10	50
LRB-7	1-1/4" x 1"	25	125	LRB-16	2" x 1-1/2"	10	50
LRB-8	1-1/2" x 1/2"	25	100				

## REDUCING BUSHINGS MALLEABLE

Reduces the size of internal female thread

**Material:** Malleable Iron

**Certifications:** cULus Listed

**Features:** Threaded NPSM for Rigid and IMC conduit



ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LRB-21	2-1/2" x 1-1/2"	5	50	LRB-33	3-1/2" x 3"	N/A	5
LRB-22	2-1/2" x 2"	5	25	LRB-36	4" x 3"	N/A	5
LRB-28	3" x 2"	N/A	5	LRB-37	4" x 3-1/2"	N/A	5
LRB-29	3" x 2-1/2"	N/A	10				

## LOCKNUTS

Connects threaded conduit to box or enclosure

**Material:** Zinc Die-Cast or Steel as noted

**Certifications:** UL Listed (Zinc only)

**Notes:** LNS-38 (only) is threaded NPSM for Rigid and IMC conduit.



ZINC				STEEL			
ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LN-50	1/2"	100	1000	LNS-38	3/8"	100	1000
LN-75	3/4"	100	1000	LNS-50	1/2"	100	1000
LN-100	1"	100	1000	LNS-75	3/4"	100	1000
LN-125	1-1/4"	50	500	LNS-100	1"	100	1000
LN-150	1-1/2"	20	200	LNS-125	1-1/4"	50	500
LN-200	2"	25	250	LNS-150	1-1/2"	20	200
LN-250	2-1/2"	10	100	LNS-200	2"	25	250
LN-300	3"	10	100	LNS-250	2-1/2"	10	100
LN-350	3-1/2"	10	50	LNS-300	3"	10	100
LN-400	4"	10	50	LNS-350	3-1/2"	10	50
				LNS-400	4"	10	50
				LNS-500	5"	N/A	10
				LNS-600	6"	N/A	10

## EXTRA HEAVY DUTY UL LOCKNUTS STEEL

Connect threaded conduit to box or enclosure

**Material:** Zinc Plated Steel

**Certifications:** UL Listed, cULus Listed (1/2" - 4" only)



ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LNS-50UL	1/2"	100	1000	LNS-250UL	2-1/2"	N/A	25
LNS-75UL	3/4"	100	1000	LNS-300UL	3"	N/A	25
LNS-100UL	1"	100	500	LNS-350UL	3-1/2"	N/A	25
LNS-125UL	1-1/4"	N/A	100	LNS-400UL	4"	N/A	25
LNS-150UL	1-1/2"	N/A	50	LNS-500UL	5"	N/A	5
LNS-200UL	2"	N/A	25	LNS-600UL	6"	N/A	5

## BONDING LOCKNUTS - STEEL

Connects threaded conduit to threadless opening in box or enclosure

**Material:** Steel

**Certifications:** cULus Listed

**Notes:** For use in harsh vibration environments



ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LNS-50-G	1/2"	50	500	LNS-200-G	2"	25	250
LNS-75-G	3/4"	50	500	LNS-250-G	2-1/2"	5	50
LNS-100-G	1"	50	500	LNS-300-G	3"	5	50
LNS-125-G	1-1/4"	25	250	LNS-350-G	3-1/2"	10	50
LNS-150-G	1-1/2"	20	200	LNS-400-G	4"	5	25

## SEALING LOCKNUTS - STEEL

Provides a rain-tight seal when fastening threaded conduit to threadless opening in box or enclosure

**Material:** Steel Locknut with PVC Molded Gasket

**Certifications:** cULus Listed



ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
LNS-50-I	1/2"	50	500	LNS-200-I	2"	10	100
LNS-75-I	3/4"	25	250	LNS-250-I	2-1/2"	5	50
LNS-100-I	1"	25	250	LNS-300-I	3"	5	50
LNS-125-I	1-1/4"	10	100	LNS-350-I	3-1/2"	5	25
LNS-150-I	1-1/2"	10	100	LNS-400-I	4"	5	25



## TILT-IN CABLE BOX CONNECTORS - STEEL

Connects ROMEX® or non-metallic sheathed cable to box or enclosure

**Material:** Steel, Zinc Electroplated  
**Notes:** Locknut not required



ITEM#	TRADE SIZE	INNER QTY	MASTER QTY
L-15	1/2"	100	500
L-16	3/4"	50	250
L-17	1-1/4"	25	125
L-18	1-1/2"	N/A	25

## NON-WATERTITE CONNECTORS - ZINC

Connects ROMEX® or non-metallic sheathed cable to box or enclosure

**Material:** Zinc Die-Cast  
**Certifications:** UL Listed, CSA Listed




ITEM#	TRADE SIZE	INNER QTY	MASTER QTY
L-104	3/4"	50	500
L-105	1"	25	250
L-106	1-1/4"	10	100
L-107	1-1/2"	5	50
L-108	2"	10	40

## NON-WATERTITE CONNECTORS - ZINC

Connects ROMEX® or non-metallic sheathed cable to box or enclosure

**Material:** Zinc Die-Cast  
**Certifications:** UL Listed & CSA (oval), cULus Listed (round)



OVAL				ROUND			
ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY	ITEM#	TRADE SIZE	INNER QTY	MSTR. QTY
L-1106	1-1/4"	10	100	L-1106-R	1-1/4"	10	100
L-1107	1-1/2"	10	50	L-1107-R	1-1/2"	10	50
L-1108	2"	5	25	L-1108-R	2"	5	25

## SNAP-IN CONNECTOR PLASTIC

Connects ROMEX® or non-metallic sheathed cable to box or enclosure

**Material:** Thermoplastic  
**Certifications:** UL Listed  
**Features:** Heavy duty



ITEM#	TRADE SIZE	INNER QTY	MASTER QTY
LNM-51	1/2"	100	1000

## TWO-SCREW BOX CONNECTORS - ZINC

Connects 14/2 to 10/3 armored ROMEX® or non-metallic sheathed cable to box or enclosure

**Material:** Zinc Die-Cast  
**Certifications:** UL Listed, CSA Listed  
**Notes:** L-51 NM cable: (2) 14/2, (1) 12/2, L-57: AC cable: (FE) 14/2-10/2, .46 min x .598 max AC cable



ITEM#	TRADE SIZE	KNOCK OUT	INNER QTY	MASTER QTY
L-51	3/8"	1/2"	100	1000
L-57	3/8"	1/2"	100	1000

## BUSHINGS

Converts raw-edged holes to smooth neat insulated openings for cable protection

**Material:** 6/6 Nylon  
**Certifications:** CSA Listed  
**Features:** Snaps in with fingertip pressure.



ITEM#	TRADE SIZE	INNER QTY	MASTER QTY
170	1/2"	50	500
171	3/4"	50	500
172	1"	25	250
173	1-1/4"	25	250
174	1-1/2"	25	250
175	2"	5	50
176	2-1/2"	5	50

## SNAP-IN CONNECTOR PLASTIC

Connects ROMEX® or non-metallic sheathed cable to metal box or enclosure

**Material:** Thermoplastic  
**Certifications:** UL Listed  
**Features:** Accepts (1) 10/3 to 14/2, (2) 12/2 and 14/2. For use with single and multiple cords in wire range .300" to .600"  
**Notes:** Maximum service temperature 105° C



ITEM#	TRADE SIZE	INNER QTY	MASTER QTY
ME-3201	1/2"	50	500

ROMEX® is a registered trademark of Southwire Company.