

1896

DATE: 10/02/2018

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00124370

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR: _____

BUYER: SFOLSE

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH	
INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES	<u>5-7 DAYS</u>
INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK	_____
INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK	_____

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: 1 RECEIVED

NUMBER: _____

NUMBER: _____

NUMBER: _____

Gas And Supply
Jimmy Gibbs
Phone 504-392-2400
Fax 504-392-1500
jimmy.gibbs@gasandsupply.com

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

*** ALL BIDDERS MUST COMPLETE SECTION BELOW ***	
FIRM NAME: <u>I.W.S. GAS AND SUPPLY</u>	
SIGNATURE: (Must be signed here) <u>Jimmy Gibbs</u>	TITLE: <u>SALES</u>
PRINT OR TYPE NAME: <u>Jimmy Gibbs</u>	
ADDRESS: <u>111 BUREAS DR</u>	
CITY STATE: <u>BELLE CHASSE, LA.</u>	ZIP: <u>70037</u>
TELEPHONE: <u>504 392-2400</u>	FAX: <u>504 392-1500</u>
EMAIL ADDRESS: <u>Jimmy.Gibbs@GasAndSupply.com</u>	

TOTAL PRICE OF ALL BID ITEMS: \$ 2351.16

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00124370

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	3.00	EA	SUPPLIES FOR THE JEFFERSON PARISH PUBLIC WORKS DEPARTMENT 0010 - TIP,WELDING,VICTOR #00-1-101 SK# 00-0306610	7.55	22.65
2	3.00	EA	0020 - TIP,WELDING,VICTOR #4-1-101 SK# 00-0306620	7.55	22.65
3	3.00	EA	0030 - HANDLE,TORCH,HEAVY DUTY WITH BUILT-IN REVERSE FLOW CHECK VALVES AND FLASH BACK ARRESTORS,VICTOR #315FC, MODEL #0382G0034, GRAINGER #5KJ43 SK# 00-0306720	108.00	324.00
4	3.00	EA	0040 - ATTACHMENT,WELDING,CUTTING, VICTOR #0381G0816 FOR VICTOR #CA2460 WELDING OUTFIT.GRAINGER #54RZ99 SK# 00-0306730	108.00	324.00
5	12.00	EA	0050 - SUPPORT,BACK,LARGE,POWERBRIGHT ORANGE,DECADE CADET #46583 OR PROFLEX BY ERGODYNE #11884HV,GRAINGER #35ZA91, FASTENAL #1038962 SK# 00-0477130	14.65	175.80
6	100.00	EA	0060 - CARTRIDGE,RESPIRATOR,THREADED, ORGANIC/ACID/AMMONIA,GMC TYPE,10 PER BOX MSA PART #464046 MUST BE THIS BRAND TO FIT EXISTING MSA RESPIRATORS, GRAINGER #4LR60 SK#00-0484090	6.70	670.00
7	12.00	EA	0070 - BRUSH,WHEEL,STANDARD TWIST WIRE, 4 IN DIA.,7/8 IN TRIM,.020 WIRE SIZE <i>PFERD 82154</i> 5/8 IN-11 UNC ARBOR,20,000 RPM,WEILER #13120 (NOTE: SOLD IN LOTS OF 10) SK# 00-059737Q	13.24	158.88
8	6.00	EA	0080 - HANDLE,HINGED POWER,CHROME,1/2 IN SQUARE DRIVE X 17-7/8 IN LONG,PROTO #5468, ARMSTRONG 12-918,OR EQUIVALENT SK# 00-0601550	29.23	175.38
9	20.00	EA	0090 - SHACKLE,ANCHOR,1/4 IN, 1/2 TON LOAD LIMIT,SCREW PIN, GALVANIZED,CROSBY <i>CAMPBELL 5410435</i>	3.06	61.20

Gas And Supply
Jimmy Gibbs
Phone 504-392-2400
Fax 504-392-1500
jimmy.gibbs@gasandsupply.com

Power wire brushes


Threaded knot wheel brushes

Gas And Supply
 Jimmy Gibbs
 Phone 504-392-2400
 Fax 504-392-1500



jimmy.gibbs@gasandsupply.com

Standard twist

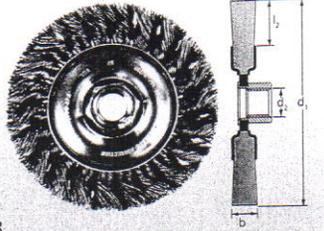

EDP 82153


Standard twist knot wheel brushes with a threaded nut for easy change out. Features loosely twisted knots for aggressive brushing action with a good surface finish. They are ideal when heavy-duty or severe cleaning is required.

For weld cleaning, weld spatter removal, scale removal, cleaning, deburring, and flash removal.

Recommendation for use


For optimal performance, use on angle grinders.

Made in the USA.

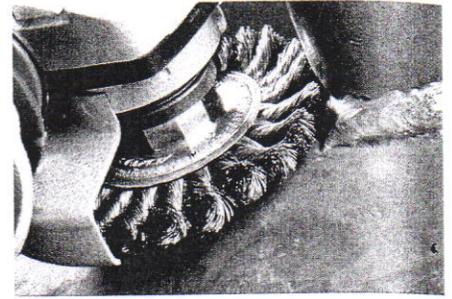

Diameter d ₁ [Inches]	Thread size d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Wire diameter and EDP number				Recom. speed [RPM]	MSFS max. [RPM]	
					.014	.016	.020	.023			
Carbon steel wire											
4	5/8-11	22	7/8	5/8	82153 P	-	82154	-	10,000 - 15,000	20,000	10/5
4	3/8-24	22	7/8	5/8	-	-	82158	-	10,000 - 15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82470	-	7,500 - 15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	82471	82472	-	82473	4,500 - 9,000	9,000	10
Stainless steel wire (INOX)											
4	5/8-11	22	7/8	5/8	82283 P	-	82284	-	8,000 - 15,000	20,000	10/5
4	3/8-24	22	7/8	5/8	-	-	82288	-	8,000 - 15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82596	-	6,000 - 15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	-	82597	-	82598	3,500 - 9,000	9,000	10
Brass wire											
4	5/8-11	22	7/8	5/8	82366	-	-	-	8,000 - 15,000	20,000	10

Standard twist, COMBITWIST®

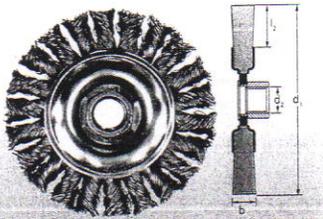

EDP 82383

COMBITWIST® advantages

- ✦ More aggressive brushing
- ✦ Longer brush life
- ✦ Superior rotational balance
- ✦ Faster stock removal
- ✦ Reduced operator fatigue
- ✦ Better surface finish

Made in the USA.

PFERDERGONOMICS®



COMBITWIST®



Diameter d ₁ [Inches]	Thread size d ₂ [Inches]	No. of knots	Trim length l ₂ [Inches]	Face width b [Inches]	Wire diameter and EDP number				Recom. speed [RPM]	MSFS max. [RPM]	
					.014	.016	.020	.023			
Carbon steel wire											
4	5/8-11	22	7/8	5/8	82383	-	82384	-	10,000 - 15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82680	-	7,500 - 15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	82681	82682	-	82683	4,500 - 9,000	9,000	10
Stainless steel wire (INOX)											
4	5/8-11	22	7/8	5/8	82412	-	82413	-	8,000 - 15,000	20,000	10
5	5/8-11	24	5/8	5/8	-	-	82749	-	6,000 - 15,000	15,000	10
6	5/8-11	32	1-1/8	5/8	-	82752	-	82753	3,500 - 9,000	9,000	10




PFERDMEDIA

For more information and to see a product video, visit pferdusa.com/vcombitwist

Campbell® Carbon Screw Pin Anchor Shackles, Galvanized, C-419-G

- Shackle Bodies Are Drop-Forged Carbon Steel
- Galvanized to Meet ASTM A-153 Specifications
- C-419-G Shackles Meet the Design Requirements of Federal Specification RR-C-271, Type IVA, Grade A, Class 2
- Working Load Limit, Size, Manufacture Name, Date Code and USA Permanently Marked on Each Shackle
- Statistically Tested for Impact Resistance, Tensile Strength, Hardness, Ductility and Fatigue
- 419 Series Shackles Meet or Exceed All Manufacturing Requirements of the ASME B30.26 "Rigging Hardware". These Include the Material Ductility Requirement (Section 26-1.1.2), the Design Factor Requirement (Section 26.1.2), the Identification Requirement (Section 26-1.5.1), and the Effective Temperature Range (Section 26-1.6.1). the Shackles Can Be Proof Tested in Accordance with Section 26-1.4
- Certification Available Upon Request
- 6 to 1 Design Factor
- Pins and Bolts Are Heat-Treated and Made of Alloy Steel
- DO NOT EXCEED THE WORKING LOAD LIMIT

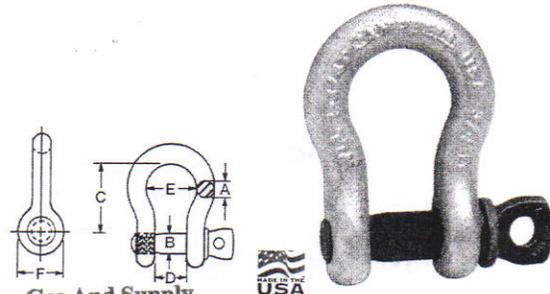

Gas And Supply
Jimmy Gibbs
 Phone 504-392-2400
 Fax 504-392-1500

jimmy-gibbs@gasandsupply.com

Trade Size	Cat. No.	UPC No.	Working Load Limit (Short Tons)	Length Tolerance (+/-)	Width Tolerance (+/-)	B Dim.	C Dim.	D Dim.	E Dim.	F Dim.	Weight Each (lbs.)
3/16 in	5410335	020418076138	1/3 T	1/16 in	1/16 in	1/4 in	7/8 in	3/8 in	19/32 in	9/16 in	0.05 lb
1/4 in	5410435	020418076169	1/2 T	1/16 in	1/16 in	5/16 in	1-1/8 in	15/32 in	25/32 in	11/16 in	0.10 lb
5/16 in	5410535	020418076190	3/4 T	1/16 in	1/16 in	3/8 in	1-1/4 in	17/32 in	27/32 in	3/4 in	0.20 lb
3/8 in	5410635	020418076220	1 T	1/8 in	1/16 in	7/16 in	1-7/16 in	21/32 in	31/32 in	15/16 in	0.30 lb
7/16 in	5410735	020418076251	1-1/2 T	1/8 in	1/16 in	1/2 in	1-3/4 in	23/32 in	1-5/32 in	1-1/8 in	0.52 lb
1/2 in	5410835	020418076275	2 T	1/8 in	1/16 in	5/8 in	1-15/16 in	13/16 in	1-1/4 in	1-1/4 in	0.80 lb
5/8 in	5411035	020418076299	3-1/4 T	1/8 in	1/16 in	3/4 in	2-7/16 in	1-1/16 in	1-9/16 in	1-7/16 in	1.06 lb
3/4 in	5411235	020418076312	4-3/4 T	1/4 in	1/16 in	7/8 in	2-13/16 in	1-1/4 in	1-13/16 in	1-3/4 in	2.15 lb
7/8 in	5411435	020418076336	6-1/2 T	1/4 in	1/16 in	1 in	3-1/8 in	1-7/16 in	2-1/16 in	2 in	3.20 lb
1 in	5411635	020418076350	8-1/2 T	1/4 in	1/16 in	1-1/8 in	3-3/4 in	1-11/16 in	2-1/2 in	2-3/8 in	5.00 lb
1-1/8 in	5411835	020418076374	9-1/2 T	1/4 in	1/16 in	1-1/4 in	4-1/4 in	1-13/16 in	2-15/16 in	2-5/8 in	7.00 lb
1-1/4 in	5412035	020418076398	12 T	1/4 in	1/16 in	1-3/8 in	4-1/2 in	2 in	3-1/4 in	3 in	10.00 lb
1-3/8 in	5412235	020418076411	13-1/2 T	1/4 in	1/8 in	1-1/2 in	5-1/4 in	2-1/4 in	3-1/2 in	3-1/4 in	13.00 lb
1-1/2 in	5412435	020418076435	17 T	1/4 in	1/8 in	1-5/8 in	5-3/4 in	2-3/8 in	3-7/8 in	3-1/2 in	16.00 lb
1-3/4 in	5412835	020418076466	25 T	1/4 in	1/8 in	2 in	7 in	2-7/8 in	4-3/4 in	4 in	26.00 lb
2 in	5413235	020418076480	35 T	1/2 in	1/8 in	2-1/4 in	7-3/4 in	3-1/4 in	5-3/4 in	4-7/8 in	40.00 lb
2-1/2 in	5414035	020418076527	55 T	1/2 in	1/8 in	2-3/4 in	10-9/16 in	4-1/8 in	7-1/4 in	5-1/2 in	90.00 lb

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00124370

SEALED BID


ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
10	20.00	EA	#G-209 SK# 00-0271020 0110 - SHACKLE, ANCHOR, 5/8 IN, WITH SCREW PIN, HOT DIP GALVANIZED, 5 TON, WORKING LOAD LIMIT, CROSBY #G-209-A SK# 00-0271100 <i>CAMPBELL 5411095</i>	13.59	271.80
11	20.00	EA	0120 - DISC, GRINDING, FLAP, 4-1/2 IN DIA X 7/8 IN ARBOR, POLIFAN FLAT TYPE, LAYERED, ALUMINUM OXIDE, 60 GRIT, 13,300 MAXIMUM RPM GRIT & EPD #62152, PFERD #80- PFF 115 22 A SK# 00-058867A	7.24	144.80

Gas And Supply
Jimmy Gibbs
 Phone 504-392-2400
 Fax 504-392-1500
jimmy.gibbs@gasandsupply.com

Campbell® Alloy Screw Pin Anchor Shackles, Galvanized, A-419-G

- Shackle Bodies Are Drop-Forged Alloy Steel
- Galvanized to Meet ASTM A-153 Specifications
- A-419-G Shackles Meet the Design Requirements of Federal Specification RR-C-271, Type IVA, Grade B, Class 2
- Working Load Limit, Size, Manufacture Name, Date Code and USA Permanently Marked on Each Shackle
- Statistically Tested for Impact Resistance, Tensile Strength, Hardness, Ductility and Fatigue
- 419 Series Shackles Meet or Exceed All Manufacturing Requirements of the ASME B30.26 "Rigging Hardware". These Include the Material Ductility Requirement (Section 26-1.1.2), the Design Factor Requirement (Section 26.1.2), the Identification Requirement (Section 26-1.5.1), and the Effective Temperature Range (Section 26-1.6.1). the Shackles Can Be Proof Tested in Accordance with Section 26-1.4
- Certification Available Upon Request
- 5 to 1 Design Factor
- Pins and Bolts Are Heat-Treated and Made of Alloy Steel
- DO NOT EXCEED THE WORKING LOAD LIMIT


Gas And Supply
Jimmy Gibbs
 Phone 504-392-2400
 Fax 504-392-1500
jimmy.gibbs@gasandsupply.com

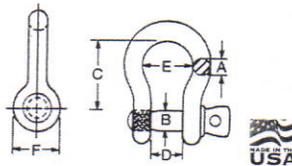

Trade Size	Cat. No.	UPC No.	Working Load Limit (Metric Tons)	Length Tolerance (+/-)	Width Tolerance (+/-)	B Dim.	C Dim.	D Dim.	E Dim.	F Dim.	Weight Each (lbs.)
3/8 in	5410695	020418182136	2 t	1/8 in	1/16 in	7/16 in	1-7/16 in	21/32 in	31/32 in	15/16 in	0.31 lb
1/2 in	5410895	020418182143	3-1/3 t	1/8 in	1/16 in	5/8 in	1-15/16 in	13/16 in	1-1/4 in	1-1/4 in	0.70 lb
5/8 in	5411095	020418267420	5 t	1/8 in	1/16 in	3/4 in	2-3/8 in	1-1/16 in	1-11/16 in	1-1/2 in	1.40 lb
3/4 in	5411295	020418182150	7 t	1/4 in	1/16 in	7/8 in	2-13/16 in	1-1/4 in	1-13/16 in	1-3/4 in	2.00 lb
7/8 in	5411495	020418267437	9-1/2 t	1/4 in	1/16 in	1 in	3-5/16 in	1-7/16 in	2-9/32 in	2-3/32 in	3.60 lb
1 in	5411695	020418182167	12-1/2 t	1/4 in	1/16 in	1-1/8 in	3-3/4 in	1-11/16 in	2-1/2 in	2-3/8 in	5.70 lb
1-1/4 in	5412095	020418182174	18 t	1/4 in	1/16 in	1-3/8 in	4-1/2 in	2 in	3-1/4 in	3 in	10.50 lb
1-3/8 in	5412295	020418267444	21 t	1/4 in	1/8 in	1-1/2 in	5-1/4 in	2-1/4 in	3-5/8 in	3-5/16 in	13.30 lb
1-1/2 in	5412495	020418267451	30 t	1/4 in	1/8 in	1-5/8 in	5-3/4 in	2-3/8 in	3-7/8 in	3-5/8 in	18.90 lb
2 in	5413295	020418267468	55 t	1/4 in	1/8 in	2-1/4 in	7-3/4 in	3-1/4 in	5-3/4 in	4-7/8 in	50.00 lb

Campbell® Stainless Steel Screw Pin Anchor Shackles (Import)

- Forged Type 316 Stainless Steel
- Electro-Polish Finish
- Imported
- DO NOT EXCEED THE WORKING LOAD LIMIT

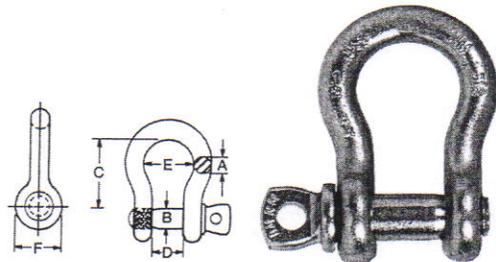

Trade Size	Cat. No.	UPC No.	Working Load Limit (Short Tons)	Length Tolerance (+/-)	Width Tolerance (+/-)	B Dim.	C Dim.	D Dim.	E Dim.	F Dim.	Weight Each (lbs.)
1/4 in	6402104	020418093654	1/2 T	1/16 in	1/16 in	5/16 in	1-1/8 in	1/2 in	3/4 in	11/16 in	0.12 lb
3/8 in	6402106	020418093678	3/4 T	1/8 in	1/16 in	7/16 in	1-7/16 in	21/32 in	31/32 in	15/16 in	0.31 lb
7/16 in	6402107	020418093685	1 T	1/8 in	1/16 in	1/2 in	1-3/4 in	23/32 in	1-5/32 in	1-1/8 in	0.50 lb
1/2 in	6402108	020418093692	1-1/2 T	1/8 in	1/16 in	5/8 in	1-15/16 in	13/16 in	1-1/4 in	1-1/4 in	0.72 lb
5/8 in	6402110	020418093708	2 T	1/8 in	1/16 in	3/4 in	2-7/16 in	1-1/16 in	1-9/16 in	1-7/16 in	1.38 lb
3/4 in	6402112	020418093715	3 T	1/4 in	1/16 in	7/8 in	2-13/16 in	1-1/4 in	1-13/16 in	1-3/4 in	2.22 lb