


Projects:

Comments:

50W 2x4 LED Panel

SPECIFICATIONS:

WATTAGE:	50W
MODEL #:	ZY-P7-50W
CERTIFICATIONS:	UL, CuL, FCC, CE, RoHS, DLC, LM79
LUMENS OUTPUT (IES):	5000LM
EFFICACY (IES):	100 LM/W
VOLTAGE:	AC120-277V
POWER FACTOR:	0.9
POWER CONSUMPTION:	50W
KELVIN (CCT):	4000/5000
CRI:	80
LIFE SPAN (HOURS):	50,000 Hours
DIMMING COMPATIBLE:	Yes, 0-10V Dimming
LENGTH OF WARRANTY (YEARS):	5 Years Standard
FIXTURE MATERIAL:	Aluminum
DIMENSIONS (L X W X H)	600x1200x12mm (23.62x47x0.47 in)
WEIGHT:	8.5 kg (18.7 lbs)
MOUNTING OPTIONS:	Surface Mount, Suspended/Hanging
WORKING ENVIRONMENT:	-25°C to 40°C (-20°F to 120°F)
SUGGESTED REPLACEMENT FOR:	200W
PERCENTAGE OF WATTAGE SAVED:	75%

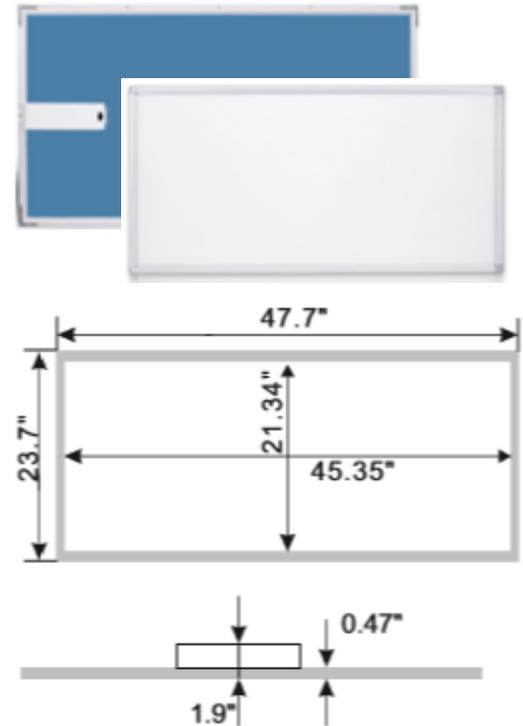

Features:

Designed to fit any ceiling surface. Built-in for squared/rectangular ceilings with 2" or less installation depth. Suspended and hanging for other types of ceilings. Environmentally friendly and recyclable. Easy low cost maintenance and repair. UL, CUL, certified to wet location, DCL Listed.

Applications:

Art galleries, museums, homes, schools, offices, hotels, restaurants, retail stores, and other commercial and industrial applications.

Recommended Dimmers:

Leviton cat, Nos:

AWRMG-7XX AWSMG-7XX
AWSMT-7XX IP710-LFZ/DLX
<http://www.leviton.com>

Lutron cat, Nos:

DIVA-DVTV NOVA-
NVTVNOVAT-NTFTV W/PP20
<http://www.lutron.com/en-US>

