




CENTRALBIDDING
FROM CENTRAL AUCTION HOUSE

**50-00138227 - One Time Purchase of a Quantity of Submersible Solids
Handling Sewer Pumps for the Jefferson Parish Department of Sewerage
Jefferson Parish Government**

Project documents obtained from www.CentralBidding.com

11-May-2022 08:41:24 AM

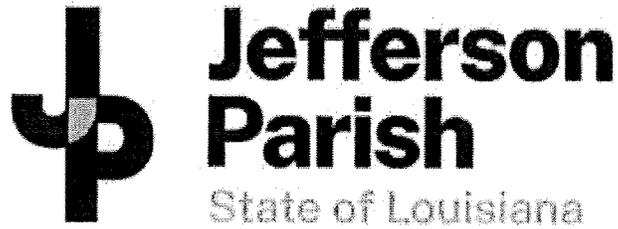

Bid Number 50-00138227

**One Time Purchase of a Quantity of
Submersible Solids Handling Sewer Pumps
for the Jefferson Parish Department of Sewerage**

BID DUE: MAY 19, 2022 AT 2:00 PM

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received on the Purchasing Department's eProcurement site, www.jeffparishbids.net, by the bid due date and time. Late bids will not be accepted.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053**

**Buyer Name: Brenda Bellow-Buyer I
Buyer Email: bbellow@jeffparish.net
Buyer Phone: 504-364-2683**

DATE: 5/02/2022
BID NO.: 50-00138227

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 1

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

BUYER: BBELLOW@jeffparish.net

BIDS WILL BE RECEIVED ONLINE VIA WWW.JEFFPARISHBIDS.NET UNTIL 2:00 PM, 5/19/2022 AND PUBLICLY OPENED THEREAFTER IN THE WEST BANK PURCHASING DEPT, SUITE 4400, JEFFERSON PARISH GENERAL GOVERNMENT BUILDING, 200 DERBIGNY STREET, GRETNA, LA 70053. At no charge, bidders are to submit via Jefferson Parish's electronic procurement page by visiting www.jeffparishbids.net to register for this free site. Additional instructions are included in the text box highlighting electronic procurement.

LATE BIDS WILL NOT BE ACCEPTED

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION. HOWEVER, ELECTRONIC SIGNATURES AS DEFINED IN LSA - R.S. 9:2620(8) ARE ACCEPTABLE. SIGNATURE MUST BE A SECURED DIGITAL SIGNATURE.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS THE FOLLOWING INSTRUCTIONS APPLY TO ALL BIDS

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law as well be in compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647 as amended.

Jefferson Parish adheres to the Louisiana Code of Governmental Ethics, contained in Louisiana Revised Statutes Annotated, R.S. 42:1101, et seq. Vendor/Proposer by this submission, warrants that there are no "conflicts of interest" related to this procurement that would violate applicable Louisiana Law. Violation of the Louisiana Code of Governmental Ethics may result in rescission of contract, permit or licenses, and the imposition of fines and/or penalties, without contractual liability to the public in accordance with applicable law.

All vendors submitting bids should register as a Jefferson Parish vendor if not already yet registered. Registration forms may be downloaded from <http://purchasing.jeffparish.net> and by clicking on Vendor Information. Current W-9 forms with respective Tax Identification numbers and vendor applications may be submitted at any time; however, if your company is not registered and/or a current W-9 form is not on file, vendor registration is mandatory. Vendors may experience a delay in payment if your company is not a registered vendor with Jefferson Parish.

All quotations shall be based on F.O.B. Agency warehouse or job site, anywhere within the Parish as designated by the Purchasing Department. This provision does not apply to public works projects

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

Bidders should submit all questions in writing via email to the buyer's email address as indicated above, no later than Five (5) working days prior to the bid opening. Bid numbers should be mentioned in all requests. If submitting online, vendors may send questions via the E-Procurement site no later than Five (5) working days prior to the bid opening.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum. Please note that all official communication will be expressed in the form of an addendum.

Visit our website at [HTTP://PURCHASING.JEFFPARISH.NET](http://PURCHASING.JEFFPARISH.NET)

All formal Addenda require written acknowledgement on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected. JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated. Vendors must not alter the bid forms. Doing so will cause the bid to be rejected.

A corporate resolution or written evidence of the individual signing the bid having such authority must be submitted with the bid. Failure to comply will cause bid to be rejected. For corporate entities, such written evidence may be a printout of the Louisiana Secretary of State's website listing the signatory as an officer. Such printout shall be included with the bid submission. Bids submitted by Owners or Sole Proprietorships must include certification that he or she owns the entity for which the bid is signed. This documentation must be submitted with the bid. Failure to do so will result in bid rejection.

NOTE: A sample corporate resolution can be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document. A sample certification of sole proprietorship can also be downloaded from our website <http://purchasing.jeffparish.net> or you may provide your own document.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

A. AWARD OF CONTRACT: JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE. SPLIT AWARDS MADE TO SEVERAL VENDORS WILL ONLY BE GRANTED TO THOSE DEEMED RESPONSIVE AND RESPONSIBLE.

All bid prices shall remain valid for 45 days. Jefferson Parish and the lowest responsive and responsible bidder(s) by mutual written consent may mutually agree to extend the deadline for award by one (1) or more extensions of thirty (30) calendar days.

PROTESTS: Only those vendors that submit bids in response to this solicitation may protest any element of the procurement, in writing to the Director of the Purchasing Department. Written protest must be received within 48 hours of the release of the bid tabulation by the Purchasing Department. After consultation, the Parish Attorney's Office will then respond to protests in writing. (For more information, please see Chapter 2, Article VII, Division 2, Sec. 2-914.1 of the Jefferson Parish Code of Ordinances.)

PREFERENCE: Unless federal funding is directly spent by Jefferson Parish for this purchase, preference is hereby given to materials, supplies, and provisions produced, manufactured or grown in Louisiana, quality being equal to articles offered by competitors outside the state. "LSA - R.S. 38:2251-2261"

B. USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

C. CANCELLATION OF CONTRACT: JEFFERSON PARISH reserves the right to cancel all or any part if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel any contract at anytime and for any reason by issuing a THIRTY (30) day written notice to the contractor.

For good cause and as consideration for executing a contract with Jefferson Parish, vendor conveys, sells, assigns and transfers to Jefferson Parish or its assigns all rights, title and interest in and to all causes of action it may now or hereafter acquire under the antitrust laws of the United States and the State of Louisiana, relating to the particular good or services purchased or acquired by Jefferson Parish.

D. PRICES: Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and local taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's specifications (ANSI A17.1-1961).

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

Jefferson Parish and its partners as the recipients of federal funds are fully committed to awarding a contract(s) to firm(s) that will provide high quality services and that are dedicated to diversity and to containing costs. Thus, Jefferson Parish strongly encourages the involvement of minority and/or woman-owned business enterprises (DBE's, including MBE's, WBE's and SBE's) to stimulate participation in procurement and assistance programs.

The purpose and intention of this invitation to bid is to afford all suppliers an equal opportunity to bid on all construction, maintenance, repair, operating supplies and/or equipment listed in this bid proposal. **JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR.** Items bid must meet specifications.

Advised bids will be tabulated and a copy of the tabulation will be forwarded to each responding bidder.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This electronic procurement system allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only. Bidders are to submit electronically using this free service; while the website accepts various file types, one single PDF file containing all appropriate and required bid documents is preferred. Bidders submitting uploaded images of bid responses are solely responsible for clarity. If uploaded images/documents are not legible, then bidder's submission will be rejected. Please note all requirements contained in this bid package for electronic bid submission.

Please visit our E-Procurement Page at www.jeffparishbids.net to register and view Jefferson Parish solicitations. For more information, please visit the Purchasing Department page at <http://purchasing.jeffparish.net>.

The general specifications for construction projects and the purchase of materials, services and/or supplies are those adopted by the JEFFERSON PARISH Council by Resolution No. 113646 or 113647 as amended. The general conditions adopted by this resolution shall be considered as much a part of this document as if they were written wholly herein. A copy may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at <http://purchasing.jeffparish.net> and clicking on Online Forms.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.

13, 15

1. All bidders must attend the MANDATORY pre-bid conference and will be required to sign in and out as evidence of attendance. In accordance with LSA R.S. 38:2212(I), all prospective bidders shall be present at the beginning of the MANDATORY pre-bid conference and shall remain in attendance for the duration of the conference. Any prospective bidder who fails to attend the conference or remain for the duration shall be prohibited from submitting a bid for the project.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid electronic envelope. Failure to comply will cause the bid to be rejected. When submitting the bid electronically, the license number must be entered in the appropriate field in the electronic procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precaution must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. All bidders must comply with the requirements stated in the attached "Standard Insurance Requirements" sheet attached to this bid solicitation. Failure to comply with this instruction will result in bid rejection.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. All sureties must be in original format (no copies) When submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations on warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits Required; This applies to all solicitations for construction, alteration or demolition of public buildings or projects, in conformity with the provisions contained in LSA-RS 38:2212.9, LSA-RS 38:2212.10, LSA-RS 38:2224, and Sec 2-923.1 of the Jefferson Parish Code of Ordinances. For bidding purposes, all bidders must submit with bid submission COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits, including: Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit, Debt Disclosures Affidavit and E-Verify Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

15. **NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits Required in conformity with the provisions contained in LSA – RS 38:2224 and Sec 2-923.1 of the Jefferson Parish Code of Ordinances.** For bidding purposes, all bidders must submit with bid submission **COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits**, including: Non-Collusion Affidavit, Debt Disclosures Affidavit and Campaign Contribution Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled **NON PUBLIC WORKS BID AFFIDAVIT**. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.

16. The ensuing contract for this bid solicitation may be eligible for FEMA reimbursement and/or Federal funding/reimbursement. As such, the referenced appendix will be applicable accordingly and shall be considered a part of the bid documents. All applicable certifications must be duly completed, signed and submitted with bid submission. Failure to submit applicable certifications with bid submission will result in bid rejection.

17. For this project, the Contractor shall not pay any state or local sales or use taxes on materials and equipment which are affixed and made part of the immovable property of the project or which is permanently incorporated in the project (hereinafter referred to as "applicable materials and equipment."). All purchases of applicable materials or equipment shall be made by the contractor on behalf of and as the agent of Jefferson Parish (Owner), a political subdivision of the State of Louisiana. No state and local sales and use taxes are owed on applicable materials and equipment under the provisions of Act 1029 of the 1991 Regular Session - Louisiana Revised Statute 47:301(8)(c). Owner will furnish to contractor a certificate form which certifies that Owner is not required to pay such state or local sales and use taxes, and contractor shall furnish a copy of such certificate to all vendors or suppliers of the applicable materials and equipment, and report to Owner the amount of taxes not incurred.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission; and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to JPCO 2-155.10(19). By signing this document, every corporation, partnership, or person contracting with PARISH, whether by cooperative endeavor, intergovernmental agreement, bid, proposal, application or solicitation for a parish contract, and every application for certification of eligibility for a parish contract or program, attests that it understands and will abide by all provisions of JPCO 2-155.10.

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES _____ NO X _____

MAXIMUM ESCALATION PERCENTAGE REQUESTED _____ %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF _____

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES _____

2-4 WEEKS

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

THIS SECTION MUST BE COMPLETED BY BIDDER:

FIRM NAME: Coburns Supply

ADDRESS: 1849 Commercial Drive

CITY, STATE: Harvey, LA ZIP: 70058

TELEPHONE: (225) 202-7808 FAX: (504) 348-1095

EMAIL ADDRESS: mtate@coburns.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

TOTAL PRICE OF ALL BID ITEMS: \$ 19'227.50

AUTHORIZED SIGNATURE: Mark Tate

Mark Tate

Printed Name

TITLE: Outside Sales

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00138227

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	2.00	EA	<p style="text-align: center;">ONE TIME PURCHASE OF A QUANTITY OF SUBMERSIBLE SOLIDS HANDLING SEWER PUMPS FOR THE JEFFERSON PARISH DEPARTMENT OF SEWERAGE</p> <p>0010 - Hydromatic 4 Inch Explosion- Proof, Premium Efficient, Solids Handling, Submersible Sewage Pumps w/50 foot power and sensor cords, Model No. S4LXP1000, 10HP, 240/3/60, 1150 Max RPM, for 400 Bellemeade Lift Station P-12-4</p> <p>*****PER ATTACHED SPECIFICATIONS***** *****</p>	9613.75	19'227.50

**SPECIFICATIONS
SUBMERSIBLE SOLIDS HANDLING SEWER PUMPS
JEFFERSON PARISH DEPT. OF SEWERAGE
400 BELLEMEADE SEWER LIFT STATION (P-12-4)**

1.01 GENERAL:

- A. The bidder shall supply two (2) submersible exact replacement, explosion-proof, premium efficient, solids handling pumps able to fit the existing rail system, and utilize the existing sealing flange. The pumps must match the hydraulic performance limits listed in these specifications. The pump motors shall be NEMA Premium Efficient, and bear a stainless-steel nametag showing FM approval for Class I Division I explosion proof environments and NEMA Premium Efficient. Any bids submitted for pump manufacturers, other than as specified, must include in their bid all information needed to fully demonstrate complete compliance with requirements of these specifications, and dimensional duplicity of the existing pumps. The pumps on this bid shall, at Jefferson Parish's option, have a complete witnessed certified Hydraulic Institute pump test performed in the same facility that the pump(s) were manufactured in. This hydraulic test shall certify at least seven (7) separate operating points along its operating curve, including the duty point and shut-off, and show GPM, TDH, efficiency and BHP at each tested point. These certified curves shall be approved by Jefferson Parish, or its appointed agent before the pump can be released for shipment. It is the bidder's responsibility to provide adequate information necessary for the complete evaluation of their proposed equipment. Jefferson shall be the sole judge as to the equality of any alternate manufacturer's offering.

2.01 OPERATING CONDITIONS:

- A. Each pump shall be rated 10 H.P., 240 volts, 3 phase, 60 hertz, maximum 1150 R.P.M. The unit shall produce 650 GPM at 40 feet TDH, with a minimum pump efficiency of 74 percent and maximum input KW of 9.2. The pump shall be capable of handling a minimum 3 ¼ inch spherical solid. The pump shall be non-overloading throughout the entire range of operation without employing service factor. The pump shall have an auxiliary duty point of 900 GPM @ 29 feet TDH, with a minimum 68 percent pump efficiency. The pump shall have a minimum shut off head of 64 feet. The pump motor shall reserve a minimum service factor of 1.3. The performance curve shall show head, capacity, pump efficiency, solids handling capacity, and reflect motor service factor.

3.01 CONSTRUCTION:

- A. The pump shall be a centrifugal, non-clog, solids handling, submersible, wastewater type; model S4LXP1000, as manufactured by Hydromatic Pumps, or approved equal. The pump must bear a stainless steel manufacturer's nameplate stating, "Made in the U.S.A"

or, "Assembled in the U.S.A." The pump volute, motor, and seal housing shall be high quality gray cast iron, ASTM A-48, Class 30. The pump discharge shall be fitted with a 4 inch standard ASA 125-lb. flange, faced, and drilled. Slotted flange bolt holes will not be accepted. All external mating parts shall be machined and Buna N Rubber O-ring sealed on a beveled edge. Gaskets will not be accepted. All fasteners exposed to the pumped liquids shall be 300 series stainless steel.

3.02 ELECTRICAL POWER CORD:

- A. Electrical power cord shall be 50 feet long and made of STW-A, water resistant 600 V, 60° Celsius, UL and CSA listed, and applied dependent on amp draw for size. The pump shall have an independent sensor cord containing motor overtemp and moisture sensor wires.
- B. The pump shall be double protected with a compression fitting and epoxy potted area at the power cord entry to the pump.
- C. The power cable entry into the cord cap assembly shall first be made with a compression fitting. Each individual lead shall be stripped down to bare wire at staggered intervals, and each strand shall be individually separated. This area of the cord cap shall then be filled with an epoxy compound potting which will prevent water contamination to gain entry even in the event of wicking or capillary attraction through the power cord.
- D. The power cord leads shall then be connected to the motor leads with extra heavy terminal block that allows for easy connection of motor leads to power cord leads.
- E. The cord cap assembly where bolted to the connection box assembly and the connection box assembly where bolted to the motor housing shall each be sealed with a Buna N Rubber O-ring on a beveled edge to assure proper sealing.

3.03 MOTOR:

- A. The stator, rotor, and bearings shall be mounted in a sealed and oil filled submersible type housing. The stator windings shall have a minimum Class H insulation (180° Celsius or 356° Fahrenheit), NEMA B design (3-phase). Air filled designs will not be accepted. Further protection shall be provided by "on winding" thermal sensors.
- B. The pump and motor shall be specifically designed so that they may be operated partially or completely submerged in the liquid being pumped.

- C. The motor stator shall be slip fit mounted into the watertight casing. Stators must be capable of being repaired or rewound by local motor service facilities. Heat shrink motor fits, will not be accepted. No special tools shall be required for pump and motor disassembly.
- D. Motor shall be equipped with integral heat sensors, one for each phase (three phase motor). The heat sensor(s) shall be a low resistance; bi-metal disc that is temperature sensitive. They shall be mounted directly on the stator windings. The sensors shall be connected in series with motor starter coil so that the pump ceases operation when an over-temperature condition is sensed. These sensors shall be used in conjunction with and supplemented by external motor over-current protection located at the control panel. The pump shall cease operation when the overload is tripped. The overload shall be manually reset.
- E. Motors shall have a service factor of 1.3 or greater.
- F. Cable Entry: The cable entry water seal design shall be such that it precludes specific torque requirements to ensure a watertight and submersible seal. It shall permit no entry of water into any high voltage area even if the cable is severed below the water level.
- G. Cooling System: Each pump shall be provided with an adequately designed cooling system. Water jackets or closed loop cooling systems will not be accepted.
- H. Motors shall conform to the NEMA Premium Efficiency Electric Motor Program.
Motors must meet or exceed the nominal energy efficiency levels listed in NEMA standards publication MG 1-2006, tables 12-12 and 12-13.

3.04 BEARINGS AND SHAFT:

- A. An upper radial bearing and a lower thrust bearing shall be required. These shall be heavy-duty single row ball bearings, which are permanently lubricated by the dielectric oil which fills the motor housing. Sealed grease packed bearings will not be accepted. Bearings that require lubrication according to a prescribed schedule will not be accepted. The upper radial bearing shall have a minimum B-10 life at the specified

condition of 50,000 hours and the lower double row thrust bearing shall have a minimum B-10 life at the specified condition of 50,000 hours. Bearings shall be locally available.

- B. The shaft shall be machined from a solid 416 series stainless steel forging and of a design that is of large diameter with minimum overhang to reduce shaft deflection and prolong bearing life.

3.05 SEALS:

- A. The pump shall have two mechanical seals, mounted in tandem, with an oil chamber between the seals. Seals shall be used with the rotating seal faces being carbon, and the stationary seal faces to be silicone carbide. The lower seal shall be replaceable without disassembly of the seal chamber, and without the use of special tools. Pump-out vanes shall be present on the backside of the impeller to keep contaminants out of the seal area. Units that require the use of foreign manufactured seals will not be accepted. Seals shall be locally available.
- B. The pump shall be equipped with a seal leak detection probe and warning system. This shall be designed to alert maintenance personnel of lower seal failure without having to take the unit out of service for inspection, or requiring access for checking seal chamber oil level and consistency.
- C. There shall be an electric probe or seal failure sensor installed in the seal chamber between the two tandem mechanical seals. The seal fail circuit shall utilize a probe that has no moving parts. If the lower seal fails, contaminants which enter the seal chamber shall be detected by the sensor and send a signal to operate the specified warning device.
- D. Units equipped with opposed mechanical seals will not be accepted.

3.06 IMPELLER:

- A. Impeller shall be of the two-vane, enclosed non-clogging design, and have pump-out vanes on the front and backside of the impeller to prevent grit and other materials from collecting in the seal area. Single vane design impellers which cannot be easily trimmed, which do not maintain balance with wear causing shaft deflections, and reduce seal and bearing life will not be accepted. Impeller shall not require coating. Because most impeller coatings do not remain beyond the very early life of the impeller, efficiency and other performance data submitted shall be based on performance

with an uncoated impeller. Attempts to improve efficiency by coating impeller will not be accepted. The impeller shall be manufactured from ductile iron ASTM A-536 material.

- B. Impellers shall be dynamically balanced. The tolerance values shall be listed according to the International Standard Organization grade 6.3 for rotors in rigid frames. The tolerance is to be split equally between the two balance planes, which are the two impeller shrouds.
- C. The impeller shall be slip fit to a tapered shaft and key driven. A 300 series stainless steel washer and impeller bolt shall be used to fasten the impeller to the shaft. Straight end or threaded shafts for attachment of the impeller will not be accepted.

3.07 CASING:

- A. The casing shall be of the end suction volute type, having sufficient strength and thickness to withstand all stress and strain from service at full operating pressure and load. The casing shall be of the centerline horizontal discharge type. The design shall be such that the pumps will be automatically connected to the discharge piping when lowered into position with the guide rails. The casing shall be accurately machined and bored for register fits with the suction and casing covers.
- B. A volute case wearing ring shall be provided to minimize impeller wear. The wear ring shall be 300 series stainless steel or bronze ASTM # B584-932 and held by 300 series stainless steel fasteners. The wear ring shall be easily replaceable in the field. Wear rings of any other material will not be accepted.

3.08 PAINTING:

- A. The pump shall be painted after assembly and testing, with a dark green water reducible air dry enamel. The paint shall be applied in one coat covering all exterior surfaces. The pump shall be air dried after testing and before painting.

3.09 SERVICEABILITY:

- A. The complete rotating assembly shall be capable of being removed from the volute without disturbing discharge piping or volute. The motor housing, seal housing, with seal plate and impeller still attached to the shaft, shall be capable of being lifted out of the volute case from the top as one assembly.

3.10 SUPPORT:

- A. Though the pump may not require feet to support the unit while installed, the pump volute must have feet to support the unit when removed for service. Units which do not have feet upon which the unit can be supported when removed for service will not be accepted.

4.01 TESTING:

- A. Commercial testing shall be required and include the following:

1. The pump shall be visually inspected to confirm that it is built in accordance with the specification as to HP, voltage, phase, and hertz.
2. The stator motor leads shall be tested for integrity using a meg-ohm meter at the highest setting.
3. Pump shall be allowed to run dry to check for proper rotation.
4. Discharge piping shall be attached; the pump submerged in water and amp readings shall be taken in each leg to check for an imbalanced stator winding. If there is a significant difference in readings, the stator windings shall be checked with a bridge to determine if an unbalanced resistance exists. If so, the stator shall be replaced. The pump test facility shall be located in the same plant that the pump was assembled and shall be capable of providing certified Hydraulic Institute level test reports.
5. The pump shall be removed from the water, meg-ohm meter tested again, dried and the motor housing filled with dielectric oil.

5.01 WARRANTY PERIOD AND SERVICE:

- A. The pump bidder must be listed as a factory authorized service center, for the brand they are bidding, and must be capable of completely servicing the proposed pumps within one (1) hour of the project site. The pump bidder must own and operate a direct factory service center and stocking facility, capable of completely servicing and supplying spare parts for the proposed pumps within one (1) hour of the project site. The bidder's factory service center/stocking facility shall be available for Jefferson Parish inspection on a twenty-four (24) hour prior

notice. The bidders service center must have full time, factory trained mechanics capable and certified to service the equipment being offered.

B. The pump manufacturer shall provide a written prorated warranty against defects in material and workmanship for the units supplied for a period of at least five (5) years or 10,000 operating hours, under the operating conditions specified herein, in accordance with their standard published Municipal Pump Warranty. Pump manufacturer shall demonstrate the ability to support claimed warranty coverage by meeting all requirements of the specifications and required pump performance.

COBURN SUPPLY COMPANY, INC.
CORPORATE RESOLUTION

BE IT RESOLVED by the Board of Directors of Coburn Supply Company Inc. (Coburn), in a special meeting duly assembled, that Mark Tate (Agent) be and he is hereby authorized, empowered, and directed to act for and on behalf of Coburn in all negotiations, bidding, concerns, and transactions and sign any and all documents which, in Agent's sole discretion, he deems necessary for Coburn to transact and conduct business with Jefferson Parish, Louisiana and/or the Jefferson Parish Department of Sewerage (collectively, Government) relative to Coburn submitting a bid to the Government for the one (1) time purchase by the Government from Corporation of Submersible Solids Handling Sewer Pumps, in connection with Jefferson Parish Government Bid Number 50-00138227.

CERTIFICATE

I, James J. Adams, Secretary of Coburn Supply Company, Inc., do hereby certify that the above and foregoing is a true and correct copy of a Resolution unanimously adopted at a meeting of the Board of Directors of Coburn Supply Company, Inc., at which meeting at least a majority of the Board of Directors were present and voted thereon, that said Resolution has been spread upon the minute books of Coburn Supply Company, Inc., and same is now in full force and effect.

WITNESS MY SIGNATURE on May 11, 2022, in Beaumont, Texas.



James J. Adams, Secretary of
Coburn Supply Company, Inc.

Corporate Seal



Non-Public Works Bid

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF East Baton Rouge

BEFORE ME, the undersigned authority, personally came and appeared: Mark Tete, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized Outside Sales of Coburns Supply (Entity), the party who submitted a bid in response to Bid Number 5000138227, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B there are NO campaign contributions made which would require disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A _____ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

[The remainder of this page is intentionally left blank.]

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

Mark Tate

Signature of Affiant

Mark Tate

Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME

ON THE 17th DAY OF May, 2022.

J. Hissong

Notary Public


Jay Hissong

Printed Name of Notary

141531

Notary/Bar Roll Number

My commission expires e death.

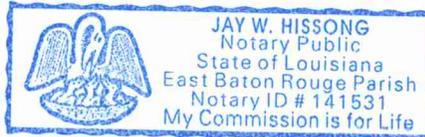




NCX SERIES

EXPLOSION PROOF SUBMERSIBLE NON-CLOG PUMPS

The FPS NCX Series Explosion Proof Non-Clog Pumps are available in single- and three-phase power options to provide a rugged, maintenance-friendly municipal wastewater transfer solution with flows up to 625 gpm. Featuring a field adjustable wear plate and factory standard dual silicon carbide mechanical seal, the NCX Series sets the bar for serviceability and reliability.



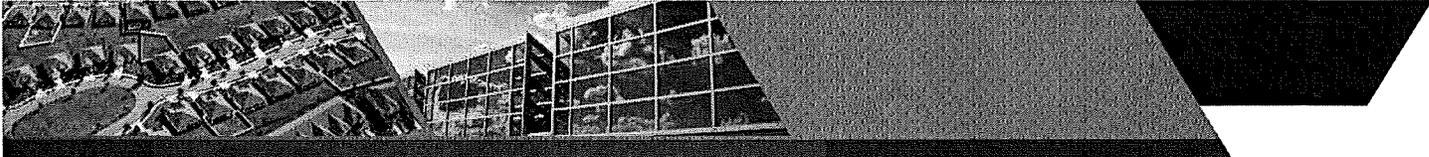


NCX SERIES PUMPS

APPLICATIONS

- Used in a variety of applications such as lift stations; sewage systems; stormwater, flood and pollution control; industrial waste and dewatering; wastewater treatment plants; and general fluid transfer
- Also used in municipal, commercial, and industrial markets for applications that require explosion-proof rating


FEATURES

- **Simplified On-Site Maintenance:** Field adjustable wear plate provides adjustable clearance between the impeller and volute for simplified maintenance, minimizing operational downtime without the need and additional cost of a replaceable wear ring
- **Up To 6 Times Longer Seal Life:** Factory standard dual silicon carbide mechanical seals have low thermal expansion and higher abrasion resistance than carbon versus ceramic commonly used for both seals, resulting in superior performance and longevity
- **Premium Heat & Chemical Resistance:** Motor enclosure sealing system utilizes Viton® O-rings to offer added chemical and temperature resistance
- **Corrosion Resistance Comes Standard:** Ductile iron casted impellers provide added corrosion resistance and are more robust when handling rigid debris versus competitive cast iron versions
- **Fully Supported:** Comes fully supported by an industry-leading team of Technical Support and Service professionals
- All single-phase Non-Clog Pumps require a specific starter kit from FPS, matched to the pump for proper operation and third-party approval

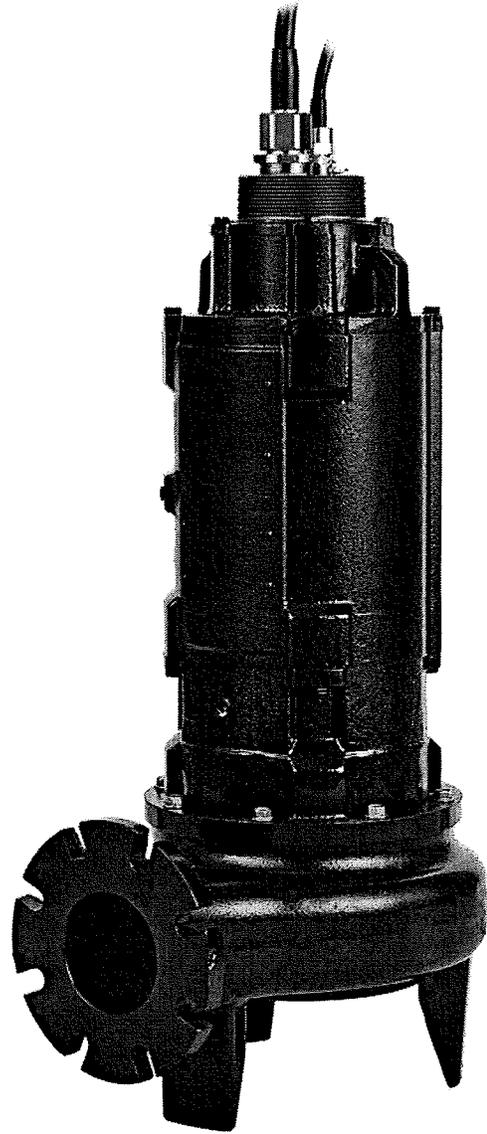

SPECIFICATIONS

Series	3NCX	4NCX
Flange Discharge	3" horizontal (125# ANSI flange)	4" horizontal (125# ANSI flange)
Maximum Solids Size	2.5"	3"
Cables	10GA/8GA Power Cable - 316 SST Receptacle, 304 SST Coupling	
	18GA Control Cable - 316 SST Receptacle, 304 SST Coupling	
Motor	60 Hz, Class H Inverter Rated Insulation System, 1750 RPM	
	Continuous duty fully submerged (104 °F maximum)	
	AISI 416 SST shaft	
	316 Series SST fasteners	
Seals	Cast iron motor housing, volute, and seal chamber	
	Dual moisture sensing probes	
	Viton® sealing system for motor enclosure	
	Dual silicon carbide mechanical seals	
Wear Plate	Adjustable/Replaceable Class 20/25 equivalent cast iron	
Agency Listing	cCSAus, Certified for Class I Division 1 Groups C & D	

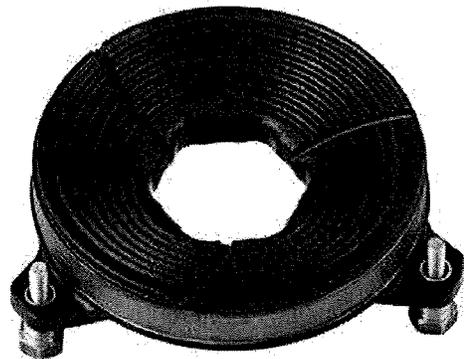

NCX SERIES PUMPS

3NCX SERIES PUMP DIMENSIONS

HP, Phase	A	B	C	D	E	F	H	J	I
3/5 HP, 3 PH	30.6" (777.1)	6.2" (156.5)	15.6" (396.4)	9.5" (242)	2.6" (65)	8.6" (218.6)	6" (153)	12.1" (307.4)	0.8" (20)
5 HP, 1 PH	36.7" (932.2)		15.7" (399.2)			9.2" (234.3)		13.5" (342.1)	




4NCX SERIES PUMP DIMENSIONS

HP, Phase	A	B	C	D	E	F	H	J	I
3/5/7 HP, 3 PH	31.2" (792.2)		16.3" (414.3)			9.2" (233.6)		12.1" (307.4)	
5 HP, 1 PH	36.7" (932.2)	6.4" (161.5)	16.4" (417.2)	10.2" (260)	3.45" (87.6)	9.8" (249.8)	7" (179)	12.8" (324.2)	0.7" (19)
10 HP, 3 PH	37.3" (874.4)								

NOTE: Dimensions in parentheses are in mm; 4NCX Model shown as reference

NOMENCLATURE EXAMPLE

3NCX-323P1

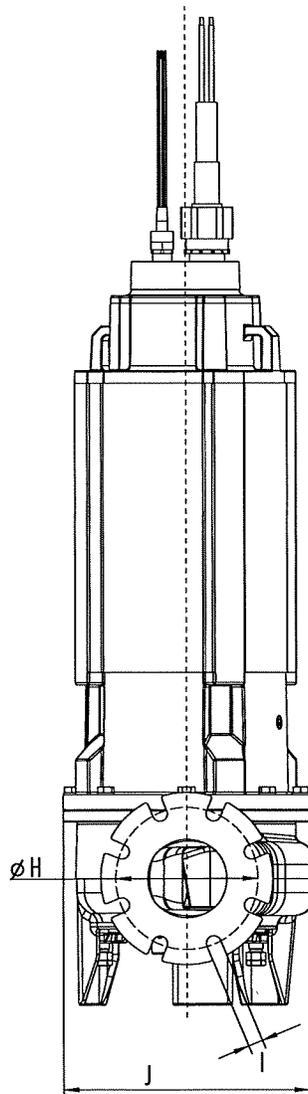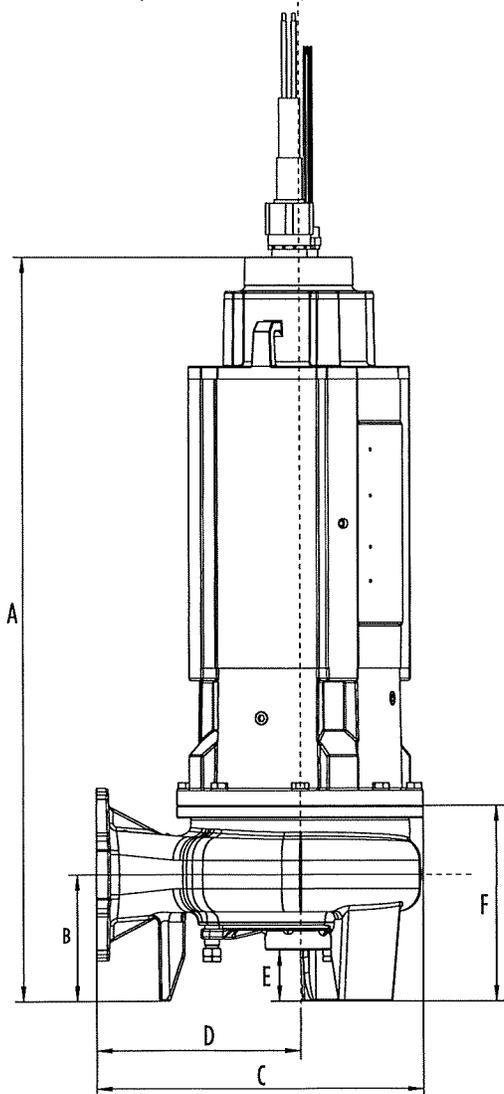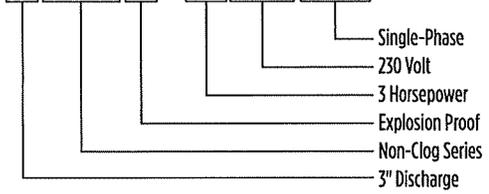


3NCX SERIES PUMPS

MODEL INFORMATION		THREE-PHASE					
Item No.	Model No.	HP	Volts	Amps	Hz	Impeller Dia.	Cord (ft)
87110437-01	3NCX-320P3	3	208	9.3	60	6.30" (160 mm)	50
87110438-01	3NCX-323P3		230	8.4	60		
87110439-01	3NCX-346P3		460	4.4	60		
87110440-01	3NCX-357P3		575	3.52	60		
87110441-01	3NCX-520P3	5	208	15.4	60	7.48" (190 mm)	50
87110442-01	3NCX-523P3		230	14.0	60		
87110443-01	3NCX-546P3		460	7.0	60		
87110444-01	3NCX-557P3		575	5.6	60		

MODEL INFORMATION		SINGLE-PHASE*					
Item No.	Model No.	HP	Volts	Amps	Hz	Impeller Dia.	Cord (ft)
87110435-01	3NCX-323P1	3	230	17.5	60	6.30" (160 mm)	50
87110436-01	3NCX-523P1	5	230	30.0	60	7.48" (190 mm)	50

*Single-phase motors require FPS Control Panel or Starter Kit for proper operation and warranty.

PERFORMANCE

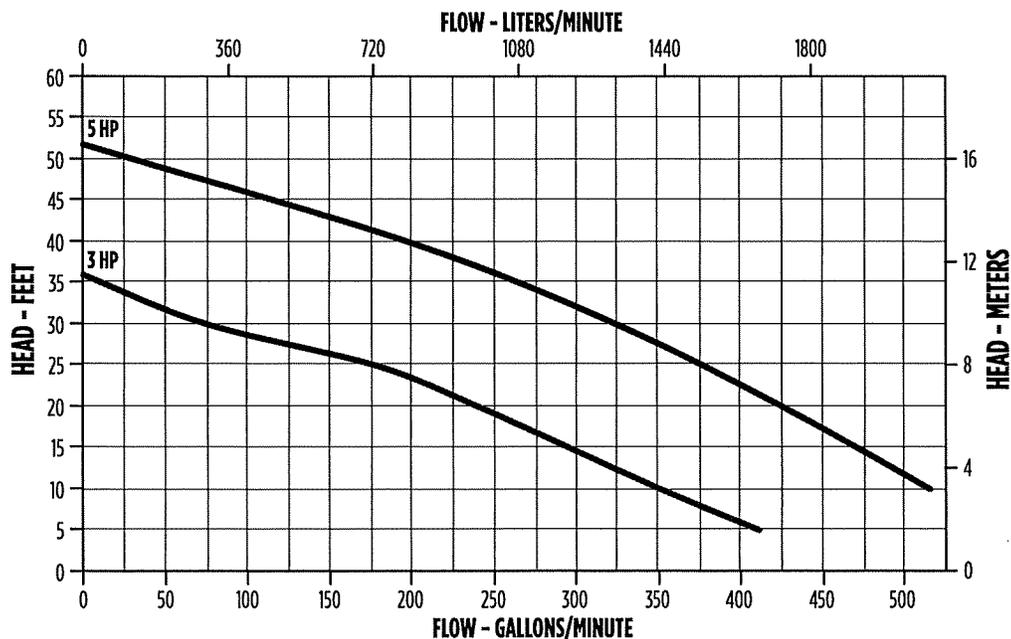

Model	Flow Gallons per Minute (GPM) @ Head (Feet)										Shut-Off
	5	10	15	20	25	30	40	50	60	70	
3NCX-3HP	410	350	295	240	178	75	0	0	0	0	36'
3NCX-5HP	-	515	-	425	-	325	200	0	0	0	52'




4NCX SERIES PUMPS

MODEL INFORMATION		THREE-PHASE					
Item No.	Model No.	HP	Volts	Amps	Hz	Impeller Dia.	Cord (ft)
87110447-01	4NCX-320P3	3	208	9.3	60	5.98" (152 mm)	50
87110448-01	4NCX-323P3		230	8.4			
87110449-01	4NCX-346P3		460	4.4			
87110450-01	4NCX-357P3		575	3.52			
87110451-01	4NCX-520P3	5	208	15.4	60	7.17" (182 mm)	50
87110452-01	4NCX-523P3		230	14.0			
87110453-01	4NCX-546P3		460	7.0			
87110454-01	4NCX-557P3		575	5.6			
87110455-01	4NCX-7520P3	7.5	208	22.3	60	7.72" (196 mm)	50
87110456-01	4NCX-7523P3		230	20.2			
87110457-01	4NCX-7546P3		460	10.1			
87110458-01	4NCX-7557P3		575	8.08			
87110459-01	4NCX-1020P3	10	208	28.7	60	8.35" (212 mm)	50
87110460-01	4NCX-1023P3		230	26.0			
87110461-01	4NCX-1046P3		460	13.0			
87110462-01	4NCX-1057P3		575	10.4			


MODEL INFORMATION		SINGLE-PHASE*					
Item No.	Model No.	HP	Volts	Amps	Hz	Impeller Dia.	Cord (ft)
87110445-01	4NCX-323P1	3	230	17.5	60	152	50
87110446-01	4NCX-523P1	5	230	30.0	60	182	50

*Single-phase motors require FPS Control Panel or Starter Kit for proper operation and warranty.

PERFORMANCE

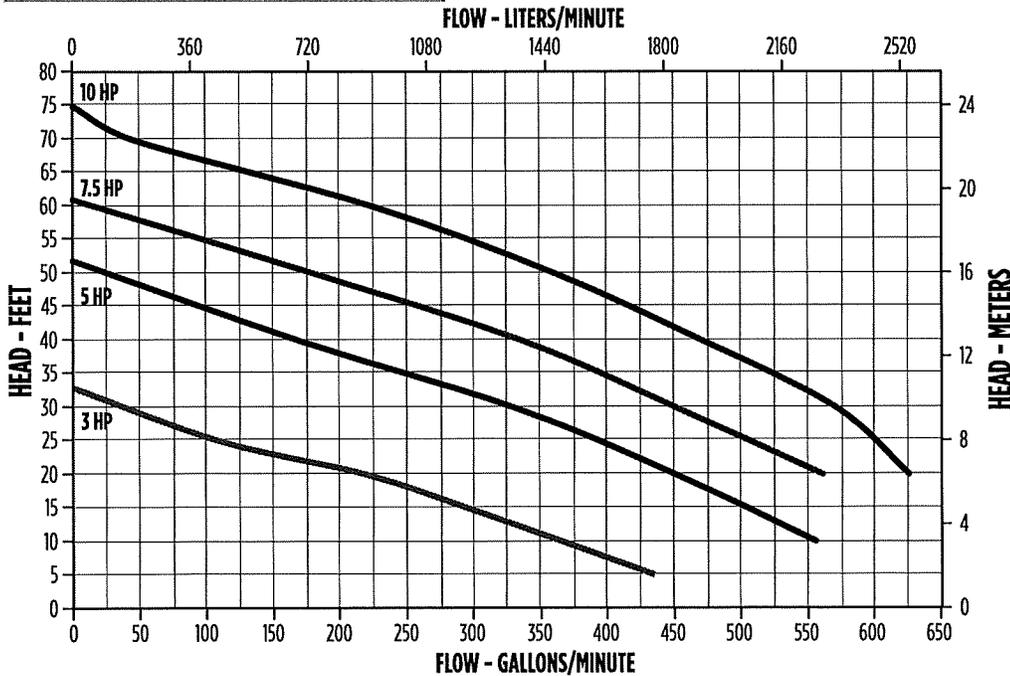


Model	Flow Gallons per Minute (GPM) @ Head (Feet)										Shut-Off
	5	10	15	20	25	30	40	50	60	70	
4NCX-3HP	435	365	295	220	110	0	0	0	0	0	33'
4NCX-5HP	-	555	-	450	-	330	170	0	0	0	52'
4NCX-7.5HP	-	-	-	560	-	450	335	180	0	0	61'
4NCX-10HP	-	-	-	625	-	570	470	360	225	45	75'

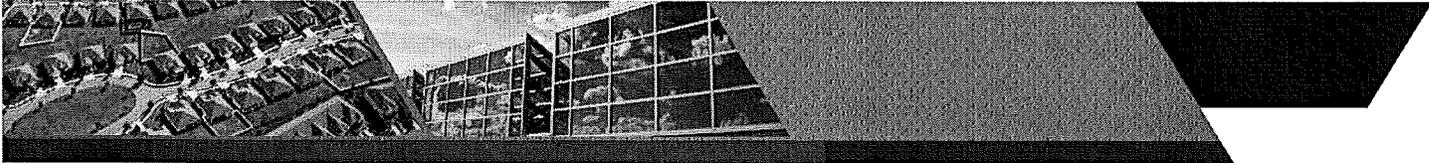

PACKAGES

FEATURES

- Packages in any configuration – simplex, duplex, triplex or larger
- Diameters up to 120" (10')
- Depths up to 240" (20')
- Available cover options include:
 - Fiberglass
 - Steel
 - Aluminum
- All packages are custom quoted and built to order
- Control panels can be included upon request

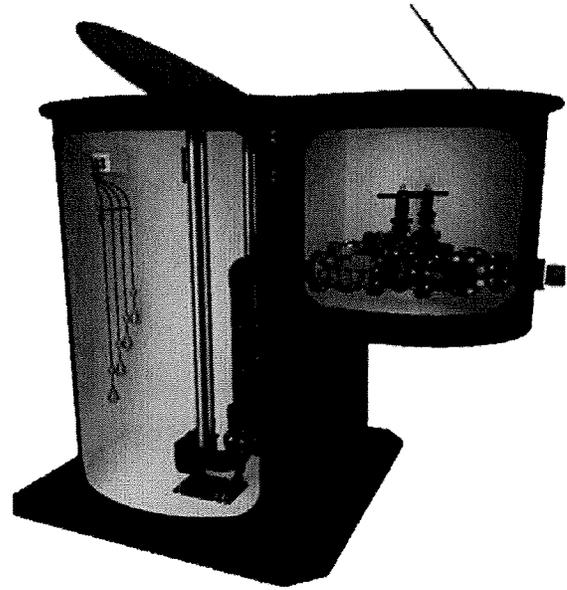


ACCESSORIES

Item No.	Model No.	Description
115930139	FPSBEAX300H	3" Horizontal Spark Proof Base Elbow
115930140	FPSBEAX400	4" Spark Proof Base Elbow
115930141	FPSPKX300	3" Spark Proof Lift-Out Kit, Hardware and Gasket
115930142	FPSPKX400	4" Spark Proof Lift-Out Kit, Hardware and Gasket

NCX SERIES STARTER KIT

Item No.	Model No.	Description
305625101	NCX-SK3	3HP NCX Starting Kit
305625102	NCX-SK5	5HP NCX Starting Kit

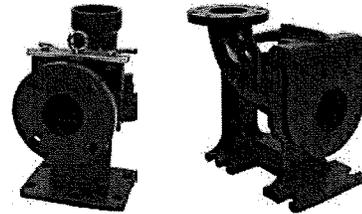



INTRINSICALLY SAFE NON-CLOG CONTROL PANELS

APPLICATIONS



- Designed exclusively for the for the NC and NCX Series Submersible Non-Clog Pumps

FEATURES


- Adjustable overload
- Seal fail indication circuitry
- Thermal cut-out circuitry
- Audible alarm with silence switch
- Red visual alarm beacon
- Separate alarm and control fuses
- Hand / Off / Auto switch
- IEC motor contactor
- Pump selector switch offers "Check-It" troubleshooting functionality
- "Check-It" feature displays all float and pump statuses and allows manual pump operation
- Dead inner door
- Waterproof NEMA 4X enclosure
- UL 508A listing
- Lockable latch
- Alarm flasher
- Auxiliary alarm contacts

OPTIONS


- Event counter
- Elapsed time meter
- Lightning protection
- Redundant off float
- Low level cut-off
- Anti-condensation heater

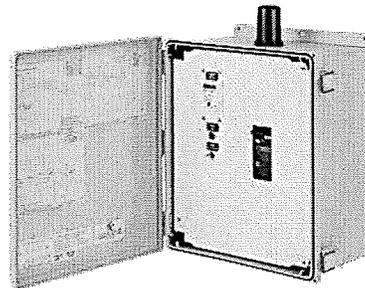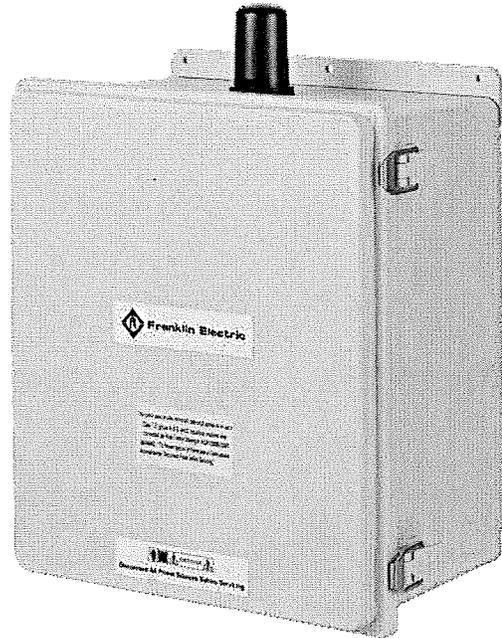


Three-Phase Simplex

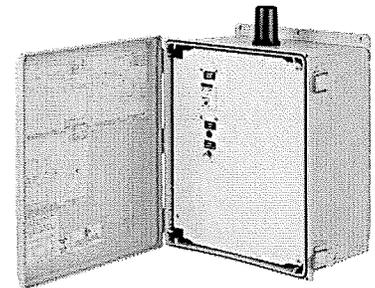

Single-Phase Simplex

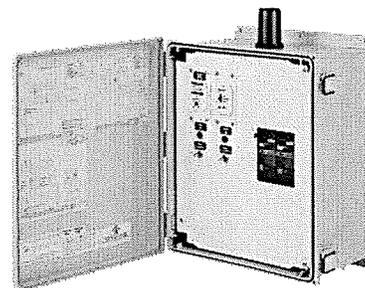

Three-Phase Duplex

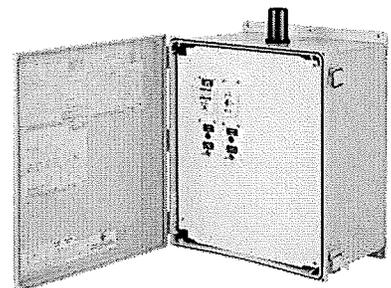

Single-Phase Duplex

