

USA 800-766-0076

Fax 323-890-4456

www.smithcooper.com

Los Angeles, CA

Chicago, IL


Atlanta, GA

Vancouver, WA


Houston, TX

Series 01728155L


LEAD-FREE BRASS BALL VALVE, THREADED

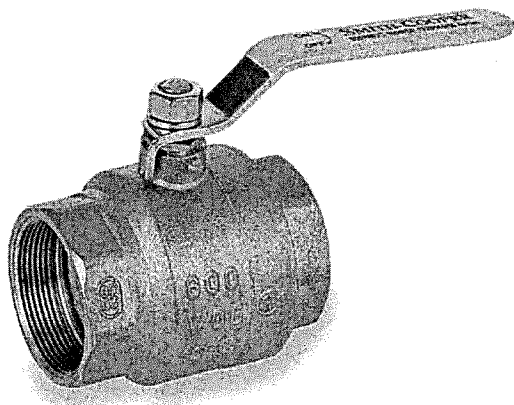

- Certified to NSF/ANSI 61-2012
- Meets Federal Safe Water Drinking Water Act, lead-free requirement
- 600 lb. CWP, 150lb. WSP
- Full port
- Lead-free forged brass body
- Blow-out proof stem
- CSA approved under z21.15a for 1/2 psig (1/2" - 2")
- CSA approved under 3-88 for 5 psig (1/2" - 2")
- ISO 9001:2008 manufacturer

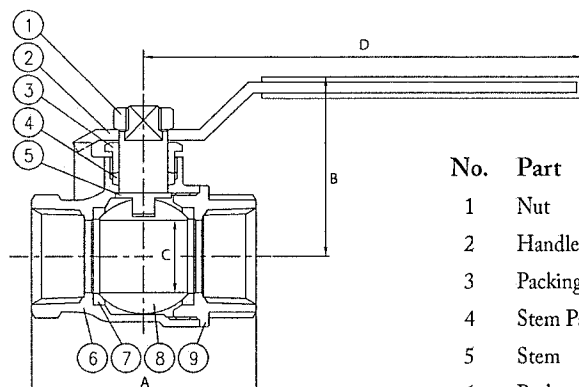

No.	Part	Material
1	Nut	Forged Steel ASTM A283 (Zinc Plated)
2	Handle	Forged Steel ASTM A283 (Zinc Plated)
3	Packing Nut	Brass
4	Stem Packing	PTFE
5	Stem	Brass ASTM B-36, C28000
6	Body	Brass ASTM B-36, C28000
7	Ball Seat	PTFE
8	Ball	Chrome Plated Brass ASTM B-36, C28000
9	Body End Cap	Brass ASTM B-36, C28000

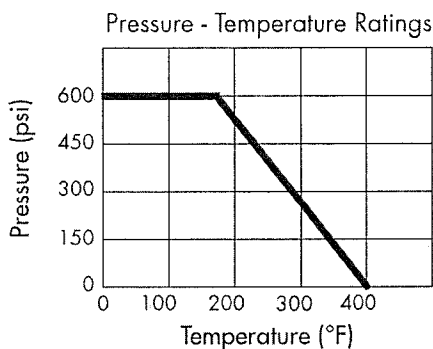

Size IN	Part Number	Weight LB	A IN	B IN	C IN	D IN
1/4	01728155CL	0.3	1.69	1.71	0.40	3.47
3/8	01728155EL	0.3	1.69	1.71	0.40	3.47
1/2	01728155GL	0.5	2.07	1.85	0.60	3.47
3/4	01728155IL	0.7	2.38	2.13	0.75	4.33
1	01728155KL	1.0	2.90	2.29	1.00	4.33
1-1/4	01728155LL	1.7	3.27	2.80	1.26	5.51
1-1/2	01728155ML	2.3	3.62	3.00	1.58	5.51
2	01728155NL	3.5	4.41	3.27	1.97	5.51
2-1/2	01728155PL	7.2	6.00	4.59	2.55	9.05
3	01728155QL	8.8	6.50	4.86	2.95	9.05
4	01728155TL	16.5	7.75	5.67	3.90	10.00