



KNOW THE DIFFERENCE ○○○○○

1. Metal DTC-X frames are powder coated for the most durable finish w/minimum 2.5 mm thickness
2. Choose from over 200 painted metal frame colors
3. Made with 3" high density, highly resilient polyurethane seat foam that meets fire-retardant standards
4. Seat back is upholstered with 1" thick polyurethane foam (insert 16.5"W X 8"H)
5. Wider seat frame angle support provides more strength and durability (7/8" X 5/8")
6. Seat frame weld clip is offset on back of rectangular frame for extra strength
7. Seat assembly attachment features direct metal to metal contact (no clips required)
8. .5" seat board w/full black chalk board finished bottom (16.5"W X 15.5"D)
9. Air vent holes at back of seat facilitate quiet air discharge
10. Seat hinge cross-brace w/ends crimped to eliminate wrap around cross bar
11. Two (2) embossed metal cross-braces on rear leg provide extra reinforcement, bracing, and spacing
12. Front leg has one (1) cross-brace with two (2) "K" shaped brace supports w/single cross-brace for extra strength, flexibility, and aisle maintenance
13. Ganging brackets are designed for easier straight alignment, security, safety, compliance/non-obtrusive (welded in chair channel frame) 18.25" on center
14. Heavy-Duty 40 oz. supported vinyl is standard
15. Choose from Standard Chair Pitch – Erect Pitch – Relaxed Pitch and Seat Height Modifications
16. 25 Year Limited Chair Frame Warranty
17. Limited Lifetime Warranty on our non-marring molded chair foot insert glides



YOUR FIRST CHOICE FOR SPECIAL PORTABLE SEATING APPLICATIONS REQUIRING OPTIMAL COMFORT.

THIS POPULAR LOGO CHAIR IS USED FOR SPECIAL TEAM BENCHES, LOCKER ROOMS, AND FUNDRAISING OPPORTUNITIES.



**SPEC SEATS**

ULTIMATE PORTABLE SEATING

SPECSEATS.COM  
800.535.2048





### FRAME CONSTRUCTION

Roll-formed double tube and channel 19 gauge steel (all perforations in channel – no perforations in rolled tube); front “K” brace support; approximately 11” clearance between first cross-brace and floor; seat height from floor approximately 19”; rear legs have (2) steel embossed cross-braces for extra support/strength; on each chair leg (4) is a molded foot glide over an extra protective smooth “U” shaped metal pronged design hairpin for a secure friction fit. These are removable only with the use of tools.

### SEAT CONSTRUCTION

11 gauge steel frame; vertical leg approximately .875”w and horizontal leg approx. .625”w forms a rectangular frame measuring approximately 16.5”w x 15.5”l; heavy duty supported vinyl sewn seat; polyurethane foam seat cushion 2.5” to 3” thick; cushion conforms to ASTM D3574, California 117 and BIFMA fire retardant requirements; over .5” thick laminate/wood black chalkboard base with enough vent holes to allow for air discharge; seat frame and seat assembly will be attached directly by using vandal proof plated recessed hex head screws.

### BACKREST CONSTRUCTION

1” thick pure polyurethane foam; heavy duty supported vinyl; .125” shaped plywood backboard with threaded metal insert/fasteners; upholstered backrest is approximately 16.5”w x 8”h; attached with vandal-proof plated recessed hex head screws.

### INTERLOCKING GANGING

Heavy duty die formed 11 gauge steel brackets; designed for fast alignment; set-up/take down, binding prevention, and minimum chair movement. Chairs do not release when tipped back. Chairs are approximately 18.25” center to center.

### METAL FRAME FINISH

Powder coat finish of not less than a thickness of 2.5 mm

### COLORS


Frame/Upholstery - As per customer selections.

### LOGO(S)

As required on chair backrest, top of seat cushion, and/or front edge

### WARRANTY

Minimum 25 year limited metal frame warranty.

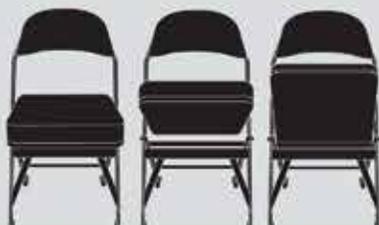

**SEAT HEIGHT:** 19.25" (48.9 cm)

**SEAT SIZE:** 16.5"w x 15 1/2"d (41.9 cm x 39.4 cm)

**BACK SIZE:** 16.5"w x 8"h (41.9 cm x 20.3 cm)

**CHAIR WEIGHT:** 20 lbs

**FRAME HEIGHT—open:** 33" (83.8 cm)

**FRAME HEIGHT—closed:** 40" (101.6 cm)

**FRAME WIDTH—includes ganging:** 18.25" on center (46.4 cm)

**FRONT TO BACK:** 22" (55.9 cm)

**FOLDED THICKNESS:** 4" (10.2 cm)

# SPEC SEATS

ULTIMATE PORTABLE SEATING

SPECSEATS.COM  
800.535.2048

