

DATE: 3/05/2020

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00130093

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETN, LA. 70054-0009
504-364-2678

VENDOR:

BUYER: DABRAHAM

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

LOCAL STK - FACTORY STK

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

*** ALL BIDDERS MUST COMPLETE SECTION BELOW ***	
FIRM NAME: <u>CED dba IC ELECTRIC</u>	
SIGNATURE: (Must be signed here)	TITLE: <u>SALES</u>
PRINT OR TYPE NAME: <u>CHUCK PUINNO</u>	
ADDRESS: <u>3321 WESTBANK EXPRESSWAY</u>	
CITY, STATE: <u>HARVEY LA</u>	ZIP: <u>70058</u>
TELEPHONE: <u>(504) 341-4281</u>	FAX: <u>(504) 340-3400</u>
EMAIL ADDRESS: <u>CPUINNO @ CED-ICELECTRIC.COM</u>	

TOTAL PRICE OF ALL BID ITEMS: \$ 6625.00

DATE: 3/05/2020

Page: 5

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00130093

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	100.00	EA	<p>A purchase of (100) LED Light Fixtures for the Eastbank Warehouse</p> <p>0001 - Fixture, LED, equivalent of 2-F48T12HO, fluorescent 54 watt lamps, 120/277 volt, for wet location, Morris Electrical no. 71901 or equal (0881200)</p> <p>Please have items shipped to:</p> <p>Eastbank Warehouse Attention: Curtis McFarland 4901 Jefferson Hwy Suite C Jefferson, LA 70121</p>	#66.25	#6,625.00



This economical linear LED washdown fixture is ideal for canopies, loading docks, tunnels, stairwells and other hard-to-reach areas where relamping is difficult and costly.

Color: White

Weight: 8.3 lbs

Project:

Type:

Prepared By:

Date:

Driver Info

Type	Constant Current
120V	0.44A
208V	0.26A
240V	0.23A
277V	0.19A
Input Watts	49.10W
Efficiency	N/A

LED Info

Watts	50W
Color Temp	5000K (Cool)
Color Accuracy	82 CRI
L70 Lifespan	50,000
Lumens	5,849
Efficacy	119.1 LPW

Technical Specifications

Listings

UL Listed:

Suitable for wet locations

IESNA LM-79 & LM-80 Testing:

RAB LED luminaires and LED components have been tested by an independent laboratory in accordance with IESNA LM-79 and LM-80.

DLC Listed:

This product is on the Design Lights Consortium (DLC) Qualified Products List and is eligible for rebates from DLC Member Utilities. DLC Product Code: PRTHPOQN

LED Characteristics

LEDs:

Long-life, high-efficacy, surface-mount LEDs

Lifespan:

50,000-hour LED lifespan based on IES LM-80 results and TM-21 calculations

Color Uniformity:

RAB's range of CCT (Correlated Color Temperature) follows the guidelines of the American National Standard for Specifications for the Chromaticity of Solid State Lighting (SSL) Products, ANSI C78.377-2017.

Construction

IP Rating:

Ingress Protection rating of IP65 for dust and water (suitable for damp locations only when

Housing:

Impact-resistant polycarbonate with stainless steel door clips. 1/2" opening/ drill out (drill out by customer) for conduit and bushing/cord entry.

Mounting:

Quick-mount, stainless steel snap on brackets supplied for surface mounting. V-Hook brackets supplied standard for suspending the fixture.

Lens:

Diffuse polycarbonate lens for low glare and maximum protection

Gaskets:

High-temperature silicone gaskets

Cold Weather Starting:

The minimum starting temperature is -20°C (-4°F)

Maximum Ambient Temperature:

Suitable for use in 40°C (104°F)

Installation:

Tether Cables are provided for easy installation. Quick connector may be used for quick and easy wiring.

Green Technology:

Mercury and UV free. RoHS-compliant components.

Finish:

Formulated for high durability and long-lasting color

Other

5 Yr Limited Warranty:

The RAB 5-year, limited warranty covers light output, driver performance and paint finish. RAB's warranty is subject to all terms and conditions found at rablighting.com/warranty.

Equivalency :

Equivalent to 32W 2 Lamp T8

Buy American Act Compliance:

RAB values USA manufacturing! Upon request, RAB may be able to manufacture this product to be compliant with the Buy American Act (BAA). Please contact customer service to request a quote for the product to be made BAA compliant.

Electrical

Driver:

Constant Current, Class 2, 120-277V, 50/60Hz, 120V: 0.44A, 208V: 0.26A, 240V: 0.23A, 277V: 0.19A

SEAL4-50/D10

RAB

installed with Lightcloud Sensor)

Technical Specifications (continued)

Electrical


THD:

9.4% at 120V, 12.1% at 277V

Power Factor:

99.4% at 120V, 97.3% at 277V

Dimensions

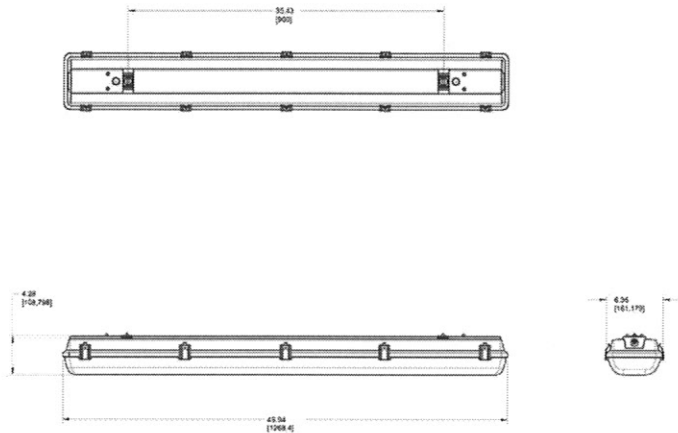

Features

- Economical linear washdown solution
- Impact resistant polycarbonate housing
- Diffuse polycarbonate lens for protection and minimal glare
- Quick mount solutions - surface & suspended
- 0-10V dimming

Ordering Matrix

Family	Length	Wattage	Color Temp	Driver	Options
SEAL	4	50		/D10	
	4 = 4 ft 8 = 8 ft	25 = 25W 50 = 50W 100 = 100W	Blank = 5000K (Cool) N = 4000K (Neutral)	/D10 = 0-10V Dimming 120-277V	Blank = No Option /LC = Lightcloud® Controller /LCS = Lightcloud® Sensor 120-277V ¹

¹ Suitable for damp locations only.