

Due 5/22 @ 11:00 AM

DATE: 5/18/2015

INVITATION TO BID  
THIS IS NOT AN ORDER

Page: 1

BID NO.: 50-00113396

**JEFFERSON PARISH**  
PURCHASING DEPARTMENT  
P.O. BOX 9  
GRETN, LA. 70054-0009  
504-364-2678

VENDOR: 27118 BLANK BID COPY VENDOR

BUYER: DMEVANS

Bids will be received until 11:00 AM, 5/22/2015 via fax: 504-364-2693 or via online at [www.jeffparish.net](http://www.jeffparish.net)

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law, as well compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 113646 and/or Resolution No. 113647. A copy of these resolutions may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at [www.purchasing.jeffparish.net](http://www.purchasing.jeffparish.net) and clicking on On-line forms.

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications. JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit prices shall prevail.

JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in the quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alterations from the specifications must be indicated and/or supporting documentation supplied with bid submission.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum.

All formal Addenda require written acknowledgment on the bid form by the bidder. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected; JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's specifications (ANSI A117.1-1991).

## INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

### IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This Electronic Procurement System allows vendors the convenience of reviewing and submitting bids online. This is a secure site and authorized personnel have limited read access only.

Please visit the Purchasing Department webpage at <http://purchasing.jeffparish.net> to register and review Jefferson Parish solicitations.

## ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE CORRESPONDING INSTRUCTIONS BELOW.

13

1. All bidders must attend the pre-bid conference in relation to this bid; attendance is mandatory. Failure to attend will prohibit a company from submitting a bid. Vendors are hereby noticed that any vendor arriving after the mandatory pre-bid conference begins will not be allowed to sign in as evidence of attendance.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.
4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid envelope. Failure to comply will cause the bid to be rejected. Additionally if submitting the bid electronically, then the license number must be entered in the appropriate field in the Electronic Procurement system. Failure to comply will cause the bid to be rejected.
5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precautions must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.

**INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS**

7. PUBLIC WORKS BIDS: All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise stated in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. NON-PUBLIC WORKS BIDS: A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. NON-PUBLIC WORKS BIDS: A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. Unless otherwise stated in the bid specifications, the successful bidder will be required to procure standard insurance policies evidencing Parish-mandated insurance requirements as indicated on the attached sheet. The current certificate of insurance must be submitted by low bidder within 10 days after bid opening to the Purchasing Department. Failure to comply will cause bid to be rejected. JEFFERSON PARISH reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. Acceptable forms shall be limited to cashier's check, certified check, or surety bid bond. If submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid Solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is a requirements contract to be provided on an as needed basis. JEFFERSON PARISH makes no representations or warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit and E-Verify Affidavit must be completed, signed, notarized and submitted by low bidder within 10 days after bid opening to the Purchasing Department on all solicitations for construction, alteration or demolition of public building or project, including but not limited to requirements found in LSA-RS 38:2212.9; LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1. Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.
15. NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits (in Original Format) required; Non-Collusion Affidavit, and Campaign Contribution Affidavit must be completed, signed, notarized and submitted by low bidder with bid submission or within 10 days after bid opening to the Purchasing Department. See LSA-RS 38:2212.10; LSA-RS 38:2224; Code of Ordinances, Jefferson Parish, Louisiana, Sec 2-923.1 Failure to comply will cause bid to be rejected; the Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event. For the convenience of vendors, all affidavits have been combined into one form entitled NON PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format for the bid to be considered responsive.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission: and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to Jefferson Parish Code of Ordinances Section 2-155.10(19). By submitting a bid, vendor acknowledges this and will abide by all provisions of the referenced Jefferson Parish Code of Ordinances.

DATE: 5/18/2015

INVITATION TO BID  
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00113396

**JEFFERSON PARISH**

PURCHASING DEPARTMENT  
P.O. BOX 9  
GRETNA, LA. 70054-0009  
504-364-2678

VENDOR: 27118 BLANK BID COPY VENDOR

BUYER: DMEVANS

Bids will be received until 11:00 AM, 5/22/2015 via fax: 504-364-2693 or via online at [www.jeffparish.net](http://www.jeffparish.net)

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work is to be done in a workman-like manner, according to standard practices. Any deviations or alterations from the specifications must be indicated and backup documentation supplied with your quotation.

**DELIVERY: FOB JEFFERSON PARISH**

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

10 WORK

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

10 WORK

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

10 WORK

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: N/A  
NUMBER: \_\_\_\_\_  
NUMBER: \_\_\_\_\_  
NUMBER: \_\_\_\_\_

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) 72-0991128

**\*\*\* ALL BIDDERS MUST COMPLETE SECTION BELOW \*\*\***

FIRM NAME:

Economical Janitorial and Paper Supplies

SIGNATURE:

(Must be signed here)

Suzie Migliore

TITLE:

President

PRINT OR TYPE NAME:

Suzie Migliore

ADDRESS:

P.O. Box 23607

CITY, STATE:

New Orleans, LA

ZIP:

70183-3607

TELEPHONE:

504, 464-7166 ext 3110

FAX:

(504) 465-9563

EMAIL ADDRESS:

Suzie@economicaljanitorial.com

TOTAL PRICE OF ALL BID ITEMS: \$ 30947.06

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113396

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			VARIOUS INDUSTRIAL ITEMS		
1	30.00	EA	0010-CLAMP,HOSE,9-3/8 INCH TO 12-1/4INCH RANGE,ALL STAINLESS STEEL,HEX SCREW, DIXON NUMBER 200-188-H SK NUMBER 00-0302120 <i>PK10/CASE</i>	<i>2.88</i> Dixon 238-115188	<i>86.40</i>
2	72.00	EA	0011-VEST,SAFETY,XX-LARGE,100 PER CENT POLYESTER MESH,FLATWEAVE 7 OUNCE, REFLECTIVE STRIPES,ORANGE FLUORESCENT, OCCULUX PART NUMBER LUX-SSFULLG SK NUMBER 00-047910D	<i>17.38</i> OCCULUX LUX-SSFULLG 561-LUX	<i>1251.36</i>
3	60.00	EA	0020-CARTRIDGE,RESPIRATOR,ORGANIC/ACID/ AMMONIA,GMC TYPE,10 PER BOX,MSA PART NUMBER 464046,MUST BE THIS BRAND TO FIT EXISTING MSA RESPIRATORS SK NUMBER 00-0484090 <i>PK10/CASE</i>	<i>8.00</i> MSA GMC X-APS	<i>480.00</i>
4	12.00	EA	0021-VISQUEEN,SHEETING,6 FEET BY100 FEET 6 MIL,CLEAR SK NUMBER 00-048437A	<i>22.20</i> PD-61006CL	<i>266.40</i>
5	24.00	EA	0030-PADLOCK,MASTERLOCK NUMBER 5,KEYED ALIKE TO NUMBER A445,FOR STREETS DEPT SK NUMBER 00-0580190 <i>PK6/CASE</i>	<i>10.04</i> MASTERLOCK 470-SKA-A445	<i>240.96</i>
6	12.00	ROLL	0031-VISQUEEN,SHEETING,20 FEET BY 100 FEET,6 MIL,CLEAR SK NUMBER 00-0484370	<i>68.85</i> PD-201006	<i>826.20</i>
7	48.00	EA	0040-LUG,META,PLASTIC,26 INCH LONG BY 15 INCH WIDE BY 8 INCH DEEP,GRAY, HEAVY DUTY,PART NUMBER WHPL-8GY SK NUMBER 00-0588650	<i>35.53</i> Rubbermaid 640-3308-CLR	<i>1705.44</i>
8	20.00	EA	0041-WAX,FLOOR,NO-RINSE,IN 1 GALLON PLASTIC JUG,RENOWN SUPER FINISH 11 FLOOR FINISH NUMBER 146-RENO2910-UC SK NUMBER 00-0484650	<i>15.28</i> Betco BC-606 untouchable	<i>305.60</i>
9	36.00	EA	0050-BARRICADE,TWO FOOT FOLDING,PLASTIC TYPE 2,MEETS NCHRP-350 AND MUTCD, SERVICES AND MATERIALS MODEL NUMBER 2181007,GRAINGER NUMBER 3BU39 SK NUMBER 00-0479260	<i>52.55</i> CORONA 831-97-01-002	<i>1891.80</i>

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113396

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
10	64.00	PK	0051-SQWINCHER DRINK MIX,FRUIT PUNCH FLAVOR,16 PACKS OF DRY POWDER PER CASE,  EACH PACK MAKES 2-1/2 GALLONS,2 YEAR EXPIRATION DATE FROM DATE OF MANUFACTURER SK NUMBER 00-048599B	3.14 SQwincher 690-010042-FP	200.96
11	600.00	EA	0060-COVERALL,DISPOSABLE,XX-LARGE,WHITE, 1.25 OUNCE BREATHABLE POLYPROPYLENE,  WITH COLLAR AND ZIPPER,OPEN WRIST AND ANKLES,NO HOOD,SEWN SEAM,LAKE LAND NUMBER C2412 OR EQUAL SK NUMBER 00-058041J PK25/CS	1.92 Westchester 813-3400/XXL	1152.00
12	4.00	EA	0061-HOSE FITTING,4 INCH,TYPE C,ALUMINUM FEMALE HOSE SHANK COUPLER,QUICK  DISCONNECT,EVERTITE BRAND OR EQUAL SK NUMBER 00-0486910	NB	NB
13	4.00	EA	0070-HOSE FITTING,4 INCH,TYPE E, ALUMINUM MALE HOSE SHANK ADAPTER,QUICK  DISCONNECT,EVERTITE BRAND OR EQUAL SK NUMBER 00-0486920	NB	NB
14	48.00	EA	0071-PADLOCK,MASTER NUMBER 1,KEYED DIFFERENT SK NUMBER 00-0967910 PR14	29.70 Master 104C 470-IDCOM	1425.60
15	4.00	EA	0080-ADAPTOR,MALE HOSE SHANK,6 INCH, TYPE E,QUICK DISCONNECT,ALUMINUM,  EVERTITE PRODUCT NUMBER E SK NUMBER 00-0487080	NB	NB
16	12.00	EA	0090-LEVEL,CARPENTERS,48 INCH, ALUMINUM,3 VIALS,1-BEAM CONSTRUCTION,  YELLOW IN COLOR,STANLEY NUMBER 42-480 SK NUMBER 00-0488180	13.80 Stanley 680-42-480	165.60
17	4.00	EA	0100-BLADE,CIRCULAR SAW,7-1/4 INCH DIAMETER BY 5/8 INCH ROUND ARBOR,40  CARBIDE TEETH,BLACK AND DECKER NUMBER 77-757 SK NUMBER 00-0488600	16.20 DeWalt 115-77-757	64.80
18	16.00	EA	0110-RAINCOAT,FULL LENGTH,LARGE,YELLOW MATERIAL IS PVC/NYLON/PVC,SEAMS ARE	33.80 Neese 530-356C-L-Y	540.80

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113396

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
19	144.00	PR	DOUBLE STITCHED AND TAPED, MEETS ASTM D6413, NEESE NUMBER 35SC SK NUMBER 00-0580280	2.21	318.24
20	60.00	EA	0120-GLOVE, 18 INCH LONG, BLACK PVC COATED, COTTON LINED, MEMPHIS NUMBER 6218 SK NUMBER 00-0580470	memphis 027-6218 34.60	2076.00
21	10.00	EA	0130-PUMP, BILGE, 1-1/2 INCH IN I.D. BY 48 INCH LONG, GLAVANIZED, 9-1/2 INCH SPOUT, BABIN NUMBER 169 SK NUMBER 00-0588900	FOX MFG 303-848 20.89	208.90
22	288.00	EA	0140-MATTOCK PICK WITH 36 INCH HICKORY HANDLE, HEAD IS 5 POUND BY 19 INCH LONG BY 3-1/2 INCH WIDE BY NUMBER 6 EYE, RAZORBACK PART NUMBER 30125 SK NUMBER 00-0588700	JACKSON 027-1195000 3.55	1022.40
23	4.00	ROLL	0150-GLASSES, SAFETY, SCRATCH RESISTANT POLYCARBONATE GRAY LENS PROVIDES 99.9 PER CENT UV PROTECTION, BLACK FRAME, MEETS ANSI Z87 STANDARD, PYRAMEX PART NUMBER SB1820S OR EQUAL SK NUMBER 00-0589300	JACKSON SAFETY 138-25688 42.20	168.80
24	6.00	ROLL	0160-CLOTH, ABRASIVE, 2 INCH BY 50 YARDS, 80 GRIT, ALUMINUM OXIDE, NORTON NUMBER K224 SK NUMBER 00-0597590	NORTON 547-66261126299 41.06	246.36
25	24.00	EA	0170-CLOTH, ABRASIVE, 2 INCH BY 50 YARDS, 220 GRIT, ALUMINUM OXIDE, NORTON NUMBER K224 SK NUMBER 00-0597680	NORTON 547-66261126294 242.09	5810.16
26	50.00	EA	0180-BLADE, DIAMOND, DRY TYPE, 14 INCH BY .125 INCH BY 1 INCH, PEARL NUMBER LW14112CP SK NUMBER 00-0965390	DEWALT 115-DW8500 8.57	428.50
27	432.00	EA	0190-BRUSH, TRUCK WASH, POLYSTYRENE FILL, WEILER MODEL NUMBER 73146, GRAINGER NUMBER 5A171 SK NUMBER 00-0965710	MAGNOLIA MB14116B 16.75	7236.00
			0200-FIRE ANT BAIT POWDER, 1 POUND CONTAINER, 0.05 PERCENT DELTAMETHRIN, ZEP BRAND SK NUMBER 00-0966610	DELTA DUST PC4191071	

## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113396

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
28	18.00	EA	0210-FLOAT,BEVELED,MAGNESIUM,16 INCH BY 3-1/2 INCH,GOLDBLATT MODEL NUMBER  C6-15D-M7,NUMBER 84387-06150 SK NUMBER 00-0966640	18.85 Gold Blatt 317-06450	339.30
29	60.00	EA	0220-PAINT,MARKING,INVERTED,WHITE,WATER BASED,17 OUNCE, NOT SOLUBLE IN WATER AND  WILL NOT WASH AWAY,KRYLON NUMBER 3901, MSC PART NUMBER 84254382 SK NUMBER 00-096803A	3.18 PB 20-652 Seymour	190.80 203.
30	12.00	EA	0230-BIT,DRILL,5/8 INCH BY 1/2 INCH REDUCED SHANK,HIGH SPEED STEEL,DOMESTIC,  CHICAGO-LATROBE BRAND,GRAINGER NUMBER 1P300 SK NUMBER 00-0200020	12.69 IRWIN 585-91140	152.28
31	16.00	EA	0240-SHACKLE,ANCHOR,1 INCH,WITH FORGED SCREW PIN,HOT DIP GALVANIZED,8-1/2 TON  LOAD LIMIT,CROSBY NUMBER G-209 SK NUMBER 00-0271160	16.88 Peerless 005-8058905	270.08
32	40.00	EA	0250-CLAMO,HOSE,2-14/16 INCH TO 3-3/4 INCH RANGE,ALL STAINLESS STEEL,DUPAGE  NUMBER B52HS SK NUMBER 00-0301980	1.48 Dixon Valve 238-HSS52	59.20
33	20.00	EA	0260-CLAMP,HOSE,4-5/8 INCH TO 5-1/2 INCH RANGE,ALL STAINLESS STEEL,HEX SCREW,  DIXON NUMBER 200-80-H SK NUMBER 00-0302040	1.70 Dixon Valve 238-HSS80	34.00
34	40.00	EA	0270-CLAMP,HOSE,4-3/4 INCH TO 7-3/4 INCH RANGE,ALL STAINLESS STEEL,NORTON SIZE 80  SK NUMBER 00-0302190	1.68 Dixon Valve 238-HSS104	67.20
35	50.00	LB	0280-ROD,WELDING,5/32 INCH DIAMETER,TYPE 5P NUMBER E6010,INCH 50 POUND CAN.  SK NUMBER 00-0307110	2.82 Best Welds 900-6010-532-5	141.00
36	144.00	EA	0290-SEALANT,URETHANE FOAM INSULATION, BIG GAP FILLER,12 OUNCE CAN,GREAT  STUFF,DOW NUMBER 157906 SK NUMBER 00-0329250	5.59 BS 33316 Triple Expand Foam Sealant	804.96 12/12
37	8.00	EA	0300-ADAPTER,HYDRANT,BRASS,2-1/2 INCH FEMALE NEW ORLEANS THREAD BY 2-1/2 INCH	38.88 Dixon Valve 238-HA2525T	311.04



DATE: 5/18/2015

Page: 9


## INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00113396


SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
38	12.00	EA	MALE NATIONAL STANDARD HOSE THREAD, CV HAROLD PART NUMBER FMP25S25N SK NUMBER 00-038009M  0310-SIGN(PADDLE) SLOW/STOP,TWO SIDED, 18 INCH OCTAGONAL ALUMINUM,0.080 INCH THICK,3M HIGH INTENSITY PRISMATIC AND DIAMOND GRADE REFLECTIVE SHEETING,12 INCH WOODEN HANDLE,STOP SIGNSAND MORE NUMBER REG-1015 SK NUMBER 00-0479030	38.16 CORTINA 831-03-852KC	457.92

## HS Series Worm Gear Clamps: 238-HS188

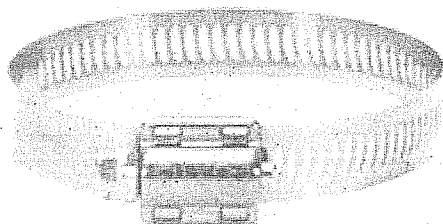


 [view larger photo](#)

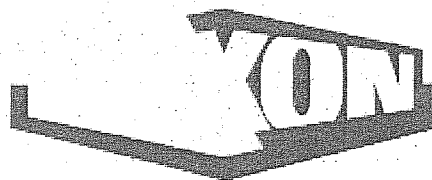

*The Right Connection*

<b>Hose O.D.</b>	9 3/8 in [Min], 12 1/4 in [Max]
<b>Bolt/Screw Size</b>	5/16 in
<b>Bolt/Screw Type</b>	Hex Head
<b>Bolt/Screw Material</b>	Steel 1018
<b>Material</b>	Stainless Steel 300
<b>Torque</b>	30.00 in lb [Max]
<b>Locking Type</b>	Worm Drive Buckle-Grooved Band
<b>Type</b>	Band & Worm Drive Buckle
<b>Quantity</b>	10 per box
<b>Wt.</b>	0.01 lb
<b>UPC</b>	
<b>UNSPSC</b>	31162906
<b>Standard Pack</b>	10EA/BOX
<b>Minimum Order</b>	10
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

## OccuNomix Standard Vests: 561-LUX-SSFULLG-02X

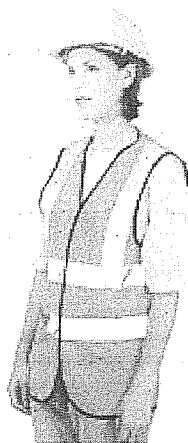

[+ view larger photo](#)

- 2" 3M Scotchlite reflective tape - Two 360° horizontal stripes plus two vertical shoulder stripes
- Bright, lightweight polyester fabric
- Machine washable
- Other sizes available

<b>Size Group</b>	2X-Large
<b>Material</b>	Polyester
<b>Width</b>	9.700 in
<b>Length</b>	14.700 in
<b>Closure Type</b>	Hook & Loop
<b>Color</b>	Hi-Viz Orange
<b>Height</b>	0.070 in
<b>Brand Name</b>	OccuLux®, OccuNomix
<b>Wt.</b>	0.55 lb
<b>UPC</b>	21844574236
<b>UNSPSC</b>	
<b>Standard Pack</b>	1EA
<b>Minimum Order</b>	1
<b>Country of Origin</b>	CN
<b>Hazmat</b>	No


### Testing and Approvals:

ANSI 107-1999 Class 2 Compliant  
ANSI 107-2010 Class 2

# MSA Comfo® Respirator Cartridges: 454-464046



*The Safety Company*

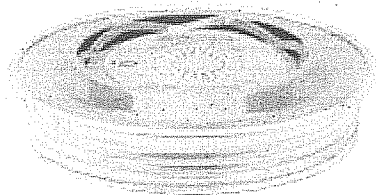

[+ view larger photo](#)

- N95-Particulate Filter (95% filter efficiency level) effective against particulate aerosols free of oil
- P100-Particulate Filter (99.97% filter efficiency level) effective against all particulate aerosols
- R95-Particulate Filter (95% filter efficiency level) effective against all particulate aerosols

<b>Filtration Grade</b>	N95, R95
<b>Resistance</b>	Chlorine, Chlorine Dioxide, Hydrogen Chloride, Hydrogen Sulfide, Organic Vapors, Sulfur Dioxide
<b>Type</b>	Cartridge
<b>Usage</b>	Contaminants
<b>Quantity</b>	10 per package
<b>Wt.</b>	0.18 lb
<b>UPC</b>	
<b>UNSPSC</b>	46182000
<b>Standard Pack</b>	10CTG/BOX
<b>Minimum Order</b>	1
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

# Master Lock Laminated Padlocks Keyed Alike Key Code 0303: 470-5KA

## Master Lock

### Laminated Padlock Keyed Alike Key Code 0303, No 5

Best used for industrial, storefronts/business gates, tool cribs, and vending machines

Commercial grade provides super protection from drilling and picking

Dual-locking levers

Hardened steel shackle for superior cut resistance

Keyed Alike—order multiple locks to open with the same key or custom order to match #3 padlock



 [view larger photo](#)

<b>Shackle Diam</b>	3/8 in
<b>Shackle Inner Height</b>	1 in
<b>Body Width</b>	2 in
<b>Body Material</b>	Steel
<b>Length</b>	0 in
<b>Height</b>	0 in
<b>Width</b>	0 in
<b>No. of Pins</b>	4
<b>Combination/Keying</b>	Key
<b>Material</b>	Hardened Boron Alloy
<b>Finish</b>	Laminate
<b>Color</b>	Gray, Silver
<b>Wt.</b>	0.83 lb
<b>UPC</b>	
<b>UNSPSC</b>	
<b>Standard Pack</b>	6EA/BOX
<b>Minimum Order</b>	6
<b>Country of Origin</b>	MX
<b>Hazmat</b>	No



## Foodservice > Food Storage

### 3308 Food/Tote Box

Reduce food spoilage costs.

- Clear, break-resistant polycarbonate provides visibility, durability and stain-resistance.
- Tight-fitting snap-on lids keep food fresh.
- Date control panels on boxes and lids for easier inventory control.
- Dishwasher and freezer safe.
- Available in standard industry sizes to accommodate existing storage racks, counters, etc.
- Boxes & Lids certified to NSF Std. #2.
- USDA Meat & Poultry Equipment Group Listed. Made of FDA compliant materials.
- This product assists in complying with HACCP guidelines.



### SPECIFICATIONS

	U.S.	Metric
Length:	26.0 in	66.0 cm
Width:	18.0 in	45.7 cm
Depth:	6.0 in	15.2 cm
Volume Capacity [Nom]:	8 1/2 gal	32.2 L
Volume Capacity [Max]:		
Volume Capacity [Min]:		
Capacity (Weight):		
Capacity [Foodservice]:		
Carton Height:		
Carton Length:		
Carton Width:		
Height:		
platform size:		
Warranty:		
power source:		
Carton Cube:	4.56 ft3	0.13 m3
Ship Weight/Carton:	30.02 lb	13.62 kg
Pack Quantity:		6
Cartons Per Pallet:		12
Material:	CP	
Process:	Injection Molding	

#8

## UNTOUCHABLE® WITH SRT™



### Black mark resistant metal interlocked floor finish

Untouchable with Scuff Resistant Technology SRT is a low odor, black heel mark resistant floor finish that is an exceptional choice for those who want the highest gloss and wear with the least amount of labor. Untouchable with SRT is nonscuffing, durable, detergent resistant and maintains its high gloss with minimal burnishing, a real labor saver. Excellent leveling and low odor make it easy to apply

#### Features

- Superior black heel mark resistance
- Extremely low odor
- Superior protection for your floor
- Self-sealing

#### Available In:

- 4 - 1 Gal. Bottles Item #60604-00 *25% Sol. d*
- 5 Gal. Pail Item #60605-00
- 55 Gal. Drum Item #60655-00
- 2 - 1.25 Gal. Quickcoat Item #60659-00

#### Directions for Use

Recommended for use on all types of resilient tile flooring and properly prepared hard surfaces.

#### RESTORATIVE MAINTENANCE:

Completely remove all old wax, finish and soil from floor surface following strip procedure instructions on Betco® stripper label. Floor surface must be clean, dry and free of residue before finish is applied. Rinse with clean water if necessary. Apply finish in uniform, thin to medium coats using a clean synthetic finish mop, microfiber mop or applicator system. Allow each coat to dry thoroughly before applying additional coats, usually 20 - 30 minutes. Elevated temperatures, heavy coats and humidity may extend dry time. A minimum of 4 coats of finish is recommended. Note: This product is a self-sealing finish, however, if tile is old, worn or porous, initially applying 1 - 2 coats of a Betco sealer will enhance gloss and long term performance.

#### ROUTINE MAINTENANCE:

Sweep large debris and dust mop. Damp mop or automatic scrub using a Betco floor cleaner. Buff or burnish the floor to enhance gloss as needed. Use Betco® One Step High Speed Cleaner/Restorer to condition the floor and extend the time between top scrub and recoating.

#### INTERIM MAINTENANCE:

Sweep large debris and dust mop. Top scrub the floor using Daily Scrub SC and maroon pad to remove the top soiled layers of finish. Floor surface must be clean, dry and free of residue before finish is applied. Apply 1 - 2 coats of finish as directed above.

Please recycle empty containers. Note: Slip resistance meets or exceeds standard, (ASTM D 2047-11) James Machine 0.5 minimum.

#### Tech Specs

Coverage	2,000 - 3,000 square feet/gallon
Drying time	20 - 30 minutes
Fragrance	Mild
Free styrene content	0.0
Freeze/thaw stability	3 cycles
Gloss (ASTM D 1455-87)	1 coat 80 - 85 2 coats 97 - 98
	Gloss (ASTM D 1455-87)
2 coats 97 - 98	Heel mark resistance
Excellent	Leveling
Excellent	pH
8.1 - 8.9	Powdering resistance
Excellent	Recoat
Very good	Shelf life
1 year	Specific gravity
1.03	

# Cortina 97-01-002 Polypropylene Type II Folding Barricade, 24" Width x 40" Height, Orange on White

9


Cortina type II folding barricade. Made of polypropylene. Recessed light bracket provides added security and is easy to mount. Recessed panel area provides sheeting protection from scratching. Superior high-strength resin withstands temperature extremes and has a UV protection package for year-round use. A recessed light bracket to protect light from impact. Recessed and replaceable sheeted panels providing flexibility and savings. Designed for easy nesting and stacking. Plastx barricades are 100 percent recyclable. NCHRP-350 certified and meet MUTCD specifications. Engineer grade reflective sheeting. 8-inches reflective top panel size. 8-inches reflective bottom panel size.

Brand Name	Cortina
Part Number	97-01-002
Material Type	Polypropylene (PP)
Number of Items	1
Color	Orange/White
EAN	0737415000560
Overall Height	40 inches
Overall Width	24 inches
UNSPSC Code	55121704
UPC	737415000560




## Sqwincher Powder Packs: 690-016042-FP

10

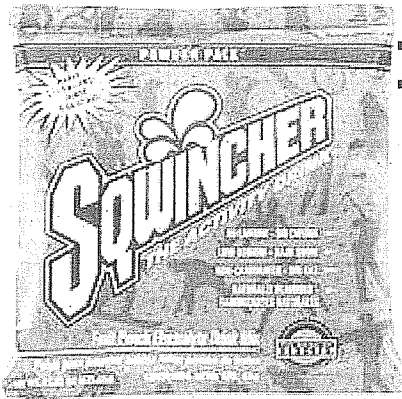

[+ view larger photo](#)


- 2.5 Gal. - Powder Pack
- Portable, lightweight
- Tastes great and keeps you hydrated



<b>Flavor</b>	Fruit Punch
<b>Capacity Vol.</b>	23.83 oz
<b>Package Yield</b>	2 1/2 gal
<b>Packing Type</b>	Pack
<b>Physical Form</b>	Powder
<b>Type</b>	Dry Mix
<b>Quantity</b>	32 per case
<b>Wt.</b>	1.57 lb
<b>UPC</b>	075880250012
<b>UNSPSC</b>	50202309
<b>Standard Pack</b>	32EA/CS
<b>Minimum Order</b>	1
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

## West Chester PE Laminate Protective Coveralls: 813-3400/XXL




 [view larger photo](#)


- Provides lightweight, breathable, comfortable protection against non-hazardous light sprays and splashes
- With polyethylene film



<b>Style</b>	Collar, Zipper Front
<b>Size Group</b>	2X-Large
<b>Material</b>	Polypropylene
<b>Color</b>	White
<b>Wt.</b>	0 lb
<b>UPC</b>	
<b>UNSPSC</b>	
<b>Standard Pack</b>	25EA/CA
<b>Minimum Order</b>	25
<b>Country of Origin</b>	CN
<b>Hazmat</b>	No

# Master Lock No. 1 Laminated Steel Pin Tumbler Padlocks: 470-1DCOM

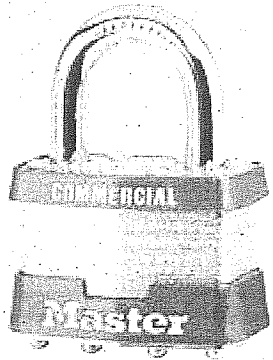

 [view larger photo](#)

## 4 PIN TUMBLER SAFETY PADLOCK KEYED DIFFERENT

**Master Lock**

- 4 pin tumbler cylinder helps prevent picking
- Dual locking levers provide extra pry resistance
- Hardened bottom plate for drill resistance
- Proprietary rustproofing for longer life
- Thousands of key changes maximize key integrity
- Top and bottom bumpers for greater scratch resistance

Shackle Diam	5/16 in.
Shackle Length	15/16 in, 15/16 in [Max]
Shackle Inner Width	3/4 in
Shackle Material	Hardened Steel
Body Width	1 3/4 in
Body Material	Laminated Steel
No. of Pins	4
Combination/Keying	Keyed Different
Packing Type	Commercial Carded
Wt.	0 lb
UPC	071649228285
UNSPSC	46171500
Standard Pack	4EA/BOX
Minimum Order	1
Country of Origin	MX
Hazmat	No

# Stanley® Top Read Levels: 680-42-480



16

[view larger photo](#)

- End caps to prevent denting
- Top read center vial for easy readability
- Yellow vial covers for high visibility and easier reading vials

Length	48 in
Width	1 in
Height	2 3/8 in
No. of Vials	3
Vial Positions	1 Level, 2 Plumb
Vial Material	Acrylic
Accuracy	±0.0010 in
Base Type	Grooved
Structure	I-Beam
Body Material	Aluminum
Type	Builders Spirit Level
Quantity	3 per carton
Wt.	1.55 lb
UPC	076174424805
UNSPSC	27111802
Standard Pack	1EA
Minimum Order	1
Country of Origin	TH
Hazmat	No

## Memphis Glove Economy Dipped PVC Gloves: 127-6218



 [view larger photo](#)

- Fully coated PVC glove protects against liquids and chemicals
- Generously sized to protect hands and wrists
- Interlock lining



**MEMPHIS  
GLOVES**


An MCR Safety Brand

<b>Size Group</b>	One Size Fits All
<b>Material</b>	PVC
<b>Lining</b>	Interlock
<b>Style</b>	Single Dipped, Smooth Finish
<b>Cuff Style</b>	Gauntlet
<b>Color</b>	Black
<b>Resistance</b>	Acid, Caustics, Chemicals, Grease, Oil, Solvent
<b>Wt.</b>	0.68 lb
<b>UPC</b>	045143062188
<b>UNSPSC</b>	46181504
<b>Standard Pack</b>	12PR/DOZ
<b>Minimum Order</b>	12
<b>Country of Origin</b>	CN
<b>Hazmat</b>	No

## Fox Mfg Babbin Bilge Pumps: 303-B48

FOX MANUFACTURING

20





 [view larger photo](#)

- Easy to use--just submerge in liquid, pump a few times to prime and then keep pumping until you're done
- No rubber seals or gaskets that can dry rot or get eaten by chemicals or solvents
- Uses an all steel dual flap valve system

Flow	13.00 gal/min
Inlet Size	1 1/2 in
Length	48 in
Nozzle Type	9 1/2 in
Wt.	2 lb
Rod Material	Steel
UPC	
UNSPSC	
Standard Pack	10EA/CS
Minimum Order	1
Country of Origin	US
Hazmat	No

## Ames True Temper® Pick Mattocks: 027-1195000



 [view larger photo](#)

### Pick Mattock w/Handles

- Perfect for digging or breaking up compacted ground


Head Weight	5 lb
Eye No.	6
Handle Length	36 in
Handle Type	Straight w/Handle Guard
Material	Forged Steel
Handle Material	Hickory
Type	Pick Mattock
Wt.	8 lb
UPC	049206119505
UNSPSC	27112000
Standard Pack	4EA/CTN
Minimum Order	1
Country of Origin	US
Hazmat	No

21


## Jackson V30 NEMESIS\* Safety Eyewear: 138-25688

**JACKSON**  
SAFETY

V30 Nemesis Safety Eyewear, Black  
Frame, Smoke Mirror Lens, Scratch  
Resistant

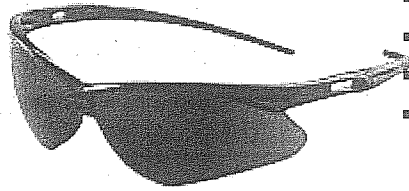

- Base Curve 8
- Single-lens wraparound protection
- Soft-touch temples for added comfort
- Sporty, flexible, lightweight design


 [view larger photo](#)


Testing and Approvals:  
ANSI Z87.1+ 2010

Frame Color	Black
Temple Color	Black
Lens Tint	Smoke-Mirror
Lens Coating/Shade	Anti-Scratch
Frame Material	Nylon
Lens Material	Polycarbonate
Resistance	99.9% UV, Scratch
Includes	Neck Cord
Wt.	0.10 lb
UPC	761445198065
UNSPSC	46181802
Standard Pack	12PR/BOX
Minimum Order	1
Country of Origin	TW
Hazmat	No



## Norton Coated Handy Rolls: 547-66261126299

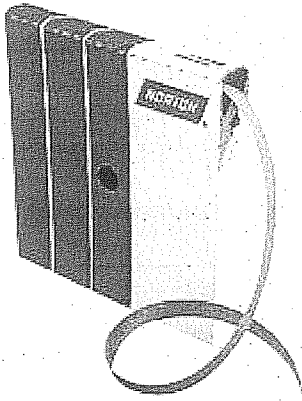

 [view larger photo](#)


- Aluminum Oxide
- Extreme resistance to loading when removing scale, rust and corrosion




<b>Abrasive Trade Name</b>	K225
<b>Width</b>	2 in
<b>Grit</b>	80
<b>Abrasive Material</b>	Aluminum Oxide
<b>Body Material</b>	Cloth
<b>Applicable Materials</b>	Most Metals
<b>Type</b>	Roll
<b>Quantity</b>	1 per pack
<b>Wt.</b>	4.02 lb
<b>UPC</b>	662611262996
<b>UNSPSC</b>	31191500
<b>Standard Pack</b>	10ROL/CTN
<b>Minimum Order</b>	1
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

23

## Norton Coated Handy Rolls: 547-66261126294

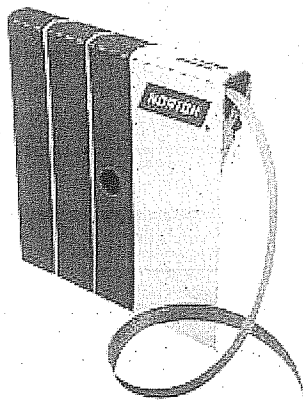

 [view larger photo](#)

- Aluminum Oxide
- Extreme resistance to loading when removing scale, rust and corrosion



24

<b>Abrasive Trade Name</b>	K225
<b>Width</b>	2 in
<b>Grit</b>	220
<b>Abrasive Material</b>	Aluminum Oxide
<b>Body Material</b>	Cloth
<b>Applicable Materials</b>	Most Metals
<b>Type</b>	Roll
<b>Quantity</b>	1 per pack
<b>Wt.</b>	2.60 lb
<b>UPC</b>	662611262941
<b>UNSPSC</b>	31191500
<b>Standard Pack</b>	10ROL/CTN
<b>Minimum Order</b>	1
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

## DeWalt® Diamond Edge Chop Saw Blades: 115-DW8500



[view larger photo](#)

- Advanced Brazing Technology cuts metal with the speed of a conventional abrasive blade
- Diamond Edge provides 100x the life vs standard DeWalt chop saw wheel



Blade Diam	14 in
Dia.	14 in
Arbor Diam	1 in
UPC	591122062026
UNSPSC	
Standard Pack	1EA
Minimum Order	1
Country of Origin	
Hazmat	No

25

## Suzie Migliore

---

**Subject:**

FW: Jefferson Parish

**Attachments:**

Filling material is staple set in foam plastic block. The 10 inch blocks have one threaded and one tapered handle hole.

THESE BRUSHES ARE ACID-RESISTANT.

Although these high-quality brushes are recommended for use on all types of vehicles, some finishes may be more susceptible to scratching than others; always test in an inconspicuous area before use.

Will accommodate flo-thru handle.

Length of Trim: 2½ inches


Doz. Wt. Each Price Doz. Price

No. 1411 Silv. Flag. Polysty. 16 lbs. \_\_\_\_\_

No. 1411-G Grn. Flag. Polysty. 16 lbs. \_\_\_\_\_

No. 1411-GB Grn. Flag. Polysty. With bumper. 16 lbs. \_\_\_\_\_

**MB1411GB comes with the protective bumper which is not pictured.**

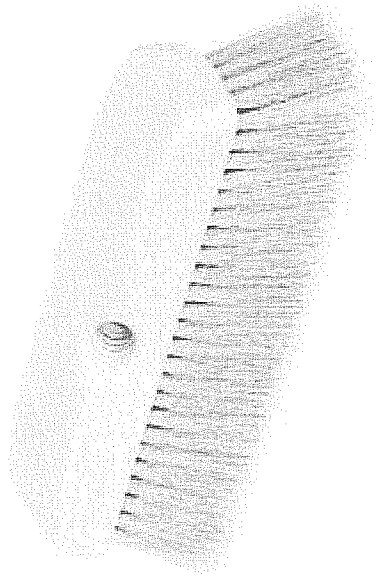

#26

#27

# DeltaDust® Insecticide

- PROVIDES QUICK CONTROL OF ANTS, BEES, COCKROACHES, FLEAS, SILVERFISH, TICKS, AND NUMEROUS STORED PRODUCT PESTS.
- KILLS CRAWLING INSECTS UP TO 8 MONTHS WHEN LEFT UNDISTURBED.
- FOR USE INDOORS AND OUTDOORS.
- DOES NOT CLUMP OR ABSORB MOISTURE.
- NON-STAINING AND ODORLESS.

## ACTIVE INGREDIENT:

Deltamethrin ..... 0.05%

OTHER INGREDIENTS ..... 99.95%

TOTAL ..... 100.0%

EPA Reg. No. 432-772

EPA Est. No. 432-TX-1

**PRECAUCION AL USARIO:** Si usted no lee ingles, no use este producto hasta que la etiqueta le haya sido explicado ampliamente. (TO THE USER: IF you cannot read English, do not use this product until the label has been fully explained to you.)

## KEEP OUT OF REACH OF CHILDREN CAUTION

### FIRST AID

#### IF ON SKIN:

Wash with plenty of soap and water. Get medical attention if irritation persists.

In case of medical emergencies or health and safety inquiries or in case of fire, leaking or damage containers, call 1-800-334-7577.

For product information Call Toll-Free: 1-800-331-2867



Produced for:

**Bayer Environmental Science**

A Business Group of Bayer CropScience LP

2 T. W. Alexander Drive

Research Triangle Park, NC 27709

**NET CONTENTS**

**1 lb**

4191071

4494104 050429A

Contains

**DeltaGard®**  
Insecticide

**BACKED**  
by **BAYER™**

## PRECAUTIONARY STATEMENTS

### Hazards To Humans & Domestic Animals

#### CAUTION

May be harmful if absorbed through skin. Avoid contact with skin, eyes or clothing. Wash thoroughly with soap and water after handling.

#### Environmental Hazards

This product is extremely toxic to fish and aquatic invertebrates. Do not apply directly to water, to areas where surface water is present or to intertidal areas below the mean high water mark. Use with care when applying in areas adjacent to any body of water. Do not contaminate water when disposing of equipment washwater.

## DIRECTIONS FOR USE

**It is a violation of Federal Law to use this product in a manner inconsistent with its labeling. IMPORTANT: Read the entire Directions for Use, Precautions and Disclaimer of Warranties before using this product.**

## STORAGE AND DISPOSAL

Do not contaminate water, feed or food by storage or disposal.

**Storage:** Store product in original container in a cool, dry, locked place out of reach of children.

**Pesticide Disposal:** Wastes resulting from the use of this product may be disposed of on site or at an approved waste disposal facility.

**Container Disposal:** Non-refillable container. Do not reuse or refill this container. Offer for recycling, if available. Puncture and dispose of in a sanitary landfill, or by other approved State and local procedures.

**Container Disposal:** (For Homeowner) Non-refillable container. Do not reuse or refill this container. Offer for recycling, if available. **If empty:** Place in trash or offer for recycling if available. **If partly filled:** Call your local solid waste agency for disposal instructions. Never place unused product down an indoor or outdoor drain.

Containers larger than one pound may not be used or stored in food handling establishments.

Not for use on plants being grown for sale or other commercial use, or for commercial seed production, or for research purposes. For use on plants intended for aesthetic purposes

or climatic modification and being grown in interior landscapes, ornamental gardens or parks, or on golf courses or lawns and grounds.

DeltaDust® is a ready-to-use insecticide dust which exhibits effective knockdown and residual control against the pests listed when used according to label directions.

DeltaDust can be used for residual pest control in and on buildings and structures and their immediate surroundings. Do not use in aircraft cabins. Permitted areas of use include but are not limited to:

- |  |  |
|--|--|
| * aircraft   | * mausoleums                             |
| * animal quarters/kennels  | * meat slaughtering and packing plants   |
| * apartment buildings  | * mobile homes and recreational vehicles |
| * bakeries   | * nursing homes/day care centers         |
| * breweries  | * rail cars                              |
| * buses  | * restaurants                            |
| * canneries  | * schools                                |
| * cafeterias   | * sewers and underground tunnels         |
| * dairies  | * stores and institutions                |
| * food/feed manufacturing, processing and service establishments | * supermarkets                           |
| * greenhouses (non-commercial)                                   | * telecommunication conduits             |
| * grocery stores and supermarkets                                | * theaters                               |
| * hospitals  | * trucks and trailers                    |
| * hotels/motels  | * utility vaults and conduits            |
| * houses   | * vessels                                |
| * industrial buildings and installations                         | * warehouses                             |
| * laboratories   | * zoos                                   |

DeltaDust is intended for applications with hand or power duster (Actisol® DPA or similar equipment), with a paint brush or by other suitable means, to hiding and runway areas and other places where insects are found.

In living areas, make applications in such a manner as to avoid depositions on exposed surfaces or introducing the material into the air. In the home, all food processing surfaces and utensils should be covered during treatment or thoroughly washed before use. Exposed food should be covered or removed.

To apply insecticide directly into cracks and crevices, use a bulbous duster or other suitable equipment. Apply lightly and uniformly to infested area. Pay particular attention to cracks and crevices; service ducts; false floors and ceilings; wall voids; around electrical and telephone fittings and equipment; around water and sewer pipes; under and behind cabinets, refrigerators and sinks; around windows and door frames; along baseboards; in attics and crawl spaces. The amount to be applied will vary with the site but should usually be in the range of 2 - 3 grams of DeltaDust per square yard (or 0.5 lbs per 1000 square feet).

## **INDOOR USE**

### **FOOD/FEED HANDLING ESTABLISHMENT APPLICATIONS**

DeltaDust applications are permitted in both food/feed and non-food areas of food/feed handling establishments as a general surface, spot, or crack and crevice treatment. Food/feed handling establishments are defined as places other than private residences in which exposed food/feed is held, processed, prepared or served. Included also are areas for receiving, storing, packing (canning, bottling, wrapping, boxing), preparing, edible waste storage and enclosed processing systems (mills, dairies, edible oils, syrups) of food. Serving areas where food is exposed and the facility is in operation are also considered food areas.

**Non-Food/Non-Feed Areas:** Examples of non-food/non-feed areas include garbage rooms, lavatories, floor drains (to sewers), entries and vestibules, offices, locker rooms, machine rooms, boiler rooms, mop closets and storage (after packaging, canning or bottling).

**General Surface Application:** Do not apply as a general surface application in the food/feed handling areas of the facility, when the facility is in operation or foods are exposed. Do not apply directly to food products. Cover or remove all food processing and/or handling equipment during application. After application in food processing plants, bakeries, cafeterias and similar facilities, wash all equipment, benches, shelving and other surfaces which food will contact. Clean food handling or processing equipment and thoroughly rinse with clean, fresh water.

**Spot, Crack and Crevice Application:** Spot and/or Crevice applications may be made while the facility is in operation provided exposed food is covered or removed from area being treated prior to application. Do not apply directly to



food or food handling surfaces.

DeltaDust may also be applied as a void treatment using suitable equipment, as mentioned above, including Actisol® DPA equipment.

Be sure to thoroughly treat service ducts, false floors and ceilings, wall voids, attics and crawl spaces. The amount of dust to be applied will vary with the site but should usually be in the range of 2 - 3 grams per square yard (or 0.5 lbs per 1000 square feet). Dust applications should be made in a manner to avoid deposits in exposed surfaces introducing the material in the air.

**ANTS, BOXELDER BUGS, COCKROACHES (INCLUDING BOTH RESISTANT AND NON-RESISTANT STRAINS), CRICKETS, FLEAS, FIREBRATS AND SILVERFISH:** Apply DeltaDust thoroughly to all areas where these pests crawl and hide, especially in those areas described above. For ants, apply to ant trails, around doors and windows and other places where ants enter premises.

**TERMITES, CARPENTER ANTS AND CARPENTER BEES:** Apply to voids or channels in damaged wooden members of a structure; to cracks, spaces or bearing joints between wooden members of a structure; or between such members and the foundation; and in locations vulnerable to termite attack. Drilling may be necessary prior to applying DeltaDust in these locations, but it must be recognized that such drilling and treating of timber in a particular location may not result in complete coverage of infested and vulnerable voids or galleries. Drilling directly overhead with subsequent application of DeltaDust should be avoided. DeltaDust can be applied in attics and crawl spaces to prevent entry of drywood and formosan termites at a rate of 0.5 lb per 1000 square feet of floor area. In these treatments, all vents and blowers should be closed. Inspect at 6 months and one year to insure that colony has been killed. Retreat if necessary. For subterranean termites the purpose of such applications of DeltaDust is to kill workers or winged forms which may be present in the treated channels at the time of treatment. Such applications are not a substitute for mechanical alteration, soil treatment or foundation treatment but merely a supplement. For active termite infestations get a professional termite inspection. Such applications are not a substitute for mechanical alteration, soil treatment or foundation treatment but merely a supplement. This supplemental treatment can be particularly supportive of new construction.

**CENTIPEDES, GROUND BEETLES, MILLIPEDES, SCORPIONS, SPIDERS AND SOWBUGS:** Apply DeltaDust along and behind baseboards, to window and door frames, corners, pipes, storage locations, attics, crawl spaces, and other areas which these pests may enter or crawl.

**WASPS AND BEES:** It is generally advisable to treat wasp and bee nests in the evening when insects are less active and have returned to the nest. Wear protective clothing if deemed necessary to avoid stings. Using hand or power duster (Actisol or similar equipment) or other suitable means, with extension tubes if necessary, thoroughly dust nest, entrance and surrounding areas where insects alight. Nests in wall voids can be located by listening with your ear against the wall. Drill a hole in the area, blow dust in and reseal. For ground wasps, dust entrance and surrounding areas. For best results check nests carefully one or two days after treatment to ensure complete kill, then remove and destroy nest to prevent emergence of newly-hatched insects. If removal is not feasible, retreat the nest, if necessary. Do not use this product to treat overhead nests.

**WEBBING CLOTHES MOTHS:** Use DeltaDust as a crack and crevice treatment in closets and other storage areas where these pests are found. This is an adjunct treatment and will not control moth larvae already on the clothes. DO NOT apply this product directly to clothing.

**CARPET BEETLES (BLACK, FURNITURE, COMMON AND VARIED):** Dust where these insects are found, for example: on and under edges of floor coverings, around baseboards, under rugs and furniture, and in closets. In residential areas do not apply as a broadcast application to floors or floor coverings.

**BEDBUGS:** Apply DeltaDust thoroughly to all areas where these pests are typically found including: folds and tufts of mattresses, coils of springs, cracks and hollow posts of bedframes, upholstery of chairs and sofas, picture frame moldings and all cracks and crevices in the room should be treated. Allow powder to remain in contact with folds and tufts of mattresses, chair and sofa upholstery for 4 - 6 hours, then thoroughly vacuum these treated areas, dispose of vacuum bag and place clean linens on bed. Also vacuum treated areas that will come into direct contact with humans and pets.

**STORED PANTRY & PRODUCT PESTS:** To aid in the control of the exposed stages of:

cadelles	merchant grain beetles
cheese mites	red flour beetles
cigarette beetles	rice weevils
confused flour beetles	rusty grain beetles
dark meal worms	saw-toothed grain beetles
dermestid	spider beetles
drugstore beetles	tobacco moths
grain mites	yellow meal worms
granary weevils	warehouse moths
lesser grain borers	indian meal
lesser mealworm	mediterranean flour

### **FOOD PROCESSING PESTS**

(Same crawling & flying pests as in pantry & stored product pests INDOOR) and Fruit flies, Phorid flies and Sciarid flies.

Clean up waste materials, dust, dirt and other debris. Thoroughly treat floors, walls and other surfaces in storage and handling areas. Apply dust in cracks and crevices, behind and under cupboards, and other difficult to reach areas where insects may hide. DO NOT apply directly on food/feed, utensils or on areas where food/feed is stored.

### **ORNAMENTAL PLANT PESTS**

For the control of:

aphids	Leafrollers
beet armyworms	orange tortrix
blister beetles	periodical cicada
boxelder bugs	plant bugs
certain leafminers (Boxwood, Holly, Oak, Spruce Needle)	rose chafer
	rose midges
	rose slugs
elm leaf beetle	tent caterpillars
flea beetles	Thrips
Japanese beetle	Weevils
leafhoppers	

**SHRUBS AND ORNAMENTALS:** Apply when insects or their damage first appear and repeat at weekly intervals or as necessary. Apply 8 ounces per 1000 square feet; or thoroughly apply to place a thin layer of dust on both upper and lower sides of leaves, stems and flowers.

**ROSES, PETUNIAS, CHRYSANTHEMUMS, GERANIUMS, CARNATIONS AND OTHER RELATED FLOWERS:** To control many leaf and flower chewing insects, apply as soon as the insect appears and repeat at 7 day intervals or as long as insects continue to appear. Apply a thin layer of dust on both upper and lower sides of leaves, stems and flowers.

## **OUTDOOR USE**

**PERIMETER TREATMENT:** Use DeltaDust as a residual treatment for control of **ants, bees, centipedes, cockroaches, crickets, firebrats, fleas, ground beetles, millipedes, scorpions, silverfish, slugs, sowbugs, spiders, ticks and wasps.** Make a residual treatment around windows and doors, porches, screens, eaves, patios, garages, under stairways, in crawl spaces and other areas where pests hide. To help prevent the invasion of buildings and structures by these pests, apply thoroughly and uniformly to the foundation and crawl spaces where pests are active and may find entrance.

**SEWER TREATMENT:** Cockroach infestations in sanitary sewers may be treated with DeltaDust to provide quick knockdown and short-term population suppression. When treating sewers, one manhole per 200 linear feet should be treated. Treatments are made by removing the manhole cover and replacing with a disc of plywood bored to receive the typical flexible hose from portable or truck-mounted ventilating equipment. Apply 1-2 ounces of dust into the ventilating air to be dispersed quickly and thoroughly through the system.

**TELECOMMUNICATION TREATMENT:** Apply DeltaDust into telecommunication conduits, cracks and crevices, junction boxes, etc. using suitable application equipment (such as Actisol DPA Duster, or other types of application equipment capable of applying the proper amount). The amount of DeltaDust to be applied will vary, but should usually be approximately 1 gram of dust per cubic foot of conduit. [To calculate cubic feet, use the following equation:  $(\pi \times \text{radius}^2 \times \text{length of the conduit})$ . NOTE: radius = one-half the diameter. Example: 500 linear feet of a 4" (12" = 1 foot; therefore, 0.33 ft) conduit =  $3.14 \times (0.17 \text{ ft} \times 0.17 \text{ ft}) \times 500 \text{ ft} = 45.39 \text{ cubic feet}$ ].

DeltaDust can be used in areas showing signs of active termite infestations, such as underground telecommunication cable conduits, electrical cable conduits, junction boxes and manholes. Apply dust through suitable application equipment (such as the Actisol DPA Duster, that is capable of delivering particles suspended in a low pressure air system). Applications should be made from both ends of a run of open conduit in cases where breakdown in the conduit is suspected. DeltaDust can also be applied directly to the interior of the conduits after cables have been installed. Apply at the rate of 1 gram of dust per cubic foot of conduit using equipment (i.e., Actisol DPA Duster) that is capable of delivering particles suspended in a low pressure air system.

**FIRE ANTS:** Apply dust with a shaker can. Thoroughly apply to adequately cover mound and around the perimeter (18" from the outer edge of the mound). A second treatment may be necessary if complete control is not obtained. DO NOT DISTURB THE MOUND PRIOR TO APPLICATION. If possible, treat all colonies in the vicinity. Also, treat colonies which have not yet constructed a mound.

**FLEAS AND TICKS IN RODENT BURROWS:** To control fleas and ticks in and around rodent burrows around homes and other buildings, apply DeltaDust with a shaker can. For prairie dogs thoroughly treat quarantine areas and holding areas as well as burrows in open fields. Thoroughly apply dust to adequately cover mound and around the perimeter (18" from the outer edge). Be sure to treat abandoned rodent burrows which are suspected of containing fleas and ticks. Treat for a minimum of 5 days for light rodent populations, 10 days when populations are dense. Apply as needed for control.

### **IMPORTANT: READ BEFORE USE**

Read the entire Directions for Use, Conditions, Disclaimer of Warranties and Limitations of Liability before using this product. If terms are not acceptable, return the unopened product container at once. By using this product, user or buyer accepts the following Conditions, Disclaimer of Warranties and Limitations of Liability.

**CONDITIONS:** The directions for use of this product are believed to be adequate and should be followed carefully. However, because of manner of use and other factors beyond Bayer CropScience LP's control, it is impossible for Bayer CropScience LP to eliminate all risks associated with the use of this product. As a result, crop injury or ineffec-

tiveness is always possible. All such risks shall be assumed by the user or buyer.

**DISCLAIMER OF WARRANTIES:** BAYER CROPSCIENCE LP MAKES NO OTHER WARRANTIES, EXPRESS OR IMPLIED, OF MERCHANTABILITY OR OF FITNESS FOR A PARTICULAR PURPOSE OR OTHERWISE, THAT EXTEND BEYOND THE STATEMENTS MADE ON THIS LABEL. No agent of Bayer CropScience LP is authorized to make any warranties beyond those contained herein or to modify the warranties contained herein. Bayer CropScience LP disclaims any liability whatsoever for special, incidental or consequential damages resulting from the use or handling of this product.

**LIMITATIONS OF LIABILITY:** THE EXCLUSIVE REMEDY OF THE USER OR BUYER FOR ANY AND ALL LOSSES, INJURIES OR DAMAGES RESULTING FROM THE USE OR HANDLING OF THIS PRODUCT, WHETHER IN CONTRACT, WARRANTY, TORT, NEGLIGENCE, STRICT LIABILITY OR OTHERWISE, SHALL NOT EXCEED THE PURCHASE PRICE PAID, OR AT BAYER CROPSCIENCE LP'S ELECTION, THE REPLACEMENT OF PRODUCT.


Actisol® is a registered trademark of William Evans.

Bayer (reg'd), the Bayer Cross (reg'd), DeltaDust®, DeltaGard® and Backed By Bayer™ are trademarks of Bayer.

## Goldblatt® Magnesium Hand Floats: 317-06450



[+ view larger photo](#)

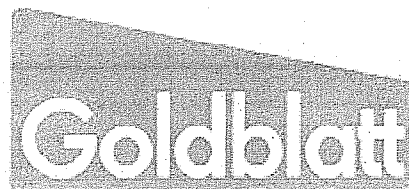


T O O L S

28

Professional Performance. Guaranteed.

<b>Blade Length</b>	16 in
<b>Blade Width</b>	3 1/2 in
<b>Blade Shape</b>	Round
<b>Blade Material</b>	Magnesium
<b>Handle Type</b>	D-Handle
<b>Handle Material</b>	Wood
<b>Applicable Materials</b>	Concrete
<b>Type</b>	Float Trowel
<b>Wt.</b>	1.38 lb
<b>UPC</b>	084389064501
<b>UNSPSC</b>	27112200
<b>Standard Pack</b>	1EA
<b>Minimum Order</b>	1
<b>Country of Origin</b>	CN
<b>Hazmat</b>	No

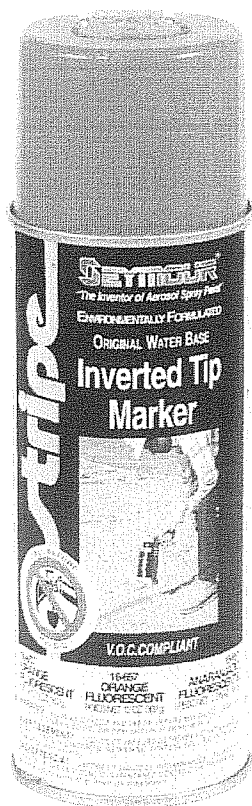**STRIPE WATER BASED INVERTED TIP MARKER**

A fast drying permanent marking paint applied in an inverted position that is lead free and V.O.C. compliant. May be actuated by hand or may be used with the #Z-606 Marking Wand or #Z-605 Marking Gun. While it has a water base formulation, it will not wash away.

**Suggested Uses:**

Utility marking;  
Golf courses  
Landscaping  
Construction sites  
Surveying  
Mining

**Benefits:**

Non-clogging  
Safe on grass  
Fast dry  
Produces vivid lines  
Meets APWA standard colors  
V.O.C. Compliant  
Converta-Cap allows  
spraying without removing cap

**Packaging:**

Cans per case	12
Shipping weight per case	16 ounce cans: 15 lbs., 20 ounce cans: 20 lbs.
Container	16 fluid ounce can, 20 fluid ounce can
Label weight	13 ounces (369 grams), 17 ounces (482 grams)
Hazard Class	2.1
Shipping Classification	Consumer Commodity ORM-D, UN 1950

**Properties:**

Flammability	"Flammable"
Flash point	-4F
Specific Gravity	0.83
Solids Content	~26%
VOC content	~52%, cannot exceed 66%
MIR value	~0.62, cannot exceed 1.20
HAPs content	0
Storage Temperature	40-100F
Application Temperature	50-90F
Durability	Good
Abrasion Resistance	Good
Resin System	V.T. Alkyd
Shelf life	Guaranteed for 2 years
Freeze/Thaw	Up to 7 times without harm

**\*\*Do not warehouse in subfreezing temperatures\*\***

**Dry Time\*:**

To touch 15 minutes

\*At 72° F, 50% humidity,  
1.5 mil thickness

**\*\*Curing/Recoat time is extended with  
multiple coats and excessively thick coats\*\***

**Gloss\*:** Flat, <15

\*as measured on a 60° gloss meter


Part #	Description	UPC Code	Part #	Description	UPC Code
16-652	White	043281000819	20-652	White	043281001915
16-653	Precaution Blue	043281000826	20-653	Precaution Blue	043281001922
16-654	Fluorescent Red	043281000833	20-654	Fluorescent Red	043281001939
16-655	Safety Green	043281000840	20-655	Safety Green	043281004640
16-657	Fluorescent Orange	043281000857	20-657	Fluorescent Orange	043281001946
16-658	Fluorescent Red/Orange	043281000864	20-658	Fluorescent Red/Orange	043281001953
16-659	Light Blue	043281000871	20-659	Black	043281001960
16-668	Fluorescent Green	043281000888	20-668	Fluorescent Green	043281001977
16-669	Fluorescent Blue	043281000895	20-669	Fluorescent Blue	043281001984
16-670	Alert Orange	043281000901	20-670	Alert Orange	043281001991
16-671	Safety Red	043281000918	20-671	Safety Red	043281002004
16-676	Hi Visibility Yellow	043281000925	20-676	Hi Visibility Yellow	043281001434
16-677	Caution Yellow	043281000932	20-678	Caution Yellow	043281002011
16-679	Fluorescent Hot Pink	043281000949	20-679	Fluorescent Hot Pink	043281002028
			20-680	Purple	043281002035



## Peerless Screw Pin Anchor Shackles: 005-8058905



- Embossed with load rating
- Working load limit must not be exceeded

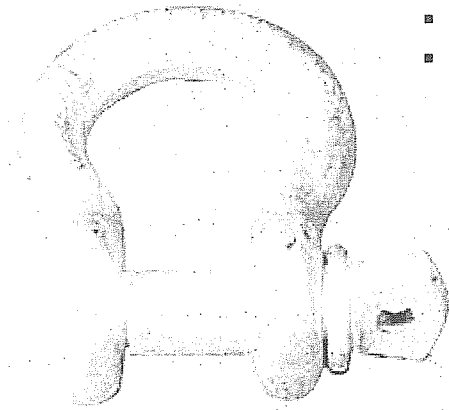


[view larger photo](#)


Bail Size	1 in
Working Load Limit	17000 lb
Opening Size	1 11/16 in
Material	Forged Steel
Finish	Hot Galvanized
Locking Type	Threaded Pin
Type	Screw Pin Shackle
Wt.	5.07 lb
UPC	042228079154
UNSPSC	31162803
Standard Pack	10EA/CTN
Minimum Order	10
Country of Origin	US
Hazmat	No

31

## Dixon Valve HSS Series Worm Gear Clamps: 238-HSS52

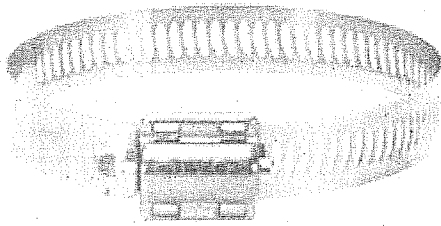

 [view larger photo](#)

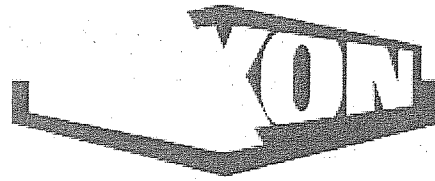

*The Right Connection*


### Testing and Approvals:

SAE


<b>Hose O.D.</b>	2 13/16 in [Min], 3 3/4 in [Max]
<b>Bolt/Screw Size</b>	5/16 in
<b>Bolt/Screw Type</b>	Hex Head
<b>Bolt/Screw Material</b>	Stainless Steel 305
<b>Material</b>	Stainless Steel 300
<b>Torque</b>	30.00 in lb [Max]
<b>Locking Type</b>	Worm Drive Buckle-Grooved Band
<b>Type</b>	Band & Worm Drive Buckle
<b>Quantity</b>	10 per box
<b>Wt.</b>	0.01 lb
<b>UPC</b>	
<b>UNSPSC</b>	31162906
<b>Standard Pack</b>	10EA/BOX
<b>Minimum Order</b>	10
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

32

## Dixon Valve HSS Series Worm Gear Clamps: 238-HSS80

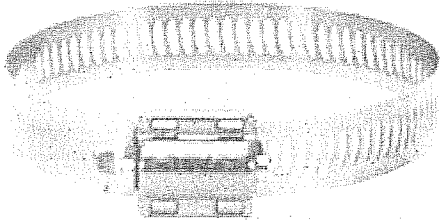

 [view larger photo](#)

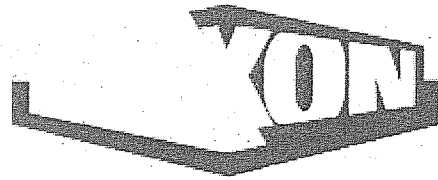


33


*The Right Connection*


Testing and Approvals:  
SAE

<b>Hose O.D.</b>	2 1/2 in [Min], 5 1/2 in [Max]
<b>Bolt/Screw Size</b>	5/16 in
<b>Bolt/Screw Type</b>	Hex Head
<b>Bolt/Screw Material</b>	Stainless Steel 305
<b>Material</b>	Stainless Steel 300
<b>Torque</b>	30.00 in lb [Max]
<b>Locking Type</b>	Worm Drive Buckle-Grooved Band
<b>Type</b>	Band & Worm Drive Buckle
<b>Quantity</b>	10 per box
<b>Wt.</b>	0.03 lb
<b>UPC</b>	
<b>UNSPSC</b>	31162906
<b>Standard Pack</b>	10EA/BOX
<b>Minimum Order</b>	10
<b>Country of Origin</b>	US
<b>Hazmat</b>	No

## Dixon Valve HSS Series Worm Gear Clamps: 238-HSS104

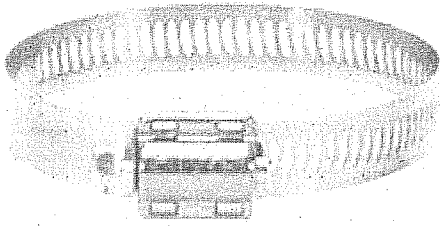

 [view larger photo](#)

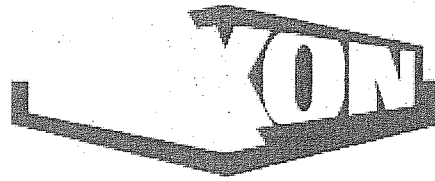

34

*The Right Connection*

<b>Hose O.D.</b>	4 1/8 in [Min], 7 in [Max]
<b>Bolt/Screw Size</b>	5/16 in
<b>Bolt/Screw Type</b>	Hex Head
<b>Bolt/Screw Material</b>	Stainless Steel 305
<b>Material</b>	Stainless Steel 300
<b>Torque</b>	30.00 in lb [Max]
<b>Locking Type</b>	Worm Drive Buckle-Grooved Band
<b>Type</b>	Band & Worm Drive Buckle
<b>Quantity</b>	10 per box
<b>Wt.</b>	0.01 lb
<b>UPC</b>	
<b>UNSPSC</b>	31162906
<b>Standard Pack</b>	10EA/BOX
<b>Minimum Order</b>	10
<b>Country of Origin</b>	US
<b>Hazmat</b>	No



# BOSS<sup>®</sup> PRODUCTS



## TECHNICAL DATA SHEET

# BOSS<sup>®</sup> 333 Polyurethane Expanding Foam

### TYPICAL PROPERTIES

ASTM D-1622

Density ..... 1.25 lbs./ft<sup>3</sup>

IN HOUSE METHOD

Yield/24 Oz. Can ..... 41.6 liters freely foamed

ASTM C-518

Thermal Conductivity ..... 0.22 - 0.26 Btu-in/hr-F-ft<sup>2</sup>

ASTM C-518

R Value ..... 3.8 - 4.5 hr-F-ft<sup>2</sup>/Btu

Tack Free (1" bead)..... 10 minutes (73°F & 50% RH)

Can Be Cut (1" bead) ..... 90 minutes (73°F & 50% RH)

Fully Cured (1" bead)..... 24 hours (73°F & 50% RH)

ASTM E-84-04 UL 723

Fire Testing ..... Flame Spread-10, Smoke Developed-30

DIN 53429

Water Absorption ..... 1%

Service Temperature ..... -40°F - 200°F

Application Temperature..... 40°F - 115°F

\*Information on this data sheet is subject to change without notice  
and should not be used for writing specifications.  
For additional information on specific applications, contact Accumetric, LLC



### DESCRIPTION


**BOSS<sup>®</sup> 333** is a ready-to-use, multi-purpose, polyurethane foam that expands to three times its original volume on contact with air. The expanding action fills holes, cracks and gaps more completely than standard caulks. **BOSS<sup>®</sup> 333** has excellent insulating properties and superb adhesion to virtually all building materials.

### USES

- Air sealing
- Partition walls with ceilings
- Through penetrations around cables and pipes
- Seams between chimneys, roof protection, roof panels and wall panels

### FEATURES

- Meets CA-25-4
- UL Classified, Tested to ASTM E-84
- Triple Expanding
- Weatherproofs against wind and moisture
- Fills gaps, cracks and holes
- Seals out insects and pests
- Can be sanded, painted and stained
- Complies with EPA Method 24 and California Air Resource Board Method 310
- VOC Compliant

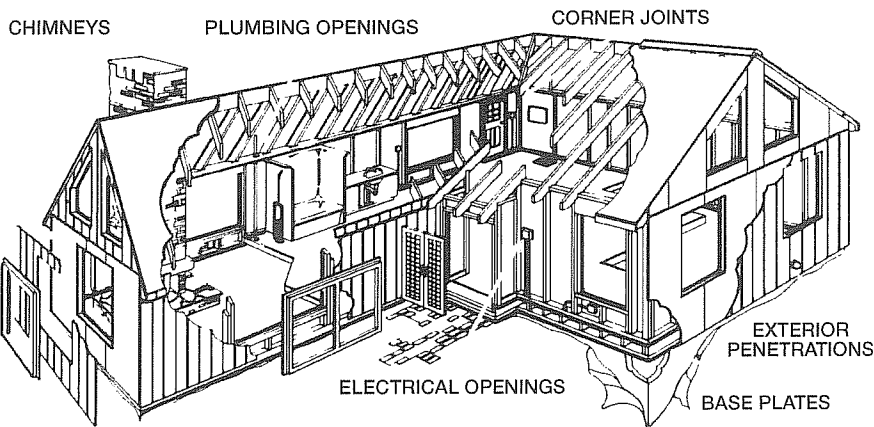

## HOW TO USE

Shake can before and during use. Surfaces must be clean and free of grease and oil. Can must be held **UPSIDE DOWN** during application. Insert straw into void and depress the trigger. Fill void 50% full to allow for expansion. For best results, use in temperatures between 60°F to 90°F and spray mist into cavity prior to applying foam.

## DANGER!

**EXTREMELY FLAMMABLE. CONTENTS UNDER PRESSURE.** Turn off all pilot lights, electrical igniters, burners and other sources of ignition or heat during use. Do not smoke, use matches or lighters while dispensing foam. Do not expose to direct sunlight, high heat or store in enclosed vehicle. Avoid breathing vapor/spray. Use in adequately ventilated areas with appropriate breathing apparatus. Avoid contact with skin and eyes. Wearing eyewear and gloves is recommended. Do not incinerate or puncture can. Store at temperatures below 120°F.

**EYE IRRITANT.** May irritate or cause allergic reaction to skin. Inhalation of vapor may result in respiratory allergies including asthma. Persons with known isocyanate allergies should avoid any skin or respiratory contact with product ingredients. Use with adequate ventilation or suitable respiratory protective equipment. Wear protective clothing to avoid skin contact. Wear eye protection.

**FIRST AID:** **Inhalation** - move immediately to fresh air. **Eye contact** - flush eyes immediately for 15 minutes. **Skin contact** - wash affected area immediately with plenty of soap and water. Get medical assistance in all cases (show label when possible).

For further health and safety information consult the current Material Safety Data Sheet available from **BOSS® Products** at 800-928-2677.

### KEEP OUT OF REACH OF CHILDREN.

**CONTAINS:** Diphenylmethanediisocyanate, Polyol and Butane/Propane.

## CLEAN UP

Uncured sealant can be easily removed using BOSS® 335 or a solvent such as alcohol or acetone. For an environmental and health friendlier choice use BOSS® Biggie Wipes. If the sealant is cured it must be removed mechanically by cutting and scraping.

## SPECIFICATIONS

**BOSS® 333** Polyurethane Expanding Foam meets CA-25-4, complies with EPA Method 24 and California Air Resource Board Method 310 and is UL Classified.

## STORAGE AND SHELF LIFE

When stored in the original unopened containers at or below 90°F (32°C), **BOSS® 333** has a shelf life of 12 months from date of shipment. In Countries where high heat and humidity are a factor, special precautions must be taken. Store product in a covered, well-ventilated warehouse and avoid excessive heat conditions. Storage in high heat, high humidity conditions may reduce shelf life by up to 30%. Rotation of stock is an absolute necessity. Cartons should always be stacked upright with the nozzle tip pointed upwards. **DO NOT** stack cartons on their side. **NEVER** stack cartons more than 8 high. **DO NOT** store within 1 meter (4 feet) of roofline of the warehouse or storage building.

## PACKAGING

**BOSS® 333** Polyurethane Expanding Foam is available in 12 oz. and 24 oz. cans.

## SHIPPING LIMITATIONS

Ground shipments only. Cannot ship by air. Reactive VOC 155 g/l (15% wt)

## USERS PLEASE READ

The information and data contained herein is believed to be accurate and reliable; however, it is the user's responsibility to determine suitability of use. Since the supplier cannot know all the uses, or the conditions of use to which these products may be exposed, no warranties concerning the fitness or suitability for a particular use or purpose are made.

It is the user's responsibility to thoroughly test any proposed use of our products and independently conclude satisfactory performance in the application.

Likewise, if the application, product specifications or manner in which our products are used requires government approval or clearance, it is the sole responsibility of the user to obtain sure authorization.

**Non-warranty:** Because the storage, handling and application of the material is beyond Accumetric's control, we can accept no liability for the results obtained. Accumetric's sole limited warranty is the product meets the manufacturing specifications in effect at time of shipment. There is no warranty of merchantability or fitness for use, nor any other express or implied warranty. Accumetric will not be liable for incidental or consequential damages of any kind. The exclusive remedy for breach of such limited warranty is a refund of purchase price or replacement of any product shown to be other than as warranted. Suggestions of uses should not be taken as inducements to infringe any patents.

MADE IN U.S.A.

## BOSS® PRODUCTS

Accumetric, LLC®  
350 Ring Road  
Elizabethtown,  
Kentucky 42701 USA  
800-928-BOSS(2677)  
TEL (270)769-3385  
FAX (270)765-2412  
Outside U.S.  
TEL +1(270)769-3385  
FAX +1(270)765-2412

Accumetric Asia Pacific, LTD  
18 Kitpanit Bldg. 5th Floor  
#502 Patpong Road  
Suriyawong, Bangrak  
Bangkok, 10500 Thailand  
TEL (662)634-3060  
FAX (662)634-3066

[www.bossproducts.com](http://www.bossproducts.com)