

Sensus Limited Warranty

G-500 R20

I. General Product Coverage

Sensus USA Inc. ("Sensus") warrants its products and parts to be free from defects in material and workmanship for one (1) year from the date of Sensus shipment and as set forth below. All products are sold to customer ("Customer") pursuant to Sensus' Terms of Sale, available at: sensus.com/TC ("Terms of Sale").

II. SR II® and accuSTREAM™ 5/8", 3/4" & 1" Meters...

are warranted to perform to AWWA New Meter Accuracy Standards for five (5) years from the date of Sensus shipment or until the registration shown below, whichever occurs first. Sensus further warrants that the SR II meter will perform to at least AWWA Repaired Meter Accuracy Standards for fifteen (15) years from the date of Sensus shipment or until the registration shown below, whichever occurs first:

	New Meter Accuracy	Repair Meter Accuracy
5/8" SR II Meter and accuSTREAM Meter	500,000 gallons	1,500,000 gallons
3/4" SR II Meter and accuSTREAM Meter	750,000 gallons	2,250,000 gallons
1" SR II Meter and accuSTREAM Meter	1,000,000 gallons	3,000,000 gallons

III. SR® 5/8", 3/4" & 1" Meters...

are warranted to perform to AWWA New Meter Accuracy Standards for one (1) year from the date of Sensus shipment. Sensus further warrants that the 5/8", 3/4" and 1" SR meter will perform to at least AWWA Repaired Meter Accuracy Standards for fifteen (15) years from the date of Sensus shipment or until the registration shown below, whichever occurs first:

	Repair Meter Accuracy
5/8" SR Meter	1,500,000 gallons
3/4" SR Meter	2,250,000 gallons
1" SR Meter	3,000,000 gallons

IV. SR 1-1/2" & 2"...

are warranted to perform to AWWA New Meter Accuracy Standards for one (1) year from the date of Sensus shipment. Sensus further warrants that the 1-1/2" and 2" SR meter will perform to at least AWWA Repaired Meter Accuracy Standards for ten (10) years from the date of Sensus shipment or until the registration shown below, whichever occurs first:

	Repair Meter Accuracy
1-1/2" SR	5,000,000 gallons
2" SR	8,000,000 gallons

V. PMM® 5/8", 3/4", 1" Meters...

are warranted to perform to AWWA New Meter Accuracy Standards for one (1) year from the date of Sensus shipment. Sensus further warrants that the 5/8", 3/4", and 1" PMM meter will perform to at least AWWA Repaired Meter Accuracy Standards for fifteen (15) years from the date of Sensus shipment or until the registration shown below, whichever occurs first:

	Repair Meter Accuracy
5/8" PMM	1,500,000 gallons
3/4" PMM	2,000,000 gallons
1" PMM	3,000,000 gallons

VI. PMM 1-1/2", 2" Meters...

are warranted to perform to AWWA New Meter Accuracy Standards for one (1) year from the date of Sensus shipment. Sensus further warrants that the 1-1/2", and 2" PMM meter will perform to at least AWWA Repaired Meter Accuracy Standards for ten (10) years from the date of Sensus shipment or until the registration shown below, whichever occurs first:

	Repair Meter Accuracy
1-1/2" PMM	5,000,000 gallons
2" PMM	8,000,000 gallons

VII. iPERL™ Water Management Systems...

that register water flow are warranted to perform to the accuracy levels set forth in the iPERL Water Management System Data Sheet available at sensus.com/iPerl/datasheet or by request from 1-800-METER-IT, for twenty (20) years from the date of Sensus shipment. The iPERL System warranty does not include the external housing.

VIII. Maincase...

of the SR, SR II and PMM in both standard and low lead alloy meters are warranted to be free from defects in material and workmanship for twenty-five (25) years from the date of Sensus shipment. Composite and E-coated maincases will be free from defects in material and workmanship for fifteen (15) years from the date of Sensus shipment.

IX. Sensus "W" Series Turbo Meters, OMNI™ Meters and Propeller Meters...

are warranted to perform to AWWA New Meter Accuracy Standards for one (1) year from the date of Sensus shipment.

X. Sensus accuMAG™ Meters...

are warranted to be free from defects in material and workmanship, under normal use and service, for 18 months from the date of Sensus shipment or 12 months from startup, whichever occurs first.

XI. Sensus Registers...

are warranted to be free from defects in material and workmanship from the date of Sensus shipment for the periods stated below or until the applicable registration for AWWA Repaired Meter Accuracy Standards, as set forth above, are surpassed, whichever occurs first:

5/8" thru 2" SR, SR II, PMM, accuSTREAM Standard Registers	25 years
5/8" thru 2" SR, SR II, PMM, accuSTREAM Encoder Registers	10 years
Electronic Communication Index (ECI)	10 years
All HSPU, IMP Contactor, R.E.R. Elec. ROFI	1 year
Standard and Encoder Registers for "W" Turbo and Propeller Meters	1 year
OMNI Register with Battery	10 years

XII. Sensus Electric Meters...

are warranted to be free from defects in material and workmanship for one (1) year from the date of Sensus shipment. Spare parts and components are warranted to be free from defects in material and workmanship for one (1) year from the date of Sensus shipment.

Repaired or refurbished equipment repaired by Sensus is warranted to be free from defects in material and workmanship for ninety (90) days from the date of Sensus shipment or for the time remaining on the original warranty period, whichever is longer.

XIII. Batteries, iPERL System Components, AMR and FlexNet™ System AMI Interface Devices...

are warranted to be free from defects in material and workmanship from the date of Sensus shipment for the period stated below:

Electronic TouchPad	10 years
RadioRead® MXU (Model 505C, 510R or 520R) and Batteries	20 years*
Act-Pak® Instrumentation	1 year
TouchRead® Coupler and AMR Equipment	1 year
FlexNet Water or Gas SmartPoint™ Modules and Batteries	20 years*
Hand Held Device	1 year
Vehicle Gateway Base Station	1 year
FlexNet Base Station (including the Metro and M400 base stations)	1 year
Echo Transceiver	1 year
Remote Transceiver	1 year
iConA and FlexNet Electricity SmartPoint Module	1 year
iPERL System Battery and iPERL System Components	20 years*
Residential Electronic Register	20 years*

* Sensus will repair or replace non-performing:

- RadioRead® MXU (Model 505C, 510R and 520R) and Batteries,
- FlexNet Water or Gas SmartPoint Modules (configured to the factory setting of six transmissions per day under normal system operation of up to one demand read to each SmartPoint Module per month and up to two firmware downloads during the life of the product) and batteries,
- Residential Electronic Register with hourly reads, and
- iPERL System Batteries, and/or the iPERL System flowtube, the flow sensing and data processing assemblies, and the register ("iPERL System Components") with hourly reads

at no cost for the first ten (10) years from the date of Sensus shipment, and for the remaining ten (10) years, at a prorated percentage, applied towards the published list prices in effect for the year product is accepted by Sensus under warranty conditions according to the following schedule:

Years	Replacement Price	Years	Replacement Price
1 – 10	0%	16	55%
11	30%	17	60%
12	35%	18	65%
13	40%	19	70%
14	45%	20	75%
15	50%	>20	100%

Note: Software supplied and licensed by Sensus is warranted according to the terms of the applicable software license agreement. Sensus warrants that network and monitoring services shall be performed in a professional and workmanlike manner.

XIV. Return...

Sensus' obligation, and Customer's exclusive remedy, under this Sensus Limited Warranty is, at Sensus' option, to either (i) repair or replace the product, provided the Customer (a) returns the product to the location designated by Sensus within the warranty period; and (b) prepaies the freight costs both to and from such location; or (ii) deliver replacement components to the Customer, provided the Customer installs, at its cost, such components in or on the product (as instructed by Sensus), provided, that if Sensus requests, the Customer (a) returns the product to the location designated by Sensus within the warranty period; and (b) prepaies the freight costs both to and from such location. In all cases, if Customer does not return the product within the time period designated by Sensus, Sensus will invoice, and Customer will pay within thirty days of the invoice date, for the cost of the replacement product and/or components.

The return of products for warranty claims must follow Sensus' Returned Materials Authorization (RMA) procedures. Water meter returns must include documentation of the

Customer's test results. Test results must be obtained according to AWWA standards and must specify the meter serial number. The test results will not be valid if the meter is found to contain foreign materials. If Customer chooses not to test a Sensus water meter prior to returning it to Sensus, Sensus will repair or replace the meter, at Sensus' option, after the meter has been tested by Sensus. The Customer will be charged Sensus' then current testing fee. Sensus SmartPoints modules and MXU's returned must be affixed with a completed return evaluation label. For all returns, Sensus reserves the right to request meter reading records by serial number to validate warranty claims.

For products that have become discontinued or obsolete ("Obsolete Product"), Sensus may, at its discretion, replace such Obsolete Product with a different product model ("New Product"), provided that the New Product has substantially similar features as the Obsolete Product. The New Product shall be warranted as set forth in this Sensus Limited Warranty.

THIS SECTION XIV SETS FORTH CUSTOMER'S SOLE REMEDY FOR THE FAILURE OF THE PRODUCTS, SERVICES OR LICENSED SOFTWARE TO CONFORM TO THEIR RESPECTIVE WARRANTIES.

XV. Warranty Exceptions and No Implied Warranties...

This Sensus Limited Warranty does not include costs for removal or installation of products, or costs for replacement labor or materials, which are the responsibility of the Customer. The warranties in this Sensus Limited Warranty do not apply to goods that have been: installed improperly or in non-recommended installations; installed to a socket that is not functional, or is not in safe operating condition, or is damaged, or is in need of repair; tampered with; modified or repaired with parts or assemblies not certified in writing by Sensus, including without limitation, communication parts and assemblies; improperly modified or repaired (including as a result of modifications required by Sensus); converted; altered; damaged; read by equipment not approved by Sensus; for water meters, used with substances other than water, used with non-potable water, or used with water that contains dirt, debris, deposits, or other impurities; subjected to misuse, improper storage, improper care, improper maintenance, or improper periodic testing (collectively, "Exceptions"). If Sensus identifies any Exceptions during examination, troubleshooting or performing any type of support on behalf of Customer, then Customer shall pay for and/or reimburse Sensus for all expenses incurred by Sensus in examining, troubleshooting, performing support activities, repairing or replacing any Equipment that satisfies any of the Exceptions defined above. The above warranties do not apply in the event of Force Majeure, as defined in the Terms of Sale.

THE WARRANTIES SET FORTH IN THIS SENSUS LIMITED WARRANTY ARE THE ONLY WARRANTIES GIVEN WITH RESPECT TO THE GOODS, SOFTWARE LICENSES AND SERVICES SOLD OR OTHERWISE PROVIDED BY SENSUS. SENSUS EXPRESSLY DISCLAIMS ANY AND ALL OTHER REPRESENTATIONS, WARRANTIES, CONDITIONS, EXPRESSED, IMPLIED, STATUTORY OR OTHERWISE, REGARDING ANY MATTER IN CONNECTION WITH THIS SENSUS LIMITED WARRANTY OR WITH THE TERMS OF SALE, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE, MERCHANTABILITY, NON-INFRINGEMENT AND TITLE.

SENSUS ASSUMES NO LIABILITY FOR COSTS OR EXPENSES ASSOCIATED WITH LOST REVENUE OR WITH THE REMOVAL OR INSTALLATION OF EQUIPMENT. THE FOREGOING REMEDIES ARE CUSTOMER'S SOLE AND EXCLUSIVE REMEDIES FOR THE FAILURE OF EQUIPMENT, LICENSED SOFTWARE OR SERVICES TO CONFORM TO THEIR RESPECTIVE WARRANTIES.

XVI. Limitation of Liability...

SENSUS' AGGREGATE LIABILITY IN ANY AND ALL CAUSES OF ACTION ARISING UNDER, OUT OF OR IN RELATION TO THIS AGREEMENT, ITS NEGOTIATION, PERFORMANCE, BREACH OR TERMINATION (COLLECTIVELY "CAUSES OF ACTION") SHALL NOT EXCEED THE TOTAL AMOUNT PAID BY CUSTOMER TO SENSUS UNDER THIS AGREEMENT. THIS IS SO WHETHER THE CAUSES OF ACTION ARE IN TORT, INCLUDING, WITHOUT LIMITATION, NEGLIGENCE OR STRICT LIABILITY, IN CONTRACT, UNDER STATUTE OR OTHERWISE.

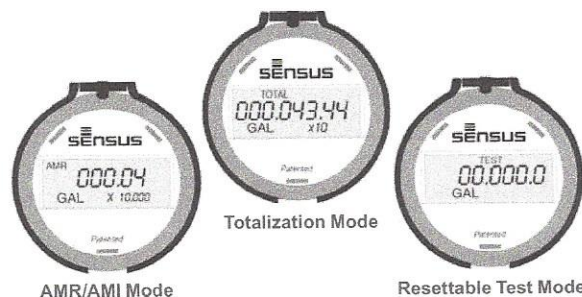

AS A SEPARATE AND INDEPENDENT LIMITATION ON LIABILITY, SENSUS' LIABILITY SHALL BE LIMITED TO DIRECT DAMAGES. SENSUS SHALL NOT BE LIABLE FOR: (I) ANY INDIRECT, INCIDENTAL, SPECIAL OR CONSEQUENTIAL DAMAGES; NOR (II) ANY REVENUE OR PROFITS LOST BY CUSTOMER OR ITS AFFILIATES FROM ANY END USER(S), IRRESPECTIVE OF WHETHER SUCH LOST REVENUE OR PROFITS IS CATEGORIZED AS DIRECT DAMAGES OR OTHERWISE; NOR (III) ANY IN/OUT COSTS; NOR (IV) MANUAL METER READ COSTS AND EXPENSES; NOR (V) DAMAGES ARISING FROM MAINCASE OR BOTTOM PLATE BREAKAGE CAUSED BY FREEZING TEMPERATURES, WATER HAMMER CONDITIONS, OR EXCESSIVE WATER PRESSURE. "IN/OUT COSTS" MEANS ANY COSTS AND EXPENSES INCURRED BY CUSTOMER IN TRANSPORTING GOODS BETWEEN ITS WAREHOUSE AND ITS END USER'S PREMISES AND ANY COSTS AND EXPENSES INCURRED BY CUSTOMER IN INSTALLING, UNINSTALLING AND REMOVING GOODS. "END USER" MEANS ANY END USER OF ELECTRICITY/WATER/GAS THAT PAYS CUSTOMER FOR THE CONSUMPTION OF ELECTRICITY/WATER/GAS, AS APPLICABLE.

The limitations on liability set forth in this Agreement are fundamental inducements to Sensus entering into this Agreement. They apply unconditionally and in all respects. They are to be interpreted broadly so as to give Sensus the maximum protection permitted under law.

To the maximum extent permitted by law, no Cause of Action may be instituted by Customer against Sensus more than TWELVE (12) MONTHS after the Cause of Action first arose. In the calculation of any damages in any Cause of Action, no damages incurred more than TWELVE (12) MONTHS prior to the filing of the Cause of Action shall be recoverable.

OMNI™ T²1-1/2", 2", 3", 4", 6", 8" and 10" OMNI T² Meter**Description****1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**

The OMNI T² meter operation is based on advanced Floating Ball Technology (FBT).

**Features****CONFORMANCE TO STANDARDS**

The OMNI T² meter meets and far exceeds the most recent revision of AWWA Standard C701 class II standards. Each meter is performance tested to ensure compliance. All OMNI meters are NSF/ANSI Standard 61, Annex F and G approved.

PERFORMANCE

The patented measurement principles of the OMNI T² meter assure enhanced accuracy ranges, an overall greater accuracy, and a longer service life than any other comparable class meter produced. The OMNI T² meter has no restrictions as to sustained flow rates within its continuous operating range. The floating ball measurement technology allows for flows up to its rated maximum capacity without affecting undue wear or accuracy degradation when installed in any orientation.

CONSTRUCTION

The OMNI T² meter consists of two basic assemblies; the maincase and the measuring chamber. The measuring chamber assembly includes the "floating ball" impeller with a coated titanium shaft, hybrid axial bearings, integral flow straightener and an all electronic programmable register with protective bonnet. The maincase is made from industry proven Ductile Iron with an approved NSF epoxy coating. Maincase features are; easily removable measuring chamber, unique chamber seal to the maincase using a high pres-

sure o-ring, testing port and a convenient integral strainer.

OMNI ELECTRONIC REGISTER

The OMNI T² electronic register consist of a hermetically sealed register with an electronic pickup containing no mechanical gearing. The large character LCD displays AMR, Totalization and a Resettable Test Totalizer. OMNI register features; AMR resolution units that are fully programmable, Pulse output frequency that are fully programmable, Integral customer data logging capability, Integral resettable accuracy testing feature compatible with the UniPro Testing Assistant Program, Large, easy-to-read LCD also displays both forward and reverse flow directions and all with a 10-year battery life guarantee.

MAGNETIC DRIVE

Meter registration is achieved by utilizing a fully magnetic pickup system. This is accomplished by the magnetic actions of the embedded rotor magnets and the ultra sensitive register pickup probe. The only moving component in water is the "floating ball" impeller.

MEASURING ELEMENT

The revolutionary thermoplastic, hydro dynamically balanced impeller floats between the bearings. The Floating Ball Technology (FBT) allows the measuring element to operate virtually without friction or wear, thus creating the extended

upper and lower flow ranges capable on only the OMNI T² meter.

STRAINER

The OMNI T² with the "V" shaped integral strainer using a stainless steel screen along with Floating Ball Technology (FBT) create a design that gives far improved accuracy even in those once thought questionable settings. A removable strainer cover permits easy access to the screen for routine maintenance.

MAINTENANCE

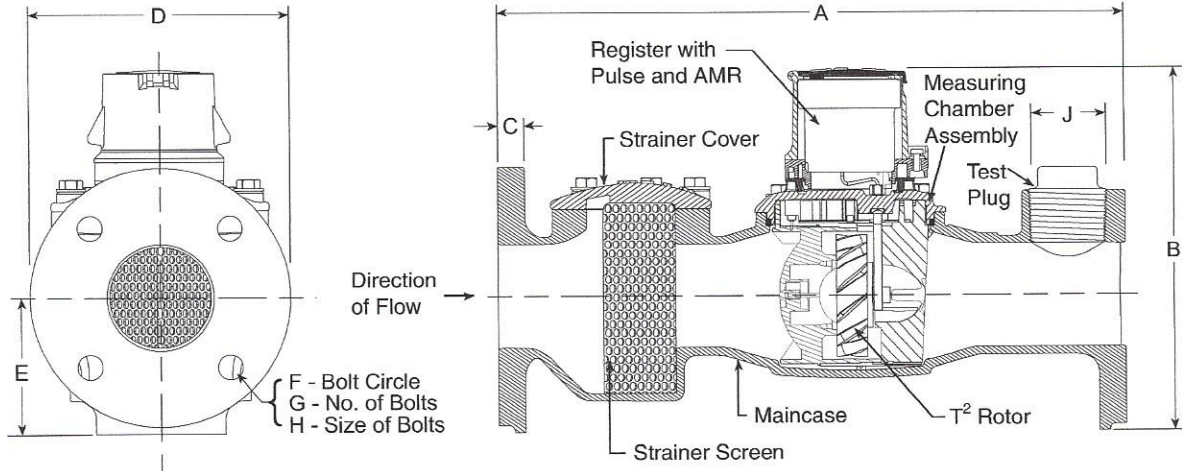
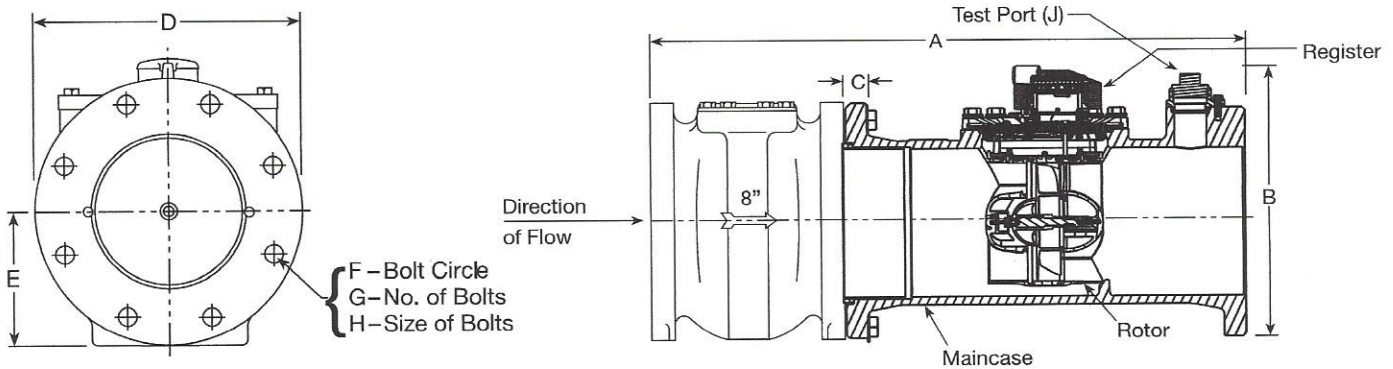
The OMNI T² meter is designed for easy maintenance. Should any maintenance be required, the measuring chamber and / or strainer cover can be removed independently. Parts and or a replacement measuring chamber may be utilized in the event repairs are needed. Replacement Measuring Chambers Exchange are available for the OMNI T² meters and may also be utilized for retrofitting to competitive meters to achieve increased accuracy and extended service life.

AMR / AMI SYSTEMS:

Meters and encoders are compatible with current Sensus AMR/AMI systems.

GUARANTEE:

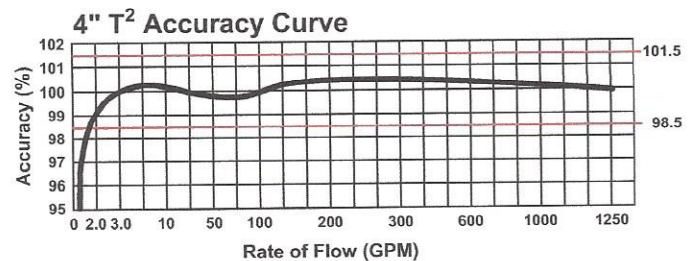
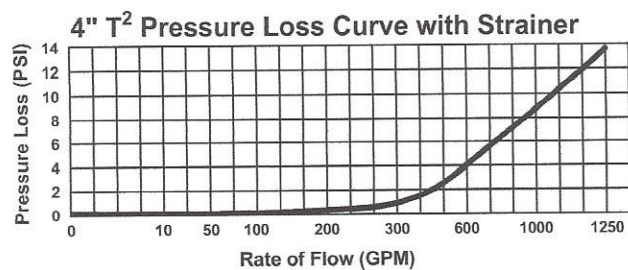
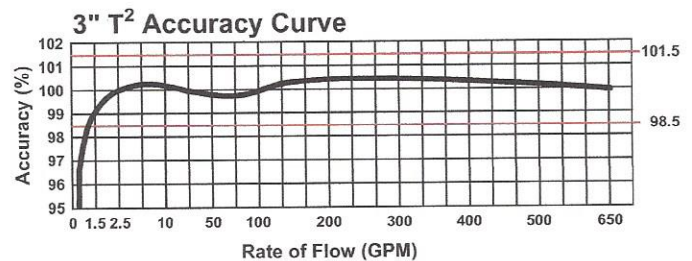
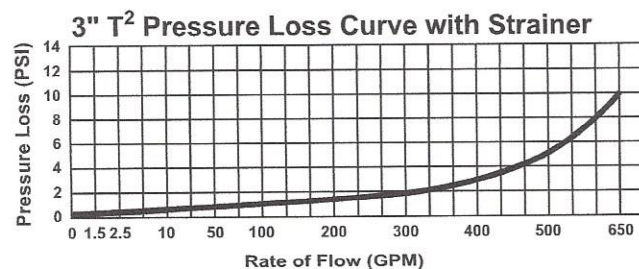
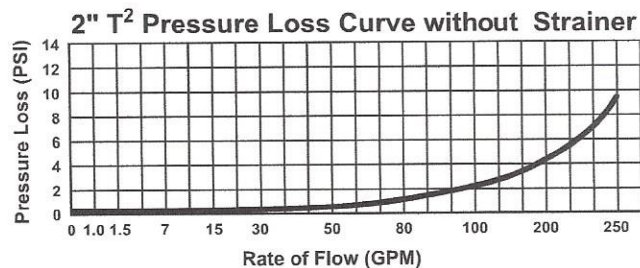
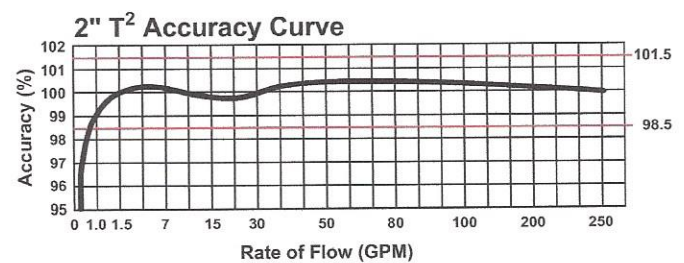
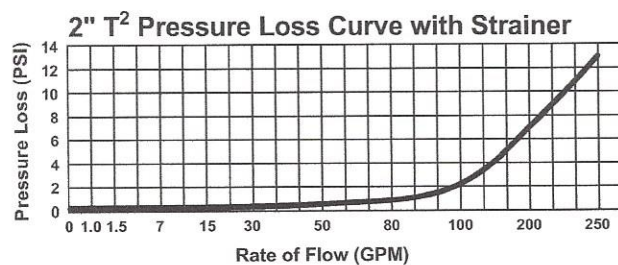
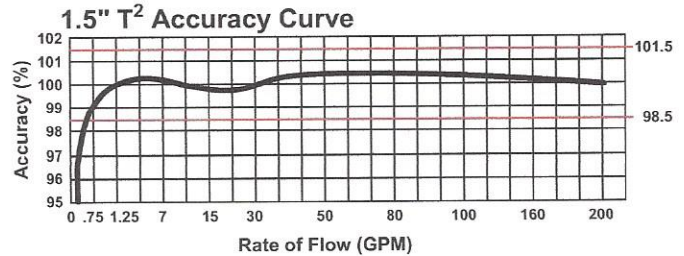
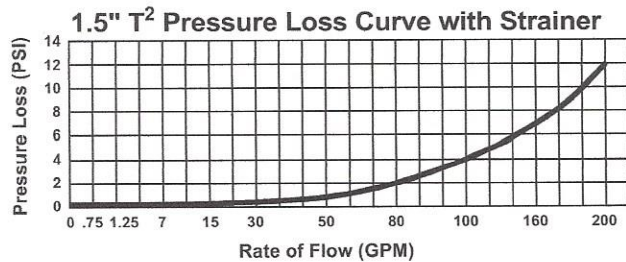
Sensus OMNI T² Meters are backed by "The Sensus Guarantee." Ask your Sensus representative for details or see Bulletin G-500.

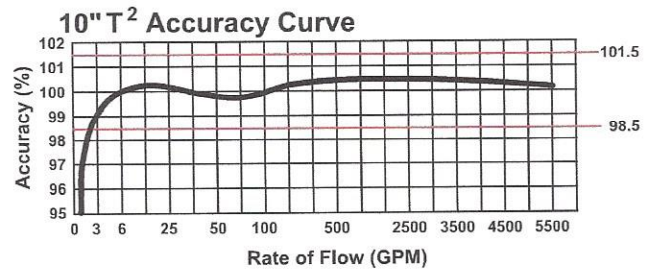
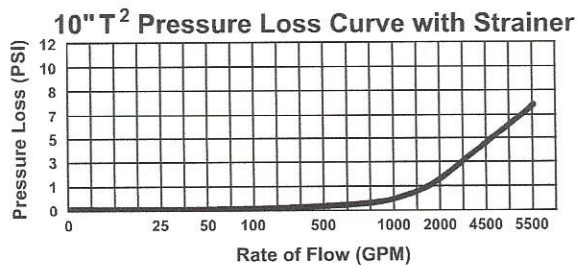
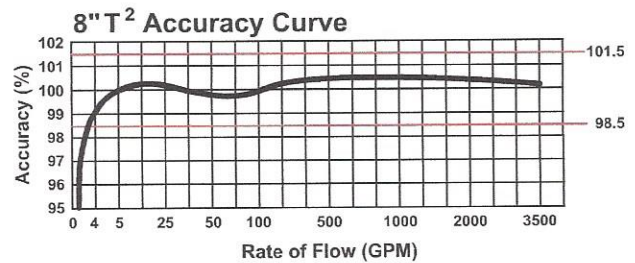
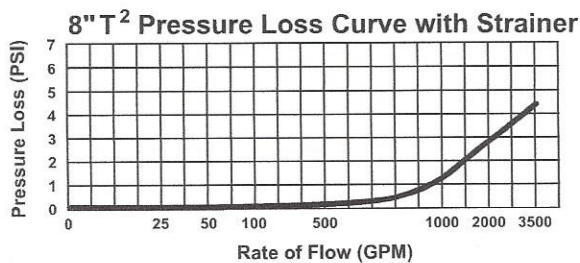
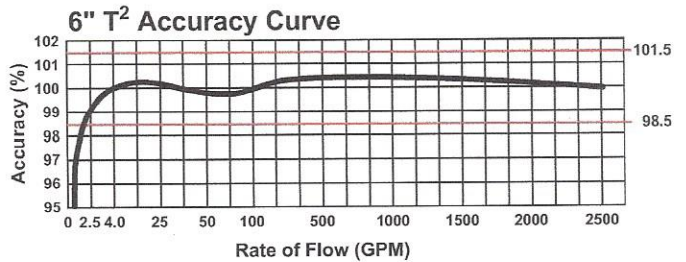
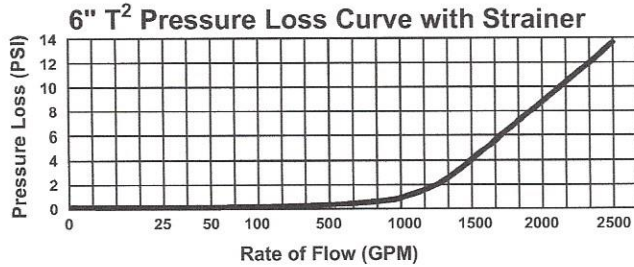
OMNI T²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**OMNI T²: 1 1/2" - 6"****OMNI T²: 8" - 10"****DIMENSIONS AND NET WEIGHTS**

Meter and Pipe Size	Normal Operating Range		Connections	A	B	C	D	E	F	G	H	J	Net Weight	Shipping Weight
1-1/2" DN 40mm	1.25 gpm .28 m ³ /hr	200 gpm 45 m ³ /hr	Flanged	13" 330mm	7-7/8" 200mm	15/16" 24mm	5-1/8" 130mm	2-5/16" 59mm	4" 102mm	2	5/8" 16mm	1" 25mm	18.8 lbs. 8.53 kg.	22.5 lbs. 10.20 kg.
2" DN 50mm	1.5 gpm .34 m ³ /hr	250 gpm 57 m ³ /hr	Flanged	17" 432mm	7-7/8" 200mm	1" 25mm	5-3/4" 146mm	2-5/16" 59mm	4-1/2" 114mm	2	3/4" 19mm	1-1/2" 40mm	27.4 lbs. 12.42 kg.	34.5 lbs. 15.65 kg.
2" without Strainer DN 50mm	1.5 gpm .34 m ³ /hr	250 gpm 57 m ³ /hr	Flanged	10" 254mm	7-7/8" 200mm	1" 25mm	5-3/4" 146mm	2-5/16" 59mm	4-1/2" 114mm	2	3/4" 19mm	N/A	17.4 lbs. 7.9 kg.	24.5 lbs. 11.11 kg.
3" DN 80mm	2.5 gpm .57 m ³ /hr	650 gpm 148 m ³ /hr	Flanged	19" 432mm	8-3/4" 222mm	3/4" 19mm	7-7/8" 200mm	4-1/8" 105mm	6" 153mm	4	5/8" 16mm	2" 50mm	48.5 lbs. 22.00 kg.	57.4 lbs. 26.04 kg.
4" DN 100mm	3.0 gpm .68 m ³ /hr	1250 gpm 284 m ³ /hr	Flanged	23" 584mm	11-3/16" 284mm	15/16" 24mm	9-1/8" 232mm	4-3/4" 121mm	7-1/2" 191mm	8	5/8" 16mm	2" 50mm	67.9 lbs. 30.80 kg.	75.8 lbs. 34.38 kg.
6" DN 150mm	4 gpm .91 m ³ /hr	2500 gpm 568 m ³ /hr	Flanged	27" 685mm	13-1/4" 336mm	15/16" 24mm	11" 279mm	5-3/4" 146mm	9-1/2" 242mm	8	3/4" 19mm	2" 50mm	140 lbs. 63.5 kg.	165 lbs. 74.8 kg.
8" DN 200mm	5 gpm 1.1 m ³ /hr	3500 gpm 795 m ³ /hr	Flanged	30-1/8" 765 mm	15" 381 mm	11/16" 17 mm	13-1/2" 343 mm	6-3/4" 172 mm	11-3/4" 300 mm	8	3/4" 19 mm	2" NPT	471 lbs. 214 kg.	521 lbs. 236 kg.
10" DN 250mm	6 gpm 1.4 m ³ /hr	5500 gpm 1249 m ³ /hr	Flanged	41-1/8"	19"	11/16"	16"	8-1/2"	14-1/4"	12	7/8"	2" NPT	685 lbs. 311 kg.	745 lbs. 338 kg.

OMNI T²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**SPECIFICATIONS**

SERVICE	Measurement of potable and reclaim water. Operating temperature range of 33 °F (56 °C) - 150 °F (65.6 °C)																		
OPERATING RANGE (100% ± 1.5%)	1-1/2": 1.25 – 200 GPM (.28 – 45 m ³ /hr) 2" and 2" without Strainer: 1.5 – 250 GPM (.34 – 57 m ³ /hr) 3": 2.5 – 650 GPM (.57 – 148 m ³ /hr) 4": 3 – 1250 GPM (.68 – 284 m ³ /hr) 6": 4 – 2500 GPM (.91 – 568 m ³ /hr) 8": 5 – 3500 GPM (1.1-795 m ³ /hr) 10": 6 – 5500 GPM (1.4 – 1249 m ³ /hr)																		
LOW FLOW (95% – 101.5%)	1-1/2": .75 GPM (.17 m ³ /hr) 2" and 2" without Strainer: 1.0 GPM (.23 m ³ /hr) 3": 1.5 GPM (.34 m ³ /hr) 4": 2.0 GPM (.45 m ³ /hr) 6": 2.5 GPM (.57 m ³ /hr) 8": 4 GPM (0.9 m ³ /hr) 10": 5 GPM (1.1 m ³ /hr)																		
MAXIMUM CONTINUOUS OPERATION	1-1/2": 160 GPM (36 m ³ /hr) 2" and 2" without Strainer: 200 GPM (45 m ³ /hr) 3": 500 GPM (114 m ³ /hr) 4": 1000 GPM (227 m ³ /hr) 6": 2000 GPM (454 m ³ /hr) 8": 3500 GPM (795 m ³ /hr) 10": 5500 GPM (1249 m ³ /hr)																		
MAXIMUM INTERMITTENT OPERATION	1-1/2": 200 GPM (45 m ³ /hr) 2" and 2" without Strainer: 250 GPM (57 m ³ /hr) 3": 650 GPM (148 m ³ /hr) 4": 1250 GPM (284 m ³ /hr) 6": 2500 GPM (568 m ³ /hr) 8": 4700 GPM (1067 m ³ /hr) 10": 7000 GPM (1590 m ³ /hr)																		
PRESSURE LOSS	1-1/2": 6.9 psi @ 160 GPM (48 bar @ 36 m ³ /hr) 2" and 2" without Strainer: 7.0 psi @ 200 GPM (.48 bar @ 45 m ³ /hr) 3": 5.1 psi @ 500 GPM (.35 bar @ 114 m ³ /hr) 4": 8.7 psi @ 1000 GPM (.60 bar @ 227 m ³ /hr) 6": 8.2 psi @ 2000 GPM (.56 bar @ 454 m ³ /hr) 8": 5.1 psi @ 3500 GPM (.35 bar @ 795 m ³ /hr) 10": 7.2 psi @ 5500 GPM (.50 bar @ 1249 m ³ /hr)																		
MAXIMUM OPERATING PRESSURE	200 PSI (13.8 bar)																		
FLANGE CONNECTIONS	U.S. ANSI B16.1 / AWWA Class 125																		
REGISTER	Fully electronic sealed register with programmable registration (Gal. /Cu.Ft./ Cu. Mtr. / Imp.Gal / Acre Ft.) Programmable AMR/AMI reading and pulse outputs Guaranteed 10 year battery life																		
NSF APPROVED MATERIALS	<table> <tr> <td>Maincase:</td><td>Coated Ductile Iron</td></tr> <tr> <td>Measuring Chamber:</td><td>Thermoplastic</td></tr> <tr> <td>Rotor "Floating Ball":</td><td>Thermoplastic</td></tr> <tr> <td>Radial Bearings:</td><td>Hybrid Thermoplastic</td></tr> <tr> <td>Thrust Bearings:</td><td>Sapphire/Ceramic Jewel</td></tr> <tr> <td>Magnets:</td><td>Ceramic Magnet</td></tr> <tr> <td>Strainer Screen:</td><td>Stainless Steel</td></tr> <tr> <td>Strainer Cover:</td><td>Coated Ductile Iron</td></tr> <tr> <td>Test Plug:</td><td>Coated Ductile Iron</td></tr> </table>	Maincase:	Coated Ductile Iron	Measuring Chamber:	Thermoplastic	Rotor "Floating Ball":	Thermoplastic	Radial Bearings:	Hybrid Thermoplastic	Thrust Bearings:	Sapphire/Ceramic Jewel	Magnets:	Ceramic Magnet	Strainer Screen:	Stainless Steel	Strainer Cover:	Coated Ductile Iron	Test Plug:	Coated Ductile Iron
Maincase:	Coated Ductile Iron																		
Measuring Chamber:	Thermoplastic																		
Rotor "Floating Ball":	Thermoplastic																		
Radial Bearings:	Hybrid Thermoplastic																		
Thrust Bearings:	Sapphire/Ceramic Jewel																		
Magnets:	Ceramic Magnet																		
Strainer Screen:	Stainless Steel																		
Strainer Cover:	Coated Ductile Iron																		
Test Plug:	Coated Ductile Iron																		

OMNI T²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**Headloss Curves**

OMNI T²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**Headloss Curves**

© All products purchased and services performed are subject to Sensus' terms of sale, available at either; <http://na.sensus.com/TC/TermsConditions.pdf> or 1-800-METER-IT. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer.

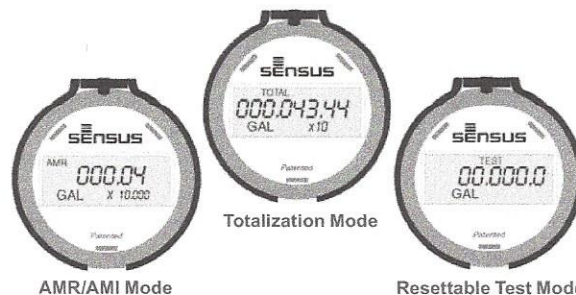
This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.

OMNI™ C²1-1/2", 2", 3", 4", 6", 8" and 10" OMNI C² Meter

Description

1-1/2", 2", 3", 4", 6", 8" and 10" Sizes

The OMNI C² meter operation is based on advanced Floating Ball Technology (FBT).



Features

CONFORMANCE TO STANDARDS

The OMNI C² meter meets and far exceeds the most recent revision of AWWA Standard C701 and C702 class II. Additionally, the meter does not require a valve to meet these standards. Each meter is performance tested to ensure compliance. All OMNI meters are NSF/ANSI Standard 61, Annex F and G approved latest standards.

PERFORMANCE

The patented measurement principles of the OMNI C² meter assure enhanced accuracy ranges, an overall greater accuracy, and a longer service life than any other comparable class meter produced. The OMNI C² meter has no restrictions as to sustained flow rates within its continuous operating range. The floating ball measurement technology allows for flows up to its rated maximum capacity without undue wear or accuracy degradation when installed in any orientation.

CONSTRUCTION

The OMNI C² meter consists of two basic assemblies; the maincase and the measuring chamber. The measuring chamber assembly includes the "floating ball" impeller with a coated titanium shaft, hybrid axial bearings, integral flow straightener and an all electronic programmable register with protective bonnet. The maincase is made from industry proven Ductile Iron with an approved NSF epoxy coating. Maincase features are; easily removable measuring chamber, unique chamber seal to the

maincase using a high pressure o-ring, testing port and an AWWA compliant strainer.

OMNI ELECTRONIC REGISTER

The OMNI C² electronic register is hermetically sealed with an electronic pickup containing no mechanical gearing. The large character LCD displays AMR, Totalization and a Resettable Test Totalizer. OMNI register features; AMR resolution units that are fully programmable, Pulse output frequency that are fully programmable, Integral customer data logging capability, Integral resettable accuracy testing feature compatible with UniPro Testing Assistant Program, Large, easy-to-read LCD also displays both forward and reverse flow directions and all with a 10-year battery life guarantee.

MAGNETIC DRIVE

Meter registration is achieved by utilizing a fully magnetic pickup system. This is accomplished by the magnetic actions of the embedded rotor magnets and the ultra sensitive register pickup probe. The only moving component in water is the "floating ball" impeller.

MEASURING ELEMENT

The revolutionary thermoplastic, hydrodynamically balanced impeller floats between the bearings. The Floating Ball Technology (FBT) allows the measuring element to operate virtually without friction or wear, thus creating the extended upper and lower flow ranges capable on only the OMNI C² meter.

STRAINER

The OMNI C² with the AWWA compliant "V" shaped strainer using a stainless steel screen along with Floating Ball Technology (FBT) create a design that gives far improved accuracy even in those once thought questionable settings. A removable strainer cover permits easy access to the screen for routine maintenance.

MAINTENANCE

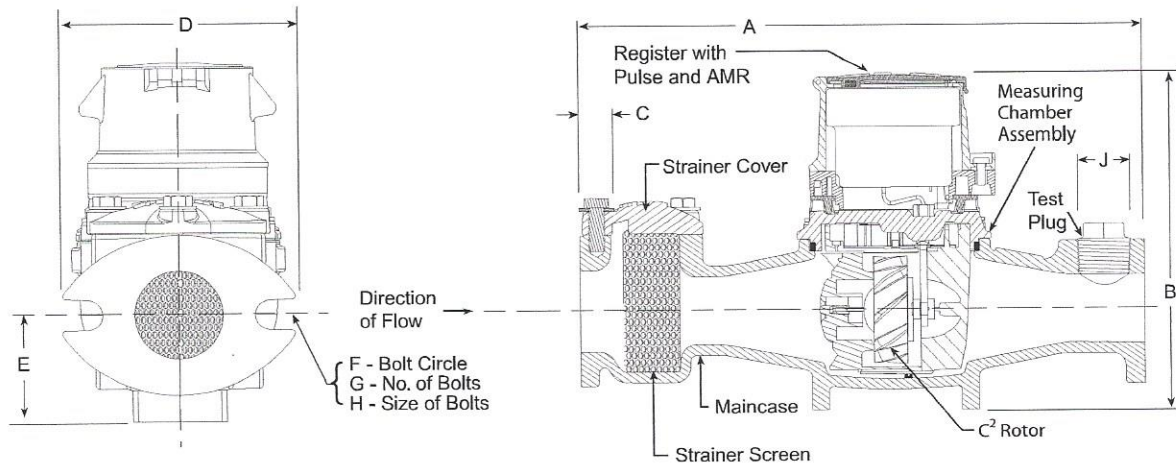
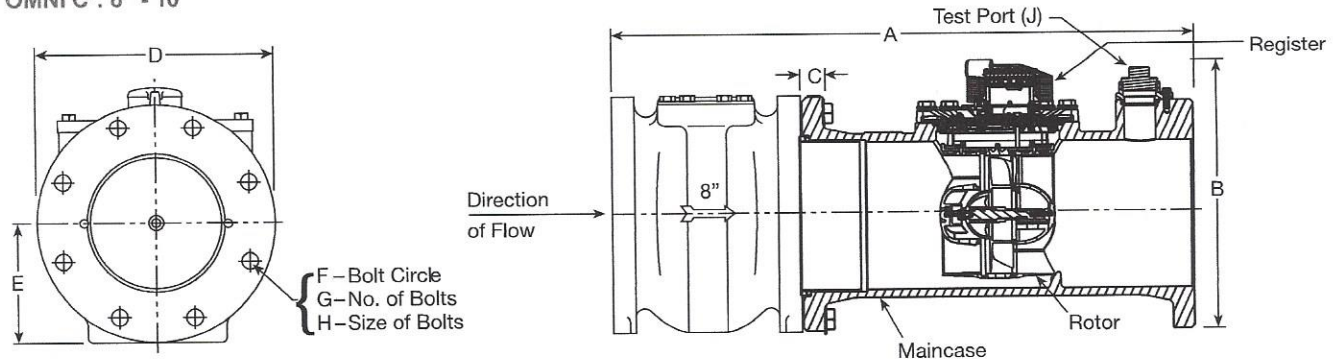
The OMNI C² meter is designed for easy maintenance. Should any maintenance be required, the measuring chamber and / or strainer cover can be removed independently. Parts and or a replacement measuring chamber may be utilized in the event repairs are needed. Replacement Measuring Chambers are available for the OMNI C² meters and may also be utilized for retrofitting to competitive meters to achieve increased accuracy and extended service life.

AMR / AMI SYSTEMS:

Meters and encoders are compatible with current Sensus AMR/AMI systems.

GUARANTEE:

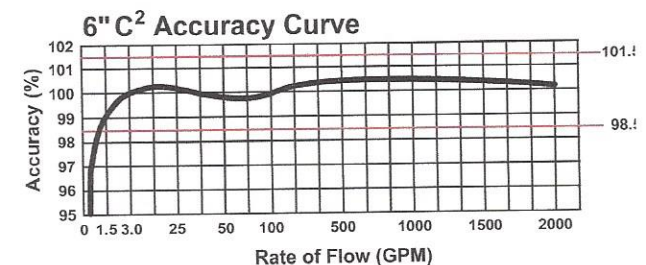
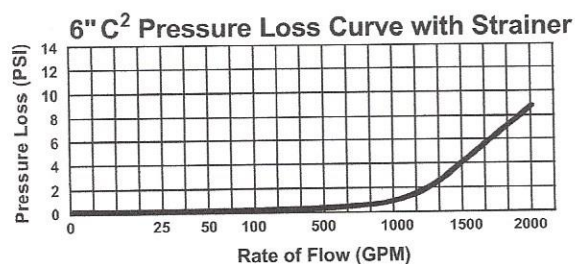
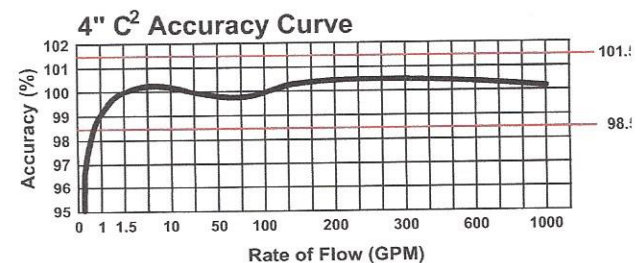
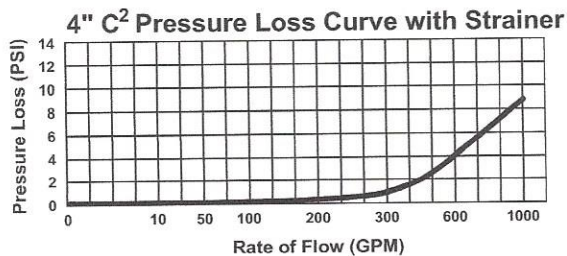
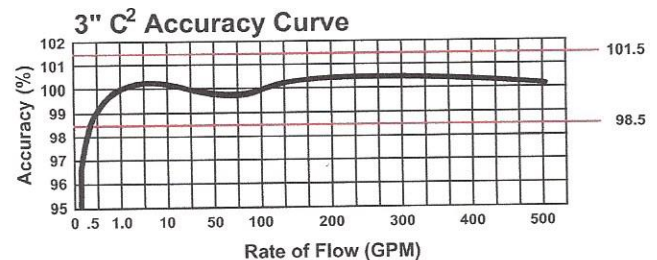
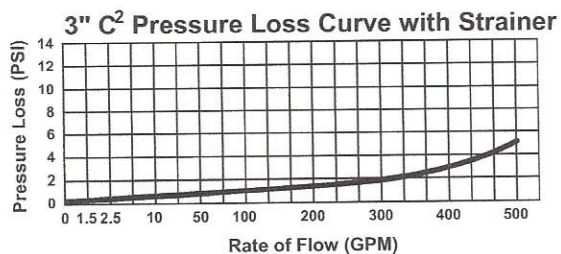
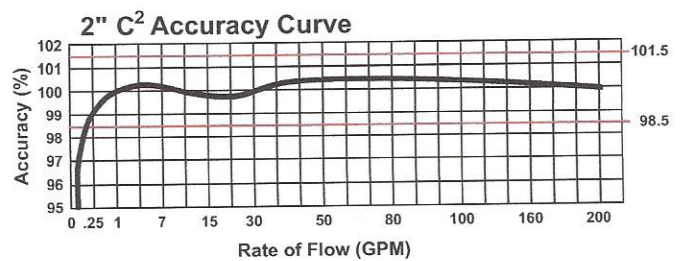
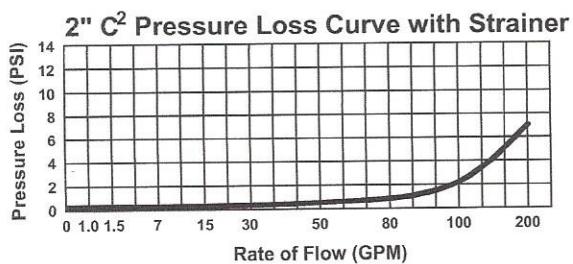
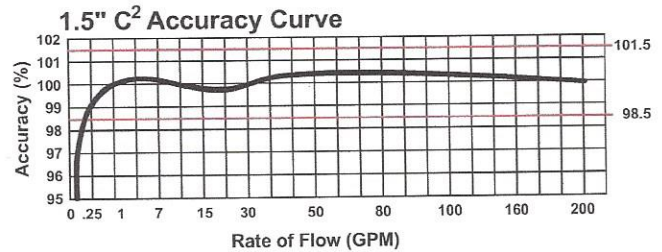
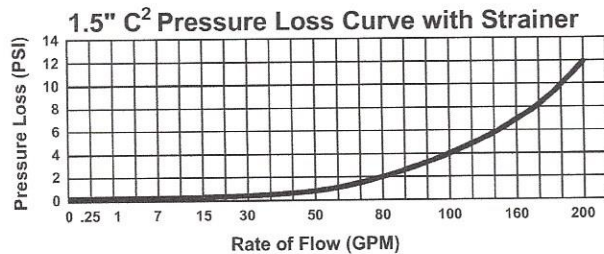
Sensus OMNI C² Meters are backed by "The Sensus Guarantee." Ask your Sensus representative for details or see Bulletin G-500.

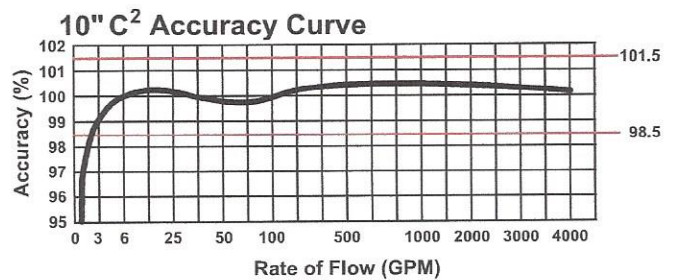
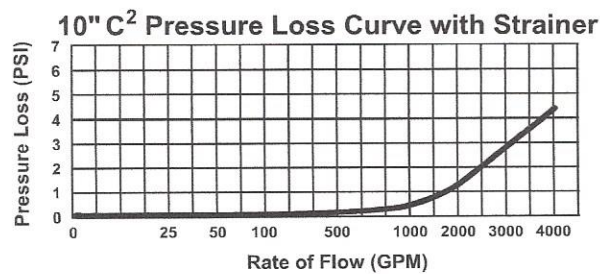
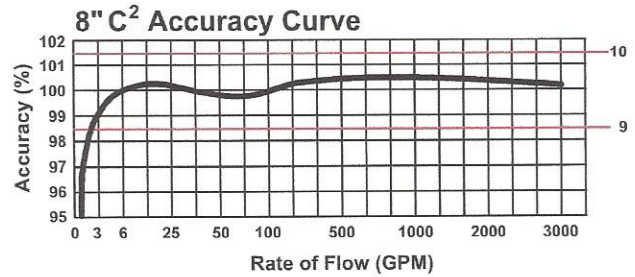
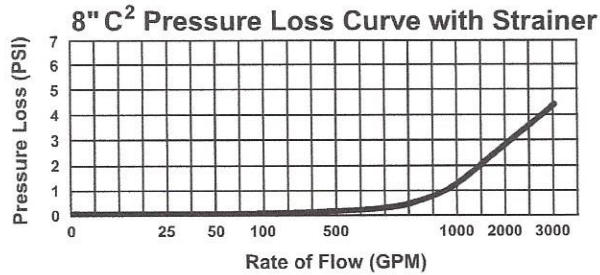
OMNI C²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**OMNI C²: 1 1/2" - 6"****OMNI C²: 8" - 10"****DIMENSIONS AND NET WEIGHTS**

Meter and Pipe Size	Normal Operating Range		Connections	A	B	C	D	E	F	G	H	J	Net Weight	Shipping Weight
1-1/2" DN 40mm	.5 gpm .11 m ³ /hr	200 gpm 45 m ³ /hr	Flanged	13" 330mm	7-7/8" 200mm	15/16" 24mm	5-1/8" 130mm	2-5/16" 59mm	4" 102mm	2	5/8" 16mm	1" 25mm	18.8 lbs. 8.53 kg.	22.5 lbs. 10.20 kg.
2" DN 50mm	.5 gpm .11 m ³ /hr	200 gpm 45 m ³ /hr	Flanged	15-1/4" 387mm	7-7/8" 200mm	1" 25mm	5-3/4" 146mm	2-5/16" 59mm	4-1/2" 114mm	2	3/4" 19mm	1" 25mm	25.4 lbs. 11.39 kg.	32.5 lbs. 14.74 kg.
3" DN 80mm	1 gpm .23 m ³ /hr	500 gpm 114 m ³ /hr	Flanged	17" 432mm	8-3/4" 222mm	3/4" 19mm	7-7/8" 200mm	4-1/8" 105mm	6" 153mm	4	5/8" 16mm	1" 25mm	45 lbs. 20.41 kg.	72.8 lbs. 33.02 kg.
4" DN 100mm	1.5 gpm .34 m ³ /hr	1000 gpm 227 m ³ /hr	Flanged	20" 508mm	11-3/16" 284mm	15/16" 24mm	9-1/8" 232mm	4-3/4" 121mm	7-1/2" 191mm	8	5/8" 16mm	1-1/2" 40mm	64.9 lbs. 29.44 kg.	72.8 lbs. 33.02 kg.
6" DN 150mm	3 gpm .68 m ³ /hr	2500 gpm 5687 m ³ /hr	Flanged	24" 610mm	13-1/4" 336mm	15/16" 24mm	11" 279mm	5-3/4" 146mm	9-1/2" 242mm	8	3/4" 19mm	1-1/2" 40mm	130 lbs. 48.5 kg.	155 lbs. 70.3 kg.
8" DN 200mm	4 gpm .91 m ³ /hr	2700 gpm 614 m ³ /hr	Flanged	30-1/8" 765 mm	15" 381 mm	11/16" 17 mm	13-1/2" 343 mm	6-3/4" 172 mm	11-3/4" 300 mm	8	3/4" 19 mm	2" NPT	471 lbs. 214 kg.	521 lbs. 236 kg.
10" DN 250mm	5 gpm 1.1 m ³ /hr	4000 gpm 908 m ³ /hr	Flanged	41-1/8" 1045mm	19" 485mm	11/16" 17mm	16" 406mm	8-1/2" 216mm	14-1/4" 362mm	12	7/8" 22mm	2" NPT	685 lbs. 311 kg.	745 lbs. 338 kg.

OMNI C²: 1-1/2", 2", 3", 4", 6", 8" and 10" Sizes**SPECIFICATIONS**

SERVICE	Measurement of potable and reclaim water. Operating temperature range of 33 °F (56 °C) - 150 °F (65.6 °C)	
OPERATING RANGE (100% ± 1.5%)	1-1/2": .5 – 200 GPM (.11 - 45 m ³ /hr) 2": .5 – 200 GPM (.11 - 45 m ³ /hr) 3": 1.0 – 500 GPM (.23 - 114 m ³ /hr) 4": 1.5 – 1000 GPM (.34 - 227 m ³ /hr) 6": 3 – 2000 GPM (.68 - 454 m ³ /hr) 8": 4 – 2700 GPM (0.91 – 614 m ³ /hr) 10": 5-4000 GPM (1.1-908 m ³ /hr)	
LOW FLOW (95% – 101.5%)	1-1/2": .25 GPM (.06 m ³ /hr) 2": .25 GPM (.06 m ³ /hr) 3": .5 GPM (.11 m ³ /hr) 4": .75 GPM (.17 m ³ /hr) 6": 1.5 GPM (.34 m ³ /hr) 8": 2.5 GPM (0.57 m ³ /hr) 10": 3.5 GPM (0.8 m ³ /hr)	
MAXIMUM CONTINUOUS OPERATION	1-1/2": 160 GPM (36 m ³ /hr) 2": 160 GPM (36 m ³ /hr) 3": 400 GPM (91 m ³ /hr) 4": 800 GPM (182 m ³ /hr) 6": 1600 GPM (363 m ³ /hr) 8": 2700 GPM (614 m ³ /hr) 10": 4000 GPM (908 m ³ /hr)	
MAXIMUM INTERMITTENT OPERATION	1-1/2": 200 GPM (45 m ³ /hr) 2": 200 GPM (45 m ³ /hr) 3": 500 GPM (114 m ³ /hr) 4": 1000 GPM (227 m ³ /hr) 6": 2000 GPM (454 m ³ /hr) 8": 3400 GPM (773 m ³ /hr) 10": 5000 GPM (1136 m ³ /hr)	
PRESSURE LOSS	1-1/2": 6.9 psi @ 160 GPM (48 bar @ 36 m ³ /hr) 2": 4.3 psi @ 160 GPM (30 bar @ 36 m ³ /hr) 3": 3.2 psi @ 400 GPM (.22 bar @ 91 m ³ /hr) 4": 6.4 psi @ 800 GPM (.51 bar @ 182 m ³ /hr) 6": 5.5 psi @ 1600 GPM (.56 bar @ 363 m ³ /hr) 8": 4 psi @ 2700 GPM (.27 bar @ 614 m ³ /hr) 10": 4.5 psi @ 4000 GPM (.31 bar @ 908 m ³ /hr)	
MAXIMUM OPERATING PRESSURE	200 PSI (13.8 bar)	
FLANGE CONNECTIONS	U.S. ANSI B16.1 / AWWA Class 125	
REGISTER	Fully electronic sealed register with programmable registration (Gal. /Cu.Ft./ Cu. Mtr. / Imp.Gal / Acre Ft.) Programmable AMR/AMI reading and pulse outputs Guaranteed 10 year battery life	
NSF APPROVED MATERIALS	Maincase: Coated Ductile Iron Measuring Chamber: Thermoplastic Rotor "Floating Ball": Thermoplastic Radial Bearings: Hybrid Thermoplastic Thrust Bearings: Sapphire/Ceramic Jewel Magnets: Ceramic Magnet Strainer Screen: Stainless Steel Strainer Cover: Coated Ductile Iron Test Plug: Coated Ductile Iron	

OMNI C²: 1-1/2", 2", 3", 4", and 6" Sizes**Headloss Curves**

OMNI C²: 8" and 10" Sizes**Headloss Curves**

© All products purchased and services performed are subject to Sensus' terms of sale, available at either; <http://na.sensus.com/TC/TermsConditions.pdf> or 1-800-METER-IT. Sensus reserves the right to modify these terms and conditions in its own discretion without notice to the customer.

This document is for informational purposes only, and SENSUS MAKES NO EXPRESS WARRANTIES IN THIS DOCUMENT. FURTHERMORE, THERE ARE NO IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION, WARRANTIES AS TO FITNESS FOR A PARTICULAR PURPOSE AND MERCHANTABILITY. ANY USE OF THE PRODUCTS THAT IS NOT SPECIFICALLY PERMITTED HEREIN IS PROHIBITED.