

- Energy saving about 70%
- Long life span more than 5 years
- No infrared rays, no ultraviolet radiation, no thermal effect
- Ultra slim and unlimited design and various dimensions are available
- Soft and wide light emitting
- Special circuit design, avoided the single broken LED influence problem
- High efficiency constant current drive system, with heat protection system, can work under unstable voltage
- Instant start, no flickering, no humming, no RF interference






Technical Data

Product Number	Length (Inch)	Input Voltage (Volt)	Color Temperature	Bare Lamp Watt	Bare Lamp Lumens
ZY-P1-30W CDS / ZY-P1-30W CNS	1ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	30	3750
ZY-P1-40W CDS / ZY-P1-40W CNS	1ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P4-30W CDS / ZY-P4-30W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	30	3750
ZY-P4-40W CDS / ZY-P4-40W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P4-60W CDS / ZY-P4-60W CNS	2ft by 2ft	AC100-277V/AC100-382V	3000K-7000K	60	7500
ZY-P7-40W CDS / ZY-P7-40W CNS	2ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	40	5000
ZY-P7-50W CDS / ZY-P7-50W CNS	2ft by 4ft	AC100-277V/AC100-382V	3000K-7000K	50	6250
ZY-P7-75W CDS / ZY-P7-75W CNS	2ft by 4ft	AC100-277V	3000K-7000K	75	9375

Type of Area	Apartment Buildings, Hangers & Storage, Large Retail & Open Areas, Office & Small Retail
Ballast Factor	1.00
Certifications	CE, CUL Listed, DLC Approved, FCC Compliant, Lighting Facts, ROHS, UL Listed
Dimmable	Yes
Lamp Life:	50,000hrs
CRI	80
Dimensions	23.62" x 23.62" x .5"
Length	23.62"
Width	23.62"
Height	1.73"
Lumen Output:	4,400
Manufacturer's Warranty	5 Year
Part Number	ZY-P4-40W
Minimum Start Temperature	0 Deg F
Technology	LED
Voltage	Multivolt 120V-277V
Wattage	40 Watt
Ballast Start Type	Instant Start
Fixture Type	2 x 2 Ft - New Fixture
Beam Angle	Normal

Dimension

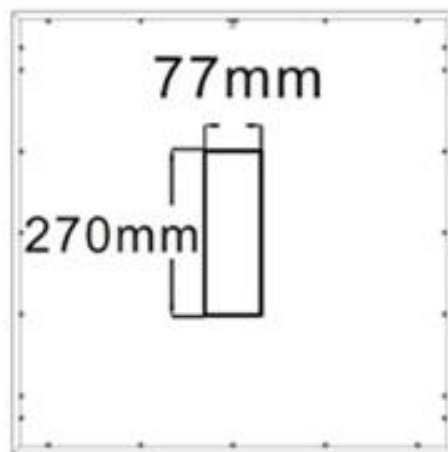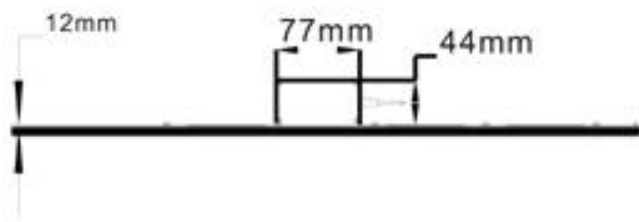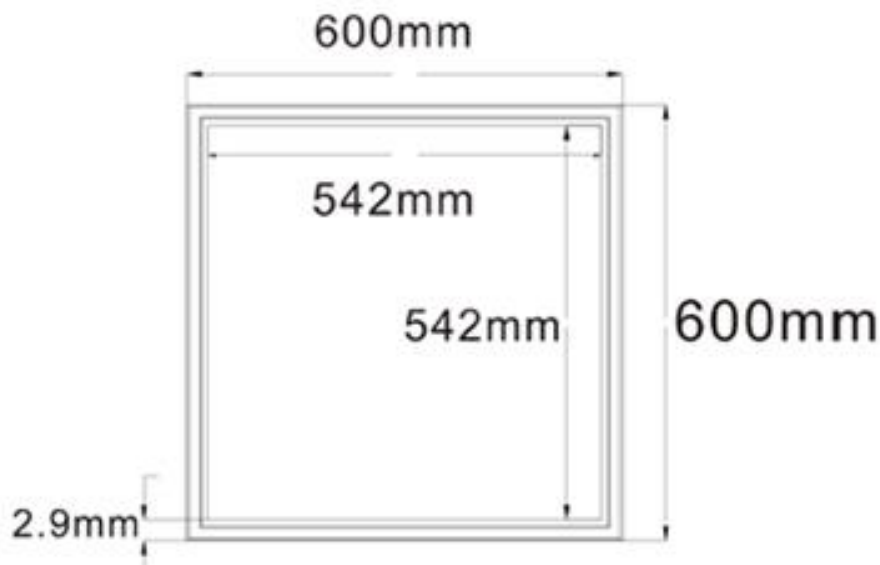

LUMINOUS INTENSITY DISTRIBUTION DIAGRAM

