

352

1.00

EA

0352 - 1/2 INCH SQUARE DRIVE IMPACT
SOCKETS, DEEP LENGTH, 6 POINT,

1-7/16 INCH

***LAWSON #19200**



Representative Image Only

**Williams® 1/2" Drive Deep Impact Socket,
1-7/16"**Williams® - 1/2" Drive, 6 Point, Deep Length Impact Socket, 1-7/16" (Pack
of 1)

Item# 19200
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.6
Brand : Williams®
Mfr Model# : 14-646
Catalog Page# : [14-18](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19200
Product Name : Williams® - 1/2" Drive Deep Impact Socket, 1-7/16"
Drive Type : Square
Drive Size : 1/2"
Style : Deep
Number of Points : 6
Size : 1-7/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.5"
Working End Diameter : 2"
Bolt Clearance Depth : 2.675"
Bolt Clearance Diameter : 1.0625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

353

1.00

EA

0353 - 1/2 INCH SQUARE DRIVE IMPACT
SOCKETS, DEEP LENGTH, 6 POINT,

LAWSON #19201

1-1/2 INCH



Representative Image Only

**Williams® 1/2" Drive Deep Impact Socket,
1-1/2"**Williams® - 1/2" Drive, 6 Point, Deep Length Impact Socket, 1-1/2" (Pack
of 1)

Item# : 19201
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.83
Brand : Williams®
Mfr Model# : 14-648
Catalog Page# : [14-18](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) Create a Re-order list.. [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19201
Product Name : Williams® - 1/2" Drive Deep Impact Socket, 1-1/2"
Drive Type : Square
Drive Size : 1/2"
Style : Deep
Number of Points : 6
Size : 1-1/2"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.6825"
Working End Diameter : 2.125"
Bolt Clearance Depth : 2.875"
Bolt Clearance Diameter : 1.0625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

354

1.00

EA

0354 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19285
INDUSTRIAL FINISH, 9/16 INCH



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 9/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 9/16"
(Pack of 1)

Item# : 19285
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .59
Brand : Williams®
Mfr Model# : 6-618A
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19285
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 9/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 9/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 1/2"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

355

1.00

EA

0355 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,***LAWSON #19286***
INDUSTRIAL FINISH, 5/8 INCH

Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 5/8"**Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 5/8" (Pack
of 1)

Item# 19286
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .62
Brand : Williams®
Mfr Model# : 6-620A
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specialty heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19286
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 5/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 5/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.09375"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 1 1/2"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Frt.
UNSPSC #: 27112228
TAA Compliant: Yes

356

1.00

EA

0356 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19287
INDUSTRIAL FINISH, 11/16 INCH



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 11/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 11/16"
(Pack of 1)

Item# : 19287
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .62
Brand : Williams®
Mfr Model# : 6-622A
Catalog Page# : 14-19
Usually Ships: Ⓢ Today



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) ▶[Create a Re-order list.. ▼](#) [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19287
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 11/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 11/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.15625"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 1/2"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

357

1.00

EA

0357 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS STANDARD LENGTH, 6 POINT,
LAWSON #19288



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 3/4"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 3/4" (Pack of 1)

Item# : 19288
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .65
Brand : Williams®
Mfr Model# : 6-624A
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19288
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 3/4"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 3/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.25"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 11/16"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

358

1.00

EA

0358 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19289



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 13/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 13/16"
(Pack of 1)

Item# 19289
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .7
Brand : Williams®
Mfr Model# : 6-626A
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19289
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 13/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 13/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.375"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 11/16"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

359

1.00

EA

0359 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19290
INDUSTRIAL FINISH, 7/8 INCH



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 7/8"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 7/8" (Pack of 1)

Item# 19290
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .74
Brand : Williams®
Mfr Model# : 6-628A
Catalog Page# : 14-19
Usually Ships: ? Today



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) ▶[Create a Re-order list.. ▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19290
Product Name :	Williams® - 3/4" Drive Standard Impact Socket 7/8"
Drive Type :	Square
Drive Size :	3/4"
Style :	Standard
Number of Points :	6
Size :	7/8"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	2"
Drive End Diameter :	1.625"
Working End Diameter :	1.5"
Bolt Clearance Depth :	1.03125"
Bolt Clearance Diameter :	1.116"
Nose Length /Length to Shoulder :	1"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112226
TAA Compliant:	Yes

360

1.00

EA

0360 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19291
INDUSTRIAL FINISH, 15/16 INCH



Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 15/16"**

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 15/16"
(Pack of 1)

Item# 19291
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .48
Brand : Williams®
Mfr Model# : 6-630A
Catalog Page# : 14-19
Usually Ships: 2 Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION

TECH SPECS

- Individual Impact Sockets
- Black industrial finish
 - SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
 - Designed for maximum engagement on 6 point fasteners
 - Suitable for use with pneumatic and electric impact wrenches
 - Specially heat-treated for impact use to provide long life, safety and durability
 - Made in USA

DESCRIPTION

TECH SPECS

Item# : 19291
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 15/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 15/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.5625"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 1.1116"
Nose Length /Length to
Shoulder : 1"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112625
TAA Compliant: Yes

361

1.00

EA

0361 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT
LAWSON #19292



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1" (Pack of 1)

Item# 19292
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .75
Brand : Williams®
Mfr Model# : 6-632A
Catalog Page# : [14-19](#)
Usually Ships: [?](#) While Supplies Last



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)Create a Re-order list.. [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19292
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.625"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 11/16"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

362

1.00

EA

0362 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19293



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-1/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-1/16"
(Pack of 1)

Item# 19293
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .79
Brand : Williams®
Mfr Model# : 6-634A
Catalog Page# : 14-19
Usually Ships: 7 Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19293
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-1/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-1/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2"
Drive End Diameter : 1.625"
Working End Diameter : 1.6675"
Bolt Clearance Depth : 1.03125"
Bolt Clearance Diameter : 1.0625"
Nose Length /Length to
Shoulder : 1.3125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112625
TAA Compliant: Yes

363

1.00

EA

0363 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19294



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-1/8"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-1/8"
(Pack of 1)

Item# 19294
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .85
Brand : Williams®
Mfr Model# : 6-636
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19294
Product Name :	Williams® - 3/4" Drive Standard Impact Socket, 1-1/8"
Drive Type :	Square
Drive Size :	3/4"
Style :	Standard
Number of Points :	6
Size :	1-1/8"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	2.125"
Drive End Diameter :	1.625"
Working End Diameter :	1.75"
Bolt Clearance Depth :	1.15625"
Bolt Clearance Diameter :	1.125"
Nose Length /Length to Shoulder :	1.4375"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112525
TAA Compliant:	Yes

364

1.00

EA

0364 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19295



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-3/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-3/16"
(Pack of 1)

Item# 19295
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .94
Brand : Williams®
Mfr Model# : 6-638
Catalog Page# : 14-19
Usually Ships: 7 Today



TAA Compliant

Quantity: 1 [Check Stock](#) 7[Add to Cart](#) ▶Create a Re-order list.. ▼ [Add to List](#)

DESCRIPTION TECH SPECS

- Individual Impact Sockets
- Black industrial finish
 - SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
 - Designed for maximum engagement on 6 point fasteners
 - Suitable for use with pneumatic and electric impact wrenches
 - Specially heat-treated for impact use to provide long life, safety and durability
 - Made in USA

DESCRIPTION TECH SPECS

Item# : 19295
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-3/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-3/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.125"
Drive End Diameter : 1.625"
Working End Diameter : 1.675"
Bolt Clearance Depth : 1.15625"
Bolt Clearance Diameter : 1.1675"
Nose Length /Length to
Shoulder : 1.4375"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

365

1.00

EA

**0365 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANARD LENGTH, 6 POINT,*******LAWSON #19296*****

Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 1-1/4"**Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-1/4"
(Pack of 1)

Item# 19296
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.18
Brand : Williams®
Mfr Model# : 6-640
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA.

DESCRIPTION**TECH SPECS**

Item# : 19296
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-1/4"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-1/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.125"
Drive End Diameter : 1.75"
Working End Diameter : 2"
Bolt Clearance Depth : 1.15625"
Bolt Clearance Diameter : 1.25"
Nose Length /Length to
Shoulder : 1.4375"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112623
TAA Compliant: Yes

366

1.00

EA

0366 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19297



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-5/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-5/16"
(Pack of 1)

Item# 19297
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.12
Brand : Williams®
Mfr Model# : 6-642
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19297
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-5/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-5/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.125"
Drive End Diameter : 1.75"
Working End Diameter : 2.03125"
Bolt Clearance Depth : 1.15625"
Bolt Clearance Diameter : 1.3125"
Nose Length /Length to
Shoulder : 1.4375"
Finish : Black Oxide
Locking Type : Pin
UNSPSC # : 27112828
TAA Compliant : Yes

367

1.00

EA

0367 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19298**



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-3/8"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-3/8"
(Pack of 1)

Item# 19298
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.25
Brand : Williams®
Mfr Model# : 6-644
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list...](#) [▼](#) [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19298
Product Name : Williams® - 3/4" Drive Standard Impact Socket 1-3/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-3/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.25"
Drive End Diameter : 1.75"
Working End Diameter : 2.125"
Bolt Clearance Depth : 1.28125"
Bolt Clearance Diameter : 1.375"
Nose Length /Length to
Shoulder : 1.5825"
Finish : Black Oxide
Locking Type : Fr.
UNSPSC #: 27112828
TAA Compliant: Yes

368

1.00

EA

0368 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19299



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-7/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-7/16"
(Pack of 1)

Item# : 19299
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.3
Brand : Williams®
Mfr Model# : 6-646
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19299
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-7/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-7/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.25"
Drive End Diameter : 1.75"
Working End Diameter : 2.1875"
Bolt Clearance Depth : 1.28125"
Bolt Clearance Diameter : 1.4375"
Nose Length /Length to
Shoulder : 1.5625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

369

1.00

EA

0369 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19300*



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-1/2"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-1/2"
(Pack of 1)

Item# : 19300
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.33
Brand : Williams®
Mfr Model# : 6-648
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: [Check Stock ?](#)[Add to Cart](#) Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19300
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-1/2"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-1/2"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.25"
Drive End Diameter : 1.75"
Working End Diameter : 2.25"
Bolt Clearance Depth : 1.28125"
Bolt Clearance Diameter : 1.5"
Nose Length /Length to
Shoulder : 1.5625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112528
TAA Compliant: Yes

370

1.00

EA

0370 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19301



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-9/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-9/16"
(Pack of 1)

Item# 19301
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.59
Brand : Williams®
Mfr Model# : 6-650
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19301
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-9/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-9/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.375"
Drive End Diameter : 1.75"
Working End Diameter : 2.34375"
Bolt Clearance Depth : 1.40625"
Bolt Clearance Diameter : 1.5625"
Nose Length /Length to
Shoulder : 1.6675"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

371

1.00

EA

0371 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19302



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-5/8"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-5/8"
(Pack of 1)

Item# 19302
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.64
Brand : Williams®
Mfr Model# : 6-652
Catalog Page# : [14-19](#)
Usually Ships: [2](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19302
Product Name : Williams® - 3/4" Drive Standard Impact Socket 1-5/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-5/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.375"
Drive End Diameter : 1.75"
Working End Diameter : 2.40625"
Bolt Clearance Depth : 1.40625"
Bolt Clearance Diameter : 1.625"
Nose Length /Length to
Shoulder : 1.6675"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

372

1.00

EA

0372 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,

LAWSON #19303



Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 1-11/16"**Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-11/16"
(Pack of 1)

Item# 19303
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.76
Brand : Williams®
Mfr Model# : 6-654
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19303
Product Name : Williams® - 3/4" Drive Standard Impact Socket 1-11/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-11/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.5625"
Drive End Diameter : 1.75"
Working End Diameter : 2.48675"
Bolt Clearance Depth : 1.59375"
Bolt Clearance Diameter : 1.4375"
Nose Length /Length to
Shoulder : 1.875"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

373

12.00

EA

0373 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19304



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-3/4"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-3/4"
(Pack of 1)

Item# 19304
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.9
Brand : Williams®
Mfr Model# : 6-656
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19304
Product Name :	Williams® - 3/4" Drive Standard Impact Socket, 1-3/4"
Drive Type :	Square
Drive Size :	3/4"
Style :	Standard
Number of Points :	6
Size :	1-3/4"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	2.916"
Drive End Diameter :	1.75"
Working End Diameter :	2.53125"
Bolt Clearance Depth :	1.59375"
Bolt Clearance Diameter :	1.75"
Nose Length /Length to	
Shoulder :	1.875"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112626
TAA Compliant:	Yes

374

1.00

EA

0374 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,

***LAWSON #19305**



Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 1-13/16"**Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-13/16"
(Pack of 1)

Item# 19305
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .9
Brand : Williams®
Mfr Model# : 6-658
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19305
Product Name : Williams® - 3/4" Drive Standard Impact Socket 1-13/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-13/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.625"
Drive End Diameter : 1.75"
Working End Diameter : 2.59375"
Bolt Clearance Depth : 1.65625"
Bolt Clearance Diameter : 1.6125"
Nose Length /Length to
Shoulder : 1.9375"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

375

1.00

EA

0375 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19306**:



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 1-7/8"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 1-7/8"
(Pack of 1)

Item# : 19306
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.03
Brand : Williams®
Mfr Model# : 6-660
Catalog Page# : 14-19
Usually Ships: 7 Today



TAA Compliant

Quantity: 1 [Check Stock](#) 7[Add to Cart](#) ▶Create a Re-order list.. ▼ [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19306
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 1-7/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 1-7/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.75"
Drive End Diameter : 1.75"
Working End Diameter : 2.625"
Bolt Clearance Depth : 1.8125"
Bolt Clearance Diameter : 1.4375"
Nose Length /Length to
Shoulder : 2.0625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

376

1.00

EA

0376 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19308**



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 2"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 2" (Pack of 1)

Item# 19308
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.46
Brand : Williams®
Mfr Model# : 6-664
Catalog Page# : 14-19
Usually Ships: 2 Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19308
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 2"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 2"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.875"
Drive End Diameter : 1.75"
Working End Diameter : 2.8125"
Bolt Clearance Depth : 1.8125"
Bolt Clearance Diameter : 1.4375"
Nose Length /Length to
Shoulder : 2.1875"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112925
TAA Compliant: Yes

377

1.00

EA

0377 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19309*



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 2-1/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 2-1/16"
(Pack of 1)

Item# 19309
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.43
Brand : Williams®
Mfr Model# : 6-666
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#) ?[Add to Cart](#) ▶[Create a Re-order list..](#) ▼ [Add to List](#)**DESCRIPTION****TECH SPECS**

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19309
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 2-1/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 2-1/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 2.875"
Drive End Diameter : 1.75"
Working End Diameter : 2.875"
Bolt Clearance Depth : 1.8125"
Bolt Clearance Diameter : 1.4375"
Nose Length /Length to
Shoulder : 2.1875"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112528
TAA Compliant: Yes

378

1.00

EA

0378 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
LAWSON #19310



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 2-3/16"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 2-3/16"
(Pack of 1)

Item# 19310
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.1
Brand : Williams®
Mfr Model# : 6-670
Catalog Page# : 14-19
Usually Ships: 2 Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)**DESCRIPTION****TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19310
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 2-3/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 2-3/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.1875"
Drive End Diameter : 1.75"
Working End Diameter : 3.0625"
Bolt Clearance Depth : 2.0625"
Bolt Clearance Diameter : 2.1875"
Nose Length /Length to
Shoulder : 2.5"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112228
TAA Compliant: Yes

379

1.00

EA

0379 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,
***LAWSON #19311*



Representative Image Only

Williams® 3/4" Drive Standard Impact Socket, 2-1/4"

Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 2-1/4"
(Pack of 1)

Item# 19311
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.17
Brand : Williams®
Mfr Model# : 6-672
Catalog Page# : [14-19](#)
Usually Ships: [2](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)**DESCRIPTION****TECH SPECS**

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specialty heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19311
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 2-1/4"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 2-1/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.1875"
Drive End Diameter : 1.75"
Working End Diameter : 3.125"
Bolt Clearance Depth : 2.15625"
Bolt Clearance Diameter : 1.84375"
Nose Length /Length to
Shoulder : 2.5"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112325
TAA Compliant: Yes

380

1.00

EA

0380 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, STANDARD LENGTH, 6 POINT,

***LAWSON #19312*



Representative Image Only

**Williams® 3/4" Drive Standard Impact
Socket, 2-3/8"**Williams® - 3/4" Drive, 6 Point, Standard Length Impact Socket, 2-3/8"
(Pack of 1)

Item# 19312
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.7
Brand : Williams®
Mfr Model# : 6-676
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19312
Product Name : Williams® - 3/4" Drive Standard Impact Socket, 2-3/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 6
Size : 2-3/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.75"
Working End Diameter : 3.25"
Bolt Clearance Depth : 2.4375"
Bolt Clearance Diameter : 1.84375"
Nose Length /Length to
Shoulder : 2.8125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

381

1.00

EA

0381 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19265*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 3/4"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 3/4" (Pack of 1)

Item# 19265
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.22
Brand : Williams®
Mfr Model# : 16-624
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19265
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 3/4"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 3/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3"
Drive End Diameter : 1.625"
Working End Diameter : 1.25"
Bolt Clearance Depth : 2.03125"
Bolt Clearance Diameter : 0.1875"
Nose Length /Length to
Shoulder : 3/4"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

382

1.00

EA

0382 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19266*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 13/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 13/16" (Pack of 1)

Item# : 19266
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.23
Brand : Williams®
Mfr Model# : 16-626
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS**

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19266
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 13/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 13/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3"
Drive End Diameter : 1.625"
Working End Diameter : 1.4375"
Bolt Clearance Depth : 2.03125"
Bolt Clearance Diameter : 0.15"
Nose Length /Length to
Shoulder : 3/4"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

383

1.00

EA

0383 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19267*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 7/8"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 7/8" (Pack of 1)

Item# 19267
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.19
Brand : Williams®
Mfr Model# : 16-628
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) [▶](#)[Create a Re-order list.. ▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19267
Product Name :	Williams® - 3/4" Drive Deep Impact Socket, 7/8"
Drive Type :	Square
Drive Size :	3/4"
Style :	Deep
Number of Points :	6
Size :	7/8"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	3"
Drive End Diameter :	1.625"
Working End Diameter :	1.4375"
Bolt Clearance Depth :	2.03125"
Bolt Clearance Diameter :	5/8"
Nose Length /Length to Shoulder :	3/4"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112628
TAA Compliant:	Yes

384

1.00

EA

0384 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19268*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 15/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 15/16" (Pack of 1)

Item# : 19268
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.22
Brand : Williams®
Mfr Model# : 16-630
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19268
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 15/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 15/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3"
Drive End Diameter : 1.825"
Working End Diameter : 1.825"
Bolt Clearance Depth : 2.03125"
Bolt Clearance Diameter : 5/8"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

385

1.00

EA

0385 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19269*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1" (Pack of 1)

Item# 19269
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.21
Brand : Williams®
Mfr Model# : 16-632
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list...](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19269
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3"
Drive End Diameter : 1.625"
Working End Diameter : 1.625"
Bolt Clearance Depth : 2.03125"
Bolt Clearance Diameter : 2.132"
Finish : Black Oxide
Locking Type : Pin
UNSPSC # : 27112626
TAA Compliant: Yes

386

1.00

EA

0386 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,

INDUSTRIAL FINISH, 1-1/16 INCH

PROTO J07517L

LAWSON #19270



Representative Image Only

**Williams® 3/4" Drive Deep Impact Socket,
1-1/16"**

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-1/16" (Pack of 1)

Item# 19270
 Price : [Log in](#)
 Standard Pack : 1 ea.
 Ship Weight : 1.21
 Brand : Williams®
 Mfr Model# : 16-634
 Catalog Page# : [14-19](#)
 Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)Create a Re-order list.. [▼](#) [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19270
 Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-1/16"
 Drive Type : Square
 Drive Size : 3/4"
 Style : Deep
 Number of Points : 6
 Size : 1-1/16"
 Measuring System : SAE
 Type : Socket
 Wrench Style : SUPERTORQUE®
 Overall Length : 3"
 Drive End Diameter : 1.625"
 Working End Diameter : 1.6875"
 Bolt Clearance Depth : 2.03125"
 Bolt Clearance Diameter : 3/4"
 Nose Length /Length to
 Shoulder : 2.3125"
 Finish : Black Oxide
 Locking Type : Pm
 UNSPSC #: 27112528
 TAA Compliant: Yes

387

1.00

EA

**0387 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,*******LAWSON #19271****

Representative Image Only

**Williams® 3/4" Drive Deep Impact Socket,
1-1/8"**

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-1/8" (Pack of 1)

Item# 19271
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.27
Brand : Williams®
Mfr Model# : 16-636
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION** **TECH SPECS****Individual Impact Sockets**

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 19271
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-1/8"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-1/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3"
Drive End Diameter : 1.625"
Working End Diameter : 1.75"
Bolt Clearance Depth : 2.03125"
Bolt Clearance Diameter : 13.16"
Nose Length /Length to
Shoulder : 2.3125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

388

1.00

EA

0388 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19272*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 1-3/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-3/16" (Pack of 1)

Item# 19272
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.42
Brand : Williams®
Mfr Model# : 16-638
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19272
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-3/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-3/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.1875"
Drive End Diameter : 1.75"
Working End Diameter : 1.9375"
Bolt Clearance Depth : 2.21875"
Bolt Clearance Diameter : 1.1875"
Nose Length /Length to
Shoulder : 2.5"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

389

1.00

EA

0389 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19273*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-1/4"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-1/4" (Pack of 1)

Item# 19273
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.73
Brand : Williams®
Mfr Model# : 16-640
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19273
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-1/4"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-1/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.25"
Drive End Diameter : 1.75"
Working End Diameter : 1.6375"
Bolt Clearance Depth : 2.28125"
Bolt Clearance Diameter : 1.25"
Nose Length /Length to
Shoulder : 2.5825"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112528
TAA Compliant: Yes

390

1.00

EA

0390 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19274**



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-5/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-5/16" (Pack of 1)

Item# 19274
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.67
Brand : Williams®
Mfr Model# : 16-642
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19274
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-5/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-5/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.25"
Drive End Diameter : 1.75"
Working End Diameter : 2"
Bolt Clearance Depth : 2.28125"
Bolt Clearance Diameter : 1.28125"
Nose Length /Length to
Shoulder : 2.5625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112628
TAA Compliant: Yes

391

1.00

EA

0391 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19275*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-3/8"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-3/8" (Pack of 1)

Item# : 19275
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.83
Brand : Williams®
Mfr Model# : 16-644
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19275
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-3/8"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-3/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.25"
Drive End Diameter : 1.75"
Working End Diameter : 2.125"
Bolt Clearance Depth : 2.28125"
Bolt Clearance Diameter : 1.375"
Nose Length /Length to
Shoulder : 2.5625"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112526
TAA Compliant: Yes

392

1.00

EA

0392 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19276*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-7/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-7/16" (Pack of 1)

Item# : 19276
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.9
Brand : Williams®
Mfr Model# : 16-646
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19276
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-7/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-7/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.75"
Working End Diameter : 2.125"
Bolt Clearance Depth : 2.53125"
Bolt Clearance Diameter : 1.40825"
Nose Length /Length to
Shoulder : 2.8125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112323
TAA Compliant: Yes

393

1.00

EA

0393 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19277*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-1/2"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-1/2" (Pack of 1)

Item# 19277
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.14
Brand : Williams®
Mfr Model# : 16-648
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS**

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19277
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-1/2"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-1/2"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.75"
Working End Diameter : 2.25"
Bolt Clearance Depth : 2.53125"
Bolt Clearance Diameter : 1.5"
Nose Length /Length to
Shoulder : 2.6125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112326
TAA Compliant: Yes

394

1.00

EA

0394 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19278*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-9/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-9/16" (Pack of 1)

Item# 19278
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.21
Brand : Williams®
Mfr Model# : 16-650
Catalog Page# : [14-19](#)
Usually Ships: Ⓢ Today



TAA Compliant

Quantity: 1 [Check Stock](#) ⓘ[Add to Cart](#) ▶[Create a Re-order list..](#) ▼ [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19278
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-9/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-9/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.75"
Working End Diameter : 2.3125"
Bolt Clearance Depth : 2.53125"
Bolt Clearance Diameter : 1.5625"
Nose Length /Length to
Shoulder : 2.3125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC # : 27112222
TAA Compliant: Yes

395

1.00

EA

0395 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19279*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-5/8"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-5/8" (Pack of 1)

Item# 19279
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.46
Brand : Williams®
Mfr Model# : 16-652
Catalog Page# : [14-19](#)
Usually Ships: [Today](#)



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) ▶[Create a Re-order list.. ▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19279
Product Name :	Williams® - 3/4" Drive Deep Impact Socket, 1-5/8"
Drive Type :	Square
Drive Size :	3/4"
Style :	Deep
Number of Points :	6
Size :	1-5/8"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	3.6"
Drive End Diameter :	1.75"
Working End Diameter :	2.4375"
Bolt Clearance Depth :	2.53125"
Bolt Clearance Diameter :	1.625"
Nose Length /Length to Shoulder :	2.8125"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112328
TAA Compliant:	Yes

396

1.00

EA

0396 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19280*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-11/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-11/16"
(Pack of 1)

Item# 19280
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.53
Brand : Williams®
Mfr Model# : 16-654
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# :	19280
Product Name :	Williams® - 3/4" Drive Deep Impact Socket, 1-11/16"
Drive Type :	Square
Drive Size :	3/4"
Style :	Deep
Number of Points :	6
Size :	1-11/16"
Measuring System :	SAE
Type :	Socket
Wrench Style :	SUPERTORQUE®
Overall Length :	3.5"
Drive End Diameter :	1.75"
Working End Diameter :	2.5"
Bolt Clearance Depth :	2.53125"
Bolt Clearance Diameter :	1.6875"
Nose Length /Length to Shoulder :	2.6125"
Finish :	Black Oxide
Locking Type :	Pin
UNSPSC #:	27112626
TAA Compliant:	Yes

397

1.00

EA

0397 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19281*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-3/4"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-3/4" (Pack of 1)

Item# 19281
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.51
Brand : Williams®
Mfr Model# : 16-656
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19281
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-3/4"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-3/4"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.5"
Drive End Diameter : 1.75"
Working End Diameter : 2.5"
Bolt Clearance Depth : 2.53125"
Bolt Clearance Diameter : 1.75"
Nose Length /Length to
Shoulder : 2.6125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112626
TAA Compliant: Yes

398

1.00

EA

0398 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19282*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 1-13/16"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-13/16"
(Pack of 1)

Item# 19282
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.88
Brand : Williams®
Mfr Model# : 16-658
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19282
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-13/16"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-13/16"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.75"
Drive End Diameter : 1.75"
Working End Diameter : 2.625"
Bolt Clearance Depth : 2.75"
Bolt Clearance Diameter : 1.8125"
Nose Length /Length to
Shoulder : 2.78125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

399

1.00

EA

0399 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19283*



Representative Image Only



Williams® 3/4" Drive Deep Impact Socket, 1-7/8"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 1-7/8" (Pack of 1)

Item# 19283
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.95
Brand : Williams®
Mfr Model# : 16-660
Catalog Page# : [14-19](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)[Create a Re-order list..](#) [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19283
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 1-7/8"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 1-7/8"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.75"
Drive End Diameter : 1.75"
Working End Diameter : 2.6875"
Bolt Clearance Depth : 2.75"
Bolt Clearance Diameter : 1.875"
Nose Length /Length to
Shoulder : 2.78125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

400

1.00

EA

0400 - 3/4 INCH SQUARE DRIVE IMPACT
SOCKETS, BOLT CLEARANCE LENGTH, 6 POINT,
***LAWSON #19284*



Representative Image Only

Williams® 3/4" Drive Deep Impact Socket, 2"

Williams® - 3/4" Drive, 6 Point, Deep Length Impact Socket, 2" (Pack of 1)

Item# 19284
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.16
Brand : Williams®
Mfr Model# : 16-664
Catalog Page# : [14-19](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS

Individual Impact Sockets

- Black industrial finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Designed for maximum engagement on 6 point fasteners
- Suitable for use with pneumatic and electric impact wrenches
- Specially heat-treated for impact use to provide long life, safety and durability
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19284
Product Name : Williams® - 3/4" Drive Deep Impact Socket, 2"
Drive Type : Square
Drive Size : 3/4"
Style : Deep
Number of Points : 6
Size : 2"
Measuring System : SAE
Type : Socket
Wrench Style : SUPERTORQUE®
Overall Length : 3.75"
Drive End Diameter : 1.75"
Working End Diameter : 2.1875"
Bolt Clearance Depth : 2.75"
Bolt Clearance Diameter : 2"
Nose Length /Length to
Shoulder : 2.78125"
Finish : Black Oxide
Locking Type : Pin
UNSPSC #: 27112828
TAA Compliant: Yes

401

1.00

EA

0401 - LADDERS, ELECTRICAL EXTENSION
LADDER, NON-CONDUCTIVE, 300 POUND

***LAWSON #1329988*



Louisville Ladder 24' Fiberglass Extension Ladder, 300 lbs., Type IA


Louisville Ladder - 24' Fiberglass Extension Ladder, 300 lbs., Type IA (Pack of 1)

Item# 1329988
 Price : [Log In](#)
 Standard Pack : 1 ea.
 Brand : Louisville Ladder
 Mfr Model# : FE3224
 Catalog Page# : 15-69
 Usually Ships: 5 to 7 Business Days



Representative Image Only

TAA Compliant



Quantity: 1

Add to Cart ►

Create a Re-order list.. ▼ Add to List

DESCRIPTION TECH SPECS

- Outside slide guides
- D-shape rungs fully serrated for slip resistant surface
- Mar-resistant rail end caps
- QuickLatch® rung lock for better secure operation
- Swivel safety shoes to be used as tread down or in spike position
- Meets ANSI A 14.5
- Conforms to OSHA regulations
- Meets or exceeds CSA testing requirements

DESCRIPTION TECH SPECS

Item# : 1329988
 Product Name : Louisville Ladder - 24' Fiberglass Extension Ladder, 300 lbs. Type IA
 Material : Fiberglass
 Load Capacity : 300 lb
 Duty Rating : IA
 Ladder Size : 24 ft
 Number of Steps : 24
 Maximum Standing Height : 17' 3"
 Rung Style : D-Rung
 Series : FE3200
 Length Each Section : 12 ft
 Maximum Extension Length : 21 ft
 Inside Width Base : 14.6675"
 Outside Width Base : 17.0825"
 Inside Width Fly : 13.6675"
 Outside Width Fly : 16.0625"
 Rail Depth : 3.25"
 Stack Height : 6.25"
 UPC : 723565200051
 UNSPSC #: 30191501
 TAA Compliant: Yes

402

1.00

EA

0402 - LADDERS, INDUSTRIAL STEP LADDER,
NON-CONDUCTIVE, 300 POUND WORKLOAD,
***LAWSON #1329467*



Representative Image Only



Louisville Ladder 4' Fiberglass Stepladder, 300 lbs., Type IA

Louisville Ladder - 4' Fiberglass Stepladder, 300 lbs., Type IA (Pack of 1)

Item# 1329467
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Louisville Ladder
Mfr Model# : L-3016-04
Usually Ships: 5 to 7 Business Days



TAA Compliant

Quantity: 1

Add to Cart

Create a Re-order list. Add to List

DESCRIPTION TECH SPECS

A non-conductive fiberglass stepladder meant for heavy duty use capable of supporting 300lbs. equipped with a molded top with handyman tool slots and aluminum angle slip resistant rubber feet

- Molded top with handyman's tool slots
- Aluminum angle slip resistant rubber feet
- pinch-resistant spreader braces
- heavy duty gusset bracing
- ANSI A 14.5
- OSHA
- CSA

DESCRIPTION TECH SPECS

Item# : 1329467
Product Name : Louisville Ladder - 4' Fiberglass Stepladder, 300 lbs., Type IA
Type : Stepladder
Material : Fiberglass
Load Capacity : 300 lb
Duty Rating : IA
Ladder Size : 4 ft
Series : L-3016
Bottom Width : 18.797"
Spread : 28.207"
Step Depth : 3"
UPC : 728885108467
UNSPSC #: 30191501
TAA Compliant: Yes

403

1.00

EA

0403 - LADDERS, INDUSTRIAL STEP LADDER,
NON-CONDUCTIVE, 300 POUND WORKLOAD,
***LAWSON #1329764*



Representative Image Only



Louisville Ladder 6' Fiberglass Stepladder, 300 lbs., Type IA

Louisville Ladder - 6' Fiberglass Stepladder, 300 lbs., Type IA (Pack of 1)

Item# 1329764
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Louisville Ladder
Mfr Model# : L-3016-G6
Usually Ships: 5 to 7 Business Days



TAA Compliant

Quantity: 1

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

A non-conductive fiberglass stepladder meant for heavy duty use capable of supporting 300lbs equipped with a molded top with handyman tool slots and aluminum angle slip resistant rubber feet

- Molded top with handyman's tool slots
- Aluminum angle slip resistant rubber feet
- pinch-resistant spreader braces
- heavy duty gusset bracing
- ANSI A 14.5
- OSHA
- CSA

DESCRIPTION TECH SPECS

Item# : 1329764
Product Name : Louisville Ladder - 6' Fiberglass Stepladder, 300 lbs Type IA
Type : Stepladder
Material : Fiberglass
Load Capacity : 300 lb
Duty Rating : IA
Ladder Size : 6 ft
Series : L-3016
Bottom Width : 21.767"
Spread : 40.037"
Step Depth : 3"
UPC : 725355106404
UNSPSC #: 30191501
TAA Compliant: Yes

404

1.00

EA

0404 - LADDERS, INDUSTRIAL STEP LADDER,
NON-CONDUCTIVE, 300 POUND WORKLOAD,
***LAWSON #1329804*



Louisville Ladder 8' Fiberglass Stepladder, 300 lbs., Type IA

Louisville Ladder - 8' Fiberglass Stepladder, 300 lbs., Type IA (Pack of 1)

Item# 1329804
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Louisville Ladder
Mfr Model# : FS1508
Catalog Page# : 15-68
Usually Ships: 5 to 7 Business Days



TAA Compliant



Quantity: 1

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- DaBoot™ non-marring slip-resistant rail tread
- Inside spreader braces
- Wide back braces
- Double rivet step construction
- SHOX™ side rail impact absorption system
- ProTop™ multipurpose tray
- Meets ANSI A14.5
- Conforms to OSHA regulations
- Meets or exceeds CSA testing requirements

DESCRIPTION TECH SPECS

Item# : 1329804
Product Name : Louisville Ladder - 8' Fiberglass Stepladder 300 lbs Type IA
Type : Stepladder
Material : Fiberglass
Load Capacity : 300 lb
Duty Rating : IA
Ladder Size : 8 ft
Number of Steps : 7
Maximum Standing Height : 5' 8"
Series : FS1500
Bottom Width : 25.536"
Spread : 52.75"
Step Depth : 3"
UPC : 725385200135
UNSPSC #: 30161501
TAA Compliant: Yes

405

1.00

EA

0405 - LADDERS, FIBERGLASS STEP LADDERS,
300 POUND WORKLOAD, 10 FOOT HEIGHT,
***LAWSON #1329778*



Louisville Ladder 10' Fiberglass Stepladder, 300 lbs., Type IA

Louisville Ladder - 10' Fiberglass Stepladder, 300 lbs., Type IA (Pack of 1)

Item# 1329778
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Louisville Ladder
Mfr Model# : L-3016-10
Usually Ships: 5 to 7 Business Days



TAA Compliant

Quantity: 1

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

A non-conductive fiberglass stepladder meant for heavy duty use capable of supporting 300lbs. equipped with a molded top with handyman tool slots and aluminum angle slip resistant rubber feet

- Molded top with handyman's tool slots
- Aluminum angle slip resistant rubber feet
- pinch-resistant spreader braces
- heavy duty gusset bracing
- ANSI A 14.5
- OSHA
- CSA

DESCRIPTION TECH SPECS

Item# : 1329778
Product Name : Louisville Ladder - 10' Fiberglass Stepladder, 300 lbs., Type IA
Type : Stepladder
Material : Fiberglass
Load Capacity : 300 lb
Duty Rating : IA
Ladder Size : 10 ft
Series : L-3016
Bottom Width : 27.638"
Spread : 64.086"
Step Depth : 3"
UPC : 726865108517
UNSPSC #: 30101501
TAA Compliant: Yes

406	405.00	EA	0406 - MISCELLANEOUS, MEASURING TAPE, 25 FOOT X 1 INCH BLADE, LOCKING ***LAWSON #97650*
-----	--------	----	---

Measuring Tape, Power Return, 25' x 1"

25' Long x 1" Wide Chrome Case Tape Measure, English, Chrome (Pack of 1)



Item# 97650
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.03
Catalog Page# : [14-75](#)
Usually Ships: Today

WARNING



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS RESTRICTIONS

• Made in the USA

DESCRIPTION TECH SPECS RESTRICTIONS

Item# : 97650
Product Name : Measuring Tape Power Return, 25' x 1"
Type : Power Return
Style : Chrome Case
Blade Width : 1"
Blade Length : 25 ft
Body Color : Chrome
Measuring System : English
UNSPSC #: 27111801
TAA Compliant: No

407

40.00

EA

0407 - MISCELLANEOUS, CARPENTERS LEVEL,
24 INCH LENGTH, BREAK RESISTANT ACRYLIC
***LAWSON #27890*

Empire Level 24" Magnum Level

Empire Level - 24" Aluminum Composite Masonry Level, 3 Vials: Plumb -
Level - Plumb (Pack of 1)



Item# 27890
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.5
Brand : Empire Level
Mfr Model# : E90.24
Catalog Page# : [14-74](#)
Usually Ships: Today



Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- Great substitute for any wood level – four times more durable
- Larger vials are easier to read

DESCRIPTION TECH SPECS

Item# : 27890
Product Name : Empire Level - 24" Magnum Level
Type : Masonry
Length : 24"
Number of Vials : 3
Vial Positions : Plumb - Level - Plumb
Material : Aluminum Composite
Base Type : Flat
UNSPSC #: 27111802
TAA Compliant: No

408	1.00	EA	0408 - MISCELLANEOUS, MECHANICS STARTER SETS, 138 SET PIECE WITH STORAGE BOX PROTO J99701	NO BID	NO BID
409	1.00	EA	0409 - MISCELLANEOUS, MECHANICS STARTER SETS WITHOUT CHEST 138 PIECE SET PROTO J99700	NO BID	NO BID
410	1.00	EA	0410 - MISCELLANEOUS, BASIC TOOL SETS, 62 PIECES WITH STORAGE BOX PROTO J99201	NO BID	NO BID
411	1.00	EA	0411 - MISCELLANEOUS, BASIC TOOL SETS, WITHOUT CHEST, 62 PIECES PROTO J99200	NO BID	NO BID
412	1.00	EA	0412 - MISCELLANEOUS, PIPE DESCALERS, TO REMOVE CORROSION AND DEBRIS FROM PIPE SURFACE, ZINC PLATED STEEL, PIPE CAPACITY 3 INCH - 12 INCH, 32 INCH LONG, 7 POUNDS, REED NO. DS-12 08000	NO BID	NO BID
413	1.00	EA	0413 - MISCELLANEOUS, PIPE DESCALERS, TO REMOVE CORROSION AND DEBRIS FROM PIPE SURFACE, ZINC PLATED STEEL, PIPE CAPACITY 3 INCH - 36 INCH, 4 INCH LONG, 12 POUNDS, REED NO. DS-37 08006	NO BID	NO BID
414	2.00	EA	0414 - SAW AND BLADES CIRCULAR SAW BLADE TIP MATERIAL: CARBIDE BLADE TYPE: COMBINATION BLADE DIAMETER: 8-1/2 INCH NUMBER OF TEETH: 60 ARBOR HOLE: 5/8 INCH KERF: 0.094 INCH APPLICATION: FINISHING BLADE FOR SMOOTH RIPPING AND CROSSCUTTING IN HARD AND SOFT WOOD, BUILDING MATERIALS, PLYWOOD, CHIPBOARD, PANELING, AND PRESSBOARD DIAMOND KNOCKOUT: NO	NO BID	NO BID
415	1.00	EA	0415 - SAW AND BLADES CIRCULAR SAW BLADE TIP MATERIAL: CARBIDE BLADE TYPE: FINISHING BLADE DIAMETER: 10 INCH NUMBER OF TEETH: 80 ARBOR HOLE: 5/8 INCH KERF: 0.110 INCH APPLICATION: FOR WOOD CUTTING DIAMOND KNOCKOUT: NO TOOTH GRIND: ATB HOOK ANGLE: -5 DEGREES CUTTING DEPTH: 4 INCHES MAX. RPM: 6000 PLATE THICKNESS: 0.087 INCHES FOR USE WITH: TABLE, RADIAL ARM AND MITER SAWS MANUFACTURER: DEWALT MFR. MODEL NO. DW7647	NO BID	NO BID
416	1.00	EA	0416 - SAW AND BLADES CIRCULAR SAW BLADE TIP MATERIAL: CARBIDE BLADE TYPE: FINISHING BLADE DIAMETER: 12 INCH NUMBER OF TEETH: 80 ARBOR HOLE: 1 INCH KERF: 0.106 INCH	NO BID	NO BID
417	1.00	ST	0417 - SAW AND BLADES DADO BLADE SET BLADE DIAMETER: 8 INCH CUTTING WIDTH: 29/32 INCH CUTTING DEPTH: 1/8 INCH DESIGN: STACKED ARBOR HOLE: 5/8 INCH DIAMOND KNOCKOUT: YES	NO BID	NO BID

418

1.00

PK

0418 - MISCELLANEOUS, SANDPAPER
SANDING SHEET

LAWSON #85655A



Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet

Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet, 9" Width x 11"
Length, Aluminum Oxide Grain, 80 Grit (Pack of 25)

Item# 85655A
Price : [Log In](#)
Standard Pack : 25 ea.
Ship Weight : 1.75
Catalog Page# : 12-53
Usually Ships: Today

[SDS Documents](#)



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS ALTERNATES

- Aluminum oxide grain has long life
- Resists loading and tearing
- Designed for aggressive cutting action

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION TECH SPECS ALTERNATES

Item# : 85655A
Product Name : Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet
Type : Non-Pressure Sensitive
Length : 11"
Width : 9"
Grit : 80
UNSPSC #: 31191501
TAA Compliant: No

419

1.00

PK

0419 - MISCELLANEOUS, SANDPAPER
SANDING SHEET

LAWSON #85674A



Representative Image Only



Emery Cloth

Emery Cloth, 9" x 11", Medium Grade (Pack of 25)

Item# 85674A
Price : [Log In](#)
Standard Pack : 25 ea.
Ship Weight : 1.54
Catalog Page# : [12-54](#)
Usually Ships: Today

[SDS](#)
[Documents](#)
TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) [Create a Re-order list.. ▼](#) [Add to List](#)

DESCRIPTION

TECH SPECS

- Good for rust removal and general-purpose metal sanding

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION

TECH SPECS

Item# : 85674A
Product Name : Emery Cloth
Type : Emery Cloth
Length : 11"
Width : 9"
Grit : 100
Grade : Medium
Sheets : 25
UNSPSC #: 31191501
TAA Compliant: Yes

420

1.00

PK

0420 - MISCELLANEOUS, SANDPAPER
SANDING SHEET

LAWSON #88692



Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet

Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet, 9" Width x 11" Length, Aluminum Oxide Grain, 120 Grit (Pack of 25)

Item# 88692
Price : [Log In](#)
Standard Pack : 25 ea.
Ship Weight : 1.23
Catalog Page# : [12-53](#)
Usually Ships: [?](#) Today

[SDS Documents](#)



Quantity: 1 [Check Stock](#) [?](#)

[Add to Cart](#)

Create a Re-order list.. [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

- Aluminum oxide grain has long life
- Resists loading and tearing
- Designed for aggressive cutting action

CAUTION Protect yourself from product breakage and flying particles. Always wear eye and face protection and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION TECH SPECS

Item# : 88692
Product Name : Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet
Type : Non-Pressure Sensitive
Length : 11 "
Width : 9 "
Grit : 120
UNSPSC #: 31101501
TAA Compliant: No

421

1.00

PK

0421 - MISCELLANEOUS, SANDPAPER
SANDING SHEET

***LAWSON #99450**

**Tuff-Grit Non-Pressure Sensitive Adhesive
(PSA) Sandpaper Sheet**Tuff-Grit - Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet, 9"
Width x 11" Length, Aluminum Oxide Grain, 220 Grit (Pack of 25)

Item# : 99450
Price : [Log In](#)
Standard Pack : 25 ea.
Ship Weight : 1.0
Brand : Tuff-Grit
Catalog Page# : 12-53
Usually Ships: 2 Today

[SDS](#)
[Documents](#)
TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION** **TECH SPECS**

- Premium aluminum oxide grain
- Special agents virtually eliminate loading
- Flexible resin bond system produces greater resistance to heat and increased durability
- Cool, free cutting action over long periods of time
- Lasts up to 300% longer than competitive, non-loading products
- Excellent for hand-sanding and block-sanding on all paint coatings and non-ferrous metals – use fine grits for all primer and primer surfaces
- Intermediate to finish sanding on all wood surfaces
- Coarse grit rolls are excellent for file board applications

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION **TECH SPECS**

Item# : 99450
Product Name : Tuff-Grit - Non-Pressure Sensitive Adhesive (PSA) Sandpaper Sheet
Type : Aluminum Oxide Plus
Length : 11 "
Width : 9 "
Grit : 220
UNSPSC #: 31191501
TAA Compliant: Yes


422

6.00

PK

0422 - ANCHOR
TYPE: SELF DRILLING

LAWSON #18284

**Toggler® SnapSku® Mini Nylon Self-Drilling
Wall Anchor**Toggler® - SnapSku® Mini, Nylon Self-Drilling Wall Anchor, #6 - #8 Screw
Diameter (Pack of 25)

Item# 18284
Price : [Log In](#)
Standard Pack : 25 ea.
Ship Weight : .07
Brand : Toggler®
Catalog Page# : [6-41](#)
Usually Ships: ⚙ Today

[Documents](#)
TAA CompliantQuantity: 1 [Check Stock ?](#)[Add to Cart](#) ▶Create a Re-order list.. ▼ [Add to List](#)**DESCRIPTION** **TECH SPECS** **ACCESSORIES**

- Anchor locks on wall, hear it "pop" and lock
 - Shock- and vibration-resistant
 - Installs with a screwdriver or screw gun, no pre-drilling necessary
 - Positive stop resists over-turning
 - Screw and fixture can be removed, leaving anchor in wall for reuse
 - Remove and reinstall anchor in same hole
 - For use in 3/8", 1/2" and 5/8" drywall applications
1. Press tip of SnapSku™ anchor into drywall using a No. 2 Phillips screwdriver or screw gun. Drive anchor clockwise into drywall until anchor stops flush with wall
 2. Place item over anchor and insert screw
 3. Tighten screw flush with item. Screw "pops" open anchor, locking anchor to wall


DESCRIPTION **TECH SPECS** **ACCESSORIES**

Item# : 18284
Product Name : Toggler® - SnapSku® Mini Nylon Self-Drilling Wall Anchor
Type : Wall Anchor
Description : SnapSku® Mini
Material : Nylon
Screw Diameter : No. 6 - No. 8
Recommended Screw Length Item Thickness + 1"
Overall Length : 1-1/4"
Screw Size : No. 6 - No. 8
Flange Diameter : Ø 4"
UNSPSC #: 31182103
TAA Compliant: Yes

423	10.00	PK	0423 - BRAD NAIL NAIL LENGTH (IN.): 1/2 GAUGE: 18 CONSTRUCTION: STEEL COLOR: NATURAL FOR USE WITH: MFR. NO. TR250, TRE550 PACKAGE QUANTITY: 1000 MANUFACTURER: STANLEY MFR. MODEL NO. SWKBN050S	NO BID	NO BID
424	10.00	PK	0424 - BRAD NAIL NAIL LENGTH (IN.): 1-3/16 GAUGE: 18 CONSTRUCTION: STEEL COLOR: NATURAL FOR USE WITH: MFR. NO. TRE650, ETROOD PACKAGE QUANTITY: 1000 MANUFACTURER: STANLEY MFR. MODEL NO. SWKBN1187	NO BID	NO BID
425	10.00	PK	0425 - BRAD NAIL NAIL LENGTH (IN.): 1-1/4	NO BID	NO BID
426	2.00	PK	0426 - STRAIGHT FINISH NAILS HEAD STYLE: FLAT COLLATION CONFIGURATION: STICK COLLATION TYPE: ADHESIVE GAUGE: 16 GAUGE LENGTH: 1-1/2 INCH POINT TYPE: CHISEL SHANK: SMOOTH MATERIAL: STEEL FINISH: COATED FOR USE WITH: MFR. NO. FN16250K-2, SB-1664FN MANUFACTURER: BOSTICH MFR. MODEL NO. SB16-1.50	NO BID	NO BID
427	2.00	PK	0427 - STRAIGHT FINISH NAILS HEAD STYLE: FLAT COLLATION CONFIGURATION: STICK COLLATION TYPE: ADHESIVE GAUGE: 16 GAUGE LENGTH: 2 INCH POINT TYPE: CHISEL SHANK: SMOOTH MATERIAL: STEEL FINISH: COATED FOR USE WITH: MFR. NO. FN16250K-2, SB-1664FN MANUFACTURER: BOSTICH MFR. MODEL NO. SB16-2.00	NO BID	NO BID

428	2.00	PK	0428 - STRAIGHT FINISH NAILS HEAD STYLE: FLAT COLLATION CONFIGURATION: STICK COLLATION TYPE: ADHESIVE GAUGE: 16 GAUGE LENGTH: 2-1/2 INCH POINT TYPE: CHISEL SHANK: SMOOTH MATERIAL: STEEL FINISH: COATED FOR USE WITH: MFR. NO. FN16250K-2, SB-1664FN MANUFACTURER: BOSTICH MFR. MODEL NO. SB16-2.50	NO BID	NO BID
-----	------	----	---	--------	--------

429	2.00	PK	0429 - BI-METAL UTILITY BLADE LENGTH: 2-3/8 INCH	***LAWSON #93208***	
-----	------	----	---	---------------------	--

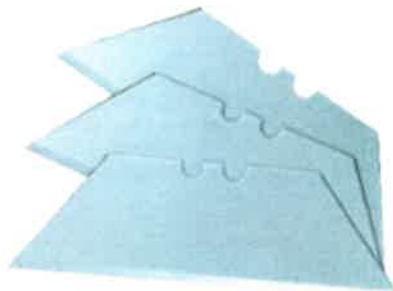

Razor Blade Utility Knife

Replacement Razor Blade, 2 Notch Design. For use with 93207 & KT13442 Utility Knives. (Pack of 50)

Item# 93208
Price : [Log In](#)
Standard Pack : 50 ea.
Ship Weight : .48
Catalog Page# : 14-70
Usually Ships: Today

TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

TECH SPECS

Item# : 93208
Product Name : Razor Blade Utility Knife
Type : Replacement Blades (100/bx)
Style : Utility Knife
Thickness : .025"
Material : Steel
Can Be Used With : 93207
UNSPSC #: 27111501
TAA Compliant: Yes

430

12.00

EA

0430 - SANDING BELT
WIDTH: 3 INCH

***LAWSON #51844**:

Tuff-Grit Abrasive Belt

Tuff-Grit - Abrasive Belt for Portable File, 3" x 24", 60X Grit (Pack: of 10)



Item# 51844
Price : [Log In](#)
Standard Pack : 10 ea.
Ship Weight : 1.02
Brand : Tuff-Grit
Catalog Page# : [12-31](#)
Usually Ships: Today

[SDS](#)
[Documents](#)
TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- Premium dense coat aluminum oxide grain is resin-bonded on strong X weight cloth backing
- Aggressive cutting action and excellent resistance to sanding heat
- Used on portable files, portable belt sanders and benchstand belt sanders
- Designed for a wide variety of ferrous metalworking and light woodworking applications

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1.

DESCRIPTION TECH SPECS

Item# : 51844
Product Name : Tuff-Grit - Abrasive Belt
Type : Portable Belt
Length : 24"
Width : 3"
Grit : 60
UNSPSC #: 31101507
TAA Compliant: Yes

431	12.00	EA	0431 - SANDING BELT WIDTH: 3 INCH	***LAWSON #51843**
-----	-------	----	--------------------------------------	--------------------



Tuff-Grit Abrasive Belt

Tuff-Grit - Abrasive Belt for Portable File, 3" x 24", 80X Grit (Pack of 10)

Item# 51843
 Price : [Log In](#)
 Standard Pack : 10 ea.
 Ship Weight : .93
 Brand : Tuff-Grit
 Catalog Page# : 12-31
 Usually Ships: Today

SDS
 Documents
 TAA Compliant



Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. **Add to List**

DESCRIPTION TECH SPECS

- Premium close coat aluminum oxide grain is resin-bonded on strong X weight cloth backing
- Aggressive cutting action and excellent resistance to sanding heat
- Used on portable files, portable belt sanders and benchstand belt sanders
- Designed for a wide variety of ferrous metalworking and light woodworking applications

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION TECH SPECS

Item# : 51843
 Product Name : Tuff-Grit - Abrasive Belt
 Type : Portable Belt
 Length : 24"
 Width : 3"
 Grit : 80
 UNSPSC #: 31191507
 TAA Compliant: Yes

432	12.00	EA	0432 - SANDING BELT WIDTH: 3 INCH	NO BID	NO BID
			LENGTH: 24 INCH ABRASIVE TYPE: CLOSED COAT ABRASIVE MATERIAL: ALUMINUM OXIDE GRIT: 100 GRADE: MEDIUM SERIES: R255 METALITE BACKING MATERIAL: CLOTH BACKING WEIGHT: X COLOR: BROWN MANUFACTURER: NORTON MFR. MODEL NO. 78072727933		

433

12.00

EA

0433 - SANDING BELT
WIDTH: 3 INCH

LAWSON #51842



Tuff-Grit Abrasive Belt

Tuff-Grit - Abrasive Belt for Portable File, 3' x 24", 120X Grit (Pack of 10)

Item# 51842
Price : [Log In](#)
Standard Pack : 10 ea.
Ship Weight : 1.03
Brand : Tuff-Grit
Catalog Page# : [12-31](#)
Usually Ships: Today

[SDS](#)
[Documents](#)
TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- Premium close coat aluminum oxide grain is resin-bonded on strong X weight cloth backing
- Aggressive cutting action and excellent resistance to sanding heat
- Used on portable files, portable belt sanders and benchstand belt sanders
- Designed for a wide variety of ferrous metalworking and light woodworking applications

CAUTION: Protect yourself from product breakage and flying particles. Always wear eye and face protection, and make sure machine guards are in place. Comply with ANSI B7.1

DESCRIPTION TECH SPECS

Item# : 51842
Product Name : Tuff-Grit - Abrasive Belt
Type : Portable Belt
Length : 24'
Width : 3'
Grit : 120
UNSPSC #: 31101507
TAA Compliant: Yes

434

12.00

EA

0434 - ABRASIVE CUT-OFF WHEEL
TYPE: 1

***LAWSON #64007**



Representative Image Only

Cut-Off Wheel

Cut-Off Wheel, 4-1/2" Diameter, Aluminum Oxide Grain, Type 27, 0.045" Thick, 7/8" Arbor (Pack of 2)

Item# 64007
Price : [Log In](#)
Standard Pack : 2 ea.
Ship Weight : .21
Catalog Page# : 12-5
Usually Ships: 2 Today

WARNING
 SDS
[Documents](#)
TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION TECH SPECS RESTRICTIONS ACCESSORIES ALTERNATES

- Right angle cut-off wheels allow you to easily cut flush to the work surface
- Manufactured with premium Aluminum Oxide (A/O) grain for fast cutting
- Made in USA
- Specially designed for multiple project applications
- Designed for use on right-angle grinders
- Designed for cutting only

NOTE These wheels are not to be used for grinding. Use for cut-off applications only

CAUTION Always operate equipment with guards in place. Never use a worn, larger diameter wheel on a small grinder.

DESCRIPTION TECH SPECS RESTRICTIONS ACCESSORIES ALTERNATES

Item# : 64007
Product Name : Cut-Off Wheel
Type : Cut-Off Wheels
Grain : Aluminum Oxide
Diameter : 4-1/2"
Arbor : 7/8"
Wheel Type : 27
Thickness : 0.045"
Maximum RPM : 13 300
UNSPSC # : 31181600
Industry # : LLFGS056
TAA Compliant: Yes

DESCRIPTION TECH SPECS RESTRICTIONS ACCE

California Proposition 65:
WARNING Cancer - www.P65Warnings.ca.gov

435

6.00

EA

0435 - DEPRESSED CENTER WHEEL
TYPE: TYPE 27

***LAWSON #93491**



Premium Grinding Wheel

Premium Grinding Wheel, 4-1/2" Diameter, Aluminum Oxide Grain, Type 27, 1/8" Thick, 7/8" Arbor (Pack of 1)

Item# 93491
 Price : [Log In](#)
 Standard Pack : 1 ea.
 Ship Weight : .22
 Catalog Page# : [12-11](#)
 Usually Ships: [?](#) Today

[SDS](#)
[Documents](#)
 TAA Compliant



Quantity: 1 [Check Stock ?](#)

[Add to Cart](#) [▶](#)

Create a Re-order list.. [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS ALTERNATES

- Aluminum oxide grain for high metal removal rate
- Unique floating pressure cap allows quick positive mounting and dismounting without wrench
- Made in USA
- Specialty designed for use on high-speed right-angle grinders

CAUTION: Always operate equipment with guards in place. Never use a worn, larger diameter wheel on a small grinder. Be sure grinding wheels and machines are in good condition. Wear adequate personal safety protection.

DANGER: Use grinding wheels on machinery designed expressly for that purpose. Never use grinding wheels on Sanders or other equipment operating at speeds exceeding the rated free speed marked on the wheel.

DESCRIPTION TECH SPECS ALTERNATES

Item# : 93491
 Product Name : Premium Grinding Wheel
 Type : Premium
 Application : Ferrous Metal & Stainless Steel, Cutting, Notching and Light Grinding
 Grain : Aluminum Oxide
 Diameter : 4-1/2"
 Arbor : 7/8"
 Wheel Type : 27
 Thickness : 1/8"
 Maximum RPM : 13,300
 UNSPSC #: 31191800
 TAA Compliant: Yes

436

1.00

EA

0436 - PANEL SAW
BLADE DIAMETER: 8 INCH

NO BID

NO BID

437

1.00

ST

0437 - PILOT POINT DRILL BIT SET
SIZES (IN.): 1/16 TO 1/2

***LAWSON #84750A**



Regency® Jobber Length Drill Bit Kit

Regency® - Jobber Drill Bit Set, 1/16 to 1/2 by 64ths, 135° Modified Split Point, High Speed Steel (HSS), Gold Finish, 29 Pc. (Pack of 1)

Item# 84750A
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.92
Brand : Regency®
Catalog Page# : 11-8
Usually Ships: Ⓢ Today



[Documents](#)
TAA Compliant:



Quantity: 1 [Check Stock](#) ⓘ

[Add to Cart](#) ▶

Create a Re-order list.. ▼ [Add to List](#)

DESCRIPTION TECH SPECS ACCESSORIES

- 135° modified split point
 - Self-centering point eliminates drill walking
 - Manufactured from top-quality high-speed steel to reduce breakage and chipping for increased toughness and longer tool life
 - Drill size equals the shank size
 - Gold finish
 - Made in USA
 - The three-flat shank design provides a positive grip that prevents the drill bit from slipping in the drill chuck
 - Comes supplied in a high-impact storage index
- CAUTION: Any cutting tool may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.

DESCRIPTION TECH SPECS ACCESSORIES

Item# : 84750A
Product Name : Regency® - Jobber Length Drill Bit Kit
Drill Length : Jobber
Drill Type : Fractional Set
Type : Heavy Duty Set
Material : High Speed Steel
Finish : Gold
Diameter : 1/16 to 1/2 by 64ths
Point : 135° Modified Split
Flute Length : Multiple "
Shank : Straight
Flats : Multiple
Overall Length : Multiple "
Case : High-Impact
UNSPSC #: 23241834
TAA Compliant: Yes

438	1.00	ST	0438 - PILOT POINT DRILL BIT SET MATERIAL: COBALT FINISH: GOLD FERROUS OXIDE NUMBER OF PIECES: 29 INCLUDES: 1/16 TO 1/2 INCH BY 64THS WITH STORAGE CASE MANUFACTURER: DEWALT MFR. MODEL NO. DW1269	NO BID	NO BID
-----	------	----	---	--------	--------

439	1.00	ST	0439 - PRO-DRILLING AND DRIVING SET NUMBER OF PIECES: 80 ***LAWSON #FA5108***
-----	------	----	--



Falcon Tools® Screwdriver Master Bit Set, S2 Tool Steel, 100pc

Falcon Tools® - 100pc Master Screwdriver Bit Set, S2 Tool Steel (Pack of 1)

Item# **FA5108**
 Price : [Log In](#)
 Standard Pack : 1 ea.
 Ship Weight : 1.63
 Brand : Falcon Tools®
 Catalog Page# : [14-37](#)
 Usually Ships: Today

FALCON
TOOLS®

TAA Compliant

Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- The most complete bit set you will ever need
 - Includes 65 1/4" hex insert bits and five accessory pieces
 - Bits are manufactured from S2 tool steel
 - Products include genuine licensed TORX®, ACR®, Tri-Wing®, Torq-Set® and Pozidriv®
- FA5500 through FA5599 included in set

DESCRIPTION TECH SPECS

Item# : **FA5108**
 Product Name : **Falcon Tools® - Screwdriver Master Bit Set S2 Tool Steel, 100pc**
 Type : **Master Screwdriver Bit Set**
 Material : **S2 Tool Steel**
 Number of Pieces : **100**
 UNSPSC #: **27112836**
 TAA Compliant: **Yes**

440	1.00	EA	0440 - MULTI-BIT SCREWDRIVER DRIVER TYPE: 11-IN-1	NO BID	NO BID
			PRIMARY APPLICATION: GENERAL PURPOSE RATCHETING: NO BIT RETAINER TYPE: QUICK CHANGE INCLUDES: PHILLIPS NO. 1 AND NO. 2,		

441	3.00	EA	0441 - UTILITY KNIFE BLADE OPERATION: RETRACTABLE	***LAWSON #50122**
-----	------	----	--	--------------------


Utility Knife, Auto-Load

Auto-Load Utility Knife (Pack of 1)



Item# 50122
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .55
Catalog Page# : 14-70
Usually Ships: Ⓢ Today

[Documents](#)



Quantity: 1 [Check Stock](#) Ⓢ

[Add to Cart](#) ▶

Create a Re-order list.. ▼ [Add to List](#)

DESCRIPTION TECH SPECS ACCESSORIES

- No need to take the knife apart to change blades
- Blade may be re-used by flipping over and inserting the used end back into blade slot while holding down the blade release button
- Uses any standard two-notch utility blade

Blade changing instructions

1. Remove the used blade by pushing the release button
2. Pull the slide knob into full back position to load a new blade
3. Push slide knob forward to expose new blade

DESCRIPTION TECH SPECS ACCESSORIES

Item# : 50122
Product Name : Utility Knife, Auto-Load
Type : Auto-Load
Material : Zinc Die Cast
Finish : Powder Coated
Color : Yellow/Black
UNSPSC # : 27111503
TAA Compliant: No

442	1.00	ST	<p>0442 - ROUTER BIT SET SUPER DELUXE 1/2 SHANK</p> <p>MATERIAL: CARBIDE TIPPED NUMBER OF PIECES: 30 APPLICATION: FOR ALL TYPES OF ROUTING APPLICATIONS, TRIMMING, DECORATIVE EDGING, STOCK REMOVAL, GROOVING AND SPECIALTY DESIGN INCLUDES: 1/4 INCH, 3/8 INCH, 1/2 INCH, 3/4 INCH STRAIGHT, 1/2 INCH HINGE, 1/2 INCH PANEL PILOT, 1/2 INCH 3/4 INCH DOVETAIL, 1/2 INCH V-GROOVE, 3/8 INCH HANG SLOT, 45 DEGREES 45 DEGREES CHAMFER(16H609), T1/4 INCH RABBETING, 1/2 INCH FLUSH TRIM (16Y579) 1/2 INCH, 5/8 INCH CORE BOX, R5/32 INCH, 1/4 INCH ROMAN OGEE, R3/16 INCH OGEE, R3/16 INCH OGEE WITH FILLET, R3/16 INCH CLASSICAL OGEE, R3/32 INCH CLASSICAL, R1/4, 3/8 INCH,</p>	NO BID	NO BID
443	1.00	EA	<p>0443 - LAMINATE ROUTER BIT MATERIAL: CARBIDE TIPPED</p> <p>CUTTING DIAMETER (IN.): 1/4 DEPTH OF CUT (INCHES): 3/4 FLUTE LENGTH (INCHES): 3/4 NUMBER OF FLUTES: 2 CUTTING LENGTH (IN.): 3/4 SHANK DIA. (INCHES): 1/4 SHANK LENGTH (INCHES): 1-1/4 OVERALL LENGTH (INCHES): 2-9/16 APPLICATION: STRAIGHT FLUTE WITH BORING POINT AND PILOT, USED TO CUT OUT OPENINGS IN DIVERSE COMBINATION OF MATERIALS, ESPECIALLY MOBILE HOME, MODULAR HOME AND RV INDUSTRIES SUB CATEGORY: LAMINATE AND TRIM ROUTER BIT MANUFACTURER: WESTWARD MFR. MODEL NO. 16Y584</p>	NO BID	NO BID
444	1.00	EA	<p>0444 - REFRIGERANT DIGITAL ANALYZER NUMBER OF HOSES: 4</p> <p>NUMBER OF VALVES: 4 GAUGES HIGH SIDE RED (PSI): 0 TO 700 GAUGES LOW SIDE BLUE (PSI): 30 INCH HG TO 350</p>	NO BID	NO BID

445	1.00	EA	0445 - MANIFOLD GAUGE AND HOSE SET TYPE: AIR CONDITIONING AND STATIONARY ----- ***LAWSON #KT14682***
-----	------	----	---



Kent® Air Conditioning R134a Manifold Gauge Set

Air Conditioning R134a Aluminum Block Manifold Gauge Set Tools and Service Items R134a Aluminum Block Manifold Gauge Set W/72"HSE&QC (Pack of 1)

Item# KT14682
 Price : [Log In](#)
 Standard Pack : 1 ea.
 Ship Weight : 5.0
 Brand : Kent®
 Usually Ships: Today

WARNING



Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. **Add to List**

DESCRIPTION

TECH SPECS

RESTRICTIONS

- Aluminum block design with sight glass
- Complete with 6 (72") standard hose and quick couplers
- Professional quality
- Anti-flutter design gauges
- Additional access port

DESCRIPTION

TECH SPECS

RESTRICTIONS

Item# : KT14682
 Product Name : Air Conditioning R134a Manifold Gauge Set
 Brand : Kent
 Category/Performance : Air Conditioning
 Group : Tools and Service Items
 Configuration : R134a Aluminum Block Manifold Gauge Set
 Description : R134a Aluminum Block Manifold Gauge Set
 Size : W72"HSE&QC
 UNSPSC #: 25172405
 TAA Compliant: No

446	1.00	EA	0446 - DIGITAL MULTIMETER MULTIMETER STYLE: FULL SIZE ***LAWSON #1579835***
-----	------	----	--

447

1.00

EA

**0447 - VOLTAGE TESTER
AC VOLTAGE RANGE: 12 TO 600*******LAWSON #64073*******Voltage Tester-Two Indicator**

Voltage Tester-Two Indicator-Vibration/Visual (Pack of 1)

Item# 64073
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .65
Catalog Page# : 17-98
Usually Ships: ? Today

TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)Create a Re-order list.. [Add to List](#)**DESCRIPTION** **TECH SPECS**

- Positive AC/DC voltage indication from 6V to 600V at 60/50 Hz
- Positive or negative DC pole identified by neon lamp
- Retractable locking spring-loaded shrouds protect the metal leads; the durable metal leads can pierce insulation on conductors
- Self-extinguishing, high-impact sealed case prevents dirt and dust from entering tester
- Case design has quick storage for the prods
- Tester can be operated with one hand
- Made in USA
- Two voltage indications: When voltage is detected, the tester vibrates, the neon light gives a visual indication

DESCRIPTION **TECH SPECS**

Item# : 64073
Product Name : Voltage Tester-Two Indicator
Style : Two Indicator Voltage Tester
Approvals : UL, CSA
Description : Voltage Tester - Two Indications
Type : Testing Equipment
UNSPSC #: 41113837
TAA Compliant: Yes

448

1.00

EA

**0448 - MULTI-BIT SCREWDRIVER
DRIVER TYPE: 10-IN-1*******LAWSON #1362988*****

449	1.00	EA	0449 - COMBINATION SCREWDRIVER SET TIP STYLE: ASSORTED NUMBER OF PIECES: 7 HANDLE MATERIAL: ACETATE W/CUSHION GRIP INCLUDES: KEYSTONE 1/4 INCH X 4 INCH, 5/16 INCH X 6 INCH, CABINET 3/16 INCH X 3 INCH, 3/16 INCH X 6 INCH, 1/4 INCH X 4 INCH, PHILLIPS NO. 1 X 3 INCH, NO. 2 X 4 INCH TETHER CAPABLE STANDARD TOOL (ACCESSORY NEEDED FOR TETHERING) HANDLE DESIGN: CUSHION GRIP SHANK SHAPE: ROUND AND SQUARE SHANK MATERIAL: ALLOY TOOL STEEL FINISH: CHROME MANUFACTURER: KLEIN TOOLS #85076 MFR. MODEL NO. 5LL68	NO BID	NO BID
-----	------	----	--	--------	--------

450	1.00	EA	0450 - ADJUSTABLE WRENCH SET NUMBER OF PIECES: 3 JAW CAPACITY: 3/4, 1, 1-1/8 INCH OVERALL LENGTH: 6, 8, 10 INCH MATERIAL: DROP-FORGED AND HEAT TREATED ***THREE PARTS:***LAWSON #19611***,***LAWSON #19612***,***LAWSON #19613***	\$	\$
-----	------	----	--	----	----

BAHCO® Wrench, Adjustable, Slim Head, 6" Length

BAHCO® - Wrench, Adjustable, Slim Head, 6" Length (Pack of 1)



Item# 19611
 Price : [Log In](#)
 Standard Pack : 1 ea.
 Ship Weight : .29
 Brand : BAHCO®
 Mfr Model# : 8070 RC US
 Catalog Page# : 14-26
 Usually Ships: Ⓢ Today



TAA Compliant



Quantity: 1 [Check Stock ?](#)

Add to Cart ▶

Create a Re-order list.. ▼ **Add to List**

DESCRIPTION TECH SPECS

- Industrial grade steel handles
- Slim head with tapered jaws combine easy accessibility with extra turning strength
- Measurement scale on head conveniently shows fastener size
- Precision hardened and anti-corrosion treated

DESCRIPTION

TECH SPECS

Item# :	19611
Product Name :	BAHCO® - Wrench, Adjustable, Slim Head, 6" Length
Maximum Jaw Opening :	3/4"
Length :	6"
Finish :	Chrome
Style :	Slim Head
Head Thickness :	7/16"
Jaw Tip Thickness :	3/16"
UNSPSC #:	27112111
TAA Compliant:	Yes

BAHCO® Wrench, Adjustable, Slim Head, 8" Length

BAHCO® - Wrench, Adjustable, Slim Head, 8" Length (Pack of 1)



Item#	19612
Price :	Log In
Standard Pack :	1 ea.
Ship Weight :	.58
Brand :	BAHCO®
Mfr Model# :	8071 RC US
Catalog Page# :	14-26
Usually Ships:	Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION

TECH SPECS

- Industrial grade steel handles
- Slim head with tapered jaws combine easy accessibility with extra turning strength
- Measurement scale on head conveniently shows fastener size
- Precision hardened and anti-corrosion treated

DESCRIPTION

TECH SPECS

Item# :	19612
Product Name :	BAHCO® - Wrench Adjustable, Slim Head, 8" Length
Maximum Jaw Opening :	1-1/16"
Length :	8"
Finish :	Chrome
Style :	Slim Head
Head Thickness :	1/2"
Jaw Tip Thickness :	1/4"
UNSPSC #:	27112111
TAA Compliant:	Yes

BAHCO® Wrench, Adjustable, Slim Head, 10" Length

BAHCO® - Wrench, Adjustable, Slim Head, 10" Length (Pack of 1)



Item# 19613
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .91
Brand : BAHCO®
Mfr Model# : 8072 RC US
Catalog Page# : [14-26](#)
Usually Ships: Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION **TECH SPECS**

- Industrial grade steel handles
- Slim head with tapered jaws combine easy accessibility with extra turning strength
- Measurement scale on head conveniently shows fastener size
- Precision hardened and anti-corrosion treated

DESCRIPTION **TECH SPECS**

Item# : 19613
Product Name : BAHCO® - Wrench, Adjustable, Slim Head, 10" Length
Maximum Jaw Opening : 1-1/8"
Length : 10"
Finish : Chrome
Style : Slim Head
Head Thickness : 5/8"
Jaw Tip Thickness : 5/16"
UNSPSC #: 27112111
TAA Compliant: Yes

451

1.00

EA

0451 - TUBING CUTTER
CUTS: COPPER, ALUMINUM, BRASS, STEEL
LAWSON #57598

Tubing and Pipe Cutters Quick Cutter

Tubing and Pipe Cutters Professional Quick Cutter (Pack of 1)



Item# 57598
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.11
Catalog Page# : 9-64
Usually Ships: Today



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS ACCESSORIES

- General-purpose cutting wheel included – cuts copper, brass, aluminum, thinwall steel and stainless steel
- Specially-designed, material-specific cutting wheels are available for optimal performance
- Die-cast bodies and handles
- Powder-coated finish, laser-inscribed logo
- Alloy steel rollers and cutting wheels
- Cuts tubing 1/4" to 2-5/8" O.D.
- Quick-release spring system for faster adjustments
- Includes special PVC wheel stored in handle
- Features four rollers to hold tube in place

DESCRIPTION TECH SPECS ACCESSORIES

Item# : 57598
Product Name : Tubing and Pipe Cutters Quick Cutter
Description : Professional Quick Cutter
Type : Tubing and Pipe Cutters
Capacity : 1/4 - 2-5/8"
UNSPSC #: 40163000
TAA Compliant: No

452	1.00	EA	0452 - INFRARED THERMOMETER TEMP. RANGE (F): -58 TO 752 DEGREES F FOCUS SPOT SIZE AND DISTANCE: 1 INCH AT 9 INCH ACCURACY: +/-3.6 DEGREES F OR +/-2 PERCENT EMISSIVITY: FIXED 0.95 INCLUDES: BATTERY LASER SIGHTING: SINGLE DOT BATTERY TYPE: AAA DISPLAY: BACKLIT LCD SPECTRAL RESPONSE: 5 TO 14 UM RESPONSE TIME: 500 MSEC. REPEATABILITY: +/-2 PERCENT MEMORY: MAX OPERATING TEMP. RANGE: 32 DEGREES TO 120 DEGREES F STANDARDS: CLASS II LASER TRIGGER: LOCKABLE MANUFACTURERS WARRANTY LENGTH: 1 YEAR MANUFATURER: WESTWARD MFR. MODEL NO 2ZB46	NO BID	NO BID
453	1.00	EA	0453 - CORDLESS COMBINATION KIT VOLTAGE: 18.0	NO BID	NO BID
454	1.00	EA	0454 - RECHARGEABLE FLASHLIGHT LAMP TYPE: XENON	NO BID	NO BID

455

1.00

EA

0455 - TUBING CUTTER

CUTS: COPPER, ALUMINUM, BRASS, PLASTIC

LAWSON #57597

Tubing and Pipe Cutters Standard Tube Cutter

Tubing and Pipe Cutters Standard Tube Cutter (Pack of 1)



Item# 57597
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.45
Catalog Page# : 9-64
Usually Ships: Today

TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)

DESCRIPTION

TECH SPECS

ACCESSORIES

- General-purpose cutting wheel included – cuts copper, brass, aluminum, thinwall steel and stainless steel
- Specialty-designed, material-specific cutting wheels are available for optimal performance
- Die-cast bodies and handles
- Powder-coated finish, laser-inscribed logo
- Alloy steel rollers and cutting wheels
- Cuts tubing 1/8" to 1-3/4" O.D.
- Free-spinning retractable reamer in body
- Includes special FVC cutting wheel stored in handle
- Features four rollers to hold tube in place

DESCRIPTION

TECH SPECS

ACCESSORIES

Item# : 57597
Product Name : Tubing and Pipe Cutters Standard Tube Cutter
Description : Standard Tube Cutter
Type : Tubing and Pipe Cutters
Capacity : 1/8 - 1-3/4"
UNSPSC #: 40183000
TAA Compliant: Yes

456	1.00	ST	0456 - HOLLOW SHAFT NUT DRIVER SET NUMBER OF PIECES: 7	***LAWSON #42376**
-----	------	----	---	--------------------

MAXXPRO®plus Nutdriver Set, Hollow Shaft, 7pc

MAXXPRO®plus - 7pc Hollow Shaft Nutdriver Set (Pack of 1)



Item# 42376
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.78
Brand : MAXXPRO®plus
Catalog Page# : [14-33](#)
Usually Ships: Today

MAXXPRO®plus

TAA Compliant



Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION **TECH SPECS**

- MAXXPRO® PLUS handle sizes are determined by the length and diameter of the blade, ensuring the best blend of comfort, speed and power
 - Smaller handles are more rounded for greater speed, comfort and dexterity
 - Larger handles are more triangular for greater torque and comfort
 - Three component handle series plus anti-slip microfiber panels
 - Handle molded around blade via butterfly shank for strength and durability
 - Greater proportion of soft material in the thumb placement zone for user comfort
 - High-alloy chrome-vanadium steel blade with black phosphate tip
 - Hole in handle can be used for hanging or as a T-handle for more torque
 - Larger sizes have a bolster at the top of the shank to accept a wrench for additional torque
- Set includes sizes 7/32" through 1/2"
- Set includes sizes 7/32" through 1/2"

DESCRIPTION **TECH SPECS**

Item# : 42376
Product Name : MAXXPRO®plus - Nutdriver Set, Hollow Shaft, 7pc
Style : Hollow Shaft Set
Blade Material : High Alloy Steel
Handle Material : Soft components w/anti-slip micro fibre surface
Color : Gray & Blue
Replacement Pouch Number : 39342
Number of Pieces : 7
Contents : 7/32 through 1/2" in vinyl pouch
UNSPSC #: 27111702
TAA Compliant: Yes

457

6.00

EA

0457 - PINCH POINT CROW BAR, 3 FT.
LENGTH X 1-1/16 IN. SQUARE STOCK

LAWSON #18304

Prybar, Specialty, Rolling Head Prybar, 30"

30" Rolling Head Prybar, Hardened & Tempered Steel (Pack of 1)



Item# 18304
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.5
Catalog Page# : [14-61](#)
Usually Ships: [?](#) Today

TAA Compliant

Quantity: 1 [Check Stock ?](#)

[Add to Cart](#) ►

Create a Re-order list.. ▼ [Add to List](#)

TECH SPECS

Item# : 18304
Product Name : Prybar Specialty Rolling Head Prybar 30"
Type : Specialty
Blade Style : Rolling Head
Overall Length : 30"
UNSPSC #: 27112502
TAA Compliant: Yes

458

11.00

EA

0458 - PRY BAR, 24 IN. WITH HANDLE,
11/16 IN. TIP WIDTH, 31-7/8 IN.

LAWSON #29451

Prybar, Screwdriver-Type, Straight, 31"

31" Straight Screwdriver-Type Prybar, 1/2" OD, 24" Blade Length, Hardened & Tempered Steel (Pack of 1)



Item# 29451
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 3.0
Catalog Page# : [14-61](#)
Usually Ships: Today

TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION

TECH SPECS

- Features a capped end allowing the user to strike the pry bar with a hammer without damaging the head
- Double-composite handle is ergonomically designed for a more comfortable, secure grip
- The blade is hardened and tempered the entire length for maximum durability
- Available with straight or curved blade

DESCRIPTION

TECH SPECS

Item# : 29451
Product Name : Prybar, Screwdriver-Type, Straight, 31"
Type : Screwdriver-Type
Blade Style : Straight
Blade Length : 24"
Body Size : 1/2"
Overall Length : 31"
Material : Hardened & Tempered Steel
UNSPSC #: 27112502
TAA Compliant: Yes

459

10.00


EA

0459 - CHISEL, HAND, 7/8 IN. CUTTING
WIDTH, 7-1/2 IN. LONG, WILLIAMS NO. C-28

LAWSON #97700

Chisel, Cold, 8" Length, 1"

1" Cold Chisel, 8" Overall Length (Pack of 1)

Item# 97700
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.26
Catalog Page# : [14-56](#)
Usually Ships:  Today



Representative Image Only

TAA Compliant

Quantity: 1 [Check Stock](#) 

[Add to Cart](#) 

Create a Re-order list..  [Add to List](#)

DESCRIPTION

TECH SPECS

All of Lawson's chisels and punches are hand-forged from high-quality steel. They undergo exacting hardening and tempering processes to assure maximum durability. Each tool is individually ground and polished.

- For cutting, shaping and removing metal.

DESCRIPTION

TECH SPECS

Item# : 97700
Product Name : Chisel, Cold, 8" Length, 1"
Type : Cold Chisel
Size : 1"
Body Size : 7/8"
Overall Length : 8"
Material : Steel
Application : For cutting, shaping and removing metal
Manufacturer/National Brand : Mayhew
UNSPSC #: 27111001
TAA Compliant: Yes

460

3.00

EA

0460 - CHISEL, COLD, 1 IN. WIDE X 8 IN.
LONG, DOMESTIC, PROTO NO. J86A7/8X8

***LAWSON #97700**

Chisel, Cold, 8" Length, 1"

1" Cold Chisel, 8" Overall Length (Pack of 1)

Item# 97700
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.26
Catalog Page# : [14-56](#)
Usually Ships: [7](#) Today



Representative Image Only

TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)[Add to Cart](#) [▶](#)Create a Re-order list.. [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

All of Lawson's chisels and punches are hand-forged from high-quality steel. They undergo exacting hardening and tempering processes to assure maximum durability. Each tool is individually ground and polished.

- For cutting, shaping and removing metal

DESCRIPTION TECH SPECS

Item# : 97700
Product Name : Chisel, Cold, 8" Length, 1"
Type : Cold Chisel
Size : 1"
Body Size : 7-8"
Overall Length : 8"
Material : Steel
Application : For cutting, shaping and removing metal
Manufacturer/National Brand : Mayhew
UNSPSC # : 27111901
TAA Compliant: Yes

461

23.00


EA

0461 - CHISEL, STANDARD, 3 IN.,
1-1/4 IN. X 6 IN. HEX SHANK,

***LAWSON #51913**


Chisel, Brick, Knucklguard, 7" Length, 3"

3" Knucklguard Brick Chisel, 7" Overall Length (Pack of 1)

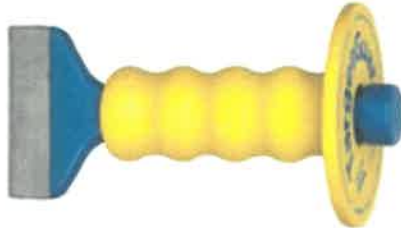

Item# 51913
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.55
Catalog Page# : 14-60
Usually Ships: Today

TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) ▼ [Add to List](#)**DESCRIPTION** **TECH SPECS**

- Offers a 3-3/4" circle of protection against glancing blows and missed hits
- Absorbs the shock of the hammer blow
- Permanently force-fit around the chisel shaft
- Features a full 360° hand-hold for a firm, comfortable grip
- Made in USA

DESCRIPTION **TECH SPECS**

Item# : 51913
Product Name : Chisel, Brick, Knucklguard, 7" Length, 3"
Type : Brick Chisel
Size : 3"
Overall Length : 7"
Application : Scoring, Cutting and Trimming
Bricks and Blocks
Manufacturer/National Brand : Dasco Target Guard
UNSPSC #: 27111901
TAA Compliant: Yes

462

4.00

EA

0462 - CUTTER, PIPE, RATCHET OPERATED,
15 IN. TILE/CLAY PIPE CAPACITY,

NO BID

NO BID

463

27.00

EA

0463 - CUTTER, COPPER TUBING, 1/4 IN.
TO 1-5/8 IN., QUICK ACTING, RIGID

LAWSON #57597

Tubing and Pipe Cutters Standard Tube Cutter

Tubing and Pipe Cutters Standard Tube Cutter (Pack of 1)



Item# 57597
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.45
Catalog Page# : [9-64](#)
Usually Ships: Today

TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list...](#) [Add to List](#)

DESCRIPTION TECH SPECS ACCESSORIES

- General-purpose cutting wheel included – cuts copper, brass, aluminum, thinwall steel and stainless steel
- Specially-designed, material-specific cutting wheels are available for optimal performance
- Die-cast bodies and handles
- Powder-coated finish, laser-inscribed logo
- Alloy steel rollers and cutting wheels
- Cuts tubing 1/8" to 1-3/4" O.D.
- Free-spinning retractable reamer in body
- Includes special PVC cutting wheel stored in handle
- Features four rollers to hold tube in place

DESCRIPTION TECH SPECS ACCESSORIES

Item# : 57597
Product Name : Tubing and Pipe Cutters Standard Tube Cutter
Description : Standard Tube Cutter
Type : Tubing and Pipe Cutters
Capacity : 1/8 - 1-3/4
UNSPSC #: 40183000
TAA Compliant: Yes

464

35.00

EA

0464 - CUTTER, COMPOUND LEVERGE RATCHET,
FOR PLASTIC PIPE, CAPACITY IS 1/8 IN.

***LAWSON #1281872*



Representative Image Only



General Tools 1/4"-1-5/8"Od Pvc Cutter

General Tools - 1/4"-1-5/8"Od Pvc Cutter (Pack of 1)

Item# 1281872
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.025
Brand : General Tools
Mfr Model# : 119
Usually Ships: Today

GENERAL

Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- Professional quality, all metal construction for greater durability

DESCRIPTION TECH SPECS

Item# : 1281872
Product Name : General Tools - 1/4"-1-5/8"Od Pvc Cutter
Type : Pipe Cutters
UNSPSC #: 27000000
TAA Compliant: No

465

10.00

EA

0465 - PLIERS, SLIP-JOINT, INSULATED
HANDLES, 8 IN. LONG, FULLER PRO

***LAWSON #1227735**

Proto® 8" Combination Plier

Proto® - 8" Combination Plier (Pack of 1)



Item# 1227735
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Proto®
Mfr Model# : J278
Usually Ships: 48 Hours

PROTO

Representative Image Only

TAA Compliant



Quantity: 1

Add to Cart ▶

Create a Re-order list.. ▼ Add to List

DESCRIPTION

TECH SPECS

- Precision machined mating surfaces

DESCRIPTION

TECH SPECS

Item# : 1227735
Product Name : Proto® - 8" Combination Plier
Type : Slip Joint
Size : 8"
Material : Forged Alloy Steel
UPC : 882879031350
Jaw Length : 1 3/4"
Jaw Width : 1 13/64"
Jaw Thickness : 3/8"
Jaw Shape : Combination
Cut Type : Shear Wire Cutter
Number of Adjustments : 2
UNSPSC #: 27000000
TAA Compliant: Yes

466	17.00	EA	0466 - SCREWDRIVER, NO. 2 PHILLIPS TIP, 4 IN. LONG, MADE IN U.S.A., ALLOY STEEL ***LAWSON #42348***
-----	-------	----	---

**MAXXPRO®plus Screwdriver Anti-Slip
Stubby Phillips #2**

MAXXPRO®plus - #2 Anti-Slip Phillips Stubby Screwdriver (Pack of 1)



Item# 42348
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .08
Brand : MAXXPRO®plus
Mfr Model# : 94307
Catalog Page# : [14-32](#)
Usually Ships: Today

MAXXPRO®plus

[Documents](#)
TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

[Create a Re-order list..](#) [Add to List](#)

DESCRIPTION **TECH SPECS**

- MAXXPRO® PLUS handle sizes are determined by the length and diameter of the blade for the best blend of comfort, speed and power
- Smaller handles are more rounded for greater speed, comfort and dexterity
- Larger handles are more triangular for greater torque and comfort
- Three-component handle series plus anti-slip microfiber panels
- Handle molded around blade via butterfly shank for strength and durability
- Greater proportion of soft material in the thumb placement zone for user comfort
- High-alloy chrome-vanadium steel blade with black phosphate tip
- Hole in handle can be used for hanging or as a T-handle for more torque
- Larger sizes have a bolster at the top of the shank to accept a wrench for additional torque

DESCRIPTION **TECH SPECS**

Item# : 42348
Product Name : MAXXPRO®plus - Screwdriver Anti-Slip Stubby Phillips #2
Type : Anti-Slip
Drive Style : Phillips®
Size : #2
Overall Length : 3-1/2"
Blade Length : 1"
Blade Thickness : .1564"
Handle Diameter : 1-1/8"
Fits Screw Diameter : M4, M5 Nos. 5, 6, 7, 8, 10
UNSPSC #: 27111701
TAA Compliant: Yes

467	29.00	EA	0467 - SCREWDRIVER, 3/16 IN. CABINET TIP, INDUSTRIAL, 6 IN. LONG ALLOY ***LAWSON #1227874**
-----	-------	----	--

Proto® 3/16" Cabinet Tip Round Shank Screwdriver

Proto® - 3/16" Cabinet Tip Round Shank Screwdriver (Pack of 1)



Item# 1227874
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Proto®
Mfr Model# : J88214
Usually Ships: 19 to 21 Business Days



Representative Image Only

TAA Compliant



Quantity: 1

Add to Cart

Create a Re-order list.. Add to List

DESCRIPTION TECH SPECS

- 4 sided handle prevents roll away
- Tip is precise width and thickness to fit screw slot
- Cross ground for consistent fit

DESCRIPTION TECH SPECS

Item# :	1227874
Product Name :	Proto® - 3/16" Cabinet Tip Round Shank Screwdriver
Type :	Round Shank Cabinet
Drive Style :	Slotted
Size :	3/16"
Overall Length :	8"
Blade Length :	4"
Material :	Alloy Steel
Handle Type :	Ergonomic
UPC :	662676042523
Handle Material :	Plastic
Shank Type :	Round
Shank Diameter :	3/16"
Shank Finish :	Black Oxide
UNSPSC #:	27111701
TAA Compliant:	Yes

468

47.00

EA

0468 - SCREWDRIVER, 5/16 IN. STANDARD
TIP, INDUSTRIAL, 6 IN. LONG ALLOY

LAWSON #42343

**MAXXPRO®plus Screwdriver, Anti-Slip,
Slotted, 5/16 x 6"**MAXXPRO®plus - 5/16 Slotted Screwdriver, 6" Blade Length, 5/16" Blade
Thickness, 1-17/32" Handle Diameter, 10-7/8" Overall Length (Pack of 1)

Item# 42343
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .4
Brand : MAXXPRO®plus
Mfr Model# : 63013
Catalog Page# : 14-32
Usually Ships: 2 Today

MAXXPRO®plus[Documents](#)
TAA CompliantQuantity: 1 [Check Stock ?](#)**Add to Cart** ▶Create a Re-order list.. ▼ **Add to List****DESCRIPTION** **TECH SPECS**

- MAXXPRO® PLUS is the essential screwdriver for working in wet or oily conditions
- Handle sizes are determined by the length and diameter of the blade for the best blend of comfort, speed and power
- Smaller handles are more rounded for greater speed, comfort and dexterity
- Larger handles are more triangular for greater torque and comfort
- Three-component handle series plus anti-slip microfiber panels
- Handle molded around blade via butterfly shank for strength and durability
- Greater proportion of soft material in the thumb placement zone for user comfort
- High-alloy chrome-vanadium steel blade with black phosphate tip
- Hole in handle can be used for hanging or as a T-handle for more torque
- Larger sizes have a bolster at the top of the shank to accept a wrench for additional torque

DESCRIPTION **TECH SPECS**

Item# : 42343
Product Name : MAXXPRO®plus - Screwdriver, Anti-Slip, Slotted, 5/16 x 6"
Type : Anti-Slip
Drive Style : Slotted
Size : 5/16"
Overall Length : 10-7/8"
Blade Length : 6"
Blade Thickness : 5/16"
Handle Diameter : 1-17/32"
Fits Screw Diameter : M5, M6, Nos. 8, 10, 12, 1, 4"
UNSPSC #: 27111701
TAA Compliant: Yes

469	63.00	EA	0469 - TOOL, SHUT-OFF, FOR 3/4 IN TO 1 IN. POLYETHYLENE WATER SERVICE TUBING, DOMESTIC, REED NO. PESO-1 STOCK NO. 00-0585220	NO BID	NO BID
470	4.00	EA	0470 - HAMMER, BALL-PEIN, 48 OZ., DOMESTIC, STANLEY NO. 54-048, PROTO NO. J1348AVP STOCK NO. 00-0585840	NO BID	NO BID
471	16.00	EA	0471 - HANDSAW, CROSSCUT, 26 IN., NICHOLSON NO. NIC80019, STANLEY NO. 15-726, MSC NO. 04381091 STOCK NO. 00-0585850	NO BID	NO BID

472	33.00	EA	0472 - SAW, PVC, 18 INCH BLADE, TO CUT PVC, ABS, WOOD VANEER, RIGID NO. 50522 TWO PARTS***LAWSON #1328885***,***LAWSON #1328886***	\$
-----	-------	----	---	----

Lenox® Handsaw Frame

Lenox® - Handsaw Frame, 18" (Pack of 1)



Item#: 1328885
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Lenox®
Mfr Model# : 20990HSF18
Usually Ships: 2 to 4 Business Days



WARNING

Quantity: 1

Add to Cart

Create a Re-order list.. **Add to List**

DESCRIPTION TECH SPECS RESTRICTIONS

CAUTION: Any cutting tool may break or shatter under improper use. Government regulations require use of safety glasses and other appropriate safety equipment at all times in the vicinity of use.

DESCRIPTION TECH SPECS RESTRICTIONS

Item# : 1328885
Product Name : Lenox® - Handsaw Frame
Type : Handsaw
Blade Length : 18"
Teeth Per Inch : 10
UNSPSC #: 27112802
TAA Compliant: No

473

11.00

EA

0473 - HAMMER, BALL PEIN, 8 OZ.,
HICKORY HANDLE, PROTO NO. 1308D,
***LAWSON #1228312**:

Proto® Hammer Ball Pein 8 Oz

Proto® - Hammer Ball Pein 8 Oz (Pack of 1)



Item# 1228312
Price : [Log In](#)
Standard Pack : 1 ea.
Brand : Proto®
Mfr Model# : J1308PD
Usually Ships: 19 to 21 Business Days

Visible To
PROTO

Representative Image Only

TAA Compliant



Quantity: 1

Add to Cart ►

Create a Re-order list.. ▼ Add to List

DESCRIPTION

TECH SPECS

- Contoured handle with red lacquer grip
- Polished face, chamfer, cheeks, and peins
- Clear lacquer protective coating on face, chamfer, cheeks, and peins
- Rim tempered hardened face and peins
- ASME B107.53M

DESCRIPTION

TECH SPECS

Item# : 1228312
Product Name : Proto® - Hammer Ball Pein 8 Oz
Type : Ball Pein Hammer
Head Weight : 8 Oz
Finish : Polished
Handle Material : Hickory
Head Material : Drop Forged Steel
Overall Length : 12"
UPC : 882674020026
UNSPSC # : 27000000
TAA Compliant: Yes

474	43.00	EA	0474 - HAMMER, ENGINEER, DOUBLE FACE, TWO POUND, 16 IN. LONG WOOD HANDLE, ***LAWSON #27849***
-----	-------	----	---

Hammer, Hand Drilling, 2lb Head Weight

2 lb Hand Drilling Hammer (Pack of 1)



Item# 27849
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 2.45
Catalog Page# : [14-77](#)
Usually Ships: Today

WARNING



Quantity: 1 [Check Stock](#)

Add to Cart

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS RESTRICTIONS

- Maximum striking power in a small-handled tool
- Includes Super Grip handle for safer, easier striking
- Perfect for tight spaces and heavy, short work

DESCRIPTION TECH SPECS RESTRICTIONS

Item# : 27849
Product Name : Hammer, Hand Drilling 2lb Head Weight
Type : Hand Drilling Hammer
Head Weight : 2 lb
UNSPSC # : 27111602
TAA Compliant: No

DESCRIPTION TECH SPECS RESTRICTIONS

California Proposition 65:
WARNING: Cancer and Reproductive Harm - www.P65Warnings.ca.gov

475	16.00	EA	0475 - HAMMER, SCALING, 16 OZ., HICKORY HANDLE, VAUGHAN NO. SC16 STOCK NO. 00-0586020	NO BID	NO BID
476	13.00	EA	0476 - SNIPS, TIN, STRAIGHT DUCKBILL, NON-SERRATED, FOR 24 GAUGE MILD METAL, 10.25 IN. LONG, WISS NO. V-10N STOCK NO. 00-0590400	NO BID	NO BID
477	12.00	EA	0477 - GRIP, WIRE, SIZE RANGE 3/4 IN. TO 1 IN., 24 IN. LONG, FOR PULLING PLASTIC PIPE, 1360 LB. WORKING STRENGTH, DOUBLE WEAVE MESH FOR GREATER PULLING STRENGTH, KLEIN NO. KP-075-24 STOCK NO. 00-0590810	NO BID	NO BID
478	5.00	EA	0478 - GRIP, WIRE, FOR PULLING PLASTIC PIPE, SIZE RANGE 1 IN. MIN. TO 1-7/16 IN. MAX., 33 IN. LONG, 1920 LB. WORKING STRENGTH, USA STCK NO. 65200 STOCK NO. 00-0590820	NO BID	NO BID
479	6.00	EA	0479 - WHEELBARROW, 6 CUBIC FT. HEAVY DUTY SEAMLESS STEEL TRAY W/FRONT BRACES, 16 IN. WHEEL ASSY, 2 PLY TIRE, KEY F, TEMPERC6, AMES R625 STOCK NO. 00-0591050	NO BID	NO BID
480	20.00	EA	0480 - HANDLE, BULL FLOAT, ALUMINUM, 1-3/4 IN. DIA. X 6 FT., GOLDBLATT NO. 84389-16326, G06957 STOCK NO. 00-0591130	NO BID	NO BID

481	8.00	EA	0481 - BINDER, LOAD, RATCHET TYPE, FOR 3/8 IN. GRADE 70 CHAIN TO 1/2 IN. ***LAWSON #98662***
-----	------	----	--

CM® Ratchet Load Binder, 9,200 lb WLL, 1/2" Gr. 30 - Gr. 43, 3/8" Gr. 70 - 80



CM® - Ratchet Load Binder, 9,200 lb WLL, 1/2" Gr. 30 - Gr. 43, 3/8" Gr. 70 - 80 (Pack of 1)

Item# 98662
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 12.81
Brand : CM®
Mfr Model# : 48366
Catalog Page# : [15-10](#)
Usually Ships: Today



[Documents](#)
TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS ALTERNATES

- Meets all DOT specifications
 - Each ratchet component is forged from pure alloy steel
 - Handle is designed loose using self-locking one-way bolts allowing easy removal of unwanted debris such as mud, snow or ice
 - Proof tested to 50% of the minimum breaking strength
 - Gears are permanently welded to the barrel
- CAUTION: Do not exceed working load limits

DESCRIPTION TECH SPECS ALTERNATES

Item# : 98662
Product Name : CM® - Ratchet Load Binder, 9,200 lb WLL, 1/2" Gr. 30 - Gr. 43, 3/8" Gr. 70 - 80
Style : Ratchet
Chain Size: Grade 80 : 3/8"
Chain Size: Grade 70 : 3/8"
Chain Size: Grade 43 : 1/2"
Chain Size: Grade 30 : 1/2"
Take Up : 8"
Working Load Limit : 9,200 lb
Handle Length : 14"
UNSPSC #: 24101011
TAA Compliant: Yes

482	2.00	EA	0482 - EXTENSION, 1/4 IN. DRIVE X 3 IN. LONG, INDUSTRIAL, CHROME, DOMESTIC, MEETS ANSI SPEC. B107.10M, PROTO NO. 4760 STOCK NO. 00-0600000	NO BID	NO BID
-----	------	----	--	--------	--------

483	11.00	EA	0483 - EXTENSION, 3/8 IN. DRIVE X 6 IN. LONG, CHROME, DOMESTIC, MEETS FEDERAL ***LAWSON #18688*** SPEC. GGG-W-641E, PROTO NO. J5260-06 STOCK NO. 00-0600080
-----	-------	----	---



Williams® Extension, 3/8" Drive, Spring Plunger, 6" Length

Williams® - 3/8" Drive Extension, 6" Length, Spring Plunger, High-Polish Chrome (Pack of 1)

Item# 18688
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .36
Brand : Williams®
Mfr Model# : B-110
Catalog Page# : 14-16
Usually Ships: Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- High-polished chrome finish
- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention
- Made in USA
- Federal Specification ANSI B107.10M

DESCRIPTION TECH SPECS

Item# : 18688
Product Name : Williams® - Extension 3/8" Drive, Spring Plunger, 6" Length
Drive Size : 3/8"
Length : 6"
Specification : ANSI B 107.10M
Finish : High-Polish Chrome
Drive Type : Square
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27112632
TAA Compliant: Yes

484	5.00	EA	0484 - SOCKET, SHORT, CHROME, 6 POINT, 1/4 IN. DRIVE, 3/8 IN., DOMESTIC, ***LAWSON #18550***
-----	------	----	--



Williams® 1/4" Drive, Standard Socket, 3/8"

Williams® - 1/4" Drive, 6 Point, Standard Length Socket, 3/8" (Pack of 1)

Item# : 18550
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .04
Brand : Williams®
Mfr Model# : M-612
Catalog Page# : 14-6
Usually Ships: [?](#) Today



TAA Compliant



Quantity: 1 [Check Stock](#) [?](#)

[Add to Cart](#) [▶](#)

Create a Re-order list... [▼](#) [Add to List](#)

DESCRIPTION TECH SPECS

- High-polished chrome finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA
- Federal Specification ANSI B107.1

DESCRIPTION TECH SPECS

Item# : 18550
Product Name : Williams® - 1/4" Drive, Standard Socket 3/8"
Drive Type : Square
Drive Size : 1/4"
Style : Standard
Number of Points : 6
Measuring System : SAE
Size : 3/8"
SAE Size : 3/8"
Overall Length : 0.875"
Drive End Diameter : 0.5625"
Working End Diameter : 0.5625"
Broach Depth : 0.46875"
Bolt Clearance Depth : 0.53125"
Bolt Clearance Diameter : 0.375"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 0.46875"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

485

2.00

EA

0485 - SOCKET, STANDARD, 12 POINT,
CHROME, 1/4 IN. X 3/8 DR., PROTO
LAWSON #18738



Representative Image Only

Williams® 3/8" Drive, Standard Socket, 1/4"

Williams® - 3/8" Drive, 12 Point, Standard Length Socket, 1/4" (Pack of 1)

Item# 18738
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .05
Brand : Williams®
Mfr Model# : B-1208
Catalog Page# : [14-8](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- High-polished chrome finish
- SUPERTORQUE® lobular openings for greater turning power without deforming the fastener
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION TECH SPECS

Item# :	18738
Product Name :	Williams® - 3/8" Drive, Standard Socket, 1/4"
Drive Type :	Square
Drive Size :	3/8"
Style :	Standard
Number of Points :	12
Measuring System :	SAE
Size :	1/4"
SAE Size :	1/4"
Overall Length :	1.03125"
Drive End Diameter :	0.8875"
Working End Diameter :	0.40825"
Broach Depth :	0.21875"
Bolt Clearance Depth :	0.5625"
Bolt Clearance Diameter :	0.21875"
Finish :	Chrome
Wrench Style :	SUPERTORQUE®
Wrench/Broach Depth :	0.21875"
Nose Length /Length to Shoulder :	0.53125"
Locking Type :	Ball
Material :	Alloy Steel
UNSPSC #:	27111704
TAA Compliant:	Yes

486	6.00	EA	0486 - SOCKET, DEEP, CHROME, 1-1/2 IN., INDUSTRIAL, 6 POINT, 1/2 IN. DRIVE,	NO BID	NO BID
-----	------	----	---	--------	--------

487	2.00	EA	0487 - ADAPTER, SOCKET, REDUCING, CHROME, 1/2 INCH F SQ. DR. X 3/8 INCH ***LAWSON #18696***		
-----	------	----	--	--	--



Williams® Socket Adapter, 3/8" Drive, 3/8M x 1/2"F

Williams® - 3/8" M x 1/2" F Socket Adapter, 3/8" Drive, 1-5/16" Length, Black (Pack of 1)

Item# : 18696
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .21
Brand : Williams®
Mfr Model# : BS-131BA
Catalog Page# : 14-16
Usually Ships: Ⓢ Today



TAA Compliant

Quantity: 1 [Check Stock](#) ⓘ

[Add to Cart](#) ▶

Create a Re-order list.. ▼ [Add to List](#)

TECH SPECS

Item# : 18696
Product Name : Williams® - Socket Adapter, 3/8" Drive 3/8M x 1/2"F
Type : Socket Adapter
Drive Size : 3/8"
Male Size : 3/8"
Female Size : 1/2"
Length : 1-5/16"
Socket Retention : Spring Plunger
Finish : Black
UNSPSC # : 27112332
TAA Compliant: Yes

488	6.00	EA	0488 - EXTENSION, CHROME, 1/2 IN. SQUARE DRIVE, 6 IN. LONG STOCK NO. 00-0601470	NO BID	NO BID
-----	------	----	--	--------	--------

489

6.00

EA

0489 - EXTENSION, 1/2 IN. DRIVE X 20 IN.
LONG, INDUSTRIAL, CHROME, DOMESTIC,

LAWSON #18897

**Williams® Extension 1/2" Drive, Spring
Plunger, 20" Length**

Williams® - 1/2" Drive Extension, Spring Plunger, 20" Length (Pack of 1)

Item# 18897
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 5.11
Brand : Williams®
Mfr Model# : S-121P
Catalog Page# : 14-16
Usually Ships: Ⓢ Today



Representative Image Only

TAA Compliant

Quantity: 1 [Check Stock](#) Ⓢ[Add to Cart](#) ▶[Create a Re-order list..](#) ▼ [Add to List](#)

DESCRIPTION

TECH SPECS

- High-polished chrome finish
- Chrome plating provides increased protection from rust and corrosion
- Ball and spring socket retention
- Made in USA
- Federal Specification ANSI B107 10M

DESCRIPTION

TECH SPECS

Item# : 18897
Product Name : Williams® - Extension 1/2" Drive Spring Plunger, 20" Length
Drive Size : 1/2"
Length : 20"
Specification : ANSI B 107 10M
Finish : High-Polish Chrome
Drive Type : Square
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27112632
TAA Compliant: Yes

490	1.00	EA	0490 - HANDLE, SLIDING TEE, 3/8 IN. DRIVE X 8 IN. LONG, CHROME, DOMESTIC, ***LAWSON #18692***
-----	------	----	---

Williams® Sliding T-Handle, 3/8" Drive, 7-15/16" Length

Williams® - 3/8" Drive Sliding T-Handle, 7-15/16" Length, Chrome Finish
(Pack of 1)



Item# 18692
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .32
Brand : Williams®
Mfr Model# : B-20A
Catalog Page# : [14-15](#)
Usually Ships: Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

TECH SPECS

Item# :	18692
Product Name :	Williams® - Sliding T-Handle, 3/8" Drive, 7-15/16" Length
Type :	Sliding T-Handle
Drive Size :	3/8"
Length :	7-15/16"
Finish :	Chrome
UNSPSC #:	27112532
TAA Compliant:	Yes

491

5.00

EA

0491 - SOCKET, STANDARD, 12 POINT,
CHROME, 1-5/16 IN. X 3/4 IN. DR.,

LAWSON #19043



Representative Image Only

Williams® 3/4" Drive, Standard Socket, 1-5/16"

Williams® - 3/4" Drive, 12 Point, Standard Length Socket, 1-5/16" (Pack of 1)

Item# 19043
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .73
Brand : Williams®
Mfr Model# : H-1242
Catalog Page# : 14-14
Usually Ships: 2 Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION

TECH SPECS

- High-polished chrome finish
- Federal Specification ANSI B107.1 (SAE) B107.5 (Metric)
- SUPERTORQUE® lobular opening for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 point and 12 point fasteners
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION

TECH SPECS

Item# : 19043
Product Name : Williams® - 3/4" Drive, Standard Socket, 1-5/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 12
Measuring System : SAE
Size : 1-5/16"
Overall Length : 2.3125"
Drive End Diameter : 1.625"
Working End Diameter : 1.675"
Broach Depth : 0.64375"
Bolt Clearance Depth : 1.40625"
Bolt Clearance Diameter : 1.34375"
SAE Size : 1-5/16"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 0.64375"
Nose Length /Length to Shoulder : 1"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

492

2.00

EA

0492 - SOCKET, SHORT, 1-7/16 INCH-3/4
DRIVE, JHWH-1246

LAWSON #19045

STOCK NO. 00-0601780



Representative Image Only

Williams® 3/4" Drive, Standard Socket, 1-7/16"

Williams® - 3/4" Drive, 12 Point, Standard Length Socket, 1-7/16" (Pack of 1)

Item# 19045
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.0
Brand : Williams®
Mfr Model# : H-1246
Catalog Page# : 14-14
Usually Ships: 2 Today



TAA Compliant

Quantity: 1 [Check Stock](#)[Add to Cart](#)[Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS**

- High-polished chrome finish
- Federal Specification ANSI B107.1 (SAE) B107.5 (Metric)
- SUPERTORQUE® lobular opening for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 point and 12 point fasteners
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19045
Product Name : Williams® - 3/4" Drive, Standard Socket, 1-7/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 12
Measuring System : SAE
Size : 1-7/16"
Overall Length : 2.375"
Drive End Diameter : 1.625"
Working End Diameter : 2"
Broach Depth : 0.9375"
Bolt Clearance Depth : 1.4375"
Bolt Clearance Diameter : 1.25"
SAE Size : 1-7/16"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 0.9375"
Nose Length /Length to Shoulder : 1"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

493

2.00

EA

0493 - SOCKET, SHORT, CHROME, 1-11/16
IN., INDUSTRIAL, 12 POINT, 3/4 IN.

LAWSON #19049



Representative Image Only

Williams® 3/4" Drive, Standard Socket, 1-11/16"

Williams® - 3/4" Drive, 12 Point, Standard Length Socket, 1-11/16" (Pack of 1)

Item# 19049
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.62
Brand : Williams®
Mfr Model# : H-1254
Catalog Page# : 14-14
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock](#) [Add to Cart](#) [Create a Re-order list..](#) [Add to List](#)**DESCRIPTION****TECH SPECS**

- High-polished chrome finish
- Federal Specification ANSI B107.1 (SAE) B107.5 (Metric)
- SUPERTORQUE® lobular opening for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 point and 12 point fasteners
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19049
Product Name : Williams® - 3/4" Drive, Standard Socket, 1-11/16"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 12
Measuring System : SAE
Size : 1-11/16"
Overall Length : 2.75"
Drive End Diameter : 1.78125"
Working End Diameter : 2.375"
Broach Depth : 1.1875"
Bolt Clearance Depth : 1.8125"
Bolt Clearance Diameter : 1.375"
SAE Size : 1-11/16"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 1.1875"
Nose Length /Length to Shoulder : 1.375"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

494

2.00

EA

0494 - SOCKET, SHORT, CHROME, 1-5/8
IN., INDUSTRIAL, 12 POINT, 3/4 IN.

LAWSON #19048



Representative Image Only

Williams® 3/4" Drive, Standard Socket, 1-5/8"

Williams® - 3/4" Drive, 12 Point, Standard Length Socket, 1-5/8" (Pack of 1)

Item# 19048
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.31
Brand : Williams®
Mfr Model# : H-1252
Catalog Page# : [14-14](#)
Usually Ships: Today



TAA Compliant

Quantity: 1 [Check Stock ?](#)[Add to Cart](#) Create a Re-order list.. [Add to List](#)**DESCRIPTION****TECH SPECS**

- High-polished chrome finish
- Federal Specification ANSI B107.1 (SAE) B107.5 (Metric)
- SUPERTORQUE® lobular opening for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 point and 12 point fasteners
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION**TECH SPECS**

Item# : 19048
Product Name : Williams® - 3/4" Drive, Standard Socket 1-5/8"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 12
Measuring System : SAE
Size : 1-5/8"
Overall Length : 2.625"
Drive End Diameter : 1.75"
Working End Diameter : 2.25"
Broach Depth : 1.15625"
Bolt Clearance Depth : 1.6875"
Bolt Clearance Diameter : 1.375"
SAE Size : 1-5/8"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 1.15625"
Nose Length /Length to
Shoulder : 1.25"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

495

2.00

EA

0495 - SOCKET, SHORT, 1-3/4 IN., 3/4
IN. DR., 12 POINT, CHROME, JHWH-1256

LAWSON #19050



Representative Image Only

Williams® 3/4" Drive, Standard Socket, 1-3/4"

Williams® - 3/4" Drive, 12 Point, Standard Length Socket, 1-3/4" (Pack of 1)

Item# 19050
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : 1.66
Brand : Williams®
Mfr Model# : H-1256
Catalog Page# : 14-14
Usually Ships: 2 Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

Create a Re-order list.. [Add to List](#)

DESCRIPTION TECH SPECS

- High-polished chrome finish
- Federal Specification ANSI B107.1 (SAE) B107.5 (Metric)
- SUPERTORQUE® lobular opening for greater turning power without deforming the fastener
- Designed for maximum engagement on both 6 point and 12 point fasteners
- Thin wall design offers more accessibility without compromising strength
- Torque load is as much as 14% greater than the competition
- Made in USA

DESCRIPTION TECH SPECS

Item# : 19050
Product Name : Williams® - 3/4" Drive, Standard Socket, 1-3/4"
Drive Type : Square
Drive Size : 3/4"
Style : Standard
Number of Points : 12
Measuring System : SAE
Size : 1-3/4"
Overall Length : 2.75"
Drive End Diameter : 1.75"
Working End Diameter : 2.4375"
Broach Depth : 1.1875"
Bolt Clearance Depth : 1.8125"
Bolt Clearance Diameter : 1.375"
SAE Size : 1-3/4"
Finish : Chrome
Wrench Style : SUPERTORQUE®
Wrench/Broach Depth : 1.1875"
Nose Length /Length to Shoulder : 1.375"
Locking Type : Ball
Material : Alloy Steel
UNSPSC #: 27111704
TAA Compliant: Yes

496

4.00

EA

0496 - SOCKET, ADPATER, REDUCING,
1/2 IN. DRIVE TO 3/8 IN. DRIVE
LAWSON #18696



Williams® Socket Adapter, 3/8" Drive, 3/8M x 1/2"F

Williams® - 3/8" M x 1/2" F Socket Adapter, 3/8" Drive, 1-5/16" Length, Black (Pack of 1)

Item# 18696
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .21
Brand : Williams®
Mfr Model# : BS-131BA
Catalog Page# : 14-16
Usually Ships: ⌚ Today



TAA Compliant

Quantity: 1 [Check Stock](#) ⓘ

Add to Cart ▶

Create a Re-order list.. ▼ [Add to List](#)

TECH SPECS

Item# :	18696
Product Name :	Williams® - Socket Adapter, 3/8" Drive, 3/8M x 1/2"F
Type :	Socket Adapter
Drive Size :	3/8"
Male Size :	3/8"
Female Size :	1/2"
Length :	1-5/16"
Socket Retention :	Spring Plunger
Finish :	Black
UNSPSC #:	27112532
TAA Compliant:	Yes

497

4.00

EA

0497 - ADPATER, DRIVE, 3/8 IN. DR.
FEMALE X 1/2 IN. MALE, CHROME, MEETS

LAWSON #18695



Williams® Socket Adapter, 3/8" Drive, 1/2M x 3/8"F

Williams® - 1/2" M x 3/8" F Socket Adapter, 3/8" Drive, 1-5/16" Length, Chrome (Pack of 1)

Item# 18695
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .11
Brand : Williams®
Mfr Model# : BS-130
Catalog Page# : [14-16](#)
Usually Ships: 2 Today



TAA Compliant



Quantity: 1 [Check Stock](#)

[Add to Cart](#)

[Create a Re-order list..](#) [Add to List](#)

TECH SPECS

Item# :	18695
Product Name :	Williams® - Socket Adapter 3/8" Drive 1/2M x 3/8 F
Type :	Socket Adapter
Drive Size :	3/8"
Male Size :	1/2"
Female Size :	3/8"
Length :	1-5/16"
Socket Retention :	Spring Plunger
Finish :	Chrome
UNSPSC #:	27112632
TAA Compliant:	Yes

498

3.00

EA

0498 - ADAPTER, SOCKET, CHROME,
INCREASING FROM 1/2 IN. FEMALE DRIVE

LAWSON #18903



Williams® Socket Adapter 1/2" Drive, Spring Plunger

Williams® - 1/2" Socket Adapter, Spring Plunger, 1-15/16" Length (Pack of 1)

Item# 18903
Price : [Log In](#)
Standard Pack : 1 ea.
Ship Weight : .36
Brand : Williams®
Mfr Model# : SH-130
Catalog Page# : [14-16](#)
Usually Ships: [?](#) Today



TAA Compliant

Quantity: 1 [Check Stock](#) [?](#)

[Add to Cart](#) [▶](#)

Create a Re-order list.. [▼](#) [Add to List](#)

TECH SPECS

Item# :	18903
Product Name :	Williams® - Socket Adapter 1/2" Drive, Spring Plunger
Type :	Socket Adapter
Drive Size :	1/2"
Male Size :	3/4"
Female Size :	1/2"
Length :	1-15/16"
Socket Retention :	Spring Plunger
Finish :	Chrome
UNSPSC #:	27112532
TAA Compliant:	Yes