



CENTRALBIDDING
FROM CENTRAL AUCTION HOUSE

**5000145099 A ONE-TIME PURCHASE OF MATERIALS FOR JEFFERSON
PARISH COMMUNITY CENTER**
Jefferson Parish Government

Project documents obtained from www.CentralBidding.com
12-Apr-2024 11:13:12 AM



Bid Number 50-00145099

**A ONE-TIME PURCHASE OF MATERIALS FOR
JEFFERSON PARISH COMMUNITY CENTER**

BID DUE: April 18, 2024 AT 11:00 AM

ATTENTION VENDORS!!!

Please review all pages and respond accordingly, complying with all provisions in the technical specifications and Jefferson Parish Instructions for Bidders and General Terms and Conditions. All bids must be received on the Purchasing Department's eProcurement site, www.jeffparishbids.net, by the bid due date and time. Late bids will not be accepted.

**Jefferson Parish Purchasing Department
200 Derbigny Street
General Government Building, Suite 4400
Gretna, LA 70053
Purchasing Specialist: Ruby Tran
Email: ruby.tran@jeffparish.net
Phone: 504-364-2687**

**INVITATION TO BID
THIS IS NOT AN ORDER**

Page: 1

DATE: 4/12/2024

BID NO.: 50-00145099

**JEFFERSON PARISH
PURCHASING DEPARTMENT
P.O. BOX 9
GRETN, LA. 70054-0009
504-364-2678**

VENDOR: 27118 BLANK BID COPY VENDOR

**PURCHASING SPECIALIST:
RTRAN@jeffparish.net**

Bids will be received until 11:00 AM, 4/18/2024

LATE BIDS WILL NOT BE ACCEPTED

NOTE: ONLY BIDS WRITTEN IN INK OR TYPEWRITTEN, AND PROPERLY SIGNED BY A MEMBER OF THE FIRM OR AUTHORIZED REPRESENTATIVE, WILL BE ACCEPTED. PENCIL AND/OR PHOTOSTATIC FIGURES OR SIGNATURES SHALL RESULT IN BID REJECTION. HOWEVER, ELECTRONIC SIGNATURES AS DEFINED IN LSA - R.S. 9:2602(8) ARE ACCEPTABLE. SIGNATURE MUST BE A SECURED DIGITAL SIGNATURE.

All bids submitted are subject to these instructions and general conditions and any special conditions and specifications contained herein, all of which are made part of this bid proposal reference. By submitting a bid, vendor agrees to comply with all provisions of Louisiana Law, as well be in compliance with the Jefferson Parish Code of Ordinances, Louisiana Code of Ethics, applicable Jefferson Parish ethical standards and Jefferson Parish Resolution No. 136353 and/or Resolution No. 141125 as amended. A copy of these resolutions may be obtained from the Office of the Parish Clerk, Suite 6700, Jefferson Parish General Government Building, 200 Derbigny Street, Gretna, LA 70053. You may also obtain a copy by visiting the Purchasing Department webpage at purchasing.jeffparish.net and clicking on On-line forms.

All vendors submitting bids should register as a Jefferson Parish vendor if not already yet registered. Registration forms may be downloaded from <http://purchasing.jeffparish.net> and by clicking on Vendor Information. Current W-9 forms with respective Tax Identification numbers and vendor applications may be submitted at any time; however, if your company is not registered and/or a current W-9 form is not on file, vendor registration is mandatory. Vendors may experience a delay in payment if your company is not a registered vendor with Jefferson Parish.

Jefferson Parish is exempt from paying sales tax under LSA-R.S. 47:301 (8)(c). All prices for purchases by Jefferson Parish of supplies and materials shall be quoted in the unit of measure specified and unless otherwise specified, shall be exclusive of state and local taxes. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit price shall prevail. Quotations shall be based on F.O.B. Delivered, anywhere within the Parish as designated by the Purchasing Department. JEFFERSON PARISH WILL ACCEPT ONE BID ONLY FROM EACH VENDOR. Items bid must meet specifications. JEFFERSON PARISH will accept one price for each item unless otherwise indicated. Two or more prices for one item will result in bid rejection. Bidders are required to complete, sign and return the bid form and/or complete and return the associated line item pricing forms as indicated. The price quoted for work shall be stated in figures. In the event there is a difference in unit prices and totals, the unit prices shall prevail

JEFFERSON PARISH reserves the right to award contracts or place orders on a lump sum or individual item basis, or such combination, as shall in its judgment be in the best interest of JEFFERSON PARISH. Every contract or order shall be awarded to the LOWEST RESPONSIVE and RESPONSIBLE BIDDER, taking into consideration the CONFORMITY WITH THE SPECIFICATIONS and the DELIVERY AND/OR COMPLETION DATE

PROTESTS: Only those vendors that submit bids in response to this solicitation may protest any element of the procurement, in writing to the Director of the Purchasing Department. Written protest must be received within 48 hours of the release of the bid tabulation by the Purchasing Department. After consultation, the Parish Attorney's Office will then respond to protests in writing. (For more information, please see Chapter 2, Article VII, Division 2, Sec. 2-914.1 of the Jefferson Parish Code of Ordinances.)

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in the quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH requires all products to be new (current) and all work must be performed according to standard practices for the project. Unless otherwise specified, no aftermarket parts will be accepted. Unless otherwise specified, all workmanship and materials must have at least one (1) year guaranty, in writing, from the date of delivery and/or acceptance of the project. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

If this bid requires a pre-bid conference (see Additional Requirements section), bidders are advised that such conference will be held to allow bidders the opportunity to identify any discrepancies in the bid specifications and seek further clarification regarding instructions. The Purchasing Department will issue a written response to bidders' questions in the form of an Addendum.

All formal Addenda require written acknowledgment on the bid form by the bidder by the bidder placing the Addendum number in the appropriate section. Failure to acknowledge an Addendum on the bid form shall cause the bid to be rejected; JEFFERSON PARISH reserves the right to award bid to next lowest responsive and responsible bidder in this event.

USE OF BRAND NAMES AND STOCK NUMBERS: Where brand names and stock numbers are specified, it is for the purpose of establishing certain minimum standards of quality. Bids may be submitted for products of equal quality, provided brand names and stock numbers are specified. Complete product data may be required prior to award.

Quantities listed are for bidding purposes only. Actual requirements may be more or less than quantities listed.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

Bidders are not to exclude from participation in, deny the benefits of, or subject to discrimination under any program or activity, any person in the United States on the grounds of race, color, national origin, or sex; nor discriminate on the basis of age under the Age Discrimination Act of 1975, or with respect to an otherwise qualified handicapped individual as provided in Section 504 of the Rehabilitation Act of 1973, or on the basis of religion, except that any exemption from such prohibition against discrimination on the basis of religion as provided in the Civil Rights Act of 1964, or Title VI and VII of the Act of April 11, 1968, shall also apply. This assurance includes compliance with the administrative requirements of the Revenue Sharing final handicapped discrimination provisions contained in Section 51.55 (c), (d), (e), and (k)(5) of the Regulations. New construction or renovation projects must comply with Section 504 of the 1973 Rehabilitation Act, as amended, in accordance with the American National Standard Institute's specifications (ANSI A117.1-1961).

Jefferson Parish and its partners as the recipients of federal funds are fully committed to awarding a contract(s) to firm(s) that will provide high quality services and that are dedicated to diversity and to containing costs. Thus, Jefferson Parish strongly encourages the involvement of minority and/or woman-owned business enterprises (DBE's, including MBE's, WBE's and SBE's) to stimulate participation in procurement and assistance programs.

IN ACCORDANCE WITH STATE REGULATIONS JEFFERSON PARISH OFFERS ELECTRONIC PROCUREMENT TO ALL VENDORS

This electronic procurement system allows vendors the convenience of reviewing and submitting bids online.

This is a secure site and authorized personnel have limited read access only. Bidders are to submit electronically using this free service; while the website accepts various file types, one single PDF file containing all appropriate and required bid documents is preferred. Bidders submitting uploaded images of bid responses are solely responsible for clarity. If uploaded images/documents are not legible, then bidder's submission will be rejected. Please note all requirements contained in this bid package for electronic bid submission.

Please visit our E-Procurement Page at www.jeffparishbids.net to register and view Jefferson Parish solicitations. For more information, please visit the Purchasing Department page at <http://purchasing.jeffparish.net>.

ADDITIONAL REQUIREMENTS FOR THIS BID

PLEASE MATCH THE NUMBERS PRINTED IN THIS BOX WITH THE
CORRESPONDING INSTRUCTIONS BELOW.

13

1. All bidders must attend the MANDATORY pre-bid conference and will be required to sign in and out as evidence of attendance. In accordance with LSA R.S. 38:2212(I), all prospective bidders shall be present at the beginning of the MANDATORY pre-bid conference and shall remain in attendance for the duration of the conference. Any prospective bidder who fails to attend the conference or remain for the duration shall be prohibited from submitting a bid for the project.
2. Attendance to this pre-bid conference is optional. However, failure to attend the pre-bid conference shall not relieve the bidder of responsibility for information discussed at the conference. Furthermore, failure to attend the pre-bid conference and inspection does not relieve the successful bidder from the necessity of furnishing materials or performing any work that may be required to complete the work in accordance with the specification with no additional cost to the owner.
3. Contractor must hold current applicable JEFFERSON PARISH licenses with the Department of Inspection and Code Enforcement. Contractor shall obtain any and all permits required by the JEFFERSON PARISH Department of Inspection and Code Enforcement. The contractor shall be responsible for the payment of these permits. All permits must be obtained prior to the start of the project. Contractor must also hold any and all applicable Federal and State licenses. Contractor shall be responsible for the payment of these permits and shall obtain them prior to the start of the project.
4. A LA State Contractor's License will be required in accordance with LSA R.S. 37-2150 et. seq. and such license number will be shown on the outside of the bid electronic envelope. Failure to comply will cause the bid to be rejected. When submitting the bid electronically, the license number must be entered in the appropriate field in the electronic procurement system. Failure to comply will cause the bid to be rejected.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

5. It is the bidder's responsibility to visit the job site and evaluate the job before submitting a bid.
6. Job site must be clean and free of all litter and debris daily and upon completion of the contract. Passageways must be kept clean and free of material, equipment, and debris at all times. Flammable material must be removed from the job site daily because storage will not be permitted on the premises. Precaution must be exercised at all times to safeguard the welfare of JEFFERSON PARISH and the general public.
7. **PUBLIC WORKS BIDS:** All awards for public works in excess of \$5,000.00 will be reduced to a formal contract which shall be recorded at the contractor's expense with the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. A price list of recordation costs may be obtained from the Clerk of Court and Ex-Officio Recorder of Mortgages for the Parish of Jefferson. All awards in excess of \$25,000.00 will require both a performance and a payment bond. Unless otherwise stated in the bid specifications, the performance bond requirements shall be 100% of the contract price. Unless otherwise state in the bid specifications, the payment bond requirements shall be 100% of the contract price. Both bonds shall be supplied at the signing of the contract.
8. **NON-PUBLIC WORKS BIDS:** A performance bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The performance bond shall be supplied at the signing of the contract.
9. **NON-PUBLIC WORKS BIDS:** A payment bond will be required for this bid. The amount of the bond will be 100% of the contract price unless otherwise indicated in the specifications. The payment bond shall be supplied at the signing of the contract.
10. All bidders must comply with the requirements stated in the attached "Standard Insurance Requirements" sheet attached to this bid solicitation. Failure to comply with this instruction will result in bid rejection.
11. A bid bond will be required with bid submission in the amount of 5% of the total bid, unless otherwise stated in the bid specifications. All sureties must be in original format (no copies). When submitting a bid online, vendors must submit an electronic bid bond through the respective online clearinghouse bond management system(s) as indicated in the electronic bid solicitation on Central Auction House. No scanned paper copies of any bid bond will be accepted as part of the electronic bid submission.
12. This is an as needed basis contract. JEFFERSON PARISH makes no representations on warranties with regard to minimum guaranteed quantities unless otherwise stated in the bid specifications.
13. Freight charges should be included in total cost when quoting. If not quoted FOB DELIVERED, freight must be quoted as a separate item. Bid may be rejected if not quoted FOB DELIVERED or if freight charges are not indicated on bid form.
14. **PUBLIC WORKS BIDS - Completed, Signed and Properly Notarized Affidavits Required;** This applies to all solicitations for construction, alteration or demolition of public buildings or projects, in conformity with the provisions contained in LSA-RS 38:2212.9, LSA-RS 38:2212.10, LSA-RS 38:2224, and Sec 2-923.1 of the Jefferson Parish Code of Ordinances. For bidding purposes, all bidders must submit with bid submission COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits, including: Non-Conviction Affidavit, Non-Collusion Affidavit, Campaign Contribution Affidavit, Debt Disclosures Affidavit and E-Verify Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.
15. **NON PUBLIC WORK BIDS - Completed, Signed and Properly Notarized Affidavits Required** in conformity with the provisions contained in LSA – RS 38:2224 and Sec 2-923.1 of the Jefferson Parish Code of Ordinances. For bidding purposes, all bidders must submit with bid submission COMPLETED, SIGNED and PROPERLY NOTARIZED Affidavits, including: Non-Collusion Affidavit, Debt Disclosures Affidavit and Campaign Contribution Affidavit. For the convenience of vendors, all affidavits have been combined into one form entitled NON PUBLIC WORKS BID AFFIDAVIT. This affidavit must be submitted in its original format, and without material alteration, in order to be compliant and for the bid to be considered responsive. A scanned copy of the completed, signed and properly notarized affidavit may be submitted with the bid, however, the successful bidder must submit the original affidavit in its original format and without material alteration upon contract execution. Failure to comply will result in the bid submission being rejected as non-responsive. The Parish reserves the right to award bid to the next lowest responsive and responsible bidder in this event.

INSTRUCTIONS FOR BIDDERS AND GENERAL CONDITIONS

16. The ensuing contract for this bid solicitation may be eligible for FEMA reimbursement and/or Federal funding/reimbursement. As such, the referenced appendix will be applicable accordingly and shall be considered a part of the bid documents. All applicable certifications must be duly completed, signed and submitted as per the appendix instructions. Failure to submit applicable certifications as per the appendix instructions will result in bid rejection.

17. For this project, the Contractor shall not pay any state or local sales or use taxes on materials and equipment which are affixed and made part of the immovable property of the project or which is permanently incorporated in the project (hereinafter referred to as "applicable materials and equipment"). All purchases of applicable materials or equipment shall be made by the contractor on behalf of and as the agent of Jefferson Parish (Owner), a political subdivision of the State of Louisiana. No state and local sales and use taxes are owed on applicable materials and equipment under the provisions of Act 1029 of the 1991 Regular Session - Louisiana Revised Statute 47:301(8)(c). Owner will furnish to contractor a certificate form which certifies that Owner is not required to pay such state or local sales and use taxes, and contractor shall furnish a copy of such certificate to all vendors or suppliers of the applicable materials and equipment, and report to Owner the amount of taxes not incurred.

It shall be the duty of every parish officer, employee, department, agency, special district, board, and commission: and the duty of every contractor, subcontractor, and licensee of the parish, and the duty of every applicant for certification of eligibility for a parish contract or program, to cooperate with the Inspector General in any investigation, audit, inspection, performance review, or hearing pursuant to Jefferson Parish Code of Ordinances Section 2-155.10(19). By submitting a bid, vendor acknowledges this and will abide by all provisions of the referenced Jefferson Parish Code of Ordinances.

DATE: 4/12/2024

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 5

BID NO.: 50-00145099

JEFFERSON PARISH

PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR: 27118 BLANK BID COPY VENDOR

PURCHASING SPECIALIST:
RTRAN

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

20 Days

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK

In the event that addenda are issued with this bid, bidders **MUST** acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form by placing the addendum number as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: _____

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME:

BRILLED LIGHTING

SIGNATURE:

(Must be signed here)

TITLE: BID MANAGER

PRINT OR TYPE NAME:

GRACE CRUZ

ADDRESS:

156 S 600 W

CITY, STATE:

LOGAN, UT

ZIP:

84321

TELEPHONE:

(435) 9320867

FAX:

()

EMAIL ADDRESS:

bids@brilledlighting.com

TOTAL PRICE OF ALL BID ITEMS: \$ 7,746.85

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00145099

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
			A ONE-TIME PURCHASE OF MATERIALS FOR JEFFERSON PARISH COMMUNITY CENTER		
1	90.00	EA	0001 2X4-COLOR/WATTAGE AJUSTABLE FLAT PANEL 29,34,39 & 49W 6,370LM 100-277V 35-5K ALTERNATE LED-BPL-2x4-3M50-5CCT NO-WGLPNF-2X4-MCTP4	\$ 60.00	\$ 5,400.00
2	15.00	EA	0002 LED RETRFIT KIT 8" CCT UNV NL-E-E4DLH1420D8-93040 ALTERNATE LED-CMD-8-3M29-5CCT	\$ 47.08	\$ 706.20
3	40.00	EA	0003 9.5W LED BR30 FLOOD 4000K ALTERNATE LR31873	\$ 7.14	\$ 285.71
4	3.00	EA	0004 150W LED AREA LIGHT 120/277V 5000K SILVER T3 LENS SQUARE POLE MOUNT LSB2-150B50-SL ALTERNATE BR-TS-SL0820-200W-H3-TCP	\$ 104.07	\$ 312.21
5	2.00	EA	0005 100W FLOOD LIGHT 08 5000K 120-277V BRONZE YOKE NL-MFD08100W27V50KYK ALTERNATE LED-ARL-3P80-TRI-BZ-TR-PC	\$ 103.85	\$ 207.70
6	25.00	EA	0006 12.5W T8 BYP LED TUBE 4000K NL-48T8-12.5-840-BYP ALTERNATE LED-T8-DF-GL-3FT-12W-CTRI	\$ 9.69	\$ 242.25
7	2.00	EA	0007 27W ADJUSTABLE WAL PACK 120/277V 5000K NLWP27W27V5K ALTERNATE 5059	\$ 65.64	\$ 131.28
8	10.00	EA	0008 40W LED STRIP LIGHT NL-LSL4FT-40W-4K ALTERNATE LED-RST-4FT-3M40W-4CCT DELIVER TO: J C SIMMONS COMMUNITY CENTER 4008 US HWY. 90 AVONDALE, LA 70094	\$ 46.15	\$ 461.50

STICK IT TO THE MAN AND FIGHT FOR THE LITTLE GUY



**Of Combined
Experience
As Engineers**



Brilled Lighting is transforming the lighting industry through strong partnerships and over 60 years of engineering excellence. With durable LED solutions, we prioritize customer satisfaction above all else, offering **factory-direct products at competitive prices.**

Our expert team provides personalized guidance for projects ranging from offices to sports facilities, ensuring tailored solutions aligned with long-term goals. Experience excellence with Brilled Lighting today!

● INDOOR & OUTDOOR LED LIGHTING SUPPLY

We aim to be a leading supplier for both indoor and outdoor lighting solutions. With consistent quality and competitive pricing, we're committed to helping facilities transition to efficient indoor lighting. Additionally, recognizing the often overlooked energy-saving potential of outdoor lighting, we offer a range of options, from pole lights to high-end stadium-style floodlighting, to meet diverse needs and enhance cost savings.

● POWER CONDITIONING

Conditioning your power involves treating each sub-panel in your facility with its power-perfect unit. Far from simple capacitors, these units treat all aspects of A/C power bringing amp, volts, ohms, EMI, and other core aspects of power inline.

● ADVANCED LIGHTING CONTROL SYSTEMS

We can provide both basic and advanced control systems to our clients. These systems not only save extra power in the long run, but they can also significantly reduce the upfront cost of LED upgrades as many utilities will pay higher rebates for LED when paired with an advanced control system

DIFFERENTIATORS

1 VALUE ADDED SERVICES

- Custom Lighting Design Services — AutoCAD, Visual, and Dialux-based
- Alternate Product Recommendations and Professional Submittals
- Site Surveys with Investment - Grade Audit Proposals
- Utility Rebate Assistance — We will process the paperwork FOR YOU!

2 REBATES PROCESSING

We work with all utilities to find rebates available for your customers and we process all the paperwork for you!

3 EXPERIENCED LIGHTING CONTRACTOR

Our network of lighting contractors knows how to install lighting, which means your job will get done quickly and efficiently, saving you on installation costs and headaches.

4 FACTORY DIRECT LIGHTING PRODUCTS

NO MORE extra markups from rep agencies and distributors, putting more profit back into your pockets.

5 TURN-KEY JOB HANDLING

We will provide you a full turn-key bid including all labor and materials so you can count on your job completed by lighting experts. This includes on-site visits, virtual visits, and digital lighting designs from our team of lighting professionals.

6 HIGHEST QUALITY PRODUCTS

Most products are available in a 10 year warranty

7 NATIONWIDE ASSISTANCE

Lighting experts and dedicated salesmen are available to help with product recommendations and services

PAST PERFORMANCES/CLIENTS

Rated outstanding by our clients:



CERTIFICATION



**Minority Business Enterprise (MBE)
Certification # MBE24069**

NAICS CODE

335131 || 335132 || 335139

VISIT OUR SITE



POINT OF CONTACT NATE LONG - DIRECTOR OF OPERATIONS



bids@brilledlighting.com

+1 435 932 0867



www.brilledlighting.com

156 S 600 W Logan, UT 84321





ALTERNATE PRODUCT DESCRIPTION

CURRENT		PROPOSED	
Current Product:	2x4 FLAT PANEL(CCT/WATTAGE ADJUSTABLE)	Proposed Product:	2x4 LED PANEL : BACKLIT-LINE
Manufacturer:	WESTGATE	Manufacturer:	EnVision LED
Part Number:	NO-WGLPNF-2X4-MCTP4	Part Number:	LED-BPL-2x4-3M50-5CCT
Watts:	30/40/50 W (Selectable)	Watts:	30/40/50 W (Selectable)
Voltage:	100-277V	Voltage:	120-277 V
Lumens:	3300/4400/5500 LM (Selectable)	Lumens:	3300/4400/5500 LM (Selectable)
CCT:	3500K/ 4000K/ 5000K (Selectable)	CCT:	30/35/40/50/65 K (Selectable)
CRI:	>80	CRI:	80
Warranty:	5 Year Warranty	Warranty:	5 Year Warranty

Current Product:	8" LED COMMERCIAL DOWNLIGHT	Proposed Product:	8" LED DOWNLIGHT 5-CCT + 3-Power
Manufacturer:	ENERGETIC LIGHTING	Manufacturer:	EnVision LED
Part Number:	E4DLH1420D8-93040	Part Number:	LED-CMD-8-3M29-5CCT
Watts:	14/17/20 W (Selectable)	Watts:	16.5/23/29W (Selectable)
Voltage:	100-277V	Voltage:	120-277 V
Lumens:	1200/1450/1750 LM (Selectable)	Lumens:	1500/2000/2500 LM (Selectable)
CCT:	3000/3500/4000 K (Selectable)	CCT:	27/30/35/40/50 K (Selectable)
CRI:	93	CRI:	90
Warranty:	10 Year Warranty	Warranty:	5 Year Warranty

Current Product:	BR 30 FLOOD LIGHT BULB	Proposed Product:	BR 30 FLOOD LIGHT BULB
Manufacturer:	SATCO	Manufacturer:	LUXRITE
Part Number:	S9622	Part Number:	LR31873
Watts:	9.5 W	Watts:	8.5 W
Voltage:	120 V	Voltage:	120 V
Lumens:	750 LM	Lumens:	650 LM
CCT:	4000 K	CCT:	4000 K
CRI:	80	CRI:	80
Warranty:	5 Year Warranty	Warranty:	5 Year Warranty

Current Product:	150 W LED AREA LIGHT	Proposed Product:	TUNABLE LED AREA LIGHT
Manufacturer:	-	Manufacturer:	BRILLED LIGHTING
Part Number:	-	Part Number:	BR-TS-SL0820-200W-H3-TCP
Watts:	150 W	Watts:	100W/150W/200W (Selectable)
Voltage:	120/277 V	Voltage:	100-277V
Lumens:	-	Lumens:	13000 / 19500 / 26000LM(Selectable)
CCT:	5000 K	CCT:	5000K
CRI:	-	CRI:	>80
Warranty:	-	Warranty:	5 Year Warranty

Current Product:	100 W FLOOD LIGHT	Proposed Product:	AREA FLOOD LIGHT
Manufacturer:	-	Manufacturer:	EnVision LED
Part Number:	MFD08100W27V50KYK	Part Number:	LED-ARL-3P80-TRI-BZ-TR-PC
Watts:	100 W	Watts:	60/70/80W (Selectable)
Voltage:	120-277 V	Voltage:	120-277 V
Lumens:	5000 K	Lumens:	8400/9800/11200 LM(Selectable)
CCT:	13300 LM	CCT:	30/40/50 K (Selectable)
CRI:	70	CRI:	>80
Warranty:	5 Year Warranty	Warranty:	5 Year Warranty

Current Product: 12 W LED T8 TUBE		Proposed Product: T8 TRIPLE FIT TUBES	
Manufacturer:	HALCO LIGHTING	Manufacturer:	EnVision LED
Part Number:	48T8-12.5-840-BYP	Part Number:	LED-T8-DF-GL-3FT-12W-CTRI
Watts:	12.5 W	Watts:	12 W
Voltage:	120-277 V	Voltage:	120-277 V
Lumens:	1800 LM	Lumens:	1500 LM
CCT:	4000 K	CCT:	30/40/50 K (Selectable)
CRI:	80	CRI:	>80
Warranty:	5 Year Warranty	Warranty:	5 Year Warranty

Current Product: 27 W ADJUSTABLE WALL PACK		Proposed Product: LED SECURITY WALL PACK (CHEETAH G)	
Manufacturer:	-	Manufacturer:	MAVERICK
Part Number:	-	Part Number:	5059
Watts:	27 W	Watts:	10/15/20W (Selectable)
Voltage:	120-277 V	Voltage:	120-277 V
Lumens:	-	Lumens:	1350/2025/2660 LM (Selectable)
CCT:	5000 K	CCT:	3500/4000/5000 K (Selectable)
CRI:	-	CRI:	80
Warranty:	-	Warranty:	5 Year Warranty

Current Product: 4' LED STRIP LIGHTS		Proposed Product: 4' LED ROUND STRIP	
Manufacturer:	WESTGATE	Manufacturer:	EnVision LED
Part Number:	LSL4FT-40W-4K	Part Number:	LED-RST-4FT-3M40W-4CCT
Watts:	40 W	Watts:	20/30/40 W (Selectable)
Voltage:	120-277 V	Voltage:	120-277 V
Lumens:	4200 LM	Lumens:	2600/3900/5200 LM (Selectable)
CCT:	4000 K	CCT:	3500/4000/5000 K (Selectable)
CRI:	>80	CRI:	>80
Warranty:	5 Year Warranty	Warranty:	5 Year Warranty

Backlit-Line: LED Panels

5-CCT & 3-Power Selectable



2X4



2X2



1X4

Regular Versions

WATT	LUMENS
20	2,200
30	3,300
40	4,400
50	5,500

HL Versions

WATT	LUMENS
30	3,750
40	5,000
45	5,625
50	6,250
55	6,875
65	8,125

Detail Specifications:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- 5CCT: 30/35/40/50/65K
- Beam Angle: 110°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 114° F
- Lens: PS (polystyrene) frosted, non-yellowing, & shatter resistant
- Housing: Iron
- Average life (L70) of 50,000 hours

Applications:

- General Indoor Lighting
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial and Industrial

Product Information:

- Metal housing finished with corrosion free power coat
- Even light distribution
- Lightweight for easier installation
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

Driver Options:

- UNV: 120-277V 0-10V Dimmable (Dim to Off)
- Optional 347-480V step down transformer available
- Standard EMB used:
 - 40W: 8W EMB ([LED-EMB-8W-HV-0-10V-2P](#))
 - 50W: 15W EMB ([LED-EMB-15W-HV-0-10V-2P](#))
- Higher wattage emb (up to 25W) available by request. Pricing will vary.
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- Isolated Driver
- Flicker Free

Mounting & Installations:

- Lay-in ceilings for 5/8" and 3/8" ceiling widths
- Built-in earthquake clips
- Optional 9' suspension kit available
- Optional surface mount, drywall kit available
- Use surface mount and suspension kit for an aesthetically pleasing design

Certifications:

- ETL Listed for USA and CA
- DLC Listed/ DLC Premium Listed (HL Versions)
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Sensor	Emergency Finish ¹		Driver ²	Whip
LED-BPL-2X2-3M40-5CCT 20/30/40W	(blank) No Sensor	(blank) No	(blank) White	(blank) 120-277V	(blank) No Whip
LED-BPL-2X2-3M50-5CCT-HL 30/40/50W	BMS Bi-Level Motion	Emergency	BL ¹ Black	HV 2 347-480V	-6FLX 6' Flex
LED-BPL-2X4-3M50-5CCT 30/40/50W	+ Daylight Sensor (S-BMS-INT-1)	Emergency	GRY ¹ Gray	Stepdown	
LED-BPL-2X4-3M65-5CCT-HL 45/55/65W	BT Bluetooth Power Pack (S-PP-BT)	Backup	BRZ ¹ Bronze		
LED-BPL-1X4-3M40-5CCT 20/30/40W	BMS-BT Bluetooth Power Pack (S-BMS-INT-1-BT)		CS ¹ Custom Color		

1. Standard quick ship finish is white. Other colors are custom finishes.

2. HV: High voltage is made to order.


Optional Accessories (Order Separately)

Suspension Kits	Surface Mount Kits ¹	Drywall Kits	Color Trims
SK-10FT-Y-LC-CB 10' Suspension Kit	2X2-SM-3" 3" Height	LED-PNL-2X2-FLNG Drywall Kit	BPL-2X2-TRIM-BL 2x2 Black Trim
SK-20FT-Y-LC-CB 20' Suspension Kit	2X4-SM-3" 3" Height	LED-PNL-2X4-FLNG Drywall Kit	BPL-2X4-TRIM-BL 2x4 Black Trim
CK-6FT-V 6' Chain Hanging Kit	1X4-SM-3" 3" Height	LED-PNL-1X4-FLNG Drywall Kit	BPL-1X4-TRIM-BL 1x4 Black Trim

1. Custom height options available. Contact us.

Specs and model numbers are subject to change with or without notice. Customization of product is available.

FEATURES




Sticky Slim Test Button

Test button will be pre-installed to the flange of the fixture. No need for external junction box for test switch


Works for Drop Ceiling Flange, Surface Mount Application

Emergency Backup


Integrated Driver

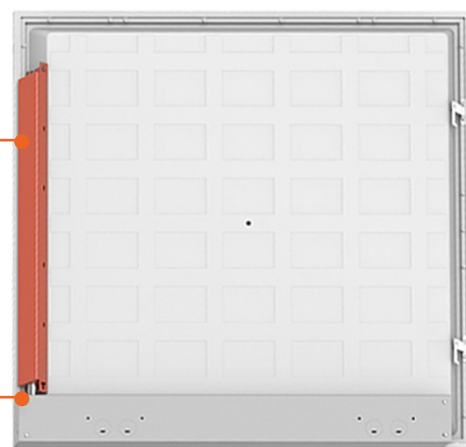


DIMENSIONS

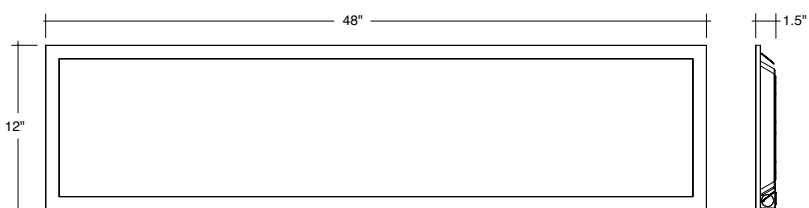

1X4

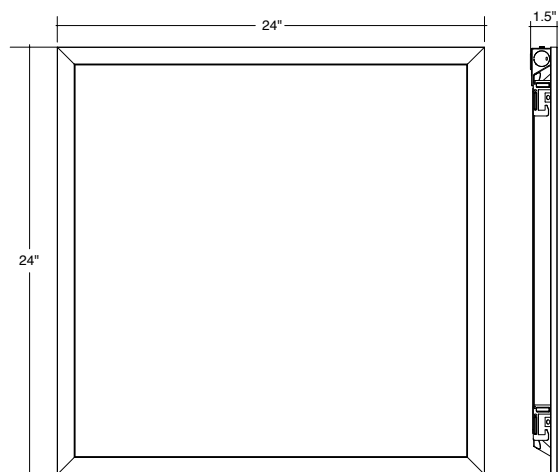

2X2

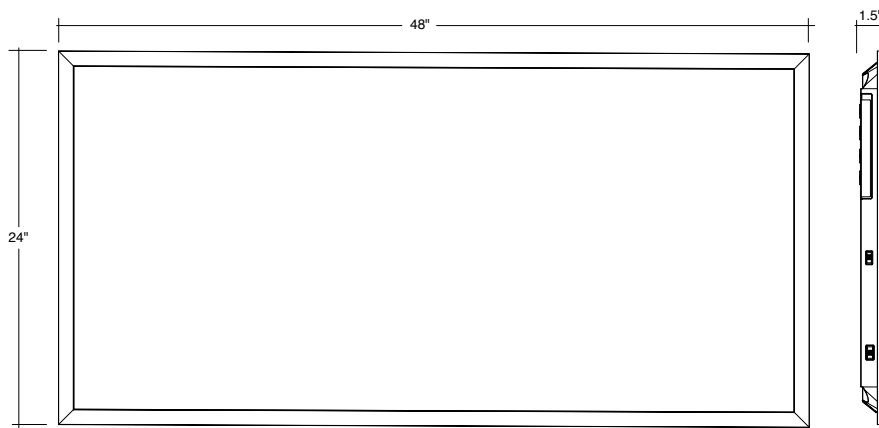


2X4

ACCESSORIES



SK-10FT-Y-LC-CB
SK-20FT-Y-LC-CB




CK-6FT-V



S-BMS-INT-1
S-BMS-INT-1-BT




S-PP-BT

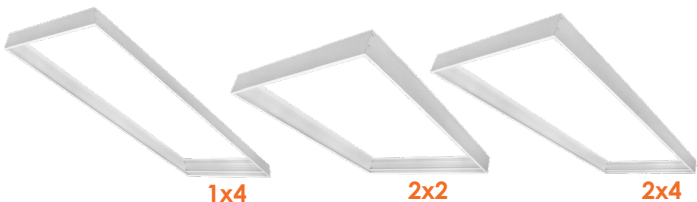

1x4

2x2

2x4

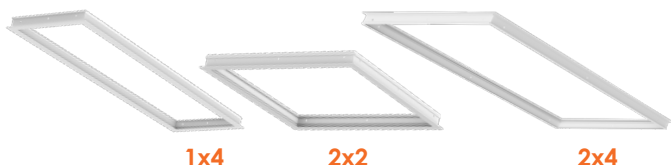

1x4

2x2

2x4



2x2



1x4



2x4

SUSPENSION KITS

Accessory	Description
SK-10FT-Y-LC-CB	10' Suspension Kit
SK-20FT-Y-LC-CB	20' Chain Hanging Kit
CK-6FT-V	6' Chain Hanging Kit
LED-PNL-2X4-SK	3.5' Suspension Kit, works for all sizes

SENSORS

Accessory	Description
S-BMS-INT-1	Bi Level Motion + Daylight Sensor
S-PP-BT	S-Line: Dimmable power pack. Dim any 0-10V fixture (Remote or ENVISION SMART APP)
S-BMS-INT-1-BT	S-BMS-INT-1-BT: Bi Level Motion + Daylight Sensor W/ Bluetooth Control (ENVISION SMART APP)

SURFACE MOUNT KITS

Accessory	Description
2X2-SM-3"	2X2 Surface Mount Kit 3" Height for all Panels and Troffers
2X4-SM-3"	2X4 Surface Mount Kit 3" Height for all Panels and Troffers
1x4-SM-3"	1X4 Surface Mount Kit 3" Height for all Panels and Troffers

DRYWALL KITS

Accessory	Description
LED-PNL-2X2-FLNG	Flange (Drywall) Kit for Panels for all 2X2 Fixtures
LED-PNL-2X4-FLNG	Flange (Drywall) Kit for Panels for all 2X4 Fixtures
LED-PNL-1X4-FLNG	Flange (Drywall) Kit for Panels for all 1X4 Fixtures

TRIMS

Accessory	Description
BPL-2X2-TRIM-BL	2x2 LED Panel: Backlit-Line Black Trim
BPL-1X4-TRIM-BL	1x4 LED Panel: Backlit-Line Black Trim
BPL-2X4-TRIM-BL	2x4 LED Panel: Backlit-Line Black Trim

CMD-Line: Commercial Downlights

5-CCT + 3-Power Selectable

Commercial Downlights



Detail Specifications:

- Finish: White Smooth Standard
 - Black & Clear- Specular Haze Trims Available
- Wet Location Rated
- Beam Angle:
 - 4, 6, 8": 80°
 - 10": 90°
- Chip: SMD 2835, R9 >50, CRI >90
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 114° F
- Lens: Frosted PC, non-yellowing
- Average life (L70) of 70,000 hours

Applications:

- General Recessed Lighting
- Residential & Multifamily
- Office, Hallways and Meeting Rooms
- Education, Healthcare, Retail, Hospitality
- Commercial Lighting

Product Information:

- Metal housing and trim for better heat dissipation
- 27" integral flex whip included on each fixture
- Carabiner safety clip on each fixture
- SnapTrim Canless: Spring clips with remote j-box eliminates can
- Standard white round trim included: optional trims available
- Deep reflector lens reduces glare and optimizes even beam distribution
- Select-n-Switch Technology: 5-CCT + 3-Power Selectable

Driver Options:

- Voltage: 120-277V
- 4 & 6": TRI Mode Dimming: 0-10V, Triac, ELV down to 5%
- 8 & 10": 0-10V Dimmable down to 5%
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz
- Built in 2.5Kv Surge Protector
- Flicker Free

Mounting & Installation:

- Cut Out Dimensions:
 - 4": 4-7/8"
 - 6": 6-1/8" - 7-3/16"
 - 8": 7-1/2" - 8-7/8"
 - 10": 9" - 10"
- Optional new construction plate available
- This fixture does not fit into a recessed can
- No housing needed in remodel applications, tension clips mount into 1/2" to 1.5" thick ceiling
- Can be removed from below the ceiling for service or replacement
- Pre-wired junction box with circuit wiring built in (3 in / 3 out)

Certifications:

- ETL Listed for USA and CA
- Energy Star Certified
- CA Title 24 JA8-2022 CEC Listed
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017
- IC Rated and ASTM-E283 Air-Tight
- Complies with UL 263, ASTM E119, CAN ULC S101

Series	Voltage	Emergency
LED-CMD-4-3M19-5CCT 4" 9/14/19W • 750/1,000/1,500LM	UNV 120-277V	Blank None
LED-CMD-6-3M19-5CCT 6" 9/13/19W • 800/1,200/1,600LM	HV¹ 347-480V	EMB Emergency
LED-CMD-8-3M29-5CCT 8" 16.5/23/29W • 1,500/2,000/2,500LM		Backup
LED-CMD-10-3M38-5CCT 10" 21/30/38W • 2,000/2,500/3,300LM		

1. HV: Step down transformer into 4" j-box

Optional Accessories (Order Separately)

Trim Options	Goof Ring	New Construction Plates	15W Emergency ¹ Backup	Junction Box
CMD-TRIM-4-HZ-SM 4" Clear- Specular Haze Smooth	GR-4-WH 4-8" Width	CUNV-NC-ICAT-7H Universal plate w/ hanging bars	LED-EMB-25W-HV-0/10V-2P 25W Emergency Backup	JBOX-ALM Junction box with 4 1/2" knockouts
CMD-TRIM-4-BLK-SM 4" Black Smooth	GR-6-WH 6.3-10" Width	CUNV-JBX-RI-XL Universal tough in plate. Extra long.		
CMD-TRIM-6-HZ-SM 6" Clear- Specular Haze Smooth	GR-8-WH 8-12.5" Width	C4-NC-RI-J-JBX 4" plate w/ hanging bars + j-box		
CMD-TRIM-6-BLK-SM 6" Black Smooth	GR-10-WH 9-14.1" Width	C6-NC-RI-J-JBX 6" plate w/ hanging bars + j-box		
CMD-TRIM-8-HZ-SM 8" Clear- Specular Haze Smooth		C8/10-NC-RI-J-JBX 8 & 10" plate w/ hanging bars + j-box		
CMD-TRIM-8-BLK-SM 8" Black Smooth				
CMD-TRIM-10-HZ-SM 10" Clear- Specular Haze Smooth				
CMD-TRIM-10-BLK-SM 10" Black Smooth				


1. Field installable. Lasts 90 minute

Specs and model numbers are subject to change with or without notice


EnVision LED Lighting, Inc.

6023 Bandini Blvd. | Bell, CA 90040 | Tel.: 323-604-0066 | www.envisionledlighting.com



FEATURES

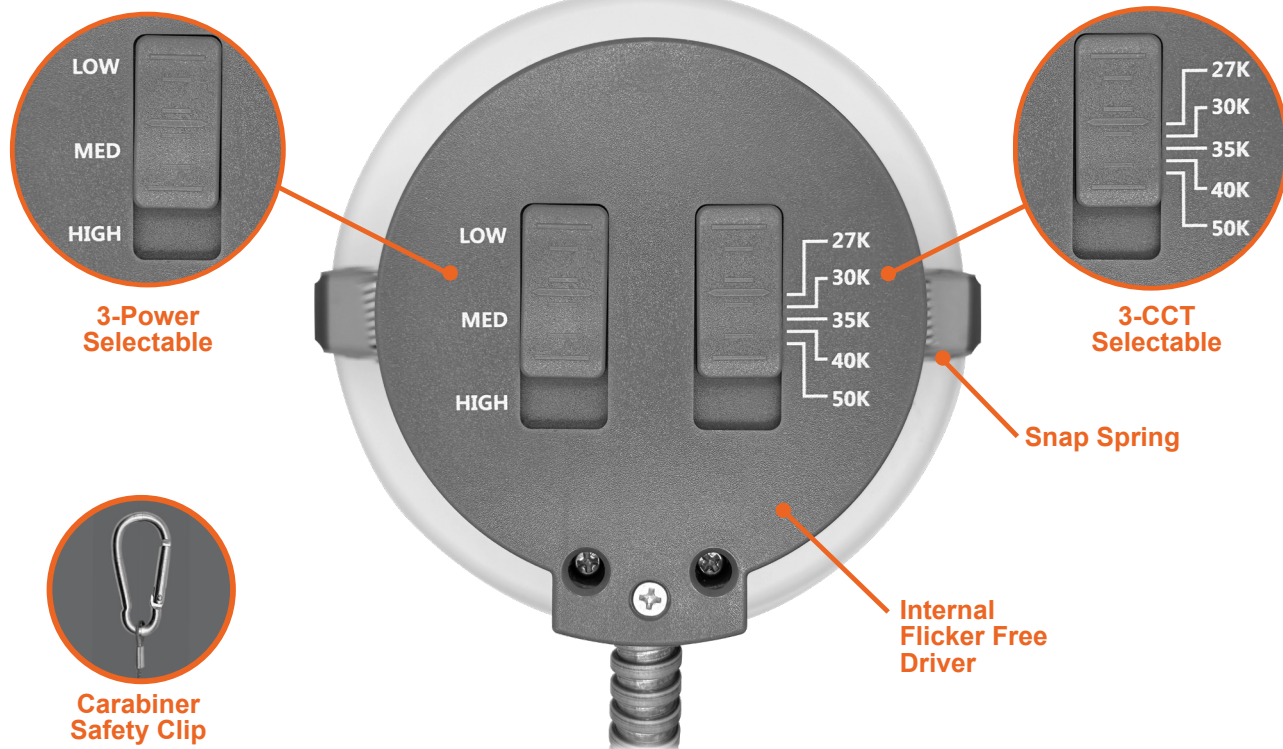



DIMENSIONS





4"

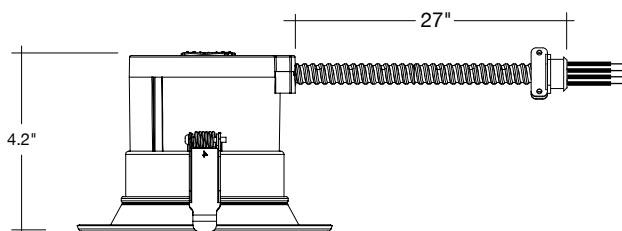


6"

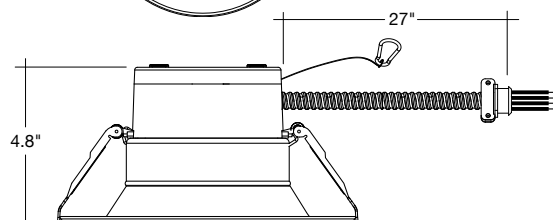


8"

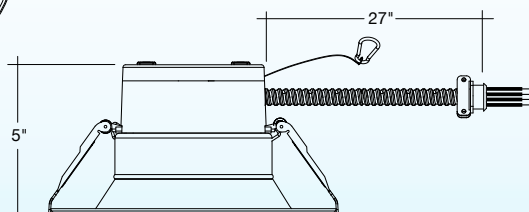

10"

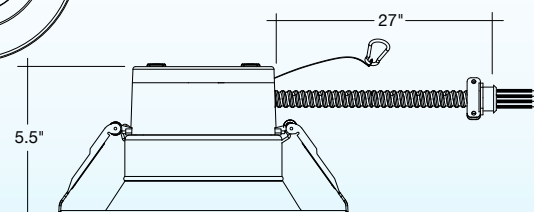


ACCESSORIES




CMD-TRIM-4-HZ-SM
CMD-TRIM-6-HZ-SM
CMD-TRIM-8-HZ-SM
CMD-TRIM-10-HZ-SM



CMD-TRIM-4-HZ-BLK
CMD-TRIM-6-HZ-BLK
CMD-TRIM-8-HZ-BLK
CMD-TRIM-10-HZ-BLK



GR-4-WH
GR-6-WH
GR-8-WH
GR-10-WH



CUNV-NC-ICAT-7H
13 7/8" x 15 1/8"




CUNV-JBX-RI-XL
7" x 26"




C4-NC-RI-J-JBX
17" W x 6.5" D x 3.5"H



C6-NC-RI-J-JBX
18.5" W x 9" D x 4"H



C8/10-NC-RI-J-JBX
18.5" W x 12" D x 4"H

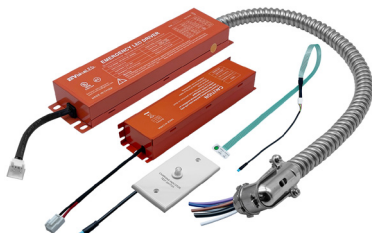

LED-EMB-25W-HV-0/10V-2P



J-BOX ALM
4.46" W x 3.04" D x 1.37" H

Model	Voltage	Watts	Lumens	Color	CRI
LED-CMD-4-3M19-5CCT-UNV	120-277V	9/14/19w	750/1000/1500lm	27/30/35/40/50k	>90
LED-CMD-6-3M19-5CCT-UNV	120-277V	9/13/19w	800/1200/1600lm	27/30/35/40/50k	>90
LED-CMD-8-3M29-5CCT-UNV	120-277V	16.5/23/29w	1500/2000/2500lm	27/30/35/40/50k	>90
LED-CMD-10-3M38-5CCT-UNV	120-277V	21/30/38w	2000/2500/3300lm	27/30/35/40/50k	>90

TRIMS

Accessory	Description
CMD-TRIM-4-HZ-SM	4" Clear-Specular Haze Reflector
CMD-TRIM-4-BLK-SM	4" Black Reflector
CMD-TRIM-6-HZ-SM	6" Clear-Specular Haze Reflector
CMD-TRIM-6-BLK-SM	6" Black Reflector
CMD-TRIM-8-HZ-SM	8" Clear-Specular Haze Reflector
CMD-TRIM-8-BLK-SM	8" Black Reflector
CMD-TRIM-10-HZ-SM	10" Clear-Specular Haze Reflector
CMD-TRIM-10-BLK-SM	10" Black Reflector

GOOF RINGS

Accessory Model	Description
GR-4-WH	4" Goof Ring, Inner Dim: 4" Outer Dim: 8"
GR-6-WH	6" Goof Ring, Inner Dim: 6.3" Outer Dim: 10.5"
GR-8-WH	8" Goof Ring, Inner Dim: 8" Outer Dim: 12.5"
GR-10-WH	10" Goof Ring, Inner Dim: 9" Outer Dim: 14.1"

NEW CONSTRUCTION PLATES

Accessory Model	Description
CUNV-NC-ICAT-7H	Universal plate w/ hanging bar
CUNV-JBX-RI-XL	Universal tough in plate. Extra long.
C4-NC-RI-J-JBX	4" plate w/ hanging bards + j-box
C6-NC-RI-J-JBX	6" plate w/ hanging bards + j-box
C8/10-NC-RI-J-JBX	8" & 10" plate w/ hanging bards + j-box

15W EMERGENCY BACKUP

Accessory Model	Description
LED-EMB-25W-HV-0/10V-2P	25W Emergency Backup

JUNCTION BOX

Accessory Model	Description
JBOX-ALM	Junction box with 4 1/2" knockouts

TESTED COMPATIBLE DIMMERS

Other dimmers may be compatible but have not been tested. Please contact us for more information.

4 & 6" Triac/ELV Dimmers:

Lutron	Legrand	Leviton	Lutron	Insteon	Hubbell
S2-LH	HCL453PTCCCV6	ISD 600 I 120 / IPI06	NLV-600-WH	2477D	RSDE06
CT-603P(R)-WH		6633-PA	DVELV-300P-AL		
		6631-PLW	NTELV-300-WH		
			SELV-300P		

4, 6, 8, 10" 0-10V Dimmers:

Lutron	Leviton	Synergy	Eaton	Hubbell
DVSTV-W	IP710-DLZ	ISD BC 120/277 WH	SF10P-W	PSD710
				RSD710Z

LUXRITE®

Life is bright™

LED FLOOD LAMP
ECO BR-SERIES
BR-20, BR-30, BR-40

BR-20 6.5W

45W WATT REPLACEMENT



BR-30 8.5W

65W WATT REPLACEMENT




BR-40 13W


85W WATT REPLACEMENT

**CRI
80****DIMMABLE**


TRIAC

120V**DAMP
LOCATION
RATED****3
YEAR
WARRANTY**

BR 20



BR 30



BR 40

ELECTRICAL


	MODEL	DESCRIPTION	POWER	INPUT VOLTS	EFFICACY	LIFETIME	WATT REPLACEMENT	COST/YR
BR20	LR31860	LED6W/BR20/27K/D	6.5	120V	70	15,000	50	\$ 0.78
	LR31861	LED6W/BR20/30K/D	6.5	120V	70	15,000	50	\$ 0.78
	LR31862	LED6W/BR20/35K/D	6.5	120V	70	15,000	50	\$ 0.78
	LR31863	LED6W/BR20/40K/D	6.5	120V	70	15,000	50	\$ 0.78
	LR31865	LED6W/BR20/50K/D	6.5	120V	70	15,000	50	\$ 0.78
	LR31866	LED6W/BR20/65K/D	6.5	120V	70	15,000	50	\$ 0.78
BR30	LR31870	LED8.5W/BR30/27K/D	8.5	120V	76	15,000	65	\$ 1.02
	LR31871	LED8.5W/BR30/30K/D	8.5	120V	76	15,000	65	\$ 1.02
	LR31872	LED8.5W/BR30/35K/D	8.5	120V	76	15,000	65	\$ 1.02
	LR31873	LED8.5W/BR30/40K/D	8.5	120V	76	15,000	65	\$ 1.02
	LR31875	LED8.5W/BR30/50K/D	8.5	120V	76	15,000	65	\$ 1.02
	LR31876	LED8.5W/BR30/65K/D	8.5	120V	76	15,000	65	\$ 1.02
BR40	LR31880	LED13W/BR40/27K/D	13	120V	85	15,000	85	\$ 1.56
	LR31881	LED13W/BR40/30K/D	13	120V	85	15,000	85	\$ 1.56
	LR31882	LED13W/BR40/35K/D	13	120V	85	15,000	85	\$ 1.56
	LR31883	LED13W/BR40/40K/D	13	120V	85	15,000	85	\$ 1.56
	LR31885	LED13W/BR40/50K/D	13	120V	85	15,000	85	\$ 1.56
	LR31886	LED13W/BR40/65K/D	13	120V	85	15,000	85	\$ 1.56

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	BASE	FLOOD	CRI	UL LISTED	ENERGY STAR
LR31860	LED6W/BR20/27K/D	2700K	WARM WHITE	460	E26	110°	80	YES	YES
LR31861	LED6W/BR20/30K/D	3000K	SOFT WHITE	460	E26	110°	80	YES	YES
LR31862	LED6W/BR20/35K/D	3500K	NATURAL	460	E26	110°	80	YES	YES
LR31863	LED6W/BR20/40K/D	4000K	COOL WHITE	460	E26	110°	80	YES	YES
LR31865	LED6W/BR20/50K/D	5000K	BRIGHT WHITE	460	E26	110°	80	YES	YES
LR31866	LED6W/BR20/65K/D	6500K	DAYLIGHT	460	E26	110°	80	YES	YES
LR31870	LED8.5W/BR30/27K/D	2700K	WARM WHITE	650	E26	110°	80	YES	YES
LR31871	LED8.5W/BR30/30K/D	3000K	SOFT WHITE	650	E26	110°	80	YES	YES
LR31872	LED8.5W/BR30/35K/D	3500K	NATURAL	650	E26	110°	80	YES	YES
LR31873	LED8.5W/BR30/40K/D	4000K	COOL WHITE	650	E26	110°	80	YES	YES
LR31875	LED8.5W/BR30/50K/D	5000K	BRIGHT WHITE	650	E26	110°	80	YES	YES
LR31876	LED8.5W/BR30/65K/D	6500K	DAYLIGHT	650	E26	110°	80	YES	YES

PHOTOMETRIC

MODEL	DESCRIPTION	COLOR (CCT)	TEMP	LUMEN	BASE	FLOOD	CRI	UL LISTED	ENERGY STAR
LR31880	LED13W/BR40/27K/D	2700K	WARM WHITE	1100	E26	110°	80	YES	YES
LR31881	LED13W/BR40/30K/D	3000K	SOFT WHITE	1100	E26	110°	80	YES	YES
LR31882	LED13W/BR40/35K/D	3500K	NATURAL	1100	E26	110°	80	YES	YES
LR31883	LED13W/BR40/40K/D	4000K	COOL WHITE	1100	E26	110°	80	YES	YES
LR31885	LED13W/BR40/50K/D	5000K	BRIGHT WHITE	1100	E26	110°	80	YES	YES
LR31886	LED13W/BR40/65K/D	6500K	DAYLIGHT	1100	E26	110°	80	YES	YES



Ra>80
PF>0.9

AC100-277V
AC120-347V
AC277-480V

5 Year
Warranty

70% Energy
Saving

BRILLED
LIGHTING
Experts In Highbay Lighting

Product Specification

Project: Jefferson Parish Part No: BR-TS-SL0820-200W-H3-TCP

LED Shoebox Light



ZigBee®



Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: Sales@BrilledLighting.com Web: www.brilledlighting.com


Product Description

- ☑ Photocell, Motion sensor, and PIR Sensor Options
- ☑ LED: SMD3030
- ☑ Lighting Angle: Type III-M/ Type IV-S/ Type V
- ☑ Working Temp: -40°F~+113°F/-40°F~+45°F
- ☑ Efficiency: 130Lm/W
- ☑ LEDTj<185°F
- ☑ Ra>80
- ☑ PF>0.90
- ☑ 5 Year Warranty
- ☑ 70% Energy Saving
- ☑ Life span>50000H




Dimensions


70W/100W/150W

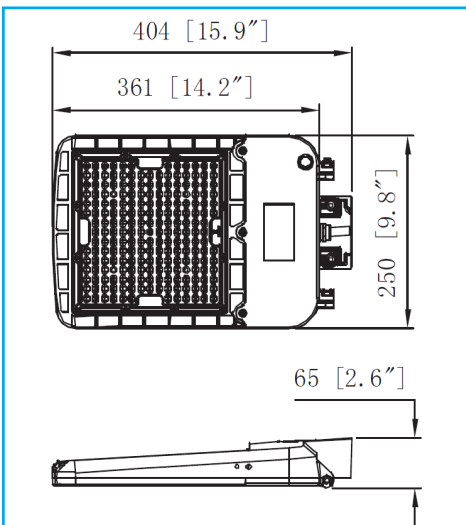

100W/150W/200W

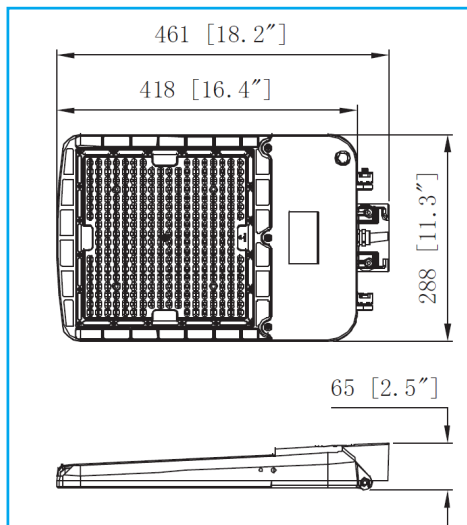

200W/240W/300W

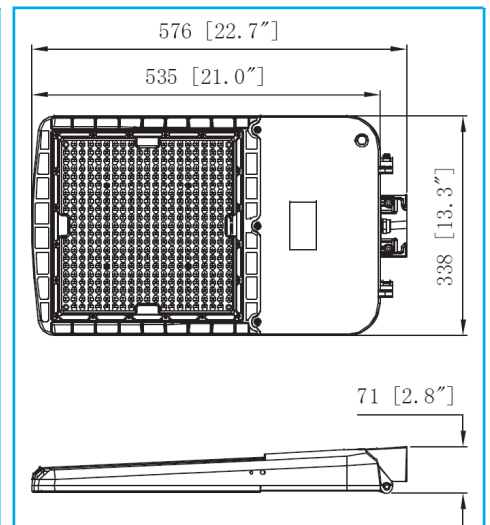

TYPE	LENGTH	WIDTH	THICKNESS
TYPE A	597 [23.5\"]	250 [9.8\"]	79 [3.1\"]
TYPE A2	646 [25.4\"]	250 [9.8\"]	79 [3.1\"]
TYPE B	599 [23.6\"]	250 [9.8\"]	162 [6.4\"]
TYPE B2	651 [25.6\"]	250 [9.8\"]	162 [6.4\"]
TYPE C	532 [21.0\"]	250 [9.8\"]	162 [6.4\"]
TYPE D	552 [21.7\"]	250 [9.8\"]	65 [2.6\"]
TYPE E	449 [17.7\"]	279 [11.0\"]	65 [2.6\"]
TYPE F	739 [29.1\"]	250 [9.8\"]	79 [3.1\"]
TYPE G	599 [23.6\"]	250 [9.8\"]	195 [7.7\"]
TYPE H	603 [23.7\"]	250 [9.8\"]	162 [6.4\"]

TYPE	LENGTH	WIDTH	THICKNESS
TYPE A	654 [25.7\"]	288 [11.3\"]	79 [3.1\"]
TYPE A2	703 [27.7\"]	288 [11.3\"]	79 [3.1\"]
TYPE B	656 [25.8\"]	288 [11.3\"]	162 [6.4\"]
TYPE B2	708 [27.9\"]	288 [11.3\"]	162 [6.4\"]
TYPE C	589 [23.2\"]	288 [11.3\"]	162 [6.4\"]
TYPE D	609 [24.0\"]	288 [11.3\"]	65 [2.5\"]
TYPE E	506 [19.9\"]	317 [12.5\"]	65 [2.5\"]
TYPE F	796 [31.3\"]	288 [11.3\"]	79 [3.1\"]
TYPE G	656 [25.8\"]	288 [11.3\"]	195 [7.7\"]
TYPE H	660 [26.0\"]	288 [11.3\"]	162 [6.4\"]

TYPE	LENGTH	WIDTH	THICKNESS
TYPE A	768 [30.2\"]	338 [13.3\"]	79 [3.1\"]
TYPE A2	817 [32.2\"]	338 [13.3\"]	79 [3.1\"]
TYPE B	770 [30.3\"]	338 [13.3\"]	162 [6.4\"]
TYPE B2	822 [32.4\"]	338 [13.3\"]	162 [6.4\"]
TYPE C	704 [27.7\"]	338 [13.3\"]	162 [6.4\"]
TYPE D	724 [28.5\"]	338 [13.3\"]	71 [2.8\"]
TYPE E	623 [24.5\"]	367 [14.5\"]	71 [2.8\"]
TYPE F	911 [35.8\"]	338 [13.3\"]	87 [3.4\"]
TYPE G	770 [30.3\"]	338 [13.3\"]	195 [7.7\"]
TYPE H	775 [30.5\"]	338 [13.3\"]	162 [6.4\"]

Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: Sales@BrilledLighting.com Web: www.brilledlighting.com

Lighting Parameters

Part no.	Input Voltage	Frequency	Power	Rated Current
TS-XX0815-150W-X-XX-XXX(XXX)	AC100-277V	50/60Hz	150W	1.65A
TS-XX0820-200W-X-XX-XXX(XXX)			200W	2.2A
TS-XX0824-240W-X-XX-XXX(XXX)			240W	2.64A
TS-XX0830-300W-X-XX-XXX(XXX)			300W	3.3A
TS-XX0815-150W-X-XX-XXX(XXX)	AC120-347V	50/60Hz	150W	1.375A
TS-XX0820-200W-X-XX-XXX(XXX)			200W	1.833A
TS-XX0824-240W-X-XX-XXX(XXX)			240W	2.2A
TS-XX0830-300W-X-XX-XXX(XXX)			300W	2.75A
TS-XX0815-150W-X-XX-XXX(XXX)	AC277-480V	50/60Hz	150W	0.596A
TS-XX0820-200W-X-XX-XXX(XXX)			200W	0.794A
TS-XX0824-240W-X-XX-XXX(XXX)			240W	0.953A
TS-XX0830-300W-X-XX-XXX(XXX)			300W	1.2A


Packaging Information

Fixture	Outer box (L*W*H)	Quantity (pcs)	N.W/pcs (lbs/Kg)	G.W/pcs (lbs/Kg)	Remarks
70W/100W/150W	17.99"*11.81"*4.72" 457*300*120mm	1	6.48/2.94	8.50/3.86	1.0M cable
100W/150W/200W	20.24"*13.31"*4.72" 514*338*120mm	1	6.96/3.16	8.86/4.02	
150W/200W/240W	24.92"*15.28"*5.04" 633*388*128mm	1	10.31/4.68	12.56/5.70	
200W/240W/300W		1	10.75/4.88	13.00/5.90	

Bracket Outer box	Outer Box (L*W*H)	Qty/Ctn (pcs)	N.W/pcs (lbs/kg)	G.W/Ctn (lbs/kg)
Type A	15.0"*9.3"*10.0" 380*236*255mm	8	2.9/1.3	25.1/11.4
Type B	17.3"*13.9"*10.2" 440*352*260mm	8	4.0/1.8	34.0/15.4
Type C	16.5"*13.9"*7.7" 420*352*196mm	8	2.6/1.2	23.1/10.5
Type D	14.8"*11.8"*7.9" 376*300*200mm	8	2.9/1.3	24.9/11.3
Type E	15.59"*14.33"*8.66" 396*364*220mm	8	2.02/0.92	2.42/1.10
Type F	15.1"*14.3"*8.9" 383*364*225mm	8	4.9/2.2	41.9/19.0
Type G	16.7"*10.0"*16.7" 425*253*425mm	8	4.2/ 1.9	36.6/ 16.6
Type H	13.94"*10.24"*16.7" 354*260*425mm	8		

Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: Sales@BrilledLighting.com Web: www.brilledlighting.com

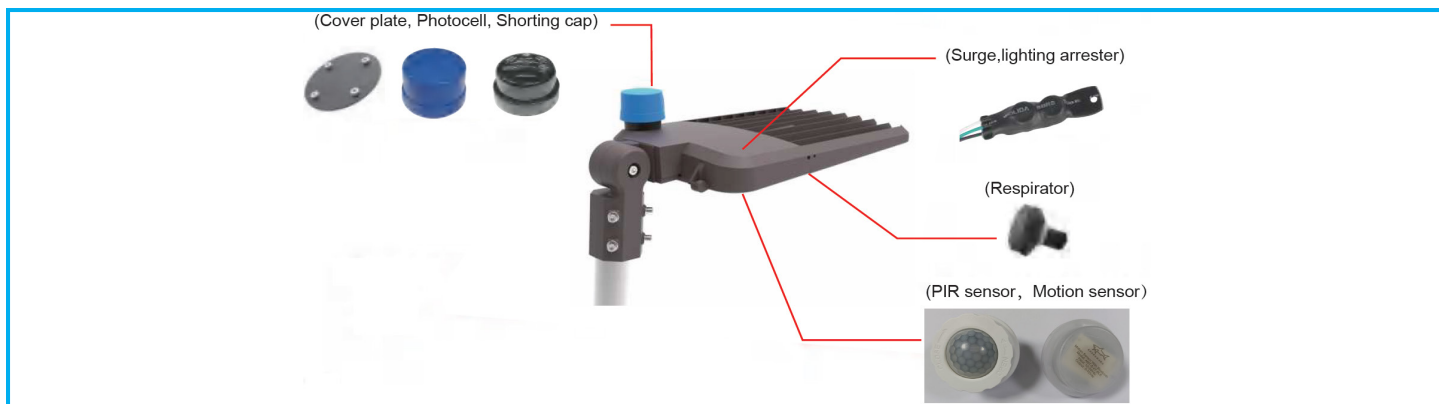


Accessories (optional)

A (Slip fitter)	A2 (Slip fitter)	B (Pole mount with slip-fitter function)	B2 (Pole mount with slip-fitter function)	C (Square/Round pole mount)
D (Trunnion)	E (Yoke)	F	G	H


Operations Instruction

Step 1. First loosen the screws on the lens: screws (total 24PCS), as shown in the figure;




Rotating Optical Lens


Step 2. Remove the optical lens, rotate it clockwise or counterclockwise to a desired angle, as shown in the figure;



Step 3. Put back the adjusted optical lens, lock screws back, as shown in the figure.




1. Take off the waterproof rubber cover from the wattage box.




Watts Selection

2. Select the wattage by using the slide switch.



3. Put back the waterproof rubber cover.



Stick it to the Man and Fight for the Little Guy!

Tel: (435) 932-0867 Email: Sales@BrilledLighting.com Web: www.brilledlighting.com

M-Line: Mini Area Lights

3-CCT & Power Selectable w/ Photocell



Area Lights



WATT	LUMENS
15	2,100
30	4,200
35	4,900
50	7,000
60	8,400
70	9,800
80	11,200

Detail Specifications:

- Finish: Bronze, White, Custom finishes available
- IP Rating: Wet Location
- Beam Angle: 120°
- 15, 30W: Non-Dimmable
- 50, 80W: Dimmable
- CCT: 30/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- 3 Step MacAdam Ellipses
- Operating Temperature: -40° - 122° F
- Lens: PC Lens: Clear acrylic with optics
- Average life (L70) of 70,000 hours

Applications:

- Dock and Loading
- Walkways & Pathways
- Parking Lots
- Hospitality, Multi-Family
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Sturdy die-cast aluminum housing finished with corrosion free powder coat
- Photocell included on each fixture. Easy disconnect.
- 1.5' STJW 18.3 AWG cable whip included
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Built in 6Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Two standard arms:
 - 1/2" Knuckle Mount
 - Trunnion Mount
- Adjustable 180° arms

Certifications:

- UL Listed for USA and CA
- DLC Premium Listed
- ROHS Compliant
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series	Finish ¹	Bracket	Photocell
LED-ARL-2P30-TRI	BZ	KN	(blank)
15/30W • 2,100/ 4,200Lm	Bronze	1/2" Knuckle	No
LED-ARL-2P50-TRI	WH	TR	Photocell
35/50W • 4,900/ 7,000Lm	White	Trunnion	PC
LED-ARL-3P80-TRI	BL ¹		Button
60/70/80W	Black		Photocell
8,400/9,800/11,200Lm	GRY ¹		
	Gray		
	CS ¹		
	Custom		
	Color		



1. Standard quickship is bronze and white. Other colors are custom finishes.

Specs and model numbers are subject to change with or without notice.

M-Line: Mini Area Lights

3-CCT & Power Selectable w/ Photocell


FEATURES

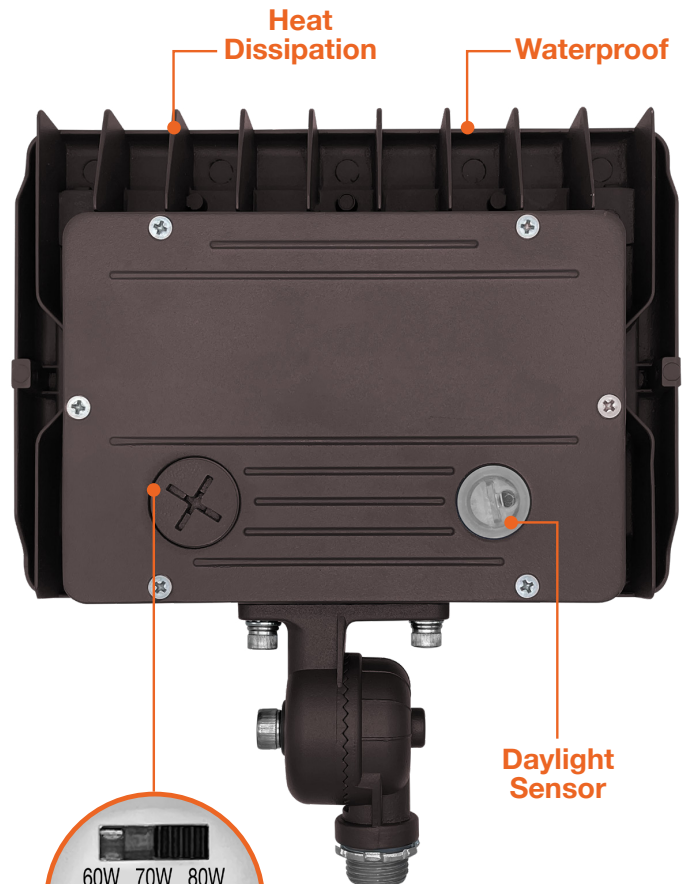


Power Select
3-CCT Selectable

M-Line: Mini Area Lights


3-CCT & Power Selectable w/ Photocell




Trunnion Bracket - 15W/ 30W




Knuckle Bracket - 15W/30W




Trunnion Bracket - 50W



Knuckle Bracket - 50W

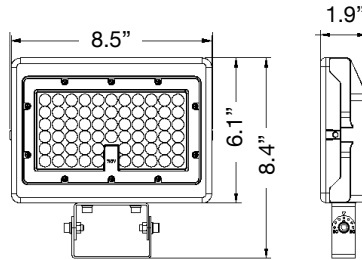

Trunnion Bracket - 80W

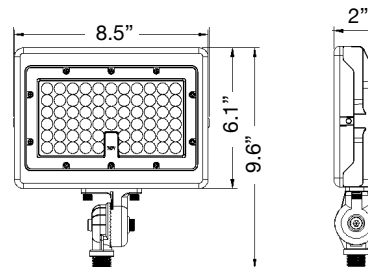

Knuckle Bracket - 80W

30W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P30-TRI-BZ-TR-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-BZ-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80
LED-ARL-2P30-TRI-WH-KN-PC	120-277V	15/30w	2,100/4,200	30/40/50k	>80

50W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-2P50-TRI-BZ-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-TR-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-BZ-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80
LED-ARL-2P50-TRI-WH-KN-PC	120-277V	35/50w	4,900/7,000	30/40/50k	>80

80W 3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-ARL-3P80-TRI-BZ-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-WH-KN-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80
LED-ARL-3P80-TRI-BZ-TR-PC	120-277V	60/70/80w	8,400/9,800/11,200	30/40/50k	>80

2'3'4' T8 Triple Fit Tubes

3-CCT Selectable



Project: _____ Part #: _____
Type: _____



Tubes

Detail Specifications:

- IP Rating: Damp Location
- Beam Angle: 300°
- CCT: 35/40/50K Selectable
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 130° F
- Lens: Frosted lens with film protectant for extra shatter protection (food industry OK)
- Average life (L70) of 70,000 hours

Applications:

- Fluorescent Retrofitting
- Walkways & Pathways
- 2x2 or 2x4 Fixtures
- T8 Strip Fixtures
- Outdoor Corridors
- General Outdoor Lighting
- Residential, Commercial and Industrial

Product Information:

- Standard size of fluorescent versions
- Suitable for use in existing fixtures
- Approved for use in enclosed fixtures
- Select-n-Switch Technology
- Instant-On to full brightness

Driver Options:

- UNV: 120-277V Non-Dimmable
- Built in 2.5Kv Surge Protector
- THD: <20% (+/-5% tolerance), PF >0.9, 50/60Hz

Mounting & Installation:

- Rewire (single or double ended connection)
- Use with existing ballast (see ballast compatibility chart)

Certifications:

- UL Listed for USA and CA
- DLC Listed
- NSF Rated
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

Series

LED-T8-DF-GL-2FT-8W-CTRI
LED-T8-DF-GL-3FT-12W-CTRI
LED-T8-DF-GL-4FT-15W-CTRI
LED-T8-DF-GL-4FT-18W-CTRI


Optional Accessories (Order Separately)

Fixture Options

T8-4FT-2LAMP-STRIP
4ft 2-Lamp Strip
(Single ended wiring)


Specs and model numbers are subject to change with or without notice.

FEATURES

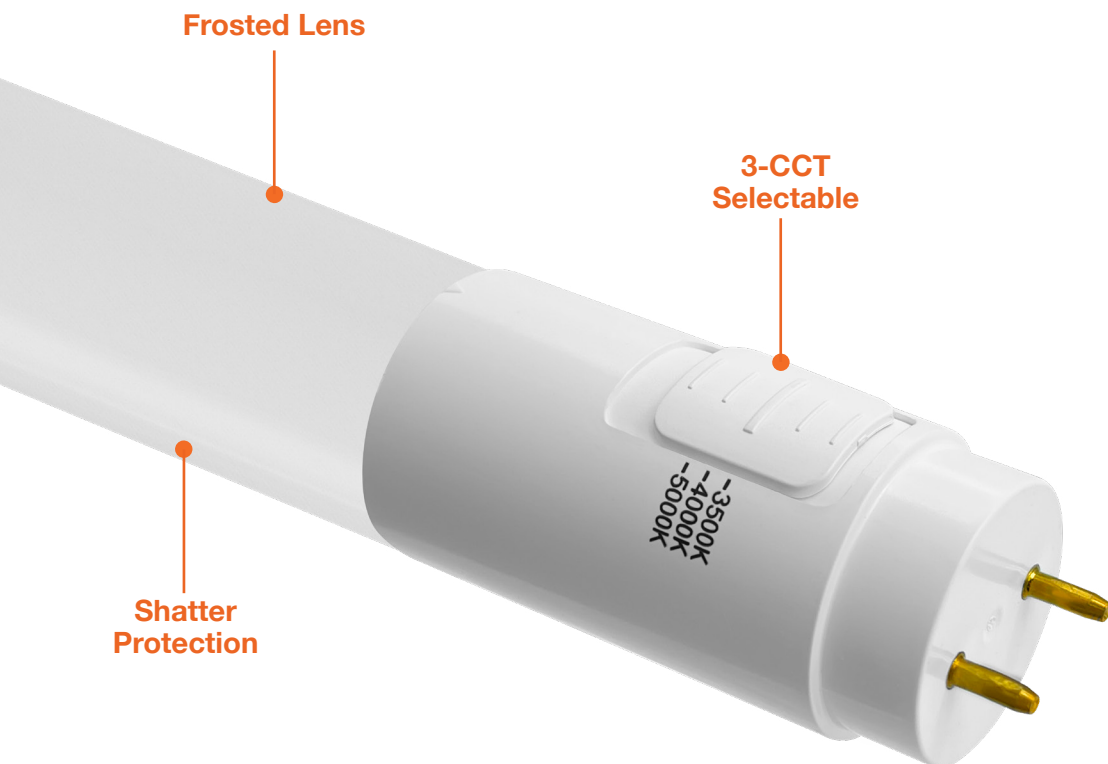

DIMENSIONS

Size	A	B	C
2ft	23.74"	23.19"	22.52"
3ft	35.75"	35.2"	34.53"
4ft	47.72"	47.17"	46.5"

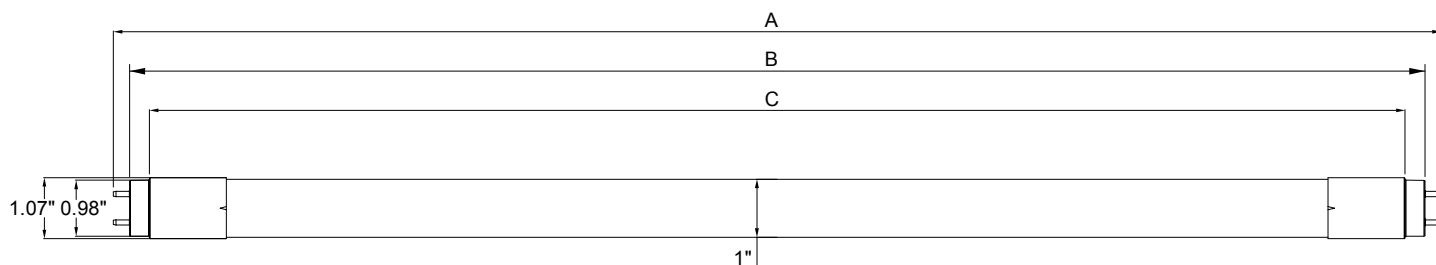

2'/3'/4' T8 Triple Fit Tubes

3-CCT Selectable

Model	Voltage	Watts	Lumens	Color	CRI
LED-T8-DF-GL-2FT-8W-CTRI	120-277V	8w	1,000	35/40/50k	>80
LED-T8-DF-GL-3FT-12W-CTRI	120-277V	12w	1,500	35/40/50k	>80
LED-T8-DF-GL-4FT-15W-CTRI	120-277V	15w	1,950	35/40/50k	>80
LED-T8-DF-GL-4FT-18W-CTRI	120-277V	18w	2,200	35/40/50k	>80



LAMP STRIP FIXTURE

Model	Description
T8-4FT-2LAMP-STRIP	4 foot- 2 Lamp LED T8 Strip Fixture



LED Security Wall Pack (Cheetah G)

CERTIFICATIONS



PRODUCT FEATURES



Construction

Die-cast aluminum with prismatic polycarbonate lens

Applications

- Retail Buildings
- Garage
- Walkway
- Warehouse
- Workshop

Mounting

- Wall mount

Warranty

7-Year Limited Product Warranty
(Optional 10-Year Warranty available)

BENEFITS

- Wattage and CCT Tunable
- Built-in photocell, this fixture turns on automatically when the environment gets dark and turns off by itself with the first glimpse of daylight.
- Great addition to poorly lit areas.
- Can be mounted directly to a wall, side of building, or above a walkway.



SPECIFICATIONS

Available Wattage	10W - 15W - 20W
Available CCT	3500K - 4000K - 5000K
Efficacy Average	135 LM/W
Lumen Output	1,350 LM - 2,700 LM
Input Voltage	AC 120-277V
Input Frequency	50/60HZ
CRI	>80
Power Factor	0.9
THD	15%
Working Temp	-4F to 113F (-20C TO 45C)
Lens	Frosted
IP Rating	IP65
Dimming	Yes
Life Span (Hours)	>70,000




LED Security Wall Pack (Cheetah G)

Order Code	DLC Product ID	Watts	CCT	LM/Watt	Total LM	Voltage	Color
05059	S-0L6ZV8	10W 15W 20W	3500K 4000K 5000K	135 LM/W	1,350 LM 2,025 LM 2,700 LM	120 - 277V	Bronze
05058	S-0L6ZV8	10W 15W 20W			1,350 LM 2,025 LM 2,700 LM		White

↑ When placing your, please use Order Code.


PHOTOMETRIC DATA

Polar Curve

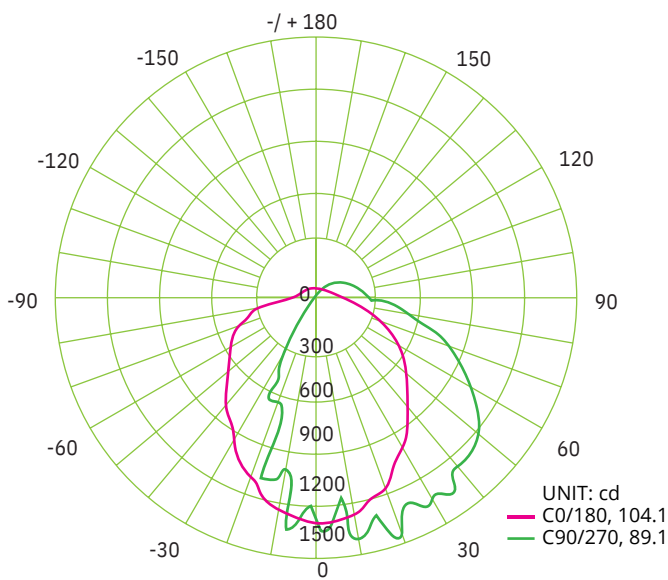


AVERAGE BEAM ANGLE (50%): 96.6 DEG

Cone Chart

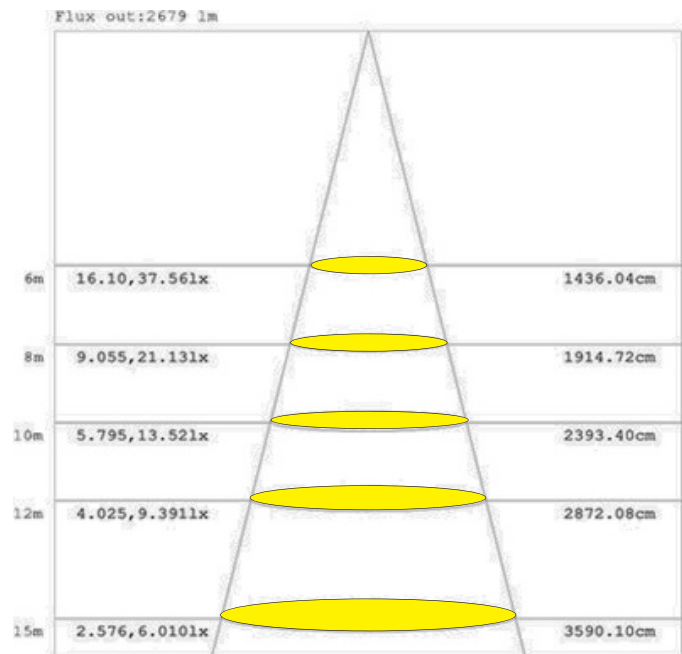

LED Security Wall Pack (Cheetah G)

DIMENSIONS

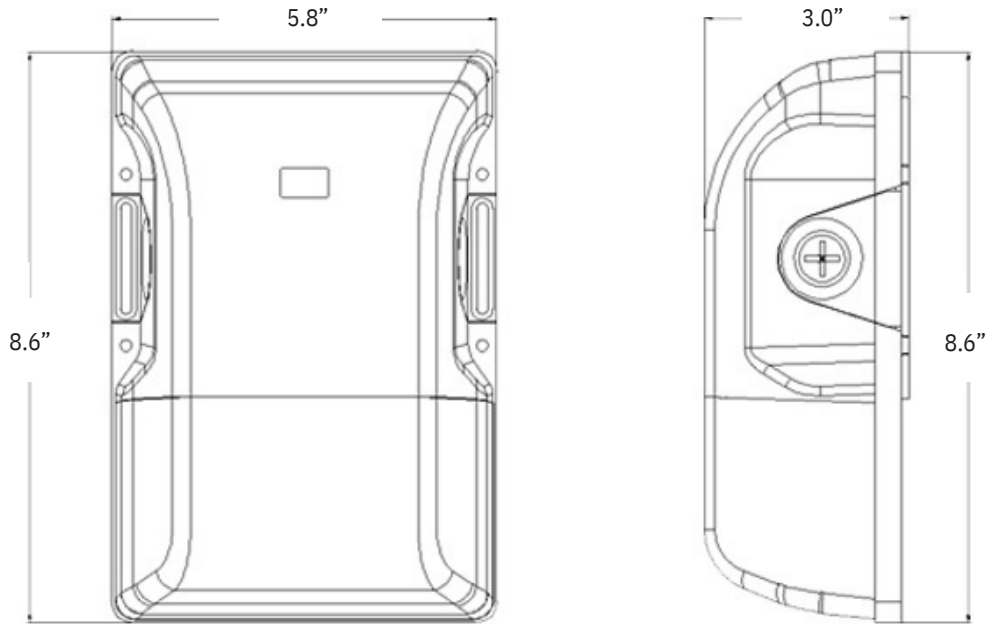

Round LED Strip Fixtures G3

4-CCT & 3-Power Selectable



Detail Specification:

- Finish: White, Custom finishes available
- IP Rating: Damp Location (IP44)
- Beam Angle: 130°
- Chip: SMD 2835, R9 >50, CRI >80
- Operating Temperature: -40° - 122° F
- Lens: Round Acrylic Frosted Lens
- Average life (L70) of 50,000 hours

Applications:

- Stairwell & Hallways
- Utility & Storage
- Garage Structures
- Office and Meeting Rooms
- Shop Lighting
- Commercial and Industrial

Product Information:

- Aluminum housing finished with corrosion free power coat
- Easy j-box access: snap on and off tool-less design
- 40 J-box cover included with every fixture

Driver Options:

- UNV: 120-277V 0-10V Dimmable
- Optional 347-480V step down transformer available
- THD: <15% (+/-5% tolerance), PF >0.9, 50/60Hz
- 12V low voltage aux output for controls
- Flicker Free

Mounting & Installation

- Surface mount into 30 or 40 j-box
- Optional 9' suspension kit available
- Optional 6' chain mount available

Certifications

- UL Listed for USA and CA
- DLC Premium Listed
- Approved for CA T24
- 5 Year Limited Warranty
- FCC CFR 47, GCC Part 15, Subpart B:2017

WATT	LUMENS
20	2,600
30	3,900
40	5,200
50	6,500
60	7,800
65	8,450
70	9,100
80	10,400
85	11,050
100	13,000

Series

LED-RST-2FT-20W-4CCT
20W • 120-277V
LED-RST-4FT-3M40W-4CCT
20/30/40W • 120-277V
LED-RST-4FT-3M80W-4CCT
50/65/80W • 120-277V
LED-RST-8FT-3M60W-4CCT
40/50/60W • 120-277V
LED-RST-8FT-3M100W-4CCT
70/85/100W • 120-277V

Sensor ¹

(Blank)
No Sensor
BMS¹
Microwave
Bi-Level Motion
+ Daylight Sensor
(Internal Sensor)
BMSPIR
PIR
Bi-Level Motion
+ Daylight Sensor
(External Sensor)

Emergency ²

(Blank)
No Emergency
Backup
EMB
Emergency
Backup
EMB20
Emergency
Backup (20W)

Finish³

(Blank)
White
BL
Black
GRY³
Gray
BRZ³
Bronze
CS³
Custom Color

Driver

(Blank)
120-277V
HV
347-480V
Stepdown

1. BMS: Microwave Sensor: Areas made of full metal and high vibration settings may trigger false motion.

2. Standard emergency is 8W (1,040LM). 20W available, inquire factory

3. Standard quick ship finish is white & black. Other colors are custom finishes.

Optional Accessories (Order Separately)

Suspension Kit

SK-10FT-Y-LC-PD
10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD
20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

Accessories

RST-SM-CN
Surface mount linkable bracket
RST-PDM-CN
Pendant mount linkable bracket

Wire Guards


RST-2FT-WG
2ft Wire Guard
RST-4FT-WG
Wire Guard (order 2 for 8ft fixtures)

Specs and model numbers are subject to change with or without notice.


Round LED Strip Fixtures G3

4-CCT & 3-Power Selectable

FEATURES

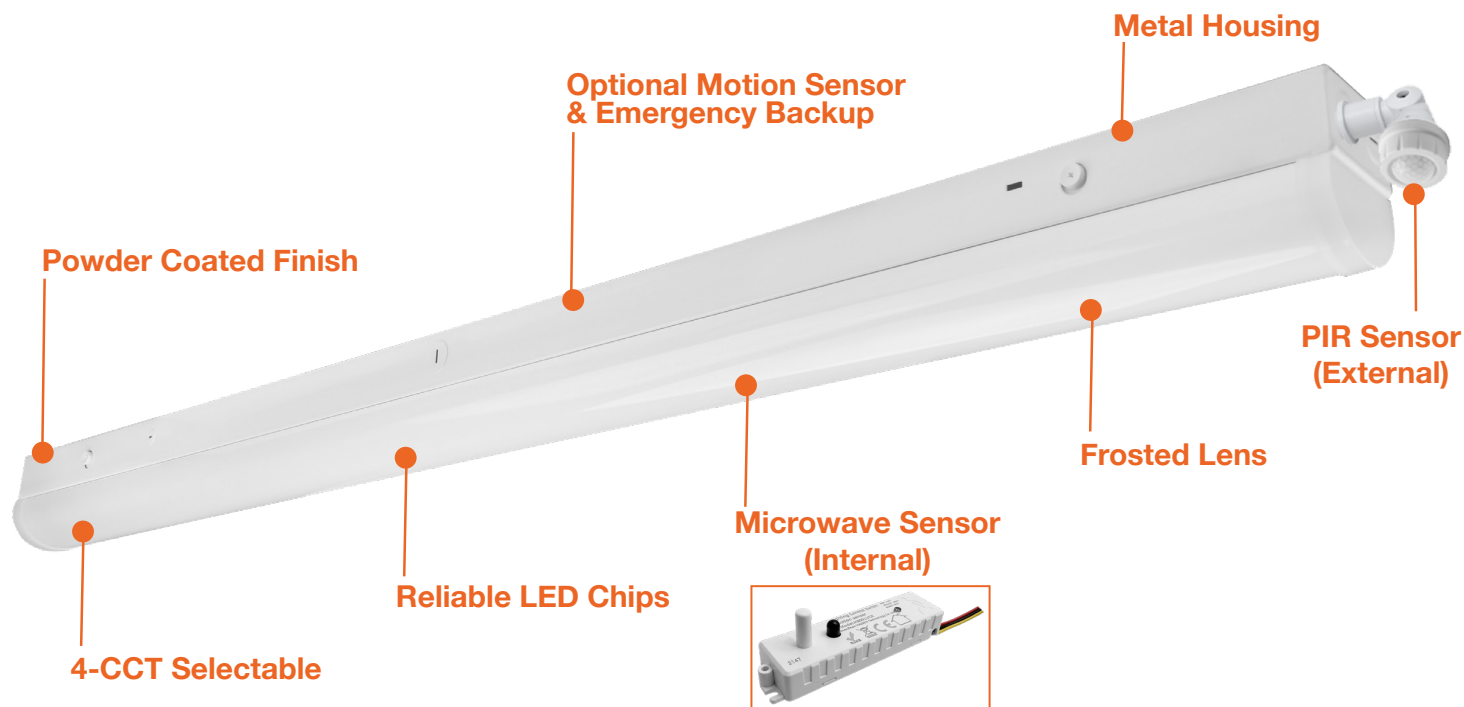

DIMENSIONS

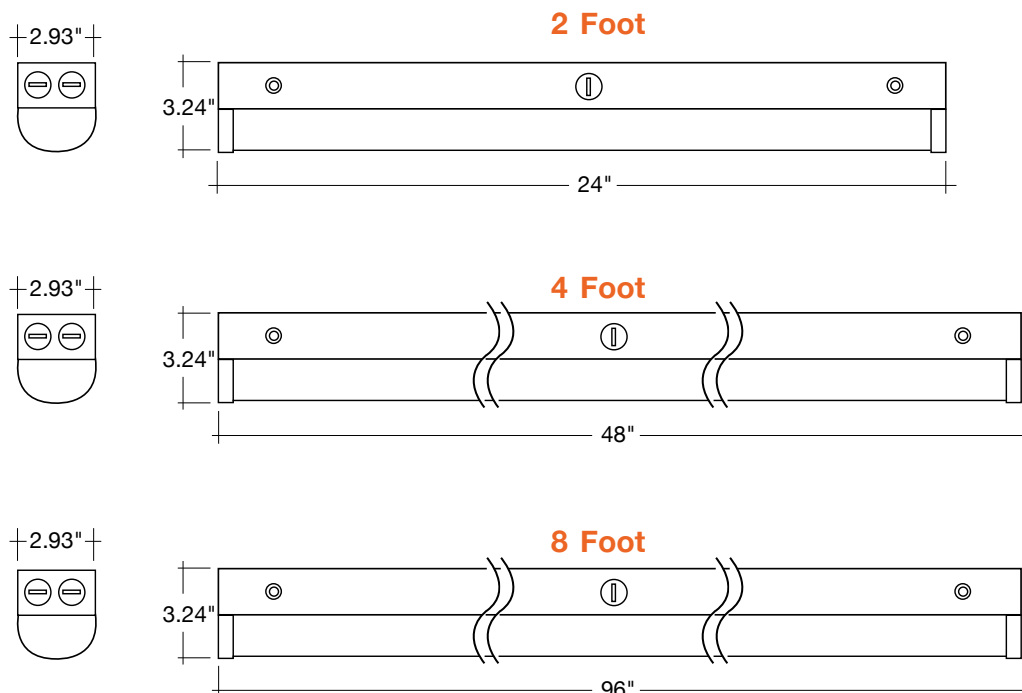

Round LED Strip Fixtures G3

4-CCT & 3-Power Selectable

ACCESSORIES



SK-10FT-Y-LC-PD
SK-20FT-Y-LC-PD




RST-SM-CN




RST-PDM-CN



RST-2FT-WG
RST-4FT-WG

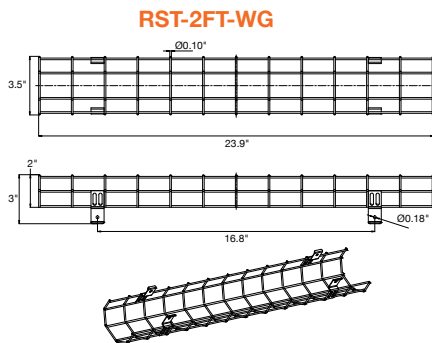

RST-2FT-WG

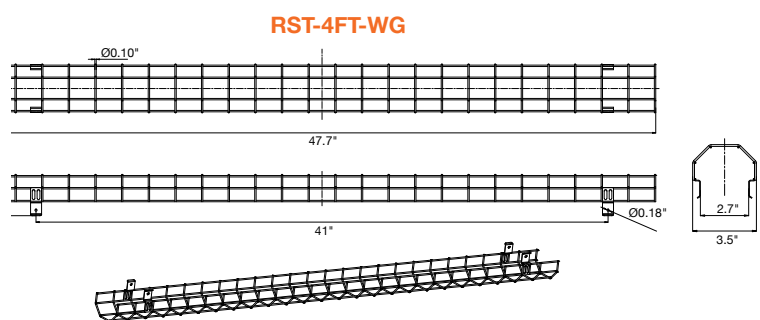

RST-4FT-WG



2-RST-4FT-WG FOR 8FT

Model	Voltage	Watts	Lumens	Color	CRI
LED-RST-2FT-20W-4CCT	120-277V	20w	2,600	30/35/40/50k	>80
LED-RST-2FT-20W-4CCT-BMS	120-277V	20w	2,600	30/35/40/50k	>80
LED-RST-2FT-20W-4CCT-EMB	120-277V	20w	2,600	30/35/40/50k	>80
LED-RST-2FT-20W-4CCT-BMS-EMB	120-277V	20w	2,600	30/35/40/50k	>80
LED-RST-4FT-3M40W-4CCT	120-277V	20/30/40w	2600/3900/5200	30/35/40/50k	>80
LED-RST-4FT-3M40W-4CCT-BMS	120-277V	20/30/40w	2600/3900/5200	30/35/40/50k	>80
LED-RST-4FT-3M40W-4CCT-EMB	120-277V	20/30/40w	2600/3900/5200	30/35/40/50k	>80
LED-RST-4FT-3M40W-4CCT-BMS-EMB	120-277V	20/30/40w	2600/3900/5200	30/35/40/50k	>80
LED-RST-4FT-3M80W-4CCT	120-277V	50/65/80w	6500/8450/10400	30/35/40/50k	>80
LED-RST-4FT-3M80W-4CCT-BMS	120-277V	50/65/80w	6500/8450/10400	30/35/40/50k	>80
LED-RST-4FT-3M80W-4CCT-EMB	120-277V	50/65/80w	6500/8450/10400	30/35/40/50k	>80
LED-RST-4FT-3M80W-4CCT-BMS-EMB	120-277V	50/65/80w	6500/8450/10400	30/35/40/50k	>80
LED-RST-8FT-3M60W-4CCT	120-277V	60/50/40w	5200/6500/7800	30/35/40/50k	>80
LED-RST-8FT-3M60W-4CCT-BMS	120-277V	60/50/40w	5200/6500/7800	30/35/40/50k	>80
LED-RST-8FT-3M60W-4CCT-EMB	120-277V	60/50/40w	5200/6500/7800	30/35/40/50k	>80
LED-RST-8FT-3M60W-4CCT-BMS-EMB	120-277V	60/50/40w	5200/6500/7800	30/35/40/50k	>80
LED-RST-8FT-3M100W-4CCT	120-277V	70/85/100w	9100/11050/13000	30/35/40/50k	>80
LED-RST-8FT-3M100W-4CCT-BMS	120-277V	70/85/100w	9100/11050/13000	30/35/40/50k	>80
LED-RST-8FT-3M100W-4CCT-EMB	120-277V	70/85/100w	9100/11050/13000	30/35/40/50k	>80
LED-RST-8FT-3M100W-4CCT-BMS-EMB	120-277V	70/85/100w	9100/11050/13000	30/35/40/50k	>80

SUSPENSION KIT

Model	Description
SK-10FT-Y-LC-PD	10' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)
SK-20FT-Y-LC-PD	20' Y-Shape, Loop Top, Paddle Bottom (Adjustable Length)

ACCESSORIES

Model	Description
RST-SM-CN	Surface Mount Linkable Bracket
RST-PDM-CN	Pendant Mount Linkable Bracket

WIRE GUARDS

Model	Description
RST-2FT-WG	2ft Wire Guard
RST-4FT-WG	4ft Wire Guard (order 2 for 8ft fixtures)