
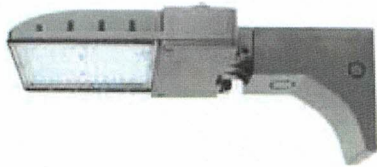



GRAL04	Cat. #		
	Job	Type	



Small Size: 40W/70W/100W



Medium Size: 150W/200W

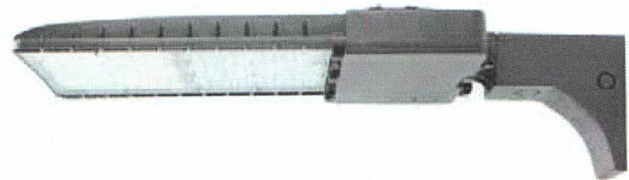

Large Size: 250W/300W





MOUNTING

- » Standard versatile mounting arm accommodates multiple drilling patterns as well as square and round poles
- » Wall Mount available for direct wall mounting and J-box mounting
- » Optional for cast aluminum slipfitter mounting adapter (Compatible with more factory mounting adaptors such as Tenon, suits for various application)


MOUNTING OPTIONS



Mounting Dimensions

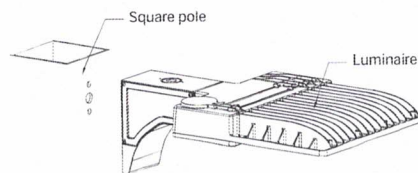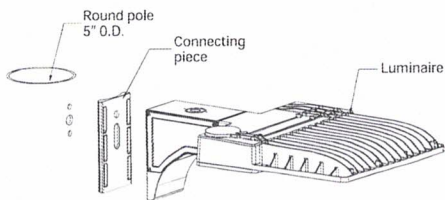

Drilling Template




© 2019 Selser Lighting Products. All rights reserved.
 Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.




Selser Lighting Products
 PO Box 45160
 Baton Rouge, LA 70895
 Phone: 225-454-6819
 Website: selserlighting.com
 info@selserlighting.com

DIMENSIONS


unit: inch/mm




40W/70W/100W (Slipfitter Mount)




40W/70W/100W (Pole Mount)

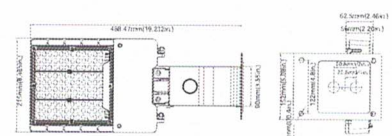


40W/70W/100W (Wall Mount)

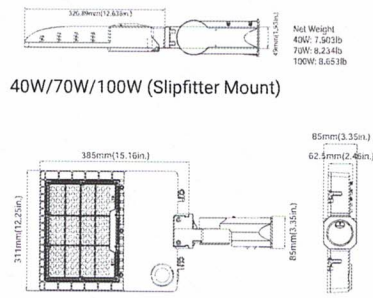


150W/200W (Slipfitter Mount)

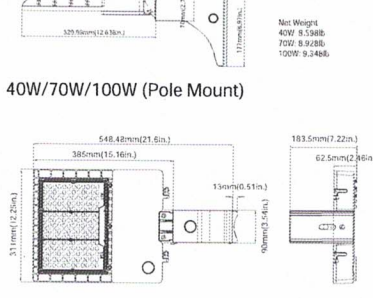


150W/200W (Pole Mount)

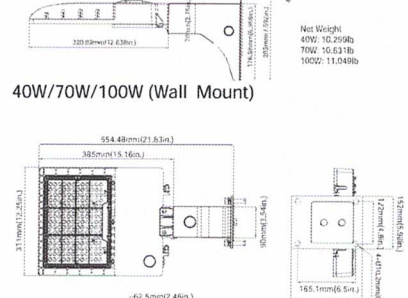


150W/200W (Wall Mount)

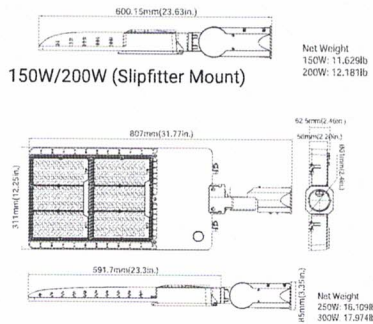

Net Weight
250W: 16.109lb
300W: 17.974lb

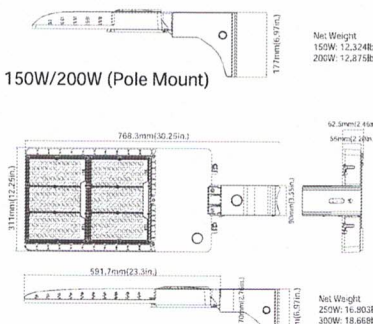


Net Weight
250W: 16.803lb
300W: 18.668lb

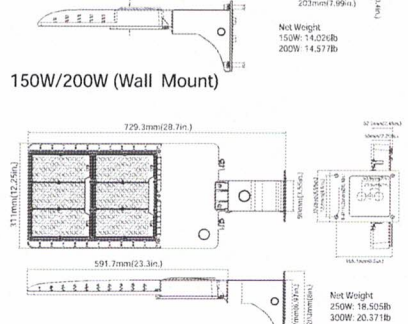

Net Weight
250W: 18.505lb
300W: 20.371lb


PHOTOMETRICS

factory offers a complete set of optical systems to meet every site lighting requirement. These systems provide remarkable flexibility in precisely matching light distribution patterns to specific site requirements.




Type 3:

Type 3 optics produce an asymmetrical pattern that directs the majority of the light forward and equally on both sides of the luminaire. In a back-to-back configuration, it creates a rectangular pattern which can extend pole spacings.



Type 4:

Type 4 is suitable for applications where light is primarily required forward with minimal backlight. Typical installations include perimeter poles.



Type 5:

Type 5 optics produce a symmetrical square distribution pattern that distributes light equally on all sides of the luminaire. Type 5 luminaires is universal for most area lighting applications

EPA OF AREA LIGHT

Item							
	1	2 @90°	2 @120°	2 @180°	3 @90°	3 @120°	4 @90°
40W/70W/100W	0.3413	0.5929	0.7983	0.6826	1.0239	1.0499	1.0239
150W/200W	0.423	0.735	0.873	0.846	1.158	1.185	1.158
250W/300W	0.4759	0.7889	1.0581	0.9518	1.2648	1.3711	1.2648



SELSE
LIGHTING PRODUCTS

© 2019 Selser Lighting Products. All rights reserved.
Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Selser Lighting Products
PO Box 45160
Baton Rouge, LA 70895
Phone: 225-454-6819
Website: selserlighting.com
info@selserlighting.com

PERFORMANCE DATA

System Watts	Voltage	Dist. Type	Lumens (4000K)	LPW (4000K)	Lumens (5000K)	LPW (5000K)
40W	120-277V	3	5400lm	135 lm/W	5500lm	138 lm/W
	120-277V	4	5360lm	134 lm/W	5480lm	137 lm/W
	120-277V	5	5600lm	140 lm/W	5720lm	143 lm/W
45W	347-480V	3	5900lm	131 lm/W	6000lm	133 lm/W
	347-480V	4	5850lm	130 lm/W	5940lm	132lm/W
	347-480V	5	6120lm	136 lm/W	6210lm	138 lm/W
70W	120-277V	3	9400lm	134 lm/W	9500lm	136 lm/W
	120-277V	4	9310lm	133 lm/W	9450lm	132 lm/W
	120-277V	5	9730lm	139 lm/W	9800lm	140 lm/W
75W	347-480V	3	9800lm	131 lm/W	10000lm	133 lm/W
	347-480V	4	9750lm	130 lm/W	9900lm	132 lm/W
	347-480V	5	10200lm	136 lm/W	10350lm	138 lm/W
100W	120-277V	3	13300lm	133 lm/W	13400lm	134 lm/W
	120-277V	4	13200lm	132 lm/W	13300lm	133 lm/W
	120-277V	5	13800lm	138 lm/W	13900lm	139 lm/W
150W	120-277V/347-480V	3	20000lm	133 lm/W	20100lm	134 lm/W
	120-277V/347-480V	4	19800lm	132 lm/W	20000lm	133 lm/W
	120-277V/347-480V	5	20700lm	138 lm/W	20900lm	139 lm/W
200W	120-277V/347-480V	3	24700lm	124 lm/W	25000lm	125 lm/W
	120-277V/347-480V	4	24600lm	123 lm/W	24800lm	124 lm/W
	120-277V/347-480V	5	25800lm	129 lm/W	26000lm	130 lm/W
250W	120-277V/347-480V	3	33600lm	134 lm/W	34000lm	136 lm/W
	120-277V/347-480V	4	33250lm	133 lm/W	33750lm	135 lm/W
	120-277V/347-480V	5	34750lm	139 lm/W	35250lm	141 lm/W
300W	120-277V/347-480V	3	40000lm	133 lm/W	40200lm	134 lm/W
	120-277V/347-480V	4	39600lm	132 lm/W	39900lm	133 lm/W
	120-277V/347-480V	5	41400lm	138 lm/W	41700lm	139 lm/W

ELECTRICAL DATA

NUMBER OF DRIVERS	DRIVER CURRENT (MA)	NOMINAL POWER (W)	INPUT VOLTAGE (V)	CURRENT (AMPS)
1	980	40	120	1.25
		40	208	0.72
		40	240	0.63
		40	277	0.54
		45	347	0.43
		45	480	0.31
1	1720	70	120	1.25
		70	208	0.72
		70	240	0.63
		70	277	0.54
		75	347	0.43
		75	480	0.31
1	2450	100	120	1.25
		100	208	0.72
		100	240	0.63
		100	277	0.54
		150	120	1.25
1	3900	150	208	0.72
		150	240	0.63
		150	277	0.54
		150	347	0.43
		150	480	0.31
		200	120	1.25
1	5100	200	208	0.72
		200	240	0.63
		200	277	0.54
		200	347	0.43
		200	480	0.31
		250	120	1.25
1	6400	250	208	0.72
		250	240	0.63
		250	277	0.54
		250	347	0.43
		250	480	0.31
		300	120	1.25
1	6000	300	208	0.72
		300	240	0.63
		300	277	0.54
		300	347	0.43
		300	480	0.31




© 2019 Selser Lighting Products. All rights reserved.
Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Selser Lighting Products
PO Box 45160
Baton Rouge, LA 70895
Phone: 225-454-6819
Website: selserlighting.com
info@selserlighting.com

FEATURES

- » Rugged one-piece, die-cast aluminum housing secures the thermally conductive LED panel and electrical chamber
- » Low profile, 3G vibration rated compact design minimizes wind load requirements
- » Housing is completely sealed against moisture and environmental contaminants (IP65)
- » Available in IES Type III, IV, V distributions
- » Light engines are available in standard 4000K and 5000K (70 CRI) configurations.
- » Scalable Lumen Packages from 5,360 to 41,700 Lumens replaces up to 1000W Metal Halide
- » Optics are precisely designed to shape the distribution, maximizing efficiency and application spacing. For the ultimate level of spill light control, an optional house-side shield accessory can be field or factory installed
- » The optics can conform to dark sky requirement
- » 0-10V Dimming is Standard, ASHREA 90.1, 2018 State of Ohio building code compliant 100,000 hour L70 Lifetime
- » 5 Year warranty Guarantee

ORDER MATRIX



Fixture Type	Wattage	Voltage	Dimming	Color Temp	Finish	Optics	Mounting	Motion Sensor	Photocell (Option)
GRAL04	40 40W 45 45W 70 70W 75 75W 100 100W 150 150W 200 200W 250 250W 300 300W	UNV 120-277V 48V 347-480V	D 0-10V	30K 3000K 40K 4000K 50K 5000K	DB Dark Bronze	T3 Type III T4 Type IV T5 Type V	PM Square/ Round Pole WM Wall Mount SP Slipfitter	MS Motion Sensor N None	PS Photocell

POLE BRACKET • For mounting one fixture on an existing pole

	4" Square Pole Mount with 2-3/8" O.D. Tenon No. 4SQ-SP-D Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.		4" Round Pole Mount with 2-3/8" O.D. Tenon NO. 4SQR-SP-D Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.
	5" Square Pole Mount with 2-3/8" O.D. Tenon No. 5SQ-SP-D Finish: Dark Bronze USE: For use with square, non-tapered steel and aluminum poles. Furnished with four 5/16" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.		5" Round Pole Mount with 2-3/8" O.D. Tenon NO. 5SQR-SP-D Finish: Dark Bronze USE: For use with Round, non-tapered steel and aluminum poles. Furnished with three 3/8" hex head stainless-steel bolts. Vertical tenon measures 2-3/8" O.D., and is made of steel tubing. Fixtures mounted to this bracket can be adjusted both vertically and horizontally.
	Pole Bracket accessories-Tenon & Yoke Adaptor NO. SP-TR-D Finish: Dark Bronze USE: The 2-3/8" OD Tenon Mount Adaptor for Yoke Fixtures is designed to mount MESTER light fixtures that are equipped with a yoke mount onto a 2-3/8" OD tenon. It may be utilized with the Mester Flood Light Series of light fixtures.		

WALL BRACKET

- Attaches to any flat surface
- Provides wiring access

	90° Wall Mount Bracket with 2-3/8" O.D. Tenon NO. WM-SP-D Finish: Dark Bronze USE: The 90° wall mount bracket with 2-3/8" tenon attaches an MESTER floodlight to almost any surface: wall, roof, or wood pole. Provides wiring access and a built-in 2-3/8" O.D. tenon to mount a fixture with our adjustable slipfitter. Suggested 3/8" diameter bolts for mounting. Mounting holes are spaced 3-1/4" apart.		2-3/8" OD Horizontal Tenon Mid-Pole Bracket NO. SQ-SP-D Finish: Dark Bronze USE: 2-3/8" OD Horizontal Tenon Mid-Pole Bracket is designed to mount light fixture that is equipped with an adjustable slipfitter onto a 2-3/8" OD horizontal tenon
--	---	--	--








© 2019 Selser Lighting Products. All rights reserved.

Due to our continued efforts to improve our products, product specifications are subject to change without notice. Selser Lighting Products. reserves the right to make changes in specifications and/or to discontinue any product at any time without notice or obligation and will not be liable for any consequences resulting from the use of this publication.

Selser Lighting Products
 PO Box 45160
 Baton Rouge, LA 70895
 Phone: 225-454-6819
 Website: selserlighting.com
 info@selserlighting.com

ROUND EXTERNAL MOUNT HORIZONTAL TENON • To mount 2-3/4 fixtures on a existing pole

 <p>Technical drawing of the Double 90° Horizontal Tenon Adaptor. It shows a T-shaped bracket with two horizontal arms and one vertical arm. Dimensions include a vertical arm length of 1.75 inches (44.25mm), horizontal arm length of 1.25 inches (31.75mm), and a base width of 1.5 inches (38.1mm).</p>	<p>Double 90° Horizontal Tenon Adaptor NO. R60-SP2-90-D Finish:Dark Bronze USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>	 <p>Technical drawing of the Triple 120° Horizontal Tenon Adaptor. It shows a T-shaped bracket with two horizontal arms and one vertical arm, with a wider base than the Double 90° model. Dimensions include a vertical arm length of 1.75 inches (44.25mm), horizontal arm length of 1.25 inches (31.75mm), and a base width of 1.5 inches (38.1mm).</p>	<p>Triple 120° Horizontal Tenon Adaptor NO. R60-SP3-120-D Finish:Dark Bronze USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
 <p>Technical drawing of the Double 180° Horizontal Tenon Adaptor. It shows a T-shaped bracket with two horizontal arms and one vertical arm. Dimensions include a vertical arm length of 1.75 inches (44.25mm), horizontal arm length of 1.25 inches (31.75mm), and a base width of 1.5 inches (38.1mm).</p>	<p>Double 180° Horizontal Tenon Adaptor NO. R60-SP2-180-D Finish:Dark Bronze USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Two fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>	 <p>Technical drawing of the Quad 90° Horizontal Tenon Adaptor. It shows a cross-shaped bracket with four horizontal arms. Dimensions include a vertical arm length of 1.75 inches (44.25mm), horizontal arm length of 1.25 inches (31.75mm), and a base width of 1.5 inches (38.1mm).</p>	<p>Quad 90° Horizontal Tenon Adaptor NO. R60-SP4-90-D Finish:Dark Bronze USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Four fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>
 <p>Technical drawing of the Triple 90° Horizontal Tenon Adaptor. It shows a T-shaped bracket with two horizontal arms and one vertical arm. Dimensions include a vertical arm length of 1.75 inches (44.25mm), horizontal arm length of 1.25 inches (31.75mm), and a base width of 1.5 inches (38.1mm).</p>	<p>Triple 90° Horizontal Tenon Adaptor NO. R60-SP3-90-D Finish:Dark Bronze USE:The Bracket is designed to mount over 2-3/8" (60mm) O.D. vertical tenon. Three fixtures can be mounted to the Round External Mount Horizontal Tenon and adjusted horizontally</p>		

