

DATE: 9/19/2019

INVITATION TO BID
THIS IS NOT AN ORDER

Page: 4

BID NO.: 50-00128174

JEFFERSON PARISH
PURCHASING DEPARTMENT
P.O. BOX 9
GRETNA, LA. 70054-0009
504-364-2678

VENDOR: MetroLED, LLC

BUYER: DABRAHAM

As per LSA-RS 47:301 et seq., all governmental bodies are excluded from payment of sales taxes to any Louisiana taxing body. Quotations shall be based on F.O.B. Agency warehouse or jobsite, anywhere within the Parish as designated by the Purchasing Department.

JEFFERSON PARISH reserves the right to cancel all or any part of an order if not shipped promptly. No charges will be allowed for parking or cartage unless specified in quotation. The order must not be filled at a higher price than quoted. JEFFERSON PARISH reserves the right to cancel at any time and for any reason by issuing a THIRTY (30) day written notice to the contractor.

JEFFERSON PARISH is expecting all products to be new and all work to be done in workman-like manner, according to standard practices. Any deviations or alteration from the specifications must be indicated on the bid form for each item and upon request, product data for same must be submitted by the time specified by the Purchasing Department.

DELIVERY: FOB JEFFERSON PARISH

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES 2-3 weeks

INDICATE STARTING TIME (IN DAYS) FOR CONSTRUCTION WORK _____

INDICATE COMPLETION TIME (IN DAYS) FOR CONSTRUCTION WORK _____

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: #1 acknowledged

NUMBER: _____

NUMBER: _____

NUMBER: _____

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) _____

***** ALL BIDDERS MUST COMPLETE SECTION BELOW *****

FIRM NAME: MetroLED, LLC

SIGNATURE: 
(Must be signed here)

TITLE: Bidding and Procurement Manager

PRINT OR TYPE NAME:
Jared Owens

ADDRESS:
4224 Northeast Expressway

CITY, STATE: Doraville Georgia ZIP: 30340

TELEPHONE: (888) 533-7860 ext 107 FAX: (8888) 391-8114

EMAIL ADDRESS: jared@metroled.com


TOTAL PRICE OF ALL BID ITEMS: \$ 3,085.50

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00128174

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	6.00	EA	A purchase of LED light fixtures for the Department of Parks & Recreation 0010 LED Light Fixtures, LITHONIA RSX1 LED P3 40K R4 MVOLT MA DDBXD or equal	\$434.50	\$2,607
				\$239.25	\$478.50
2	2.00	EA	0020 6 foot light fixture arms for the wooden pole, LITHONIA AMACE T20 US6 DNA 6 FOOT ARM MNTNG or equal	*ALL ITEMS QUOTED ARE EXACT MFG REQUESTED*	

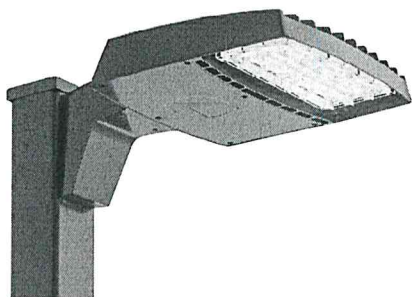

RSX1 LED Area Luminaire




Catalog Number
Notes
Type

Hit the tab key or mouse over the page to see all interactive elements.

Specifications

EPA (ft²@0°):	0.57 ft² (0.05 m²)
Length:	21.8" (55.4 cm) (SPA mount)
Width:	13.3" (33.8 cm)
Height:	3.0" (7.6 cm) Main Body 7.2" (18.4 cm) Arm
Weight (max):	31.0 lbs (14.1 kg)

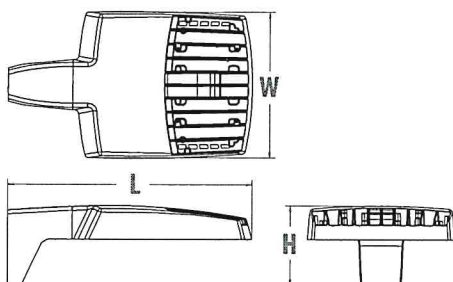

Introduction

The new RSX LED Area family delivers maximum value by providing significant energy savings, long life and outstanding photometric performance at an affordable price. The RSX1 delivers 7,000 to 17,000 lumens allowing it to replace 70W to 400W HID luminaires.

The RSX features an integral universal mounting mechanism that allows the luminaire to be mounted on most existing drill hole patterns. This "no-drill" solution provides significant labor savings. An easy-access door on the bottom of mounting arm allows for wiring without opening the electrical compartment. A mast arm adaptor, adjustable integral slipfitter and other mounting configurations are available.

Ordering Information

EXAMPLE: RSX1 LED P4 40K R3 MVOLT SPA DDBXD

RSX1 LED					
Series	Performance Package	Color Temperature	Distribution	Voltage	Mounting
RSX1 LED	P1	30K 3000K	R2 Type 2 Wide	MVOLT (120V-277V) ¹	SPA Square pole mounting (3.0" min. SQ pole for 1 at 90°, 3.5" min. SQ pole for 2, 3, 4 at 90°)
	P2	40K 4000K	R3 Type 3 Wide	HVOLT (347V-480V) ²	RPA Round pole mounting (3.2" min. dia. RND pole for 2, 3, 4 at 90°, 3.0" min. dia. RND pole for 1 at 90°, 2 at 180°, 3 at 120°)
	P3	50K 5000K	R3S Type 3 Short	(use specific voltage for options as noted)	MA Mast arm adaptor (fits 2-3/8" OD horizontal tenon)
	P4		R4 Type 4 Wide	120 ³ 277 ³	IS Adjustable slipfitter (fits 2-3/8" OD tenon) ⁴
			R4S Type 4 Short	208 ³ 347 ³	WBA Wall bracket
			R5 Type 5 Wide	240 ³ 480 ³	WBASC Wall bracket with surface conduit box
			R5S Type 5 Short		AASP Adjustable tilt arm square pole mounting ⁴
			AFR Automotive Front Row		AARP Adjustable tilt arm round pole mounting ⁴
			AFRR90 Automotive Front Row Right Rotated		AAWB Adjustable tilt arm with wall bracket ⁴
			AFRL90 Automotive Front Row Left Rotated		AAWSC Adjustable tilt arm wall bracket and surface conduit box ⁴

Options		Finish
Shipped Installed		DDBXD Dark Bronze
HS House-side shield ⁵	Shipped Installed	DBLXD Black
PE Photocontrol, button style ^{6,7}	*Standalone and Networked Sensors/Controls (factory default settings, see table page 9)	DNAXD Natural Aluminum
PEX Photocontrol external threaded, adjustable ^{7,8}	NLTAIR2 nLight AIR generation 2 ^{11,12,13}	DWHXD White
PER7 Seven-wire twist-lock receptacle only (no controls) ^{7,9,10,11}	PIRHN Networked, Bi-Level motion/ambient sensor (for use with NLTAIR2) ^{11,13,14}	DDBTXD Textured Dark Bronze
CE34 Conduit entry 3/4" NPT (Qty 2)	*Note: PIRHN with nLight Air can be used as a standalone or networked solution. Sensor coverage pattern is affected when luminaire is tilted.	DBLBXD Textured Black
SF Single fuse (120, 277, 347) ³	Shipped Separately (requires some field assembly)	DNATXD Textured Natural Aluminum
DF Double fuse (208, 240, 480) ³	EGS External glare shield ⁵	DWHGXD Textured White
SPD20KV 20KV Surge pack (10KV standard) ^{7,11}	EGFV External glare full visor (360° around light aperture) ⁵	
FAO Field adjustable output ^{7,11}	BS Bird spikes ¹⁵	
DMG 0-10V lead wires extended (no controls) ^{7,11}		



FEATURES & SPECIFICATIONS

INTENDED USE

For round metal, fiberglass, concrete or wood poles. Not for use with existing concrete poles.

CONSTRUCTION

Aluminum: Body is schedule 40 (T20) aluminum pipe 6063-T6. Welding follows industry standards best practices. Arms are pressure-washed after fabrication.

Must specify finish. Optional polyester powder and red primer paint finishes available.

INSTALLATION

Mounting hardware is not included.

Installer to provide hardware based on pole size and type.

WARRANTY

1-year limited warranty. Complete warranty terms located at

www.acuitybrands.com/CustomerResources/Terms_and_conditions.aspx

Note: Actual performance may differ as a result of end-user environment and application.

Specifications subject to change without notice.


Catalog Number
Notes
Type

Elliptical Tube Arm

AMACE

ALUMINUM (AMACE)

ELLIPTICAL TUBE ARM

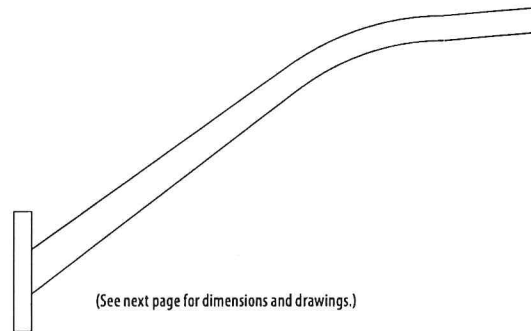

(See next page for dimensions and drawings.)

ORDERING INFORMATION

Lead times will vary depending on options selected. Consult with your sales representative.

Example: AMACE T20 US4 SA

AMACE			
Series	Pipe size	Arm length	Finish ¹
AMACE	T20 2-3/8" O.D. (2" NPS)	US2 2' arm length US4 4' arm length US6 6' arm length US8 8' arm length US10 10' arm length	<u>Standard colors</u> DDB Dark bronze DWH White DBL Black <u>DNA</u> Natural aluminum SA Satin aluminum <u>Primer finish</u> DPRM Red primer <u>Architectural colors (powder finish) *</u>

Notes

- ¹ Finish must be specified. Additional colors available; see www.lithonia.com/archcolors or Architectural Colors brochure (Form No. 794.3).