

**To:**  
2nd Parish of Jefferson  
Mark Buttery  
299 Derbigny Street  
Suite 4400  
Gretna, LA 70053  
504-364-2710 (Contact)

**Project:**  
2nd Parish of Jefferson bid #  
5000143967

**From:**  
Pueblo Hotel Supply  
Summer Smythe  
dba Grady's  
170 Greenhorn Drive  
Pueblo, CO 81004  
(719)542-8853

Job Reference Number: OPP15138

All quotes are valid within the same month quoted. If purchasing after the month of the quote, manufacturer increases may apply.

Due to current supply chain issues, and unpredictable freight increases, all freight quotes are **estimates only**. Exact freight charge will be calculated and added to invoice at time of actual shipment.

Orders paid by credit card will have a 2.9% processing fee added at time of transaction.

Item	Qty	Description	Sell	Sell Total
1	1 ea	<b>ICE MAKER, CUBE-STYLE</b> Manitowoc Model No. IDT1200A Indigo NXT™ Series Ice Maker, cube-style, air-cooled, self-contained condenser, 30"W x 24-1/2"D x 29-1/2"H, production capacity up to 1196 lb/24 hours 70°/50° (950 lb AHRI certified at 90°/70°), easyTouch display with 13 different language options, date/time stamp display, automatic reminder/alert icon, one touch asset information, automatic detection of accessories, continuous operating status, programmable production options (time, weight, day or night), one touch cleaning with displayed instructions, Alpha-San anti-microbial protection, acoustical ice sensing probe, self-diagnostic technology, DuraTech™ exterior, dice size cubes, R410A refrigerant, NSF, cULus, CE	\$6,161.37	\$6,161.37
	1 ea	WARRANTY-ICE-SC 3 year parts & labor (Machine), 5 year parts & labor (Evaporator), 5 year parts & 3 years labor (Compressor), standard		
	1 ea	(-261) 208-230v/60/1-ph, 14.2 amps, standard		
	1 ea	AR-40000-P Arctic Pure® Plus Primary Water Filter Assembly, includes head, shroud, hardware, mounting assembly, & (1) filter cartridge, 40,000 gallon capacity, 1,001-2,500 lbs./ice per day	\$362.95	\$362.95
	1 ea	WARRANTY-ARCPURE 3 year parts & labor warranty on cap, housing, hardware, & mounting assembly (does not refer to filter cartridge), standard		
	1 ea	D970 Ice Bin, 48"W x 34"D x 50"H, with side-hinged front-opening	\$1,992.89	\$1,992.89



Item	Qty	Description	Sell	Sell Total
		door, side grips, 882 lbs. application capacity, AHRI certified 29.7 cu. ft., for top-mounted ice maker, Duratech exterior, NSF		
1 ea		WARRANTY-BIN/DISP 3 year parts & labor warranty, standard		
1 ea		K00470 Bin Adapter, for 30" Indigo, Indigo NXT, RFF, RNF, ice machine on a 48" B or D-970 bin	\$327.27	\$327.27
1 ea		Legs, 6" adjustable stainless steel, standard		
<b>ITEM TOTAL:</b>				<b>\$8,844.48</b>
2	1 ea	<b>INSTALLATION</b>	\$1,555.20	\$1,555.20
		Custom Model No. INSTALLATION		
		Quote from A-Bear Refrigeration		
		Removal old ice machine head and bin. Installation of a Manitowoc IDT1200A Ice Machine and Manitowoc D970 Ice Bin.		
		**Any EXTRA material or labor needed to install beyond a typical installation is NOT included in this quote (water supply, drain and electrical within 5 to 10 feet of unit's placement).		
		This is just for labor to remove and install the ice machine Equipment is being supplied by third party.		
		*Installation		
		*Miscellaneous (Piping, Insulation, Electrical Connectors & Wire, Hardware, Etc.)		
		*Everpure Water Filters		
<b>ITEM TOTAL:</b>				<b>\$1,555.20</b>
<b>Total</b>				<b>\$10,399.68</b>



### Finance-to-Own

24-month term:  
\$473.75 - \$498.02\*  
36-month term:  
\$330.51 - \$356.05\*  
48-month term:  
\$259.22 - \$285.86\*  
60-month term:  
\$216.70 - \$244.35\*

\*These examples reflect actual payment ranges that businesses with more than 2 years in business receive. Payments will vary depending on the established business and personal credit.

Financing is available for Start-Ups. Payments do not include taxes.

For Instant Quotes click here:  
[Restaurant Equipment Financing](#)

For more information:  
email: [FoodService@LeaseQ.com](mailto:FoodService@LeaseQ.com)  
phone: (781) 328-9511

Any and all damaged item(s) should be marked as such on delivery ticket and or refused and Grady's Restaurant and Bar Equipment should be notified immediately as to the extent of the damage so that we can address and work toward a solution immediately.

All packaging materials must be retained from damaged item(s) for freight inspector/adjuster claim.

Custom fabricated item(s) are **not** returnable. Buy-out item(s) may be returnable less the manufacturer's restocking fee, freight too and from, as well as any damages that may be incurred. The returned item(s) **must be new and unused.**

Credits for returned item(s) will only be given once the factory has issued credit to Grady's Restaurant and Bar Equipment

Freight is **not** included unless otherwise specified.

Price does **not** included fees, taxes, bond, permit, or licenses unless otherwise specified.



Acceptance: \_\_\_\_\_ Date: \_\_\_\_\_

Printed Name: \_\_\_\_\_

Project Grand Total: \$10,399.68


**INDIGO<sup>®</sup> NXT**

# iT1200 Ice Cube Machine

iT1200 Ice Cube Machine

## Models

☐ IDT1200A   ☐ IYT1200A   ☐ IDT1200W   ☐ IYT1200W   ☐ IDT1200N   ☐ IYT1200N


Indigo NXT iT1200 ice machine on a D570 bin

\*Ice Machine and Bin sold separately

Designed for operators who know that ice is critical to their business, the Indigo NXT Series ice machine's preventative diagnostics continually monitor itself for reliable ice production. Improvements in cleanliness and programmability make your ice machine easy to own and less expensive to operate.

- **New levels of Performance** – Showcasing an average of 5% lower energy consumption and a 22% reduction in condenser water usage. This translates into lower cost of ownership over the life of your machine.
- **easyTouch<sup>®</sup> Display** – New icon based touch screen takes the guess work out of owning and operating an ice machine.
- **Programmable Ice Production** – Now its super easy to program your ice machine to be off at certain times of the day to save money with fluctuating electrical rates. Also programmable by daily ice production volume and night time programming.
- **Easy to Clean Foodzone** – Hinge front door swing out for easy access. Removable water-trough, distribution tube, curtain, water probe and water pump for fast and efficient cleaning. Selected components are made with AlphaSan<sup>®</sup> antimicrobial.
- **Intelligent Diagnostics** – Provides 24 hour preventative maintenance and diagnostic feedback for trouble free operation.
- **Acoustical Ice Sensing Probe** – Unique patented technology allows for reliable operation in challenging water conditions and environments
- **DuraTech<sup>®</sup> Exterior** – Provides superior corrosion resistant above stainless steel. Innovative clear-coat resists fingerprints and dirt making it easier to keep clean.
- Available **LuminIce<sup>®</sup> II Growth Inhibitor** – Controls viruses, bacteria, mold and yeast within the food zone to keep the machine clean longer. A new sanitation icon lets you know the operational status.
- **Active Sense** – Insures consistent ice harvest in all environmental conditions. This software solution works in conjunction with the acoustical ice sensing probe improving reliability and performance.

## Ice Machine Electric

 208-230/60/1 standard  
 (208-230/60/3 also available)

### Minimum circuit ampacity:

Air-cooled:	14.2 1ph	8.6 3ph
Water-cooled:	13.4 1ph	7.9 3ph
Remote:	11.0 1ph	9.2 3ph

### Maximum fuse size:

Air-cooled:	20 1ph	15 3ph
Water-cooled:	20 1ph	15 3ph
Remote:	15 1ph	15 3ph

## Specifications

**BTU Per Hour:**  
 16,200 (average),  
 and 19,100 (peak)

### Refrigerant:

R410A CFS - Free  
 Lowers global warming  
 by 48%

### Operating Limits:

- Ambient Temperature Range:  
 40 to 110 F (4.4 to 43.3 C)  
 Water Temperature Range:  
 40 to 90 F (4.4 to 32.2 C)
- Potable Water Pressure:  
 Min. 20 psi (137.9 kPa)  
 Max. 80 psi (551.1 kPa)
- Condenser Water Pressure:  
 Min. 20 psi (137.9 kPa)  
 Max. 276 psi (1902.95 kPa)



## Ice Shape



**Half Dice**  
 $\frac{3}{8}$ " x  $1\frac{1}{8}$ " x  $\frac{7}{8}$ "  
 (.95 x 2.86 x 2.22 cm)



**Dice**  
 $\frac{7}{8}$ " x  $\frac{7}{8}$ " x  $\frac{7}{8}$ "  
 (2.22 x 2.22 x 2.22 cm)


 2110 South 26th Street  
 Manitowoc, WI 54220

 Tel: 1.920.682.0161  
 Fax: 1.920.683.7589

[www.manitowocice.com](http://www.manitowocice.com)



Indigo® NXT™ iT1200 Ice Cube Machine


## iT1200 on D-570 Storage Bin

- (A) Electrical Entrance (2) Options
- (B) 3/8" (0.95 cm) F.P.T. Water Condenser Inlet (water-cooled units)
- (C) 1/2" (1.27 cm) F.P.T. Water Condenser Outlet (water-cooled units)
- (D) 1/2" (1.27 cm) Auxiliary Base Drain Socket
- (E) 3/8" (0.95 cm) F.P.T. Ice Making Water Inlet
- (F) 1/2" (1.27 cm) F.P.T. Ice Making Water Drain
- (G) 3/4" (1.91 cm) Bin Drain

### Installation Note

Minimum installation clearance:

Top/side: 8" (20.3cm)  
Back is 5" (12.7 cm)

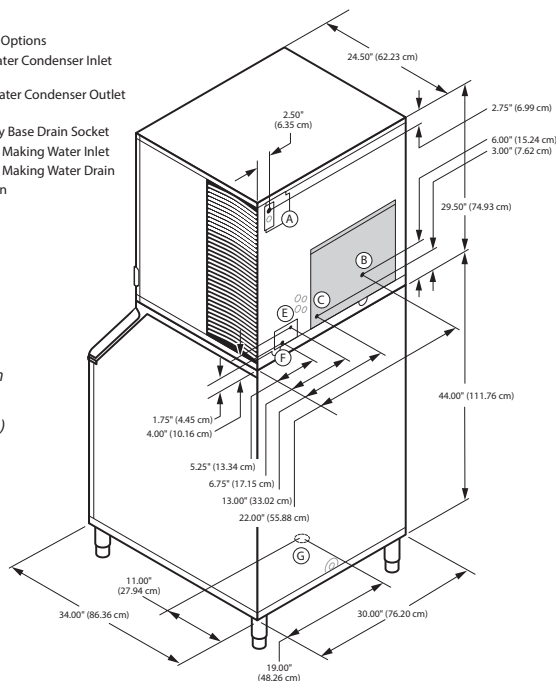

## Space-Saving Design









	iT1200 D-570	iT1200 D-970
Height	79.50" 201.93 cm	79.50" 201.93 cm
Width	30.00" 76.20 cm	48.00" 121.92 cm
Depth	34.00" 86.30 cm	34.00" 86.30 cm
Bin	532 lbs.	882 lbs.
Storage	241.1 kgs.	400.1 kgs.

Height includes adjustable bin legs 6.00" to 8.00", (15.24 to 20.32 cm) set at 6.00" (15.24 cm).

Bin capacity is based on 90% of the volume x 33 lbs/ft<sup>3</sup> average density of ice.

\* **K00470 bin adapter** required when installing on a D970 Bin

## Specifications

Model		Ice Shape	Ice Production 24 Hours				Power Usage kWh/100 lbs. @90°Air/70°F		Potable Water Usage/100 lbs. 45.4 kgs. of Ice
			70°Air/ 50°F Water		90°Air/ 70°F Water				
			1 ph	3 ph	1 ph	3 ph	1 Ph	3 Ph	
AIR COOLED	IDT1200A	dice 	1196 lbs 542 kgs	n/a n/a	950 lbs 431 kgs	n/a n/a	4.80	n/a	19.9 Gal. 75.3 L
	IYT1200A	half-dice 	1213 lbs 550 kgs	1203 lbs 546 kgs	950 lbs 431 kgs	940 lbs 426 kgs	4.75	4.83	19.9 Gal. 75.3 L
WATER COOLED	IDT1200W	dice 	1078 lbs 498 kgs	n/a n/a	900 lbs 408 kgs	n/a n/a	4.16	n/a	19.9 Gal. 75.3 L
	IYT1200W	half-dice 	1138 lbs 516 kg	1220 lbs 553kgs	965 lbs 438 kgs	1050 lbs 426 kgs	4.00	3.78	19.9 Gal. 75.3 L
	* Water-cooled Condenser Water Usage / 100 lbs. /45.4 kgs. Of Ice: 140 gal/ 530 L. *Water-cooled models are excluded from ENERGY STAR qualification.								
REMOTE COOLED	IDT1200N	dice 	1110 lbs 503 kgs	n.a. 542 kgs	925 lbs 420 kgs	n.a. n.a.	4.47	n/a	19.9 gal 75.3 L
	IYT1200N	half-dice 	1215 lbs 1010 kgs	1215 lbs 551 kgs	1010 lbs 458 kgs	1010 lbs 458 kgs	4.20	4.20	19.9 gal 75.3 L

## Accessories

**LuminIce® II Virus and Bacteria Inhibitor**  
controls viruses and bacteria inside the ice machine



**External Scoop holder**  
Protect the ice scoop with the NSF approved versatile scoop holder.



**Arctic Pure® Plus**  
reduce sediments and chlorine contaminants down to .5 microns. Use with Pre-filter recommended



**iAuCS®**  
schedules and performs routine ice machine cleaning automatically.



Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street  
Manitowoc, WI 54220

Tel: 1.920.682.0161  
Fax: 1.920.683.7589

[www.manitowocice.com](http://www.manitowocice.com)  
6561F 08/22





## **ICE MACHINE WARRANTY**

Manitowoc Ice, Inc. (hereinafter referred to as the "COMPANY") warrants for a period of thirty-six months from the installation date (except as limited below) that new ice machines manufactured by the COMPANY shall be free of defects in material or workmanship under normal and proper use and maintenance as specified by the COMPANY and upon proper installation and start-up in accordance with the instruction manual supplied with the ice machine. The COMPANY'S warranty hereunder with respect to the compressor shall apply for an additional twenty-four months, excluding all labor charges, and with respect to the evaporator for an additional twenty-four months, including labor charges.

The obligation of the COMPANY under this warranty is limited to the repair or replacement of parts, components, or assemblies that in the opinion of the COMPANY are defective. This warranty is further limited to the cost of parts, components or assemblies and standard straight time labor charges at the servicing location.

Time and hourly rate schedules, as published from time to time by the COMPANY, apply to all service procedures. Additional expenses including without limitation, travel time, overtime premium, material cost, accessing or removal of the ice machine, or shipping are the responsibility of the owner, along with all maintenance, adjustments, cleaning, and ice purchases. Labor covered under this warranty must be performed by a COMPANY Contracted Service Representative or a refrigeration service agency as qualified and authorized by the COMPANY'S local Distributor. The COMPANY'S liability under this warranty shall in no event be greater than the actual purchase price paid by customer for the ice machine.

The foregoing warranty shall not apply to (1) any part or assembly that has been altered, modified, or changed; (2) any part or assembly that has been subjected to misuse, abuse, neglect, or accidents; (3) any ice machine that has been installed and/or maintained inconsistent with the technical instructions provided by the COMPANY; or (4) any ice machine initially installed more than five years from the serial number production date. This warranty shall not apply if the Ice Machine's refrigeration system is modified with a condenser, heat reclaim device, or parts and assemblies other than those manufactured by the COMPANY, unless the COMPANY approves these modifications for specific locations in writing.

**THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES OR GUARANTEES OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.**

In no event shall the COMPANY be liable for any special, indirect, incidental or consequential damages. Upon the expiration of the warranty period, the COMPANY'S liability under this warranty shall terminate.

The foregoing warranty shall constitute the sole liability of the COMPANY and the exclusive remedy of the customer or user. To secure prompt and continuing warranty service, the warranty registration card or register on line within five (5) days from the installation date.

### **MANITOWOC ICE, INC.**

2110 So. 26th St., P.O. Box 1720, Manitowoc, WI 54221-1720

Telephone: 920-682-0161 • Fax: 920-683-7585

Web Site - [www.manitowocice.com](http://www.manitowocice.com)

Form 80-0373-3 Rev. 01/02



# Arctic Pure Plus

Premium Water Filters for Ice Machines



Arctic Pure Plus  
Premium Water Filters for Ice Machines

Models ☐ AR-PRE-P ☐ AR-10000-P ☐ AR-20000-P ☐ AR-40000-P



AR-PRE-P



AR-10000-P



AR-20000-P



AR-40000-P

- |  |   |  |   |
|--|---|--|---|
| <ul style="list-style-type: none"> <li>• Pre-filter, removes hard sediments, sand, dirt and rust from water, and protects solenoids, valves and inlets to the ice maker</li> <li>• Compatible with all models</li> </ul> | <ul style="list-style-type: none"> <li>• Chlorine Reduction</li> <li>• SLOW PHOS scale inhibitor</li> <li>• 0.5 Microns filtration</li> <li>• 15,000 gallon capacity</li> <li>• Models 0-600 lbs/day</li> </ul> | <ul style="list-style-type: none"> <li>• Chlorine Reduction</li> <li>• SLOW PHOS scale inhibitor</li> <li>• 0.5 Microns filtration</li> <li>• 20,000 gallon capacity</li> <li>• Models 601-1000 lbs/day</li> </ul> | <ul style="list-style-type: none"> <li>• Chlorine Reduction</li> <li>• SLOW PHOS scale inhibitor</li> <li>• 0.5 Microns filtration</li> <li>• 40,000 gallon capacity</li> <li>• Models 1001-2500 lbs/day</li> </ul> |
|--|---|--|---|

## Standard Features and Benefits

- 95% average reduction of chlorine from incoming water supply assures the ice tastes and smells fresher, clearer and more enjoyable
- Silver impregnated carbon block provides antimicrobial protection against potential bacteria microorganisms, algae, mold and slime on ice machine surfaces
- Engineered with SLOW PHOS (slowly soluble polyphosphate) to inhibit scale formation and corrosion
- Reduces dirt, submicron particles (down to 0.5 microns) and eliminates contaminants such as cryptosporidium and giardia cysts.
- Ultra-fine filtration (0.5 Microns) with silver impregnated carbon block and slowly soluble polyphosphates provides triple protection from harmful contaminants that can affect your ice machine's performance
- Reduces ice machine cost and maintenance frequency by reducing scale, impurities, and contaminants that can enter the machine.
- Extends the life of the ice machine, when the filters are changed every 6 months or when water pressure is below 20 psi.
- Optimizes the daily performance of the machine, allowing it run at full capacity producing the freshest and purist ice possible
- Cartridges are easy to install, safe, sanitary and can be changed out rapidly, "on the fly" without turning off the water supply
- **Certified to NSF/ANSI Standard 42, 53, 372, and CSA B483.1** by IAPMO and meets CUPC requirements.

## IAPMO R&T Certifications

System Model #	Replace. Cartridge	Std. 42 Claims	Std. 53 Claims	Chlorine Red. Cap
AR-PRE-P	K00496	Part. Class 3	None	None
AR-10000-P	K00493	Chlorine & Part. Class 1	Cyst	15,000 gal
AR-20000-P	K00494	Chlorine & Part. Class 1	Cyst	20,000 gal
AR-40000-P	K00495	Chlorine & Part. Class 1	Cyst	40,000 gal

- CSAB483.1: For Canadian water standards
- \*NSF/ANSI 53 cyst claim only valid at or below rated flow rate
- Warning : Do not use with water that is microbiologically unsafe or of unknown quality without adequate disinfections before or after the unit. For cold water use only. Not for residential use.

**Note on Pre-filter:** A pre-filter is recommended for all applications to achieve maximum filtration efficiency and cartridge life.


## Warranty

3-Year parts and labor warranty on head, shroud, hardware, and mounting assembly.  
(water filter cartridge not included).  
Residential Warranty - 1 Year





## Dimensions

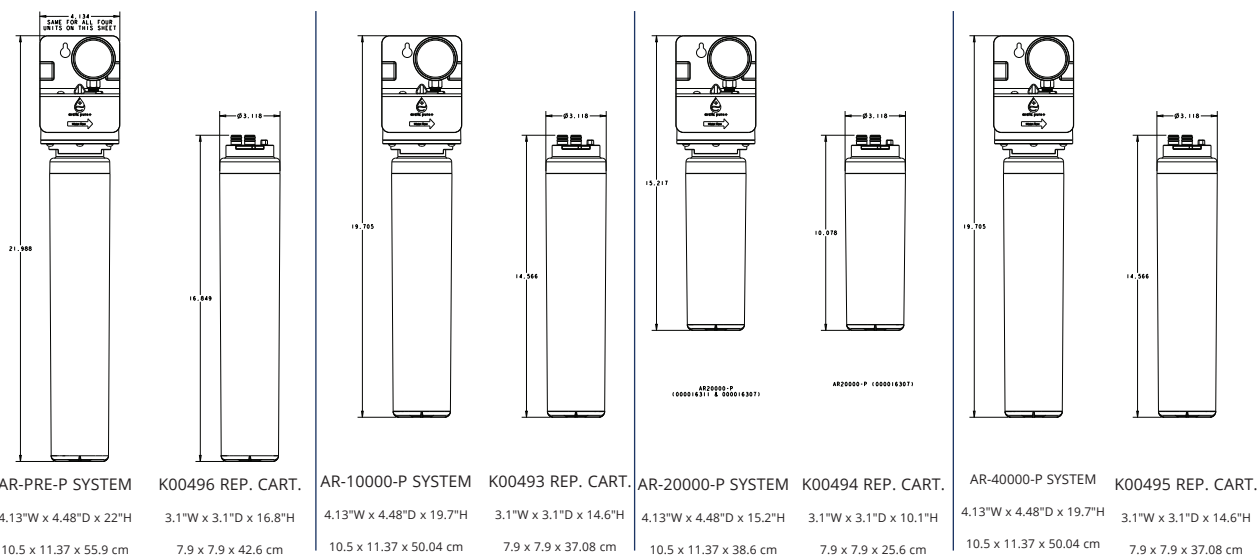

## Usage Matrix

Filter System (Replacement Cartridges)	AR-PRE-P (K00496)	AR-10000-P (K00493)	AR-20000-P (K00494)	AR-40000-P (K00495)
All Under Counters (Cubers, Flakers & Nuggets) Counter Top Nugget	X	X		
Modular Cubers: IT0300-IT750, IBF0620 Modular Flaker: RFF0320 Modular Nugget: RNF320	X	X		
Modular Cubers: IT0900, IBF0820C & IBT1020C Modular Flaker: RFF0620 RFF1220C, RFF1300 Modular Nuggets: RNF0620, RNF1020C, RNF1100	X		X	
Modular Cubers: IT1200, IT1500 & IT1900, IF1400C & IF1800C Modular Flaker: RFF2200C Modular Nugget: RNF2000C	X			X

## Specifications and Shipping

System	Replacement Cartridge	Filtration level	Capacity gal	Service Flow Rate (max. gpm (lpm))	Operating Air Temp F (C)	Operating Water Temp F (C)	Operating Pressure psi (bar)	Mtg. Holes from Center in (cm)	Approx. Shipping Weight lbs (kg)	Qty System Lots	Qty Cartridge Lots
AR-PRE-P	K00496	5 Micron	NA	1.5 (5.7)	40°-110°F (4.4°- 43.3°)	40°-90°F (4.4°- 32.2°)	35 -125 (2.41-8.61)	1.5 (3.81)	4 (1.81)	6	12
AR-10000-P	K00493	0.5 Microns	15,000	0.75 (2.84)				1.5 (3.81)	5 (2.26)	6	12
AR-20000-P	K00494	0.5 Microns	20,000	1.25 (4.73)				1.5 (3.81)	4 (1.81)	6	12
AR-40000-P	K00495	0.5 Microns	40,000	2.0 (7.6)				1.5 (3.81)	5 (2.26)	6	12

### Installation Tips

- Install vertically with cartridge hanging down
- Allow 2.5" (6.35cm) clearance below the cartridge for easy replacement
- Flush cartridge by running water through filter for ten (10) minutes
- Use copper or polyethylene 3/8" hose for Quick Connect fitting
- Always follow local plumbing codes

### Operation Tips

- Change cartridge every 6 months or when pressure gauge indicates below 35 psi ( which ever comes first)
- Twist 1/4 turn to left to remove cartridge. Twist 1/4 turn to the right to install cartridge ( Water can be left on)
- Protect from freezing—Failure to do so may result in cracking of the filter housing and cause water leakage
- When using non-Manitowoc ice makers, consult the ice machine's manufactures for water supply usage requirements.
- It is recommended to have your water supply tested by a professional to determine your water treatment needs.

Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street  
Manitowoc, WI 54220

Tel: 1.920.682.0161  
Fax: 1.920.683.7589

[www.manitowocice.com](http://www.manitowocice.com)  
7805B\_ArcticPurePlus  
06/22



## **ArcticPure™ Accessory Warranty**

Manitowoc Ice, Inc. (hereinafter referred to as the "COMPANY") warrants for a period of thirty-six months from the installation date (except as limited below) that new ArcticPure™ Accessory sold by the COMPANY shall be free of defects in material or workmanship under normal and proper use and maintenance as specified by the COMPANY and upon proper installation and start-up in accordance with the instruction manual supplied with the ArcticPure™ Accessory.

The obligation of the COMPANY under this warranty is limited to the repair or replacement of parts, components, or assemblies that in the opinion of the COMPANY are defective. This warranty is further limited to the cost of parts, components or assemblies and standard straight time labor charges at the servicing location.

Time and hourly rate schedules, as published from time to time by the COMPANY, apply to all service procedures. Additional expenses including without limitation, travel time, overtime premium, material cost, accessing or removal of the ArcticPure™ Accessory, or shipping are the responsibility of the owner, along with all maintenance, adjustments, and cleaning costs. Labor covered under this warranty must be performed by a COMPANY Contracted Service Representative or a refrigeration service agency as qualified and authorized by the COMPANY'S local Distributor. The COMPANY'S liability under this warranty shall in no event be greater than the actual purchase price paid by the customer for the ArcticPure™ Accessory.

The foregoing warranty shall not apply to (1) any part or assembly that has been altered, modified, or changed; (2) any part or assembly that has been subjected to misuse, abuse, neglect, or accidents; (3) wear items such as cartridges or o-rings; (4) any ArcticPure™ Accessory that has been installed and/or maintained inconsistent with the technical instructions provided by the COMPANY; or (5) any ArcticPure™ Accessory initially installed more than five years from the serial number production date.

The ArcticPure™ Accessory is designed to operate only with COMPANY'S ice machines.

**THIS WARRANTY IS IN LIEU OF ALL OTHER WARRANTIES OR GUARANTEES OF ANY KIND, EXPRESSED OR IMPLIED, INCLUDING ANY IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR A PARTICULAR PURPOSE.** In no event shall the COMPANY be liable for any special, indirect, incidental or consequential damages. Upon the expiration of the warranty period, the COMPANY'S liability under this warranty shall terminate. The foregoing warranty shall constitute the sole liability of the COMPANY and the exclusive remedy of the customer or user.

To secure prompt and continuing warranty service, the warranty registration card must be completed and sent to the COMPANY within five (5) days from the installation date.

Complete the following and retain for your record:

Distributor/Dealer \_\_\_\_\_  
Model Number \_\_\_\_\_ Serial Number \_\_\_\_\_  
Installation Date \_\_\_\_\_

### **MANITOWOC ICE, INC.**

2110 So. 26<sup>th</sup> St., P.O. Box 1720, Manitowoc, WI 54221-1720

Telephone: 920-682-0161 • Fax: 920-683-7585

Web Site - [www.manitowocice.com](http://www.manitowocice.com)

Form 80-1464-3 06/03



# Ice Storage Bins


## Ice Storage Bins

### Model

☐ D320 ☐ D400 ☐ D420 ☐ D570 ☐ D970

### D Bins


.75" (1.90 cm) Bin drain



D320  
264 lbs. (120 kgs)



D570  
532 lbs. (241 kgs)



D400  
365 lbs. (166 kgs)



D970  
882 lbs (400 kgs)



D420  
383 lbs. (174 kgs)



Ergonomic NSF approved  
sanitary ice scoop included

### D Bin Features

**New Sanitary Scoop** Ergonomic NSF approved sanitary ice scoop included with each bin. Built-in knuckle and thumb guard. Unique molded retaining lip allows maximum scooping every time. Per scoop capacity approximately 5.3/ lbs (2.4 kg)

**Scoop Holder options** New built-in scoop holder, keeps the ice scoop handle above the ice, or purchases the optional NSF approved External Scoop Holder Kit # K00461.

**New Door design** Clever built in side grips allow you to lift the bin door from anywhere you are standing (left, right or center) even when you have just one hand free.

### Foamed Insulated Door

Insulates the ice bin, reduces sweat on the door, helps keep ice lasting longer.

**Stay up door** Unique cammed bin door self-latch keeps the door in the open position and keeps the employee safe when scooping ice.

**Ergonomic Door design** Door is angled 53 degrees to allow for easier access to the ice in the bin especially when scooping from the bottom.

**Duratech Metal Finish** Manitowoc exterior material has better corrosion resistance than stainless steel, is smudge resistant and easy to keep clean.

**New Bin liner** Polyurethane Artic Blue bin liner accentuates the crisp clear ice from a Manitowoc Ice Machine.

### Warranty

Bin & Accessories: 3 Year Parts & Labor.

D Bin Model	D-Bin Capacities				D-Bin Dimensions					
	*Application Capacity		**2018 AHRI Capacity		Height		Width		Depth	
	lbs.	kgs	Cu. ft	Cu. M	in.	cm	in.	cm	in.	cm
D320	264	119.90	8.9	0.25	38	96.5	22	55.9	34	86.4
D420	383	173.79	12.9	0.37	50	127	22	55.9	34	86.4
D400	365	165.70	12.3	0.35	38	96.5	30	76.2	34	86.4
D570	532	241.14	17.9	0.51	50	127	30	76.2	34	86.4
D970	882	400.11	29.7	0.84	50	127	48	121.9	34	86.4

\*Application Capacity based on 90% of the total volume x 33 lbs/ ft<sup>3</sup> average density of ice. Ice must be managed  
\*\*\*2018 AHRI certified measurement for bin capacity

Above bin heights include leg height of 6" / 15.24 cm  
All bins include a sanitary plastic scoop and one set of adjustable legs chrome legs (6-7.75in/15.24-20.32cm).  
External Scoop holder order separately Kit # K00461  
Metal Scoop order separately Kit # K00463



Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street  
Manitowoc, WI 54220

Tel: 1.920.682.0161  
Fax: 1.920.683.7589

[www.manitowocice.com](http://www.manitowocice.com)  
6453E  
6/22



## D Bins

Indigo Ice Machines Series												
Machine			iT420	iT620	iT0300	iT450	iT0500 &iF0500N	iF0600N, iF0600C, iT0750	iF0900N, iT0900, iF0900C	iT1200, iT1200C	iF1400C, iF1800C	iT1500, iT1900
Machine Capacity @90/70 F			375	465	240	378	440	555, 530	710, 714	950, 1000	1200 1470 1600	1360 1455
Bins	Bin Cap	Width	22"	22"	30"	30"	30"	30"	30"	30"	30"	48"
D320	264	22"	*	*								
D420	383	22"	*	*								
D400	365	30"	K00472	K00472	*	*	*	*	NR	NR	NR	
D570	532	30"	K00472	K00472	*	*	*	*	*	*	NR	
D970	882	48"	NR	NR	NR	K00470	K00470	K00470	K00470	K00470	K00471 + K00470	*

Manitowoc Flaker and Nugget Machines											
		Machine	RNP0320	RFP0320	RNP0620	RFP0620	RNF1020	RFF1220C	RNF1100	RFF1300 & RNF2000C	RFF2200C
Machine cap			251	286	451	540	825	958	825	874	1702
Bins	Bin cap	Width	22"	22"	22"	22"	22"	22"	30"	30"	36.7"
D320	264	22"	*	*	NR	NR	NR	NR			
D420	383	22"	*	*	*	*	NR	NR			
D400	365	30"	K00472	K00472	K00472	K00472	NR	NR	NR	NR	
D570	532	30"	NR	K00472	K00472	K00472	NR	NR	*	*	
D970	882	48"	NR	NR	K00473	K00473	K00473 if 2 used.	K00473 if 2 used.	K00470	K00470	K00470

An optional adapter is required when putting a narrower ice machine on a wider bin.

\* No adapter is needed

NR= Not Recommend. Bin too small or too large for application.

Putting a wider machine on narrower bin is not an option.

Machines side by side must be water cooled, remote, or use a top air discharge for self-contained air cooled.

Application Bin Capacity shown in lbs using the AHRI rating based on 90% of total volume x 33 lbs/ft<sup>3</sup> average density of ice.

Machine capacity shown in lbs/24hrs using the AHRI rating base at 90F ambient, 70F water temperature

## Ice Storage Bins

### Available Accessories

See price book for replacement: scoops, legs, specialty legs and casters

#### K00146 Convenient Ice Bagger

Includes bagger, D-bin adapter, and 250 bags and ties (Not for D320 or D400) Order K00068 replacement bags



#### K00461 External Scoop Holder

NSF approved. Can be mounted on the left or right side of bins, horizontally or vertically or on a wall.



#### K00463 Metal Scoop

Indestructible NFS approved aluminum alloy with sanitary knuckle and thumb guard. Works with K00461 external scoop holder or hangs inside the D-Bin series. Limited life time guarantee.



#### K00462

#### Secure Fastening Kit

Securely fast the Indigo NXT ice machine head to the pre-drilled inserts on the back of the D-bin series. Stainless steel flanged feet attach to bin and can be screwed to the floor



Manitowoc Ice reserves the right to make changes to the design or specifications without prior notice.

2110 South 26th Street  
Manitowoc, WI 54220

Tel: 1.920.682.0161  
Fax: 1.920.683.7589

[www.manitowocice.com](http://www.manitowocice.com)  
6453E  
6/22





## LIMITED WARRANTY FOR ICE STORAGE BIN & DISPENSERS

### LIMITED WARRANTY

Manitowoc Ice a division of Manitowoc FSG Operations, LLC, ("Company") warrants that new Ice Storage Bins or Dispensers sold by Company shall be free of defects in material or workmanship under normal and proper use and maintenance as specified by the Company and upon proper installation and start-up in accordance with the instruction manual supplied.

### WHAT IS COVERED

- Parts and Labor for a period of three (3) years.
  - Accessory Ice Transport Carts for two (2) years parts and labor.
- The Ice Storage Bin / Dispenser warranty begins on the date of the original installation. This warranty shall not apply to any Ice Storage Bin or Dispenser initially installed more than five (5) years from the serial number production date.

The obligation of the Company under this warranty is limited to the repair or replacement of parts, components, or assemblies that in the sole opinion of the Company are defective. This warranty is further limited to the cost of parts, components or assemblies and standard straight time labor charges at the servicing location.

Time and hourly rate schedules, as published from time to time by the Company, apply to all service procedures. Additional expenses including without limitation, travel time, overtime premium, material cost, accessing or removal of the Ice Storage Bin / Dispenser, or shipping are the responsibility of the purchaser, along with all maintenance, adjustments, cleaning, and ice purchases. Labor covered under this warranty must be performed by an approved Company contracted Service Representative or a refrigeration service agency as qualified and authorized by the Company's local Distributor. The Company's liability under this warranty shall in no event be greater than the actual purchase price paid by purchaser for the Ice Storage Bin or Dispenser.

### EXCLUSIONS FROM COVERAGE

- Repair or replacement of parts required because of misuse, improper care or storage, negligence, alteration, use of incompatible supplies or lack of specified maintenance shall be excluded.
- Normal maintenance items.
- Failures caused by adverse environmental, water conditions, or improper drainage.
- Improper or unauthorized repair.
- Any Ice Storage Bin / Dispenser that has been installed and/or maintained inconsistent with the instructions provided by the Company.
- Parts subject to damage beyond the control of Company, or to Ice Storage Bin's / Dispenser's which have been subject to accidents, damage in shipment, fire, floods, other hazards or acts of God that are beyond the control of the Company.
- This Limited Warranty shall not apply if the Ice Storage Bin / Dispenser is modified with parts and assemblies other than those manufactured by the Company, unless the Company approves these modifications for specific locations in writing prior to the commencement of such modification.

### LIMITATIONS OF LIABILITY

The preceding paragraphs set forth the exclusive remedy for all claims based on failure of, or defect in, Ice Storage Bins or Dispensers sold hereunder, whether the failure or defect arises before or during the warranty period, and whether a claim, however instituted, is based on contract, indemnity, warranty, tort (including negligence), strict liability, implied by statute, common-law or otherwise, and Company and agents shall not be liable for any claims for personal injuries or consequential damages or loss, howsoever caused. Upon the expiration of the warranty period, all such liability shall terminate. THE FOREGOING WARRANTIES ARE EXCLUSIVE AND IN LIEU OF ALL OTHER WARRANTIES, WHETHER WRITTEN, ORAL, IMPLIED OR STATUTORY NO IMPLIED WARRANTY OF MERCHANTABILITY OR FITNESS FOR PARTICULAR PURPOSE SHALL APPLY, COMPANY DOES NOT WARRANT ANY PRODUCTS OR SERVICES OF OTHERS

### REMEDIES

The liability of Company for breach of any warranty obligation hereunder is limited to: (i) the repair or replacement of the Ice Storage Bin or Dispenser on which the liability is based, or with respect to services, re-performance of the services; or (ii) at Company's option, the refund of the amount paid for said equipment or services. Any breach by Company with respect to any item or unit of equipment or services shall be deemed a breach with respect to that item or unit or service only

### WARRANTY CLAIM PROCEDURE

Customer shall be responsible to:

- Complete and return warranty registration card or register on line within five (5) days from the installation date.
- All warranty service must be performed by an approved Manitowoc contracted or authorized Service Representative. To schedule a service appointment contact your local Manitowoc Service Representative or visit us at [www.manitowocice.com](http://www.manitowocice.com) to find a Service Representative near you.

### GOVERNING LAW

This Limited Warranty shall be governed by the laws of the state of Wisconsin, USA, excluding their conflicts of law principles. The United Nations Convention on Contracts for the International Sale of Goods is hereby excluded in its entirety from application to this Limited Warranty

### COMPLETE AND RETAIN FOR YOUR RECORD:

Distributor/Dealer \_\_\_\_\_

Model Number \_\_\_\_\_

Serial Number \_\_\_\_\_

Installation Date \_\_\_\_\_

Manitowoc Ice  
2110 South 26th Street  
P.O. Box 1720  
Manitowoc, WI 54221-1720  
Web site: [www.manitowocice.com](http://www.manitowocice.com)