



## Louisiana State Licensing Board for Contractors

## Contractor Information

**Business Name** ADVANCE WATERPROOFING CO., INC.  
**Mailing Address** P. O. Box 1188  
Gretna, LA 70054  
**Phone Number** (504) 362-1843  
**Fax Number** (000) 000-0000  
**Email Address** [advancewaterproofingco@gmail.com](mailto:advancewaterproofingco@gmail.com)  
**Website** <http://null>

## Active Licenses

**License Number** 18364  
**Type** Commercial License  
**Status** LICENSED  
**Effective** 04/26/2019  
**Expiration** 04/10/2021  
**First Issued** 04/10/1984

## Classifications

Class	Qualifying Party	Parishes
BUILDING CONSTRUCTION	Gregory G. Kempton	ALL
BUSINESS AND LAW	Gregory G. Kempton	ALL
SPECIALTY: ROOFING AND SHEET METAL, SIDING	Gregory G. Kempton	ALL
SPECIALTY: WATERPROOFING, COATING, SEALING, CONCRETE/MASONRY REPAIR	Gregory G. Kempton	ALL

DATE: 5/12/2020

Page: 5

BID NO.: 50-00130712

**BID FORM**  
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES \_\_\_\_\_ NO X

MAXIMUM ESCALATION PERCENTAGE REQUESTED \_\_\_\_\_%

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 8-30-2020

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

**DELIVERY: FOB JEFFERSON PARISH**INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES 10 daysLOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable) 18364**THIS SECTION MUST BE COMPLETED BY BIDDER:**FIRM NAME: Advance Waterproofing Co., Inc.ADDRESS: P.O. Box 1188CITY, STATE: Gretna, LA ZIP: 70054TELEPHONE: (504) 362-1843 FAX: (504) 365-0055EMAIL ADDRESS: advancewaterproofingco@gmail.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: N/A

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

TOTAL PRICE OF ALL BID ITEMS: \$ 98,300.00AUTHORIZED SIGNATURE: [Signature]TITLE: PresidentGreg Kempton  
Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

DATE: 5/12/2020

INVITATION TO BID FROM JEFFERSON PARISH - continued

Page 6

BID NO.: 50-00130712

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	JOB	<p>LABOR, MATERIALS &amp; EQUIPMENT NECESSARY TO CLEAN EXTERIOR OF THE BUILDING WET-GLAZE ALL EXXTERIOR WINDOWS &amp; WATERPROOF ALL EXTERIOR BRICK &amp; SANDSTONE WALLS ON DISTRICT ATTORNEY'S OFFICE BUILDING.</p> <p>0010 - WATERPROOFING &amp; PRESSURE WASHING DISTRICT ATTORNEY'S OFFICE BUILDING DEPARTMENT OF GENERAL SERVICES</p> <p>WE EXTEND THIS BID TO PROVIDE LABOR, MATERIALS, DELIVERY, EQUIPMENT AND ALL OTHER INCIDENTALS NECESSARY TO CLEAN EXTERIOR OF THE BUILDING, WET-GLAZE ALL EXTERIOR WINDOWS AND WATERPROOF ALL EXTERIOR BRICK AND SANDSTONE WALLS PER THE ATTACHED SPECIFICATIONS AT THE FOLLOWING LOCATION:</p> <p>DISTRICT ATTORNEY'S OFFICE BUILDING 100 DERBIGNY STREET GRETN, LA 70053</p>	\$98,300.00	\$98,300.00





# AIA Document A310™ – 2010

## Bid Bond

### CONTRACTOR:

(Name, legal status and address)

Advance Waterproofing Co., Inc.

P.O. Box 1188

Gretna, LA 70054

### SURETY:

(Name, legal status and principal place of business)

Harco National Insurance Company

702 Oberlin Road

Raleigh, NC 27605-0800

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

### OWNER:

(Name, legal status and address)

Jefferson Parish

P.O. Box 9

Gretna, LA 70054-0009

BOND AMOUNT: Five Percent (5%) of Total Amount Bid

### PROJECT:

(Name, location or address, and Project number, if any)

LABOR, MATERIALS, & EQUIPMENT NECESSARY TO CLEAN EXTERIOR OF THE BUILDING, WET-GLAZE ALL EXTERIOR WINDOWS & WATERPROOF ALL EXTERIOR BRICK & SANDSTONE WALLS FOR THE DISTRICT ATTORNEY'S OFFICE BUILDING FOR JEFFERSON PARISH GENERAL SERVICE  
BID NUMBER 50 - 130712

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 11th day of June 2020

<p>(Witness) <u>[Signature]</u></p> <p>(Witness) <u>[Signature]</u></p>	<p>Advance Waterproofing Co., Inc. (Principal) <u>[Signature]</u> (Seal)</p> <p>(Title) <u>President</u></p> <p>Harco National Insurance Company (Surety) <u>[Signature]</u> (Seal)</p> <p>(Title) <u>Mary Catherine Turner, Attorney-in-Fact</u></p>
---	---

Init.

AIA Document A310™ – 2010. Copyright © 1963, 1970 and 2010 by The American Institute of Architects. All rights reserved. WARNING: This AIA® Document is protected by U.S. Copyright Law and International Treaties. Unauthorized reproduction or distribution of this AIA® Document, or any portion of it, may result in severe civil and criminal penalties, and will be prosecuted to the maximum extent possible under the law. Purchasers are permitted to reproduce ten (10) copies of this document when completed. To report copyright violations of AIA Contract Documents, e-mail The American Institute of Architects' legal counsel, [copyright@aia.org](mailto:copyright@aia.org).

051110



# POWER OF ATTORNEY

Bond #

N/A

## HARCO NATIONAL INSURANCE COMPANY

## INTERNATIONAL FIDELITY INSURANCE COMPANY

Member companies of IAT Insurance Group, Headquartered: 702 Oberlin Road, Raleigh, North Carolina 27605

**KNOW ALL MEN BY THESE PRESENTS:** That **HARCO NATIONAL INSURANCE COMPANY**, a corporation organized and existing under the laws of the State of Illinois, and **INTERNATIONAL FIDELITY INSURANCE COMPANY**, a corporation organized and existing under the laws of the State of New Jersey, and having their principal offices located respectively in the cities of Rolling Meadows, Illinois and Newark, New Jersey, do hereby constitute and appoint

**MEGHANN TURNER, GARRETT TURNER, MARY CATHERINE TURNER**

Baton Rouge, LA

their true and lawful attorney(s)-in-fact to execute, seal and deliver for and on its behalf as surety, any and all bonds and undertakings, contracts of indemnity and other writings obligatory in the nature thereof, which are or may be allowed, required or permitted by law, statute, rule, regulation, contract or otherwise, and the execution of such instrument(s) in pursuance of these presents, shall be as binding upon the said **HARCO NATIONAL INSURANCE COMPANY** and **INTERNATIONAL FIDELITY INSURANCE COMPANY**, as fully and amply, to all intents and purposes, as if the same had been duly executed and acknowledged by their regularly elected officers at their principal offices.

This Power of Attorney is executed, and may be revoked, pursuant to and by authority of the By-Laws of **HARCO NATIONAL INSURANCE COMPANY** and **INTERNATIONAL FIDELITY INSURANCE COMPANY** and is granted under and by authority of the following resolution adopted by the Board of Directors of **INTERNATIONAL FIDELITY INSURANCE COMPANY** at a meeting duly held on the 13th day of December, 2018 and by the Board of Directors of **HARCO NATIONAL INSURANCE COMPANY** at a meeting held on the 13th day of December, 2018.

"**RESOLVED**, that (1) the Chief Executive Officer, President, Executive Vice President, Senior Vice President, Vice President, or Secretary of the Corporation shall have the power to appoint, and to revoke the appointments of, Attorneys-in-Fact or agents with power and authority as defined or limited in their respective powers of attorney, and to execute on behalf of the Corporation and affix the Corporation's seal thereto, bonds, undertakings, recognizances, contracts of indemnity and other written obligations in the nature thereof or related thereto; and (2) any such Officers of the Corporation may appoint and revoke the appointments of joint-control custodians, agents for acceptance of process, and Attorneys-in-fact with authority to execute waivers and consents on behalf of the Corporation; and (3) the signature of any such Officer of the Corporation and the Corporation's seal may be affixed by facsimile to any power of attorney or certification given for the execution of any bond, undertaking, recognizance, contract of indemnity or other written obligation in the nature thereof or related thereto, such signature and seals when so used whether heretofore or hereafter, being hereby adopted by the Corporation as the original signature of such officer and the original seal of the Corporation, to be valid and binding upon the Corporation with the same force and effect as though manually affixed."

IN WITNESS WHEREOF, **HARCO NATIONAL INSURANCE COMPANY** and **INTERNATIONAL FIDELITY INSURANCE COMPANY** have each executed and attested these presents on this 31st day of December, 2018



STATE OF NEW JERSEY  
County of Essex

Kenneth Chapman  
Executive Vice President, Harco National Insurance Company  
and International Fidelity Insurance Company

STATE OF ILLINOIS  
County of Cook



On this 31st day of December, 2018, before me came the individual who executed the preceding instrument, to me personally known, and, being by me duly sworn, said he is the therein described and authorized officer of **HARCO NATIONAL INSURANCE COMPANY** and **INTERNATIONAL FIDELITY INSURANCE COMPANY**; that the seals affixed to said instrument are the Corporate Seals of said Companies; that the said Corporate Seals and his signature were duly affixed by order of the Boards of Directors of said Companies.



IN TESTIMONY WHEREOF, I have hereunto set my hand affixed my Official Seal, at the City of Newark, New Jersey the day and year first above written.

Shirelle A. Outley a Notary Public of New Jersey  
My Commission Expires April 4, 2023

### CERTIFICATION

I, the undersigned officer of **HARCO NATIONAL INSURANCE COMPANY** and **INTERNATIONAL FIDELITY INSURANCE COMPANY** do hereby certify that I have compared the foregoing copy of the Power of Attorney and affidavit, and the copy of the Sections of the By-Laws of said Companies as set forth in said Power of Attorney, with the originals on file in the home office of said companies, and that the same are correct transcripts thereof, and of the whole of the said originals, and that the said Power of Attorney has not been revoked and is now in full force and effect.

IN TESTIMONY WHEREOF, I have hereunto set my hand on this day, **June 11, 2020**.

A00206

Irene Martins, Assistant Secretary

Non-Public Works Bid

AFFIDAVIT

STATE OF Louisiana

PARISH/COUNTY OF Jefferson

BEFORE ME, the undersigned authority, personally came and appeared: Greg  
Kempton, (Affiant) who after being by me duly sworn, deposed and said that  
he/she is the fully authorized Greg Kempton of Advance Waterproofing (Entity),  
the party who submitted a bid in response to Bid Number 50-130712 to the Parish of  
Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required  
attachment):

Choice A \_\_\_\_\_ Attached hereto is a list of all campaign contributions, including  
the date and amount of each contribution, made to current or  
former elected officials of the Parish of Jefferson by Entity,  
Affiant, and/or officers, directors and owners, including  
employees, owning 25% or more of the Entity during the two-year  
period immediately preceding the date of this affidavit or the  
current term of the elected official, whichever is greater. Further,  
Entity, Affiant, and/or Entity Owners have not made any  
contributions to or in support of current or former members of the  
Jefferson Parish Council or the Jefferson Parish President through  
or in the name of another person or legal entity, either directly or  
indirectly.

Choice B ✓ there are NO campaign contributions made which would require  
disclosure under Choice A of this section.

Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A \_\_\_\_\_ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.

Choice B ✓ There are NO debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

*[The remainder of this page is intentionally left blank.]*



That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

Greg G Kempton  
Signature of Affiant


Greg G Kempton  
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME  
ON THE 2 DAY OF June, 2020.

[Signature]  
Notary Public  
Peter R. Brigandi, Jr.  
Printed Name of Notary

55414  
Notary/Bar Roll Number

My commission expires on death.

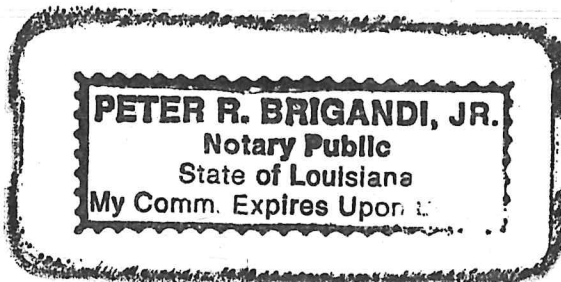

# Louisiana Secretary of State

## R. Kyle Ardoin

### SEARCH FOR LOUISIANA NOTARIES

A practicing notary in a parish may notarize in reciprocal parishes without additional bonding or examination.

You can also download information about all notaries on file. For more information, see Notary Bulk Data.

[Print](#)

#### Notary Search - Detail

**Name:** MR. PETER R. BRIGANDI JR.  
**Address:** 801 KEPLER STREET  
GRETN, LA 70053  
**Phone:** (504) 263-1770  
**Notary ID Number:** 55414  
**Parish:** ORLEANS with STATEWIDE JURISDICTION  
**Agency:** N/A  
**Notary Type:** Attorney  
Bar Roll #: 24317  
**Status:** Active  
**Commission Date:** 09/24/1997  
**Oath Date:** 09/17/1997  
**Surety Expiration Date:** Not Required  
**Annual Report Current:** Not Applicable

[Back to Search Results](#)[New Search](#)

## CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF  
Advance Waterproofing Co.  
INCORPORATED.

AT THE MEETING OF DIRECTORS OF Advance Waterproofing Co.  
INCORPORATED, DULY NOTICED AND HELD ON June 5, 2020,  
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT  
WAS:

RESOLVED THAT Greg Kempton, BE AND IS HEREBY  
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-  
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON  
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS  
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,  
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE  
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,  
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES  
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS  
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING  
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-  
FACT.


I HEREBY CERTIFY THE FOREGOING TO BE  
A TRUE AND CORRECT COPY OF AN  
EXCERPT OF THE MINUTES OF THE ABOVE  
DATED MEETING OF THE BOARD OF  
DIRECTORS OF SAID CORPORATION, AND  
THE SAME HAS NOT BEEN REVOKED OR  
RESCINDED.

  
SECRETARY-TREASURER

6/5/20  
DATE



# State of Louisiana




## State Licensing Board for Contractors

This is to Certify that:

ADVANCE WATERPROOFING CO., INC.  
P. O. Box 1188  
Gretna, LA 70054

is duly licensed and entitled to practice the following classifications

BUILDING CONSTRUCTION; SPECIALTY: ROOFING AND SHEET METAL, SIDING; SPECIALTY:  
WATERPROOFING, COATING, SEALING, CONCRETE/MASONRY REPAIR



Expiration Date: April 10, 2021

License No: 18364

Witness our hand and seal of the Board dated,  
Baton Rouge, LA 26th day of April 2019

*Will B. McCoy*

Director

*Lee Mallett*

Chairman

*Andy Dwyer*

Treasurer

This License Is Not Transferrable





# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)

5/27/2020

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

PRODUCER	CONTACT NAME: Chris Breaux
Terrebonne Insurance Agency, Inc.	PHONE (A/C, No, Ext): (985) 851-3080
210 Mystic Blvd	FAX (A/C, No): (985) 851-0304
	E-MAIL ADDRESS: chris@terrebonneinsurance.com
	INSURER(S) AFFORDING COVERAGE
Houma LA 70360	INSURER A: Kinsale Insurance Company
	INSURER B: LWCC
INSURED	INSURER C:
Advance Waterproofing, Inc.	INSURER D:
P. O. Box 1188	INSURER E:
	INSURER F:
Gretna LA 70054	

## COVERAGES

CERTIFICATE NUMBER: CL2022636468

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY						
	<input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR						
		X	Y	01000817251	2/28/2020	2/28/2021	EACH OCCURRENCE \$ 1,000,000
							DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 100,000
							MED EXP (Any one person) \$ excluded
							PERSONAL & ADV INJURY \$ 1,000,000
							GENERAL AGGREGATE \$ 2,000,000
							PRODUCTS - COMP/OP AGG \$ 2,000,000
							\$
	GEN'L AGGREGATE LIMIT APPLIES PER:						
	<input checked="" type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC						
	OTHER:						
	AUTOMOBILE LIABILITY						
	<input type="checkbox"/> ANY AUTO						COMBINED SINGLE LIMIT (Ea accident) \$
	<input type="checkbox"/> ALL OWNED AUTOS						BODILY INJURY (Per person) \$
	<input type="checkbox"/> HIRED AUTOS						BODILY INJURY (Per accident) \$
	<input type="checkbox"/> SCHEDULED AUTOS						PROPERTY DAMAGE (Per accident) \$
	<input type="checkbox"/> NON-OWNED AUTOS						\$
A	<input checked="" type="checkbox"/> UMBRELLA LIAB						
	<input type="checkbox"/> EXCESS LIAB						EACH OCCURRENCE \$ 2,000,000
	<input type="checkbox"/> OCCUR						AGGREGATE \$ 2,000,000
	<input type="checkbox"/> CLAIMS-MADE						\$
	DED <input type="checkbox"/> RETENTION \$	X	Y	01000817281	2/28/2020	2/28/2021	
B	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY						
	ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH)	Y/N					<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER
	If yes, describe under DESCRIPTION OF OPERATIONS below	N/A	Y	155108	3/1/2020	3/1/2021	E.L. EACH ACCIDENT \$ 1,000,000
							E.L. DISEASE - EA EMPLOYEE \$ 1,000,000
							E.L. DISEASE - POLICY LIMIT \$ 1,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

Bid No. 50-130712

Contractor that does waterproofing work.

Coverage includes blanket waiver and blanket additional insured as required by written contract along with hired and nonowned auto coverage on General Liability and Umbrella policies.

Waiver of Subrogation in favor of certificate holder as required by written contract in regards to workers compensation policy.

## CERTIFICATE HOLDER

## CANCELLATION

The Parish of Jefferson, its Districts, Departments and Agencies under the direction of the Parish President and the Parish Council  
Department of General Services  
200 Derbigny St., Suite 3300  
Gretna, LA 70053  
Bid No. 50-130712

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

Joel Martinsen/CHRIS

© 1988-2014 ACORD CORPORATION. All rights reserved.






# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
05/28/2020

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

**IMPORTANT:** If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

<b>PRODUCER</b>  STATE FARM INSURANCE CO. 1750 STUMPF BLVD. GRETN, LA 70056		<b>CONTACT NAME:</b> CLIFF ROBICHEAUX <b>PHONE (A/C, No, Ext):</b> 504-263-1959 <b>FAX (A/C, No):</b> 504-263-1875 <b>E-MAIL ADDRESS:</b>	
<b>INSURED</b> ADVANCE WATERPROFFING CO, INC PO BOX 1188 GRETN, LA 70054-1188		<b>INSURER(S) AFFORDING COVERAGE</b> <b>INSURER A:</b> State Farm Mutual Automobile Insurance Company <b>INSURER B:</b> <b>INSURER C:</b> <b>INSURER D:</b> <b>INSURER E:</b> <b>INSURER F:</b>	
		<b>NAIC #</b> 25178	

## COVERAGES

CERTIFICATE NUMBER:

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL SUBR INSD WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
	<b>COMMERCIAL GENERAL LIABILITY</b> <input type="checkbox"/> CLAIMS-MADE <input type="checkbox"/> OCCUR  GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER:					EACH OCCURRENCE DAMAGE TO RENTED PREMISES (Ea occurrence) \$ MED EXP (Any one person) \$ PERSONAL & ADV INJURY \$ GENERAL AGGREGATE \$ PRODUCTS - COMP/OP AGG \$ \$
A	<b>AUTOMOBILE LIABILITY</b> <input type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> NON-OWNED AUTOS ONLY		199 3727-D30-1'8E	04/30/2020	10/30/2020	COMBINED SINGLE LIMIT (Ea accident) \$ BODILY INJURY (Per person) \$ 1,000,000 BODILY INJURY (Per accident) \$ 1,000,000 PROPERTY DAMAGE (Per accident) \$ 1,000,000 \$
	<b>UMBRELLA LIAB</b> <input type="checkbox"/> OCCUR <b>EXCESS LIAB</b> <input type="checkbox"/> CLAIMS-MADE DED <input type="checkbox"/> RETENTION \$					EACH OCCURRENCE \$ AGGREGATE \$ \$
	<b>WORKERS COMPENSATION AND EMPLOYERS' LIABILITY</b> ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? <input type="checkbox"/> Y/N (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	N/A				PER STATUTE <input type="checkbox"/> OTH-ER <input type="checkbox"/> E.L. EACH ACCIDENT \$ E.L. DISEASE - EA EMPLOYEE \$ E.L. DISEASE - POLICY LIMIT \$

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)  
BID #50-130712


## CERTIFICATE HOLDER

## CANCELLATION

THE PAR OF JEFF, ITS DIST, DEPTS, & AGENCIES UNDER  
THE DIR OF THE PAR PRES & THE PAR COUNCIL DEPT  
OF GEN SERVICES 2000 DERBIGNY ST. STE 3300  
GRETN, LA 70053

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

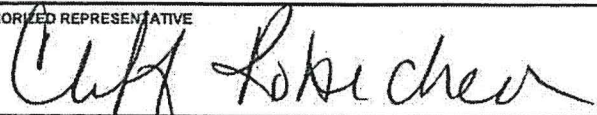


© 1998-2015 ACORD CORPORATION. All rights reserved.



## SIL-ACT® Product Data

### ATS-42

Alkyltrialkoxysilane



ADVANCED  
CHEMICAL  
TECHNOLOGIES, Inc.

*"Protecting the World's Infrastructure"*

## HIGH PERFORMANCE

SIL-ACT® ATS-42 is a clear, penetrating silane treatment which causes concrete, masonry and many natural stones to become repellent to water, chloride, waterborne contaminants and weathering elements, preventing the premature deterioration of parking decks, bridge decks, pavements and other types of concrete and masonry structures. Performance testing makes SIL-ACT® ATS-42 an excellent choice for any project requiring the highest quality clear water repellent.

## DURABLE

SIL-ACT® ATS-42 can be applied to the surface by low-pressure spray, brush, roller or squeegee. It can be stored on the jobsite at temperature extremes, eliminating storage problems associated with emulsified silane products that can deteriorate on the jobsite, prior to use, if not properly stored. SIL-ACT® ATS-42 chemically bonds with the substrate forming a penetrated layer below the surface that acts as a one-way filter. Water, chloride and other waterborne contaminants are repelled without restricting the substrates natural vapor permeability.

## FLEXIBLE



SIL-ACT® ATS-42 is an effective treatment for brick, masonry, cementitious mortars, stucco, many natural stones and cast-in-place, precast, prestressed and architectural concretes.

Structures that can be treated include:

- Parking decks
- Bridges
- Commercial buildings
- Airport pavements
- Highways
- No masking of windows required
- Cooling towers
- Stadiums
- Other horizontal and vertical structures

## STOPS WATER CHLORIDE WATERBORNE CONTAMINANTS

**PERFORMANCE TESTED!**

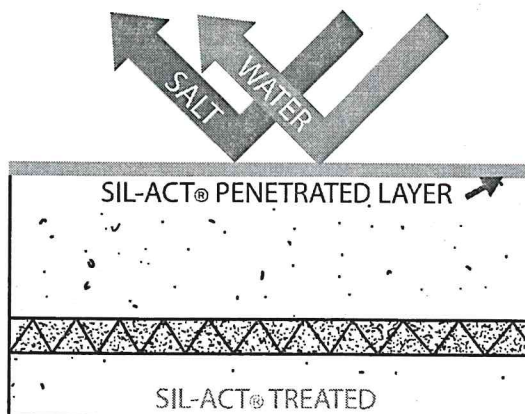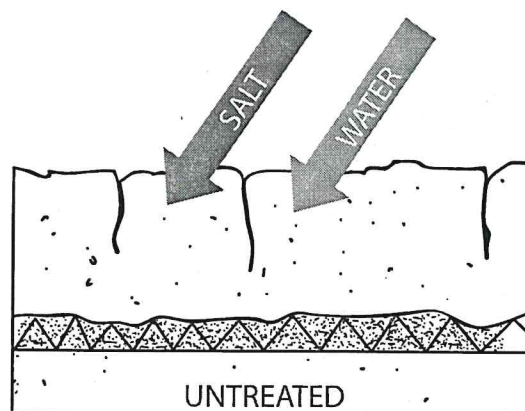

SIL-ACT®'s penetrated silane treatment layer stops water and salt intrusion into concrete, brick, masonry and many types of stone without affecting natural vapor permeability.



## TECHNICAL DATA

PROPERTY	TEST	ATS-42
Active Ingredient		Alkyltrialkoxysilane
Specific Gravity	Method 24, ASTM D-5095	~ 0.81
Density		6.76 lb/gal
Active Content		> 40% by weight
VOC Content		< 600 g/L
Surface Appearance after Application		Unchanged
Drying time at 70°F		½ hour
Moisture Absorption Reduction	ASTM C-642-82	0.11% 48 hours 0.40% 50 days
Moisture Vapor Permeability	OHD L-35, ASTM-96, D-1653	100%
Depth of Penetration	OHD L-34 / NCHRP 244 Series II	0.38 in
Waterproofing	Alberta Transp. & Utilities (1b)	86.2%
Waterproofing after Abrasion	Alberta Transp. & Utilities (1b)	87.1%
Alkali Resistance	Alberta Transp. & Utilities (1b)	84.1%
Reduction in Water Weight Gain	NCHRP 244 Series II	86%
Reduction in Absorbed Chloride	NCHRP 244 Series II	82%
	NCHRP 244 Series IV, ASTM G-53	98%
Moisture Vapor Permeability	NCHRP 244 Series II	100%
Freeze-Thaw Scaling Resistance	ASTM C-672-84	0 at 50 cycles
Resistance of Chloride on Penetration (0.5" depth)	AASHTO T 259/T 260	< 0.1 lb / yd <sup>3</sup>
Resistance of Chloride on Penetration (1.0" depth)		< 0.0 lb / yd <sup>3</sup>

### INSTRUCTIONS

- Test a small area prior to general application to ensure compatibility, desired results and coverage rates.
- Treatment is most effective when the surface to be treated is clean and dry. Remove dirt, dust, oil, grease, curing compounds, coatings and other surface contaminants. Water blasting, sandblasting or shotblasting may be required.
- Please refer to Advanced Chemical Technology's CleanACT™ line of concrete and masonry detergents and cleaners.
- Do not proceed unless surface and air temperature is between 40°F and 110°F. Do not apply if frost, ice, or standing water are visible on the surface to be treated.
- Windows, metals, etc. are not affected by SIL-ACT® ATS-42. No masking of windows required. However avoid unnecessary overspray. If necessary, clean overspray areas with a clean dry cloth, soap and water or alcohol. Protect plants and vegetation from overspray. Prior to SIL-ACT® ATS-42 installation check for preexisting contamination.
- Spray, brush or roll SIL-ACT® ATS-42 treatment on surface to be treated at the recommended application rate. See equipment section of this catalog or contact your Advanced Chemical Technologies rep for spray equipment options.
- Apply to saturation. When spraying at low pressure, if necessary follow with broom or squeegee for even distribution.
- Normal coverage rate is approximately 125 to 250 square feet per gallon.
- Clean equipment with SIL-ACT® Equipment Cleaner.
- Partially used containers should be properly sealed and protected from contamination by water or other foreign substances.

#### WARRANTY

Limited warranties are available for all SIL-ACT® products. Contact ACT or your local SIL-ACT® representative for details.

SIL-ACT® ATS-42 is covered by several patents including U.S. 4,931,319

NOTICE: This brochure was prepared as an introduction to a product manufactured by Advanced Chemical Technologies, Inc. The information provided herein is based upon typical installation conditions and is believed to be reliable. However, due to the wide variety of possible intervening factors, Advanced Chemical Technologies, Inc. does not warrant the expected results to be obtained. Details concerning product specifications and warranty may be obtained from Advanced Chemical Technologies, Inc. Specifications are subject to change. Sale of subject system is limited to Advanced Chemical Technologies, Inc. and authorized applicator's conditions of sale including those limiting warranties and remedies.

ADVANCED CHEMICAL TECHNOLOGIES, INC.

*"Protecting the World's Infrastructure"*

Technical Binder 2015





**ADVANCED  
CHEMICAL**  
TECHNOLOGIES, INC.

## SAFETY DATA SHEET

### SECTION 1

### MATERIAL IDENTIFICATION

**PRODUCT NAME / DESCRIPTION: ATS-42**

DISTRIBUTED / MANUFACTURED BY:  
Advanced Chemical Technologies, Inc.  
9608 N Robinson  
Oklahoma City, OK 73114

Date: 6/8/2016 (Version 2)  
Phone: (405) 843-2585  
Emergency Phone: (800) 255-3924

### SECTION 2

### HAZARD IDENTIFICATION

#### CLASSIFICATION:


Flammable Liquids	Category 2
Acute toxicity - oral	Category 4
Skin corrosion/irritation:	Category 2
Serious eye damage/eye irritation:	Category 2A
Skin sensitizer:	Category 1
Reproductive toxin:	Category 1B
TOST: Acute:	Category 1
TOST: Chronic:	Category 1

SIGNAL WORD:  
**DANGER!**

#### HAZARD STATEMENTS:

Highly flammable liquid and vapor  
Causes skin irritation  
May cause an allergic skin reaction  
Causes damage to organs

Harmful if swallowed  
Causes serious eye irritation  
May damage fertility or the unborn child  
Causes damage to organs through prolonged or repeated exposure

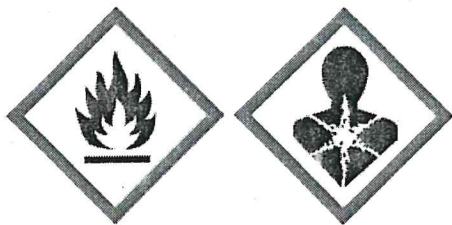

#### PRECAUTIONARY STATEMENTS:

Obtain special instructions before use.  
Do not handle until all safety precautions have been read and understood.  
Use personal protective equipment as required.  
Avoid breathing dust, fumes, gas, mist, vapors or spray.  
Keep away from heat, sparks, open flames and hot surfaces. No smoking.  
Do not spray on open flame or other ignition source.  
Keep/store away from clothing or combustible materials.  
Take any precaution to avoid mixing with combustibles.  
Keep container tightly closed.  
Ground/bond container and receiving equipment.  
Use explosion proof electrical, ventilating, lighting and equipment.



Use only non sparking tools.  
 Take precautionary measures against static discharge.  
 Do not subject to grinding, shock or friction.  
 Avoid contact during pregnancy and while nursing.  
 Wear fire/flame resistant/retardant clothing.  
 Use only outdoors or in a well ventilated area.  
 Wash all exposed skin thoroughly after handling.  
 Avoid release to the environment.  
 Explosion risk in case of fire.  
 In case of fire: Stop leak if safe to do so. Eliminate all ignition sources if safe to do so.  
 Store in well ventilated place.

Toxicity:  
 See section 11

Less than 50% of this mixture consists of ingredients with unknown acute toxicity.

### SECTION 3

### HEALTH HAZARDS

<u>Chemical Name</u>	<u>CAS No.</u>	<u>% W/W</u>
Alkoxysilane	18395-30-7	< 50
Isopropanol	67-63-0	< 20
Methanol (Proprietary Formula)	67-56-1	> 50

### SECTION 4

### FIRST AID MEASURES

#### Potential acute health effects:

<b>Eyes:</b>	May cause severe irritation with redness and pain.
<b>Skin:</b>	May cause severe irritation with redness and pain.
<b>Inhalation:</b>	May cause severe irritation.
<b>Ingestion:</b>	May cause irritation, corrosion, ulceration, nausea and vomiting.
<b>Medical conditions aggravated by exposure:</b>	Can cause lung damage.
<b>Eye contact:</b>	Immediately flush eyes with cool running water. Lift and separate eye lids while flushing with plenty of water for at least 15 minutes. Get medical attention.
<b>Skin contact:</b>	Wash with soap and water. Get medical attention if irritation occurs. Wash clothing before reuse. Destroy contaminated shoes.
<b>Inhalation:</b>	Remove victim to fresh air and keep at rest in a position comfortable for breathing. If not breathing, give artificial respiration. If breathing is difficult, give oxygen. Seek medical attention if symptoms develop.
<b>Ingestion:</b>	No NOT induce vomiting unless directed to do so by medical personnel. Never give anything by mouth to an unconscious person. If large quantities of this material are swallowed, call a physician immediately. Give plenty of water.

### SECTION 5

### FIRE FIGHTING MEASURES

<b>Fire hazard classification (OSHA/NFPA):</b>	3
<b>Extinguishing media:</b>	As required for fire being fought.
<b>Special fire fighting procedures:</b>	Use self-contained breathing apparatus.
<b>Hazardous combustion products:</b>	None known.

### SECTION 6

### ACCIDENTAL RELEASE MEASURES

#### Personal precautions, protective equipment and emergency procedures:

<b>Containment procedures:</b>	Wear protective clothing as described in Section 8 of this Safety Data Sheet. Stop the flow of material, if this is without risk. Wear appropriate protective equipment and clothing during clean up. Do not allow the spilled product to enter public drainage system or open water
--------------------------------	---

**Clean up procedures:**

sources.

Sweep up or gather material and place in appropriate container for disposal.  
Wash spill area thoroughly.  
Wear protective equipment during clean up.  
Dispose of collected material according to regulations.

**SECTION 7****HANDLING AND STORAGE****Handling:**

Avoid contact with eyes, skin and clothing.  
Do not take internally.  
For industrial use only.  
Wash after handling.  
Do not breathe dust, vapor or gas.

**Storage:**

Keep this and all chemicals out of reach of children.  
Keep away from heat, sparks, and open flames.  
Prevent spills.  
Keep container tightly closed and in a cool, well ventilated place away from incompatible materials.  
Empty product containers may contain product residue, do not reuse.

**SECTION 8****EXPOSURE CONTROLS/PERSONAL PROTECTION****Ventilation system:**

Always keep exposure below permissible exposure limits.  
In general, dilution ventilation is a satisfactory health control for this substance.  
However, if conditions of use create discomfort to the worker, a local exhaust system should be considered.

**Airborne exposure limits:**

None established.

**Personal protection:**

As prescribed in the OSHA Standard for Personal Protective Equipment (29 CFR 1920.132), employees must perform a Hazard Assessment of all workplaces to determine the need for, and selection of, proper protective equipment for each task performed.

**Eyes:**

Wear face shield, safety glasses or chemical goggles.

**Hands and skin:**

For prolonged or repeated handling, use impervious gloves. Gloves should be tested to determine suitability for prolonged contact. Use of impervious apron and boots are recommended.

**Respiratory:**

If ventilation is not sufficient, appropriate NIOSH/MSHA respiratory protection must be provided.

**Work practices:**

Eye wash fountain and emergency showers are recommended.

**SECTION 9****PHYSICAL AND CHEMICAL PROPERTIES**

Appearance:	Liquid
Color:	Clear
Odor:	Alcohol
Odor Threshold:	No data available
pH:	No data available
Boiling point:	82° C
Melting point:	No data available
Flash Point:	53° F
Evaporation Rate (Butylacetate=1):	< 1
Flammability (solid, gas):	Flammable
Upper Explosion Limit (UEL):	No data available
Lower Explosion Limit (LEL):	No data available
Vapor Pressure:	33 mm Hg
Vapor Density:	2.1
Specific gravity (Water=1):	0.81+/-0.05
Solubility water:	Reacts with water
Partition coefficient:	No data available
Autoignition Temperature:	No data available



Decomposition Temperature: No data available  
Viscosity (CPS): No data available

#### SECTION 10

#### STABILITY AND REACTIVITY

Stability: This product is stable under normal temperatures and pressures.  
Incompatibility: Reacts with water, strong oxidizers and reducers.  
Decomposition products: Silicon Dioxide, Carbon Dioxide and other hydrocarbons.  
Conditions to avoid: None known.

#### SECTION 11

#### TOXICOLOGICAL INFORMATION

Raw Material	Test	Result	Route	Species
Isopropanol (67-63-0)	LD50	400 mg/kg	Oral	Rat
Methanol (67-56-1)	LD50	5628 mg/kg	Oral	Rat

See Section 4 for symptoms

**Carcinogenicity:** No known carcinogens  
**Mutagenicity:** No known mutagens  
**Reproductive Toxins:** Methanol has been classified as a suspected reproductive toxin based on human or animal evidence with possibly other information.

#### SECTION 12

#### ECOLOGICAL INFORMATION

Raw Material	Test	Result	Time	Species
Isopropanol (67-63-0)	LC50	> 5000 mg/L	96 hrs	Carassius auratus
Methanol (67-56-1)	LC50	15400 mg/L	96 hrs	Lepomis macrochirus

**Persistence and degradability:** No data available  
**Bioaccumulation potential:** No data available  
**Mobility in soil:** No data available

#### SECTION 13

#### DISPOSAL CONSIDERATIONS

Whatever cannot be saved for recovery or recycling should be managed in an appropriate and approved waste disposal facility. Processing, use or contamination of this product may change the waste management conditions. State and local disposal regulations may differ from federal disposal regulations. Dispose container and unused contents in accordance with federal, state and local requirements.

#### SECTION 14

#### TRANSPORT INFORMATION

COATING SOLUTION  
3, UN1139, PG II  
FLAMMABLE LABEL/PLACARD REQUIRED

#### SECTION 15

#### REGULATORY INFORMATION

##### US FEDERAL REGULATIONS

##### SARA (SUPERFUND AMENDMENTS AND REAUTHORIZATION ACT):

**SARA 302:** Extremely hazardous substances list: NA  
**SARA 312:** Hazard category: NA  
**SARA 313:** Toxic chemicals list: NA

<b>CERCLA (COMPREHENSIVE ENVIRONMENTAL RESPONSE COMPENSATION AND LIABILITY ACT):</b>	NA
<b>RCRA (RESOURCE CONSERVATION AND RECOVERY ACT) LISTED HAZARDOUS WASTES:</b>	NA
<b>CWA (CLEAN WATER ACT) LISTED SUBSTANCES:</b>	NA
<b>FDA (FOOD AND DRUG ADMINISTRATION):</b>	NA




**TSCA (TOXIC SUBSTANCES CONTROL ACT):**

ALL INGREDIENTS  
LISTED

**SECTION 16**

**OTHER INFORMATION**

**NFPA:**

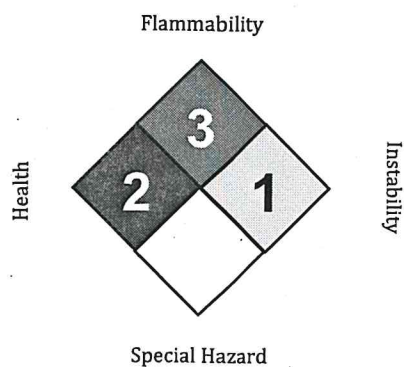

**HMIS III:**

HEALTH	2
FLAMMABILITY	3
PHYSICAL HAZARD	1

0 = not  
significant  
1 = slight  
2 = moderate  
3 = high  
4 = extreme  
\* = chronic

THIS INFORMATION IS OFFERED IN GOOD FAITH AS TYPICAL VALUES AND NOT AS A PRODUCT SPECIFICATION. NO WARRANTY, EXPRESSED OR IMPLIED, IS HEREBY MADE. THE RECOMMENDED INDUSTRIAL HYGIENE AND SAFE HANDLING PROCEDURES ARE BELIEVED TO BE GENERALLY APPLICABLE. HOWEVER, EACH USER SHOULD REVIEW THESE RECOMMENDATIONS IN THE SPECIFIC CONTEXT OF THE INTENDED USE AND DETERMINE WHETHER THEY ARE APPROPRIATE.

# Product Information

## Silicone Sealants

DOW CORNING

## Dow Corning® 795 Silicone Building Sealant

### FEATURES & BENEFITS

- Suitable for most new construction and remedial sealing applications
- Versatile – high performance structural glazing and weather sealing from a single product
- Available in 13 standard colors; custom colors also available
- Excellent weatherability – virtually unaffected by sunlight, rain, snow, ozone and temperature extremes of -40°F (-40°C) to 300°F (149°C)
- Excellent unprimed adhesion to a wide variety of construction materials and building components, including anodized, alodined, most coated and many Kynar®<sup>1</sup>-painted aluminums<sup>2</sup>
- Ease of application – ready to use as supplied
- Ease of use – all-temperature gunnability, easy tooling and low-odor cure byproduct
- Meets global standards (Americas, Asia and Europe)

### COMPOSITION

- One-part, neutral-cure, RTV silicone sealant

Neutral, one-part silicone sealant

### APPLICATIONS

- Structural and nonstructural glazing
- Structural attachment of many panel systems
- Panel stiffener applications
- Weather sealing of most common construction materials including glass, aluminum, steel, painted metal, EIFS, granite and other stone, concrete, brick and plastics

### TYPICAL PROPERTIES

Specification Writers: These values are not intended for use in preparing specifications. Please contact your local Dow Corning sales office or your Global Dow Corning Connection before writing specifications on this product.

Test	Property	Unit	Result
<b>As Supplied</b>			
ASTM C 679	Tack-Free Time, 50% RH	hours	3
	Curing Time at 25°C (77°F) and 50% RH	days	7-14
	Full Adhesion	days	14-21
ASTM C 639	Flow, Sag or Slump	Inches (mm)	0.1 (2.54)
	Working Time	minutes	20-30
	VOC Content <sup>1</sup>	g/L	28
<b>As Cured-After 21 days at 25°C (77°F) and 50% RH</b>			
ASTM D 2240	Durometer Hardness, Shore A	points	35
ASTM C 794	Peel Strength	lb/in (kg/cm)	32 (5.7)
ASTM C 1135 Tension Adhesion Strength			
	At 25% extension	psi (MPa)	45 (0.310)
	At 50% extension	psi (MPa)	60 (0.414)
ASTM C 719	Joint Movement Capability	percent	±50
ASTM C 1248	Staining (granite, marble, limestone, brick and concrete)		None
<b>As Cured-After 21 days at 25°C (77°F) and 50% RH followed by 10,000 hours in a QUV weatherometer, ASTM G 53</b>			
ASTM C 1135 Tensile Adhesion Strength			
	At 25% extension	psi (MPa)	35 (0.241)
	At 50% extension	psi (MPa)	50 (0.345)

<sup>1</sup>Kynar is a trademark of Atofina Chemicals Inc.

<sup>2</sup>Contact your local Dow Corning Sales Application Engineer for specifics.

<sup>1</sup>Based on South Coast Air Quality Management District of California. Maximum VOC is listed both inclusive and exclusive of water and exempt compounds. For a VOC data sheet for a specific sealant color, please send your request to [product.inquiry@dowcorning.com](mailto:product.inquiry@dowcorning.com).




## DESCRIPTION

*Dow Corning® 795 Silicone Building Sealant* is a one-part, neutral-cure, architectural-grade sealant that easily extrudes in any weather and cures quickly at room temperature. This cold-applied, non-sagging silicone material cures to a medium- modulus silicone rubber upon exposure to atmospheric moisture. The cured sealant is durable and flexible enough to accommodate  $\pm 50$  percent movement of original joint dimension when installed in a properly designed weather seal joint. In a properly designed structurally glazed joint, the sealant is strong enough to support glass and other panel materials under high wind load.

## APPROVALS/ SPECIFICATIONS

*Dow Corning 795 Silicone Building Sealant* meets the requirements of:

- Federal Specification TT-S 001 543A (COM-NBS) Class A for silicone building sealants
- Federal Specification TT-S-00230C (COM-NBS) Class A for one- component building sealants
- ASTM Specification C 920 Type S, Grade NS, Class 50, Use NT, G, A and O
- ASTM Specification C 1184 for structural silicone sealants
- Canadian Specification CAN2-19.13- M82

	<b>SEALANT-WATERPROOFING &amp; RESTORATION INSTITUTE</b>
Issued to: <b>Dow Corning Corp.®</b> Product: <b>795 Silicone Building Sealant</b>	
C719: Pass <input checked="" type="checkbox"/> Ext:+50% Comp:-50%	
Substrate: Glass, Aluminum, Kynar <small>(Glass and Aluminum Substrates were tested unprimed; Dow Corning 1200 OS Primer used on Kynar substrates)</small>	
C661: Rating 41	
Validation Date: 9/11/12 - 9/10/17	
No. 912-SBS917 Copyright © 2012	
<b>SEALANT VALIDATION</b>	
<a href="http://www.swrionline.org">www.swrionline.org</a>	

## COLORS

*Dow Corning 795 Silicone Building Sealant* is available in 13 colors: white, limestone, champagne, natural stone, gray, black, bronze, sandstone, adobe tan, dusty rose, rustic brick, blue spruce, and charcoal. Custom colors may be ordered to match virtually any substrate.

## HOW TO USE

Please consult the *Dow Corning Americas Technical Manual*, Form No. 62-1112, for detailed information on state-of-the- art application methods and joint design. Please contact your local Dow Corning Sales Application Engineer for specific advice.

### Preparation

Clean all joints, removing all foreign matter and contaminants such as grease, oil, dust, water, frost, surface dirt, old sealants or glazing compounds and protective coatings.

### Application Method

Install backing material or joint filler, setting blocks, spacer shims and tapes. Mask areas adjacent to joints to ensure neat sealant lines. Primer is generally not required on non-porous surfaces, but may be necessary for optimal sealing of certain porous surfaces. A test placement is always recommended. Apply *Dow Corning 795 Silicone Building Sealant* in a continuous operation using positive pressure. (The sealant can be applied using many types of air-operated guns and most types of bulk dispensing equipment.) Before a skin forms (typically within 15 minutes), tool the sealant with light pressure to spread the sealant against the backing material and joint surfaces. Remove masking tape as soon as the bead is tooled.

## HANDLING

## PRECAUTIONS

**PRODUCT SAFETY**  
**INFORMATION REQUIRED FOR SAFE USE IS NOT INCLUDED IN THIS DOCUMENT. BEFORE HANDLING, READ PRODUCT AND MATERIAL SAFETY DATA SHEETS AND CONTAINER LABELS FOR SAFE USE, PHYSICAL AND HEALTH HAZARD INFORMATION. THE MATERIAL SAFETY DATA SHEET IS AVAILABLE ON THE DOW CORNING WEBSITE AT DOWCORNING.COM, OR FROM YOUR DOW CORNING SALES APPLICATION ENGINEER, OR DISTRIBUTOR, OR BY CALLING DOW CORNING CUSTOMER SERVICE.**

## USABLE LIFE AND STORAGE

When stored at or below 27°C (80°F), *Dow Corning 795 Silicone Building Sealant* has a shelf life of 12 months from the date of manufacture. Refer to product packaging for "Use By Date."

## PACKAGING INFORMATION

*Dow Corning 795 Silicone Building Sealant* is supplied in 10.3-fl oz (305-mL) disposable plastic cartridges that fit ordinary caulking guns, 20-fl oz (590-mL) sausages and 2- and 4.5-gal (7.5- and 17-L) bulk containers.

## LIMITATIONS

*Dow Corning 795 Silicone Building Sealant* should not be used:

- In structural applications without prior review and approval by your local Dow Corning Sales Application Engineer
- In below-grade applications
- When surface temperatures exceed 50°C (122°F) during installation
- On surfaces that are continuously immersed in water

- On building materials that bleed oils, plasticizers or solvents that may affect adhesion
- On frost-laden or wet surfaces
- In totally confined joints (the sealant requires atmospheric moisture for cure)
- If the sealant is intended to be painted (paints do not typically adhere to most silicone sealants)
- To surfaces in direct contact with food or other food-grade applications

This product is neither tested nor represented as suitable for medical or pharmaceutical uses.

## **HEALTH AND ENVIRONMENTAL INFORMATION**

To support Customers in their product safety needs, Dow Corning has an extensive Product Stewardship organization and a team of Product Safety and Regulatory Compliance (PS&RC) specialists available in each area.

For further information, please see our website, [dowcorning.com](http://dowcorning.com) or consult your local Dow Corning representative.

## **LIMITED WARRANTY INFORMATION – PLEASE READ CAREFULLY**

The information contained herein is offered in good faith and is believed to be accurate. However, because conditions and methods of use of our products are beyond our control, this information should not be used in substitution for customer's tests to ensure that our products are safe, effective, and fully satisfactory for the intended end use. Suggestions of use shall not be taken as inducements to infringe any patent.

Dow Corning's sole warranty is that our products will meet the sales specifications in effect at the time of shipment.

Your exclusive remedy for breach of such warranty is limited to refund of purchase price or replacement of any product shown to be other than as warranted.

**TO THE FULLEST EXTENT PERMITTED BY APPLICABLE LAW, DOW CORNING SPECIFICALLY DISCLAIMS ANY OTHER EXPRESS OR IMPLIED WARRANTY OF FITNESS FOR A PARTICULAR PURPOSE OR MERCHANTABILITY.**

**DOW CORNING DISCLAIMS LIABILITY FOR ANY INCIDENTAL OR CONSEQUENTIAL DAMAGES.**

*We help you invent the future.™*

[dowcorning.com](http://dowcorning.com)



**DOW CORNING CORPORATION**  
**Material Safety Data Sheet**

Page: 1 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK****1. PRODUCT AND COMPANY IDENTIFICATION**

Dow Corning Corporation  
South Saginaw Road  
Midland, Michigan 48686

**24 Hour Emergency Telephone: (989) 496-5900**

Customer Service: (989) 496-6000

Product Disposal Information: (989) 496-6315

CHEMTREC: (800) 424-9300

MSDS No.: 01595709

Revision Date: 2013/05/31

Generic Description: Silicone elastomer

Physical Form: Paste

Color: Black

Odor: Slight odor

NFPA Profile: Health 0 Flammability 1 Instability/Reactivity 0

Note: NFPA = National Fire Protection Association

**2. HAZARDS IDENTIFICATION****POTENTIAL HEALTH EFFECTS****Acute Effects**

Eye: Direct contact may cause temporary redness and discomfort.

Skin: No significant irritation expected from a single short-term exposure.

Inhalation: No significant effects expected from a single short-term exposure.

Oral: Low ingestion hazard in normal use.

**Prolonged/Repeated Exposure Effects**

Skin: Repeated or prolonged exposure may cause irritation.

Inhalation: No known applicable information.

Oral: Repeated ingestion or swallowing large amounts may injure internally.

**Signs and Symptoms of Overexposure**

No known applicable information.

**Medical Conditions Aggravated by Exposure**

No known applicable information.

**DOW CORNING CORPORATION**  
**Material Safety Data Sheet**

Page: 2 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK**

The above listed potential effects of overexposure are based on actual data, results of studies performed upon similar compositions, component data and/or expert review of the product. Please refer to Section 11 for the detailed toxicology information.

**3. COMPOSITION/INFORMATION ON INGREDIENTS**

None present. This is not a hazardous material as defined in the OSHA Hazard Communication Standard.

**4. FIRST AID MEASURES**

Eye: If irritation occurs, flush eye(s) with lukewarm gently flowing water for 5 minutes. Obtain medical attention.

Skin: No health effects expected. If irritation does occur flush with lukewarm, gently flowing water for 5 minutes. If irritation persists, obtain medical advice.

Inhalation: If symptoms are experienced remove source of contamination or move victim to fresh air. If irritation persists, obtain medical advice.

Oral: If irritation or discomfort occur, obtain medical advice.

Notes to Physician: Treat according to person's condition and specifics of exposure.

**5. FIRE FIGHTING MEASURES**

Flash Point: Not applicable.

Autoignition Temperature: Not determined.

Flammability Limits in Air: Not determined.

Extinguishing Media: On large fires use dry chemical, foam or water spray. On small fires use carbon dioxide (CO<sub>2</sub>), dry chemical or water spray. Water can be used to cool fire exposed containers.

Fire Fighting Measures: Self-contained breathing apparatus and protective clothing should be worn in fighting large fires involving chemicals. Determine the need to evacuate or isolate the area according to your local emergency plan. Use water spray to keep fire exposed containers cool.

Unusual Fire Hazards: None.

**6. ACCIDENTAL RELEASE MEASURES**



**DOW CORNING CORPORATION  
Material Safety Data Sheet**

Page: 3 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK**

**Containment/Clean up:** Observe all personal protection equipment recommendations described in Sections 5 and 8. Wipe up or scrape up and contain for salvage or disposal. Clean area as appropriate since spilled materials, even in small quantities, may present a slip hazard. Final cleaning may require use of steam, solvents or detergents. Dispose of saturated absorbant or cleaning materials appropriately, since spontaneous heating may occur. Local, state and federal laws and regulations may apply to releases and disposal of this material, as well as those materials and items employed in the cleanup of releases. You will need to determine which federal, state and local laws and regulations are applicable. Sections 13 and 15 of this MSDS provide information regarding certain federal and state requirements.

**Note:** See Section 8 for Personal Protective Equipment for Spills. Call (989) 496-5900, if additional information is required.

**7. HANDLING AND STORAGE**

Use with adequate ventilation. Traces of benzene (carcinogen) may form if heated in air above 300°F (149°C). Provide ventilation to control vapor exposure within inhalation guidelines when handling at elevated temperatures. Review the OSHA benzene regulation for detailed information on safe handling requirements. Avoid eye contact. Avoid skin contact. Do not take internally.

Use reasonable care and store away from oxidizing materials. This material in its finely divided form presents an explosion hazard. Follow NFPA 654 (for chemical dusts) or 484 (for metal dusts) as appropriate for managing dust hazards to minimize secondary explosion potential.

**8. EXPOSURE CONTROLS / PERSONAL PROTECTION****Component Exposure Limits**

There are no components with workplace exposure limits.

**Engineering Controls**

Local Ventilation: None should be needed.  
General Ventilation: Recommended.

**Personal Protective Equipment for Routine Handling**

Eyes: Use proper protection - safety glasses as a minimum.  
Skin: Washing at mealtime and end of shift is adequate.

**DOW CORNING CORPORATION**  
**Material Safety Data Sheet**

Page: 4 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK**

**Suitable Gloves:** Avoid skin contact by implementing good industrial hygiene practices and procedures. Select and use gloves and/or protective clothing to further minimize the potential for skin contact. Consult with your glove and/or personnel protective equipment manufacturer for selection of appropriate compatible materials.

**Inhalation:** No respiratory protection should be needed.

**Suitable Respirator:** None should be needed.

**Personal Protective Equipment for Spills**

**Eyes:** Use proper protection - safety glasses as a minimum.

**Skin:** Washing at mealtime and end of shift is adequate.

**Inhalation/Suitable Respirator:** No respiratory protection should be needed.

**Precautionary Measures:** Avoid eye contact. Avoid skin contact. Do not take internally. Use reasonable care.

**Comments:** Traces of benzene (carcinogen) may form if heated in air above 300°F (149°C). Provide ventilation to control vapor exposure within inhalation guidelines when handling at elevated temperatures. Review the OSHA benzene regulation for detailed information on safe handling requirements.

**Note:** These precautions are for room temperature handling. Use at elevated temperature or aerosol/spray applications may require added precautions.

**9. PHYSICAL AND CHEMICAL PROPERTIES**

Physical Form: Paste  
Color: Black  
Odor: Slight odor  
Specific Gravity @ 25°C: 1.52  
Viscosity: Not determined.  
Freezing/Melting Point: Not determined.  
Boiling Point: Not determined.  
Vapor Pressure @ 25°C: Not determined.  
Vapor Density: Not determined.  
Solubility in Water: Not determined.  
pH: Not determined.  
Volatile Content: Not determined.  
Flash Point: Not applicable.  
Autoignition Temperature: Not determined.  
Flammability Limits in Air: Not determined.

**Note:** The above information is not intended for use in preparing product specifications. Contact Dow Corning before writing specifications.



**DOW CORNING CORPORATION**  
**Material Safety Data Sheet**

Page: 5 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK****10. STABILITY AND REACTIVITY**

Chemical Stability: Stable.

Hazardous Polymerization: Hazardous polymerization will not occur.

Conditions to Avoid: None.

Materials to Avoid: Oxidizing material can cause a reaction.

Hazardous Decomposition Products

Thermal breakdown of this product during fire or very high heat conditions may evolve the following decomposition products: Carbon oxides and traces of incompletely burned carbon compounds. Metal oxides. Formaldehyde. Silicon dioxide. Quartz. Nitrogen oxides.

**11. TOXICOLOGICAL INFORMATION**Special Hazard Information on Components

No known applicable information.

**12. ECOLOGICAL INFORMATION**Environmental Fate and Distribution

Complete information is not yet available.

Environmental Effects

Complete information is not yet available.

Fate and Effects in Waste Water Treatment Plants

Complete information is not yet available.

## Ecotoxicity Classification Criteria

Hazard Parameters (LC50 or EC50)	High	Medium	Low
Acute Aquatic Toxicity (mg/L)	$\leq 1$	$>1$ and $\leq 100$	$>100$
Acute Terrestrial Toxicity	$\leq 100$	$>100$ and $\leq 2000$	$>2000$

This table is adapted from "Environmental Toxicology and Risk Assessment", ASTM STP 1179, p.34, 1993.

This table can be used to classify the ecotoxicity of this product when ecotoxicity data is listed above. Please read the other information presented in the section concerning the overall ecological safety of this material.

**DOW CORNING CORPORATION**  
**Material Safety Data Sheet**

Page: 6 of 8

Version: 4.6

Revision Date: 2013/05/31

**DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK****13. DISPOSAL CONSIDERATIONS****RCRA Hazard Class (40 CFR 261)**

When a decision is made to discard this material, as received, is it classified as a hazardous waste? No

State or local laws may impose additional regulatory requirements regarding disposal. Call (989) 496-6315, if additional information is required.

**14. TRANSPORT INFORMATION****DOT Road Shipment Information (49 CFR 172.101)**

Not subject to DOT.

**Ocean Shipment (IMDG)**

Not subject to IMDG code.

**Air Shipment (IATA)**

Not subject to IATA regulations.

Call Dow Corning Transportation, (989) 496-8577, if additional information is required.

**15. REGULATORY INFORMATION**

Contents of this MSDS comply with the OSHA Hazard Communication Standard 29 CFR 1910.1200.

TSCA Status: All chemical substances in this material are included on or exempted from listing on the TSCA Inventory of Chemical Substances.

**EPA SARA Title III Chemical Listings****Section 302 Extremely Hazardous Substances (40 CFR 355):**

None.

**Section 304 CERCLA Hazardous Substances (40 CFR 302):**

None.

**Section 311/312 Hazard Class (40 CFR 370):**

Acute: No  
Chronic: No  
Fire: No  
Pressure: No



DOW CORNING CORPORATION  
Material Safety Data Sheet

Page: 7 of 8

Version: 4.6

Revision Date: 2013/05/31

## DOW CORNING(R) 795 SILICONE BUILDING SEALANT, BLACK

Reactive: No

**Section 313 Toxic Chemicals (40 CFR 372):**

None present or none present in regulated quantities.

Note: Chemicals are listed under the 313 Toxic Chemicals section only if they meet or exceed a reporting threshold.

**Supplemental State Compliance Information****California**

Warning: This product contains the following chemical(s) listed by the State of California under the Safe Drinking Water and Toxic Enforcement Act of 1986 (Proposition 65) as being known to cause cancer, birth defects or other reproductive harm.

<u>CAS Number</u>	<u>Wt %</u>	<u>Component Name</u>
67-56-1	<0.1000	Methyl alcohol
		Developmental toxin.

**New Jersey**

<u>CAS Number</u>	<u>Wt %</u>	<u>Component Name</u>
471-34-1	40.0 - 60.0	Calcium carbonate
70131-67-8	30.0 - 50.0	Dimethyl siloxane, hydroxy-terminated
63148-62-9	7.0 - 13.0	Polydimethylsiloxane
112945-52-5	3.0 - 7.0	Amorphous fumed silica
80801-30-5	1.0 - 5.0	Phenylmethyl siloxane, hydroxy-terminated
14808-60-7	<1.0	Quartz
1333-86-4	<1.0	Carbon black
13463-67-7	<=0.4	Titanium dioxide

**Pennsylvania**

<u>CAS Number</u>	<u>Wt %</u>	<u>Component Name</u>
471-34-1	40.0 - 60.0	Calcium carbonate
70131-67-8	30.0 - 50.0	Dimethyl siloxane, hydroxy-terminated





# PRO-MS50™

SILYL-MODIFIED POLYETHER SEALANT & ADHESIVE

## KEY FEATURES

- Asphalt compatible
- Tenacious bond to difficult substrates
- Non-yellowing formula

## DESCRIPTION

Bostik PRO-MS 50™ is a one component, low modulus, solvent free Silyl Modified Polyether Sealant. It demonstrates hybrid sealant properties such as color stability and long lasting elastomeric qualities for building envelop architectural grade applications. Primary applications include vinyl window perimeter sealing, fiber cement board, engineered trim board, flexible flashing materials, metals such as Kynar coated metals, Bondarized, and galvalulme, and siding applications.

## APPLICABLE STANDARDS

- ASTM C920, TYPE S, GRADE NS, CLASS 50, USE NT, A, O
- CARB and SCAQMD Compliant
- Meets VOC Requirements for OTC Regulation
- AAMA Compliant 713-10, 808.3-10
- US. Federal Specification TT-S-00230C, CAN/CGSB 19.13-M87

## BASIC USES

- Seals joints between most vinyl siding, fiber cement board (FCB), aluminum, most metals, and other common building materials.
- Interior and exterior bonds—transitional seal between building materials.
- Perimeter seals for windows, doors and other wall penetrations on vinyl, fiber cement board (FCB) and other siding materials.
- Metals such as Kynar coated metals, Bondarized and galvalulme and metal building construction and synthetic materials.
- Flexible Flashing Materials

## INSTALLATION PROTOCOL

**Joint Design:** Joint Design: In general, more joint movement can be accommodated in a thin bead of sealant than a thick bead. Bostik PRO-MS 50™ should be no thicker than 1/2" (12.7mm) and no thinner than 1/4" (6.4mm). In joints between 1/2" and 1", the ratio of sealant width to depth should be approximately 2:1. Sealant depth in joints between 1/4" and 1/2" should be 1/4" deep. Joints with dynamic movement should not be designed in widths less than 1/4".



**Surface Preparation:** See limitations about surface preparation. Surfaces must be structurally clean, dry (no frost) and structurally sound, free of contaminants, including, but not limited to, dust, dirt, loose particles, tar, asphalt, rust, mill oil, etc. If substrate is painted or coated, scrape away all loose and weakly bonded paint or coating. Any paint or coating that cannot be removed must be tested to verify adhesion of the sealant or to determine the appropriate surface preparation if needed. (See ASP section on next page for details.)

To remove laitance and any other loose material, clean concrete, stone or other masonry materials with non-alcoholic based solvent by washing, grinding, sandblasting or wire brushing as necessary. Do not use water to clean substrates. Dust must be thoroughly removed after cleaning.

**Backer Rods and Bond Breaker Tapes:** Bond breakers including, but not limited to, closed-cell polyethylene backer rods are used to control depth of the sealant bead, provide a firm tooling surface and avoid three-sided adhesion. Where the depth of joint prevents use of backer rods, a polyethylene strip or tape must be



used as a bond breaker to prevent 3-sided adhesion. Do not prime or damage the surface of the bond breaker. Refer to instructions given by rod and tape manufacturers for the correct backer rod and tape size related to joint size.

**Priming:** In general, application of Bostik PRO-MS 50™ does not require priming the substrates. However, some substrates may require a Bostik primer. It is the user's responsibility to check adhesion of the cured sealant on typical test joints at the project site before and also during application as weather conditions may affect the adhesion results (See ASP section on next page). Refer to Bostik Primer product data sheet or call Technical Service for proper selection and application of Bostik Primers.

**Tooling:** Bostik PRO-MS 50™ comes ready-to-use. Cut spout or tip to desired bead size. Apply moderate pressure to break seal inside the nozzle. Apply by using a professional caulking gun. Use opened cartridges and sausages the same day they are opened. Apply Bostik PRO-MS 50™ in a continuous operation using positive pressure to the bottom of the joint to properly fill and seal the joint. When applying, avoid air entrapment and overlapping. Tool the sealant before the skin forms with adequate pressure to spread the sealant against the backup material at the bottom and sides of the joint. A dry tool with a concave profile is recommended for that operation. Do not use water or soapy water for this operation. Avoid smearing and feathering of the sealant to allow full performance of the cured seam. Excess sealant should be dry-wiped or joints should be properly taped.

**Cleaning:** After dry-wiping uncured sealant from substrates and tools, remaining uncured sealant can be removed by using Xylene, Toluene or similar aromatic solvents. Please refer to the MSDSs provided for these solvents before use. Bostik Hand Towel and Specialty Sealant Remover™ can also remove uncured sealant. Cured sealant is usually very difficult to remove without altering or damaging the surface to which the sealant has been misapplied. Cured sealant can be removed by abrasion or other mechanical means (scrapers, putty knives).

**Curing Time:** Bostik PRO-MS 50™ is a moisture cure sealant. On wood, with ambient air at 50% relative humidity and at 73°F, Silyl Modified Polyether sealants will generally skin in less than one hour and cure 1/16 of an inch per day. Lower temperature and lower relative humidity will significantly increase the skin time and cure time of a Silyl Modified Polyether sealant.

**Painting and Coating:** Bostik PRO-MS 50™ is not RTV silicone and therefore is suitable for painting with latex-based paints. Paint chemistries and flexibility characteristics of the paint films over the sealant may affect wetting, adhesion and integrity of the paint layer, and it is therefore mandatory to pretest the paint or other coating over the Bostik PRO-MS 50™ to ensure the successful compatibility between the sealant and the paint/coating after a sufficient amount of time. See your paint manufacturer for specifications and limitations and call our Technical Service for more information. In general, oil-based paints are not recommended because of their poor elastic properties and because of their potential interaction with the sealant chemistry, which may create non-curing conditions for the sealant. Do not paint over the polyurethane sealant until it has fully cured.

**Maintenance:** If the sealant becomes damaged, replace the damaged portion by removing the old sealant completely, cleaning the surfaces and reapplying a fresh and appropriate amount of new sealant in accordance with the directions and information contained in this data sheet.

## MANDATORY ADHESION TO SUBSTRATES

### PRETEST — (ASP)

A hand pull test must be run before the job starts and at regular intervals during the job. It must be run on the job site after the sealant is fully cured, usually within 7 to 21 days. (Adhesion may develop fully after at least 14 days.) The hand pull test procedure is as follows:

1. Make a knife cut horizontally from one side of the joint to the other.
2. Make two vertical cuts approximately two inches long, at the sides of the joint, meeting the horizontal cut at the top of the two-inch cuts.
3. Grasp the two-inch piece of sealant firmly between the fingers and pull down at a 90° angle or more, and try to pull the uncured sealant out of the joint.
4. If adhesion is sufficient, the sealant should tear cohesively in itself.
5. Sealant may be replaced by applying more sealant in the same manner as it was originally applied. Care should be taken to ensure that the new sealant is in contact with the original, and that the original sealant surfaces are clean, so that a proper bond between the new and old sealant will be obtained.

### PACKAGING

10.1 fl. oz. Cartridges, 24 Cartridges/Case

20 fl. oz. Sausages, 12 Sausages/Case

### STORAGE & SHELF LIFE

Shelf life of PRO-MS 50™ must be checked prior to using the product; do not use past its shelf life. Caulk past its shelf life may not perform or adhere as described by this data sheet. High temperature and high relative humidity may reduce significantly the shelf life of polyurethane sealants. If you are unsure of the expiration date of your Bostik product, please call customer service at 1-800-7/BOSTIK (1-800-726-7845) to check if the product is still within its shelf life.

### COLORS

White	Medium Bronze	Stone	Terra Cotta
Bronze	Desert Tan	Limestone	Antique White
Light Gray	Aluminum Gray	Black	Capitol Tan

### CAUTION

IRRITANT. MAY IRRITATE EYES, SKIN AND RESPIRATORY TRACT. Methanol may form during curing. Do not breathe fumes. Do not get in eyes, on skin or on clothing. Use with adequate ventilation or wear mask. Wash thoroughly after handling. Store container in a cool, dry area with lid tightly sealed. Do not reuse container.

**KEEP OUT OF THE REACH OF CHILDREN.**

### FLASH POINT

284°F (140°C)


### APPLICATION LIMITATIONS

- Construction substrates have become complex and diverse by nature and origin. Substrate chemistries and structures can interfere with adhesive performances of the sealant. Adhesion to Substrate Pretest (ASP) is therefore **MANDATORY** to assess any adhesion and sealing characteristics — see Adhesion to Substrates Pretest section and see Installation Protocol section. This must be done pre-installation to avoid potential failures. Call Technical Service for more information about surface preparation and possible priming.



- Do not apply over damp, contaminated, loose surfaces (See Installation Protocol and Surface Preparation), old sealants or other foreign substances that may impair the adhesion bond. Avoid air entrapment.
- Dampness and substrates with high moisture will trigger extensive curing of the sealant within a very short period of time.
- Porous substrates such as, but not limited to, marble, limestone and granite might absorb components of the Bostik PRO-MS 50™ leading to staining of the substrate. ASP with sufficient aging is mandatory to assess this potential issue.
- Compatibility to copper-based substrates (i.e. flashing) can vary due to, but not limited to, age and joint size. Please consult technical services for details.
- The ultimate performance of Bostik PRO-MS 50™ depends on proper joint design and proper application with joint surfaces properly prepared (See Installation Protocol). Bostik PRO-MS 50™ is not recommended for joints with dimension less than or greater than what is recommended below. (See Installation Protocol – Joint Design section.)
- Bostik PRO-MS 50™ must not be used to seal narrow joints, fillet joints and nail face holes.
- Smearing and feathering Bostik PRO-MS 50™ over joints is not recommended.
- Bostik PRO-MS 50™ is not recommended for horizontal joints or traffic-bearing joints where abrasion resistance is required (walkways, driveways, runways, etc.). Please refer to Bostik 505™, Bostik 555-SL™ and Bostik 955-SL™ for this application.
- Bostik PRO-MS 50™ is not recommended for continuous immersion in water or any other fluid. When fully cured avoid exposure, even incidental, to fuels, chlorinated, acid and alkaline solutions. Bostik PRO-MS 50™ is not recommended for exterior or interior sealing below the waterline; please refer to Bostik 940™ Fast Set for marine applications.
- During the curing of Bostik PRO-MS 50™, do not expose to alcohol, acids or solvent-based materials.
- Lower relative humidity and temperature will significantly extend the curing time. Confined areas, deep joints and moisture barrier substrates may also affect the full cure time and extend it by many days. Apply sealant in ambient air temperature of 40° F. and rising.
- Until the sealant is fully cured, do not expose the sealant to any mechanical stress. Uncured sealant will not respond properly to cyclic expansion and contraction of the joint specified for the cured sealant only.
- The surface of a Bostik PRO-MS 50™ seal when exposed to UV rays and sunlight will not yellow but over time its gloss may change. Bostik PRO-MS 50™ may remain tacky for a few hours and attract dust and dirt from the jobsite which may affect the appearance of the sealant. Check tack-free time to prevent dirt pickup.
- Bostik PRO-MS 50™ is not recommended for glazing applications. Bond line strength can be affected by UV rays through the clear material (glass, acrylic glass, polycarbonate, etc.).
- Bostik PRO-MS 50™ is not RTV silicone and therefore is suitable for painting with latex based paints. Paint chemistries and flexibility characteristics of the paint films over the sealant may affect wetting, adhesion and integrity of the paint layer; and it is therefore mandatory to pretest the paint or other coating over the Bostik PRO-MS 50™ to ensure the successful compatibility between the sealant and the paint/coating after a sufficient

#### MANDATORY ADHESION TO SUBSTRATE (ASP) FIELD TEST

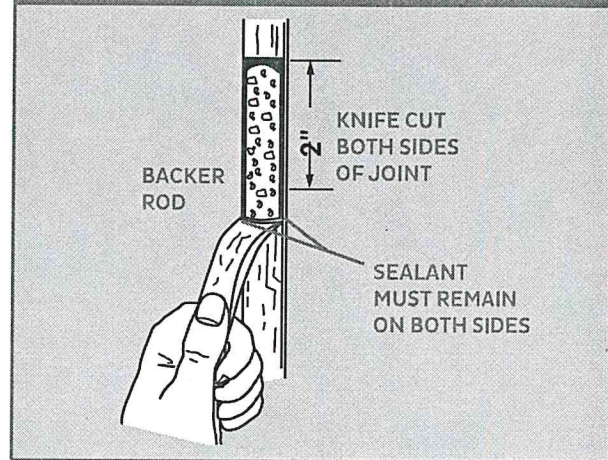

amount of time. See your paint manufacturer for specifications and limitations and call our Technical Service for more information. In general, oil-based paints are not recommended because of their poor elastic properties and because of their potential interaction with the sealant chemistry, which may create non-curing conditions for the paint.

#### LIMITED WARRANTY

Limited Warranty found at [www.bostik-us.com](http://www.bostik-us.com) or call 800.726.7845. TO THE MAXIMUM EXTENT ALLOWED BY LAW, BOSTIK DISCLAIMS ALL OTHER EXPRESS OR IMPLIED WARRANTIES, INCLUDING WITHOUT LIMITATION WARRANTIES OF MERCHANTABILITY AND FITNESS FOR A PARTICULAR PURPOSE. UNLESS OTHERWISE STATED IN THE LIMITED WARRANTY, THE SOLE REMEDY FOR BREACH OF WARRANTY IS REPLACEMENT OF THE PRODUCT OR REFUND OF THE BUYER'S PURCHASE PRICE. BOSTIK DISCLAIMS ANY LIABILITY FOR DIRECT, INCIDENTAL, CONSEQUENTIAL, OR SPECIAL DAMAGES TO THE MAXIMUM EXTENT ALLOWED BY LAW. DISCLAIMERS OF IMPLIED WARRANTIES MAY NOT BE APPLICABLE TO CERTAIN CLASSES OF BUYERS AND SOME STATES DO NOT ALLOW THE EXCLUSION OR LIMITATION OF INCIDENTAL OR CONSEQUENTIAL DAMAGES, SO THE ABOVE LIMITATIONS MAY NOT APPLY TO YOU. It is the buyer's obligation to test the suitability of the product for an intended use prior to using it. The Limited Warranty extends only to the original purchaser and is not transferable or assignable. Any claim for a defective product must be filed within 30 days of discovery of a problem, and must be submitted with written proof of purchase.



### COVERAGE FOR 10.1 FL. OZ. (298 ML) CARTRIDGE

	width							
depth	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
1/8"	99	49	33	24	20	16	14	12
1/4"		24	20	12	10	8	7	6
3/8"			11	8	6	5	5	4
1/2"				6	5	4	3	3

Linear Feet Per 10.1 FL. OZ. Cartridge

### COVERAGE FOR 20 FL. OZ. (600 ML) SAUSAGE

	width							
depth	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
1/8"	288	145	95	71	58	48	40	36
1/4"		71	58	36	29	23	20	17
3/8"			32	23	17	16	13	11
1/2"				17	14	11	10	8

Linear Feet Per 20 fl. oz. sausage

### COVERAGE FOR 5 GALLON (18.9 L) PAIL

	width							
depth	1/8"	1/4"	3/8"	1/2"	5/8"	3/4"	7/8"	1"
1/8"	6150	3100	2050	1540	1230	1025	870	770
1/4"		1540	1240	770	615	510	440	370
3/8"			680	510	410	310	290	245
1/2"				370	305	245	220	185

Linear Feet Per 5 Gallon Pail

### PRIMER COVERAGE RECOMMENDATIONS

For one quart of primer, coverage is as follows

1 unit	5 gallon pail
5 units	1.5 gallon unit
7 gallons	1 gallon unit

\*All values are approximations and can vary due to joint dimension variations, porosity, and texture of substrates. Yield per cartridge is approximate due to variables beyond control, such as irregular joint configuration and installation technique.

### TABLE 1: TYPICAL UNCURED PROPERTIES\*

Property	Value	Test Method/Note
Tool/Work Time	<30 min.	Bostik Test Method
Skin Time	30-45 min.	Bostik Test Method
Curing Time @77°F (25°C)	3-4 days	Varies w/relative humidity
Flow, Sag or Slump	0.3 inch	Bostik Test Method

\*Values given above are not intended to be used in specification preparation purposes.

### TABLE 2: TYPICAL CURED PROPERTIES\* (AFTER 14 DAYS CURE AT 77°F AND 50% RH)

Property	Value	Test Method/Note
Hardness (Shore A)	38	ASTM D 2240
Modulus @ 100% Elongation	70 psi	ASTM D 412
Tensile Strength @ Break	180 psi	ASTM D 412
Elongation @ Break	950%	ASTM D 412
Adhesion Peel	>35 piw	TT-S-00230C / ASTM C 794
Joint Movement Capability	+/-50%	TT-S-00230C / ASTM C 719
UV Resistance	Pass	ASTM C 793

\*Values given above are not intended to be used in specification preparation purposes.



BOSTIK HOTLINE


**Smart help**  
**1-800-726-7845**

**Bostik, Inc.**

11320 W. Watertown Plank Road

Wauwatosa, WI 53226

[www.bostik-us.com](http://www.bostik-us.com)



**BOSTIK SAFE SEAL White**  
 Revision Number 2.01

**Revision Date** 26-Mar-2018  
**Supersedes Date:** 24-Aug-2017

## Section 1: IDENTIFICATION OF THE SUBSTANCE/MIXTURE AND OF THE COMPANY/UNDERTAKING

### 1.1. Product Identifier

**Product Name** BOSTIK SAFE SEAL White  
**Pure substance/mixture** Mixture

### 1.2. Relevant identified uses of the substance or mixture and uses advised against

**Recommended use** Adhesives and/or sealants.  
**Uses advised against** No information available.

### 1.3. Details of the supplier of the safety data sheet

#### Company Name

Bostik New Zealand Limited  
 19 Eastern Hutt Road Wingate,  
 Lower Hutt, New Zealand  
 Tel: 04-567 5119  
 Fax: 04-567 5412

#### Manufacturer

Bostik GmbH  
 An der Bundesstrasse 16  
 33829 Borgholzhausen, Germany  
 Tel: +49 (0) 5425 / 801 0  
 Fax: +49 (0) 5425 / 801 140

### 1.4. Emergency telephone number

**Emergency Telephone** 24 Hr: 0800 243 622  
 +64 4 917 9888  
 Poison Centre : 0800 764 766

**E-mail address** SDS.AP@Bostik.com

## Section 2: HAZARD IDENTIFICATION

### 2.1. Classification of the substance or mixture

Skin sensitization	Category 1 (6.5B)
Acute aquatic toxicity	Category 2 (9.1D)
Chronic aquatic toxicity	Category 3 (9.1C)

Classification in parenthesis is applicable for New Zealand Hazard Classification

**ERMA Group** HSR002670

### 2.2. Label Elements



**Signal Word** WARNING

#### **Hazard statements**

H317 - May cause an allergic skin reaction  
 H401 - Toxic to aquatic life  
 H412 - Harmful to aquatic life with long lasting effects

#### **Precautionary Statements - General**

P101 - If medical advice is needed, have product container or label at hand  
 P102 - Keep out of reach of children



# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

## Precautionary Statements - Prevention

P261 - Avoid breathing dust/fume/gas/mist/vapors/spray  
P272 - Contaminated work clothing should not be allowed out of the workplace  
P280 - Wear protective gloves  
P273 - Avoid release to the environment

## Precautionary Statements - Response

P321 - Specific treatment (see supplemental first aid instructions on this label)

## Skin

P302 + P352 - IF ON SKIN: Wash with plenty of soap and water  
P333 + P313 - If skin irritation or rash occurs: Get medical advice/attention  
P363 - Wash contaminated clothing before reuse

## Precautionary Statements - Disposal

P501 - Dispose of contents/ container to an approved waste disposal plant

## 2.3. Other Hazards

Small amounts of methanol (CAS 67-56-1) are formed by hydrolysis and released upon curing

## Section 3: COMPOSITION/INFORMATION ON INGREDIENTS

### 3.1 Substances

Not applicable

### 3.2 Mixtures

Chemical Name	CAS No	Weight-%
Octadecanoic acid, 12-hydroxy-, reaction products with ethylenediamine	100545-48-0	1 - <3
Diocetyl tinbis(acetylacetonate)	54068-28-9	0.1- <1
Bis(2,2,6,6-tetramethyl-4-piperidyl)sebacate	52829-07-9	0.1- <1
3-(Triethoxysilyl) propylamine	919-30-2	0.1- <1
N-(3-(trimethoxysilyl)propyl)ethylenediamine	1760-24-3	0.1- <1

\*\*\* Any remaining ingredients are not hazardous

## Section 4: FIRST AID MEASURES

### 4.1. Description of first aid measures

#### General Advice

If medical advice is needed, have product container or label at hand.

#### Inhalation

Remove victim to fresh air and keep at rest in a position comfortable for breathing. Get medical attention if symptoms occur.

#### Skin Contact

Wash off immediately with soap and plenty of water. In the case of skin irritation or allergic reactions see a physician.

#### Eye contact

Immediately flush with plenty of water. After initial flushing, remove any contact lenses and continue flushing for at least 15 minutes. Consult an ophthalmologist.

#### Ingestion

Do NOT induce vomiting. Call a physician immediately. If swallowed, rinse mouth with water (only if the person is conscious). Small amounts of toxic methanol are released by hydrolysis.

#### Self-Protection of the First Aider

First aider: Pay attention to self-protection.

### 4.2. Most important symptoms and effects, both acute and delayed

#### Symptoms

None known.

### 4.3. Indication of any immediate medical attention and special treatment needed

#### Note to physicians

Small amounts of methanol (CAS 67-56-1) are formed by hydrolysis and released upon

# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

curing. May cause sensitization of susceptible persons.

## 4.4. Reference to Other Sections

Reference to other sections      Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION. Section 11: TOXICOLOGY INFORMATION.

## **Section 5: FIRE-FIGHTING MEASURES**

### 5.1. Extinguishing media

Suitable Extinguishing Media      Carbon dioxide (CO<sub>2</sub>). Extinguishing powder. Water spray or fog. Alcohol resistant foam.

Unsuitable Extinguishing Media      No information available.

### 5.2. Special hazards arising from the substance or mixture

Specific Hazards Arising from the Chemical      Thermal decomposition can lead to release of toxic/corrosive gases and vapors.

Hazardous Combustion Products      Carbon monoxide. Carbon dioxide (CO<sub>2</sub>). Nitrogen oxides (NO<sub>x</sub>).

### 5.3. Advice for firefighters

Special Protective Equipment for Fire-fighters      In the event of fire, wear self-contained breathing apparatus. Do not allow run-off from fire-fighting to enter drains or water courses.

## **Section 6: ACCIDENTAL RELEASE MEASURES**

### 6.1. Personal precautions, protective equipment and emergency procedures

Personal Precautions      Use personal protection equipment. Avoid contact with skin, eyes or clothing.

### 6.2. Environmental precautions

Environmental Precautions      Prevent product from entering drains. Do not allow to enter into soil/subsoil.

### 6.3. Methods and material for containment and cleaning up

Methods for Containment      Soak up with inert absorbent material (e.g. sand, silica gel, acid binder, universal binder, sawdust).

Methods for cleaning up      Take up mechanically, placing in appropriate containers for disposal.

### 6.4. Reference to other sections

Reference to other sections      Section 7: HANDLING AND STORAGE  
Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION  
Section 13: DISPOSAL CONSIDERATIONS

## **Section 7: HANDLING AND STORAGE**

### 7.1. Precautions for safe handling

Advice on safe handling      Use personal protective equipment as required. Avoid contact with skin, eyes or clothing. No special fire protection measures are necessary.

### 7.2. Conditions for safe storage, including any incompatibilities

General Hygiene Considerations      Keep away from food, drink and animal feeding stuffs. Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Take off contaminated clothing and wash before reuse.

Storage Conditions      Keep away from food, drink and animal feeding stuffs. Protect from moisture. Keep



# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

container tightly closed and dry.

Incompatible Materials Water

## 7.3. Specific end use(s)

Specific Use(s) Adhesives, sealants.

Other Information No information available.

## 7.4. References to Other Sections

Reference to other sections Section 13: DISPOSAL CONSIDERATIONS. Section 10: STABILITY AND REACTIVITY.

## Section 8: EXPOSURE CONTROLS/PERSONAL PROTECTION

### 8.1. Control parameters

#### Exposure Limits

This product, as supplied, does not contain any hazardous materials with occupational exposure limits established by the region specific regulatory bodies

Derived No Effect Level (DNEL) No information available

Predicted No Effect Concentration (PNEC) No information available

OTHER INFORMATION Small amounts of methanol (CAS 67-56-1) are formed by hydrolysis and released upon curing

### 8.2. Exposure controls

Engineering Controls Ensure adequate ventilation, especially in confined areas.

#### PPE - Personal Protection Equipment

Eye/Face Protection Wear safety glasses with side shields (or goggles).

Skin and Body Protection Wear suitable protective clothing. No special technical protective measures are necessary under normal conditions.

Hand Protection Wear suitable chemical resistant gloves. The selection of suitable gloves does not only depend on the material, but also on further marks of quality and various manufacturers.

Respiratory Protection No protective equipment is needed under normal use conditions. Respiratory protection required in insufficiently ventilated working areas and during spraying. An air-fed mask, or for short periods of work, a combination of professional filter is recommended.

General Hygiene Considerations Do not eat, drink or smoke when using this product. Wash hands thoroughly after handling. Avoid contact with skin, eyes or clothing. Take off contaminated clothing and wash before reuse.

Environmental Exposure Controls Do not allow uncontrolled discharge of product into the environment.

## Section 9: PHYSICAL AND CHEMICAL PROPERTIES

### 9.1. Information on basic physical and chemical properties

Appearance Paste  
Color White  
Odor Characteristic Slight  
Odor Threshold No information available

Property	Values	Remarks • Method
pH	No information available	Not applicable
Melting point / freezing point	No information available	Not applicable

# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

Boiling point / boiling range	No information available	Not applicable
Flash Point	Not applicable No information available	Not applicable
Evaporation Rate	No information available	
Flammability (solid, gas)	No information available	Not applicable for liquids
Flammability Limit in Air		
Upper flammability limit:	No information available	
Lower flammability limit:	No information available	
Vapor Pressure	No information available	
Vapor Density	No information available	
Relative Density	1.45 1.55 °C	@ 20 °C
Water Solubility	Product cures with moisture	
Solubility in Other Solvents	No information available	
Partition Coefficient	No information available	
Autoignition Temperature	No information available	
Decomposition Temperature	No information available	
Kinematic Viscosity	No information available	
Dynamic Viscosity	No information available	
Explosive Properties	No information available	
Oxidizing Properties	No information available	

## 9.2. Other information

Softening Point	No information available
Molecular Weight	No information available
Solvent content (%)	No information available
Solid content (%)	No information available
Density	1.5 g/cm <sup>3</sup>
Bulk Density	No information available
VOC	

## Section 10: STABILITY AND REACTIVITY

### 10.1. Reactivity

Reactivity	Product cures with moisture.
------------	------------------------------

### 10.2. Chemical stability

Stability	Stable under normal conditions
-----------	--------------------------------

### 10.3. Possibility of hazardous reactions

Possibility of Hazardous Reactions None known.

Hazardous Polymerization	None under normal processing.
--------------------------	-------------------------------

### 10.4. Conditions to avoid

Conditions to avoid	Protect from moisture.
---------------------	------------------------

### 10.5. Incompatible materials

Incompatible Materials	Water.
------------------------	--------

### 10.6. Hazardous decomposition products

Hazardous decomposition products	None under normal use and recommended storage conditions.
----------------------------------	---

## Section 11: TOXICOLOGY INFORMATION

### 11.1. Information on toxicological effects

#### Acute Toxicity



# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

## Product Information

Inhalation	Based on available data, the classification criteria are not met.
Eye contact	Based on available data, the classification criteria are not met.
Skin Contact	Based on available data, the classification criteria are not met.
Ingestion	Based on available data, the classification criteria are not met.

## Numerical measures of toxicity

### Unknown acute toxicity

- 17.07795894 % of the mixture consists of ingredient(s) of unknown acute oral toxicity
- 17.07795894 % of the mixture consists of ingredient(s) of unknown acute dermal toxicity
- 20.43645894 % of the mixture consists of ingredient(s) of unknown acute inhalation toxicity (gas)
- 20.43645894 % of the mixture consists of ingredient(s) of unknown acute inhalation toxicity (vapor)
- 18.62599894 % of the mixture consists of ingredient(s) of unknown acute inhalation toxicity (dust/mist)

Chemical Name	Oral LD50	Dermal LD50	Inhalation LC50
Octadecanoic acid, 12-hydroxy-, reaction products with ethylenediamine 100545-48-0	LD50 >2000 mg/kg (Rat)	-	LC50 =5.05 mg/kg (Rat)
Diocetylbinbis(acetylacetonate) 54068-28-9	LD50 =2500 mg/kg (Rat)	LD50 >2000 mg/kg (Rat)	-
Bis(2,2,6,6-tetramethyl-4-piperidyl) sebacate 52829-07-9	LD50 (rat) > 2000 mg/kg OECD 423	LD50 (rat) > 3 170 mg/kg OECD 402	= 500 mg/m <sup>3</sup> ( Rat ) 4 h
3-(Triethoxysilyl) propylamine 919-30-2	LD50 = 1490 mg/kg (Rat, female) EPA OTS 798.1175	LD50 = 4075 mg/kg (Rabbit) EPA OTS 798.1100	LC50 >144 mg/L (6h) Rat (Vapour)
N-(3-(trimethoxysilyl)propyl)ethylenediamine 1760-24-3	LD50 = 2295 mg/kg (rat) EPA OPPTS 870.1100	LD50 > 2000 mg/kg (rabbit) EPA OPPTS 870.1200	-

## Delayed and immediate effects as well as chronic effects from short and long-term exposure

Skin Corrosion/Irritation	Based on available data, the classification criteria are not met.
Serious Eye Damage/Eye Irritation	Based on available data, the classification criteria are not met.
Sensitization	May produce an allergic reaction.
Germ Cell Mutagenicity	Based on available data, the classification criteria are not met.
Reproductive Toxicity	Based on available data, the classification criteria are not met.
STOT - Single Exposure	Based on available data, the classification criteria are not met.
STOT - Repeated Exposure	Based on available data, the classification criteria are not met.
Target Organ Effects	Eyes, Lungs, Respiratory system, Skin.
Aspiration hazard	Not applicable.
Carcinogenicity	Based on available data, the classification criteria are not met.

IARC (International Agency for Research on Cancer)

Group 2B - Possibly Carcinogenic to Humans

## Section 12: ECOLOGICAL INFORMATION

### 12.1. Toxicity

#### Ecotoxicity

#### Product Information

Toxic to aquatic life. Harmful to aquatic life with long lasting effects.

#### Component Information

Data obtained on the component(s) include

Chemical Name	Algae/aquatic plants	Fish	Crustacea
Octadecanoic acid, 12-hydroxy-, reaction products with ethylenediamine 100545-48-0	EL50 (72h) >100 mg/L Algae (Pseudokirchneriella subcapitata)	LL50 (96h) >10mg/L Fish (Onchohynchus mykiss)	EL50 (48h) >10mg/L Daphnia (Daphnia magna)
Diocetylbinbis(acetylacetonate)	-	LC50 (96h) =86 mg/L Fish (Static)	EC50 (48h) =58.6 mg/L Waterflea

# Safety Data Sheet

BOSTIK SAFE SEAL White  
Revision Number 2.01

Revision Date 26-Mar-2018  
Supersedes Date: 24-Aug-2017

54068-28-9			(Daphnia magna)
Bis(2,2,6,6-tetramethyl-4-piperidyl) sebacate 52829-07-9	EC50 72Hr 0.705 mg/l (Pseudokirchnerella subcapitata)	LC50 (96h) = 5.29 mg/l (Oryzias latipes)	LC50 48Hr 8.58 mg/l (Daphnia magna)
3-(Triethoxysilyl) propylamine 919-30-2	EC50 (72h) >1000 mg/L Green algae (desmodesmus subspicatus) (OECD TG 201)	LC50 (96h) >934 mg/L Fish (Brachydanio rerio) (OECD TG 203)	EC50 (48h) =331 mg/L Daphnia magna (OECD TG 202)
N-(3-(trimethoxysilyl)propyl)ethylenediamine 1760-24-3	-	LC50 (96H) =597 mg/L Fish (Danio rerio)Semi-static	EC50 (48h) =81mg/L Daphnia magna Static

## 12.2. Persistence and degradability

No information available.

## 12.3. Bioaccumulative potential

No information available.

## 12.4. Mobility in soil

No information available.

## 12.5. Results of PBT and vPvB assessment

The components in this formulation do not meet the criteria for classification as PBT or vPvB.

## 12.6. Other adverse effects

No information available.

## Section 13: DISPOSAL CONSIDERATIONS

### 13.1. Waste treatment methods

#### **Waste from Residues/Unused Products**

Uncured product should be disposed of as hazardous waste. Dispose of in accordance with federal, state and local regulations.

#### **Contaminated Packaging**

Handle contaminated packages in the same way as the product itself.

## Section 14: TRANSPORTATION INFORMATION

### IMDG

Not regulated

### IATA

Not regulated

### ADR

Not regulated

## Section 15: REGULATORY INFORMATION

### National Regulations

## Section 16: OTHER INFORMATION

### **Key or legend to abbreviations and acronyms used in the safety data sheet**

No information available

### **Key Literature References and Sources for Data**

No information available

Prepared By

Product Safety & Regulatory Affairs



# Safety Data Sheet

---

**BOSTIK SAFE SEAL White**  
**Revision Number 2.01**

**Revision Date 26-Mar-2018**  
**Supersedes Date: 24-Aug-2017**

---

**Revision Date** 26-Mar-2018

**Revision Note** Not applicable.

**Training Advice** When working with hazardous materials, regular training of operators is required by law

**Disclaimer**

The information provided in this Safety Data Sheet is correct to the best of our knowledge, information and belief at the date of its publication. The information given is designed only as a guidance for safe handling, use, processing, storage, transportation, disposal and release and is not to be considered a warranty or quality specification. The information relates only to the specific material designated and may not be valid for such material used in combination with any other materials or in any process, unless specified in the text.

End of Safety Data Sheet



## Louisiana State Licensing Board for Contractors

## Contractor Information

**Business Name** UNITED RESTORATION AND PRESERVATION, INC.  
**Mailing Address** 520 Marksmen Ct.  
Fayetteville, GA 30214  
**Phone Number** (770) 460-9606  
**Fax Number** (770) 460-9049  
**Email Address** jasonj@urpinc.com  
**Website** http://www.urpinc.com

## Active Licenses

**License Number** 46890  
**Type** Commercial License  
**Status** LICENSED  
**Effective** 01/29/2018  
**Expiration** 01/28/2021  
**First Issued** 01/28/2007

## Classifications

Class	Qualifying Party	Parishes
BUILDING CONSTRUCTION	Jason Preston Jalliet	ALL
BUSINESS AND LAW	Jason Preston Jalliet	ALL
SPECIALTY: JOINT INSTALLATION, SEALING AND RE-SEALING	Jason Preston Jalliet	ALL
SPECIALTY: WATERPROOFING, COATING, SEALING, CONCRETE/MASONRY REPAIR	Jason Preston Jalliet	ALL



DATE: 5/12/2020

Page: 5

BID NO.: 50-00130712

**BID FORM**  
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES \_\_\_\_\_ NO ☒

MAXIMUM ESCALATION PERCENTAGE REQUESTED \_\_\_\_\_ %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF \_\_\_\_\_

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

**DELIVERY: FOB JEFFERSON PARISH**

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

7/11/20

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)

46890

**THIS SECTION MUST BE COMPLETED BY BIDDER:**

FIRM NAME: United Restoration and Preservation, Inc.

ADDRESS: 5575 Oakdale Road SE, Suite 1A

CITY, STATE: Mableton, Georgia ZIP: 30126

TELEPHONE: (504) 427-6503 FAX: ( )

EMAIL ADDRESS: James.m@urpinc.com

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_  
NUMBER: \_\_\_\_\_  
NUMBER: \_\_\_\_\_  
NUMBER: \_\_\_\_\_

TOTAL PRICE OF ALL BID ITEMS: \$ 193,000.00

AUTHORIZED SIGNATURE: [Signature]

TITLE: Manager

James Miller  
Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

DATE: 5/12/2020

## INVITATION TO BID FROM JEFFERSON PARISH - continued

Page 6

BID NO.: 50-00130712

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	JOB	<p>LABOR, MATERIALS &amp; EQUIPMENT NECESSARY TO CLEAN EXTERIOR OF THE BUILDING WET-GLAZE ALL EXXTERIOR WINDOWS &amp; WATERPROOF ALL EXTERIOR BRICK &amp; SANDSTONE WALLS ON DISTRICT ATTORNEY'S OFFICE BUILDING.</p> <p>0010 - WATERPROOFING &amp; PRESSURE WASHING DISTRICT ATTORNEY'S OFFICE BUILDING DEPARTMENT OF GENERAL SERVICES</p> <p>WE EXTEND THIS BID TO PROVIDE LABOR, MATERIALS, DELIVERY, EQUIPMENT AND ALL OTHER INCIDENTALS NECESSARY TO CLEAN EXTERIOR OF THE BUILDING, WET-GLAZE ALL EXTERIOR WINDOWS AND WATERPROOF ALL EXTERIOR BRICK AND SANDSTONE WALLS PER THE ATTACHED SPECIFICATIONS AT THE FOLLOWING LOCATION:</p> <p>DISTRICT ATTORNEY'S OFFICE BUILDING 100 DERBIGNY STREET GRETN, LA 70053</p>	1	193,000.00



## CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF  
UNITED RESTORATION AND PRESERVATION  
INCORPORATED.

AT THE MEETING OF DIRECTORS OF UNITED RESTORATION AND PRESERVATION  
INCORPORATED, DULY NOTICED AND HELD ON 5-19-2020,  
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT  
WAS:

RESOLVED THAT JAMES MILLER, BE AND IS HEREBY  
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-  
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON  
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS  
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,  
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE  
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,  
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES  
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS  
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING  
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-  
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE  
A TRUE AND CORRECT COPY OF AN  
EXCERPT OF THE MINUTES OF THE ABOVE  
DATED MEETING OF THE BOARD OF  
DIRECTORS OF SAID CORPORATION, AND  
THE SAME HAS NOT BEEN REVOKED OR  
RESCINDED.



[Signature]  
SECRETARY-TREASURER / PRESIDENT

5-19-2020

DATE

Non-Public Works Bid

AFFIDAVIT

STATE OF Georgia

PARISH/COUNTY OF Cobb

BEFORE ME, the undersigned authority, personally came and appeared: \_\_\_\_\_

JASON P. JAILLET, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized PRESIDENT / CEO of UNITED RESTORATION AND PRESERVATION (Entity), the party who submitted a bid in response to Bid Number 50-130712, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A \_\_\_\_\_ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B X there are NO campaign contributions made which would require disclosure under Choice A of this section.



Debt Disclosures

(Choose A or B, if option A is indicated please include the required attachment):

Choice A \_\_\_\_\_ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.


Choice B X There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

*[The remainder of this page is intentionally left blank.]*

That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

  
\_\_\_\_\_  
Signature of Affiant

JASON Jai/et  
\_\_\_\_\_  
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME

ON THE 19<sup>th</sup> DAY OF May, 2020

Ashli Duggar  
\_\_\_\_\_  
Notary Public

Ashli Duggar  
\_\_\_\_\_  
Printed Name of Notary

W-00401470  
\_\_\_\_\_  
Notary/Bar Roll Number

My commission expires March 3, 2023





# **AIA® Document A310™ – 2010**

## **Bid Bond**

### **CONTRACTOR:**

*(Name, legal status and address)*

United Restoration and Preservation, Inc.  
5575 Oakdale Road SE, Suite 1A  
Mableton, Georgia 30126

### **SURETY:**

*(Name, legal status and principal place of business)*

North American Specialty Insurance  
Company  
1450 American Lane, Suite 1100  
Schaumburg, IL 60173

### **OWNER:**

*(Name, legal status and address)*

Jefferson Parish  
200 Derbigny Street  
Gretna, LA 70053

**BOND AMOUNT:** \$ Five Percent of Bid Estimate (5% of Bid)

### **PROJECT:**

*(Name, location or address, and Project number, if any)*

Bid No 50-130712, Labor, materials & equipment necessary to clean exterior of building, wet-glaze all exterior windows & waterproof all exterior brick & sandstone walls for the District Attorney's office building for Jefferson Parish General Service

### **ADDITIONS AND DELETIONS:**

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.


The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.

If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

Init.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 18th day of May, 2020

  
(Witness)

  
(Witness) Kate Longaker

United Restoration and Preservation, Inc.


(Contractor as Principal)

(Title)

North American Specialty Insurance Company

(Surety)

(Title) Edward Mooney, Attorney-In-Fact

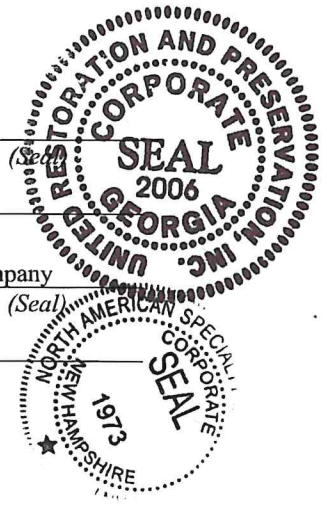

Init.



SWISS RE CORPORATE SOLUTIONS

NORTH AMERICAN SPECIALTY INSURANCE COMPANY  
WASHINGTON INTERNATIONAL INSURANCE COMPANY  
WESTPORT INSURANCE CORPORATION

GENERAL POWER OF ATTORNEY

KNOW ALL MEN BY THESE PRESENTS, THAT North American Specialty Insurance Company, a corporation duly organized and existing under laws of the State of New Hampshire, and having its principal office in the City of Overland Park, Kansas and Washington International Insurance Company a corporation organized and existing under the laws of the State of New Hampshire and having its principal office in the City of Overland Park, Kansas, and Westport Insurance Corporation, organized under the laws of the State of Missouri, and having its principal office in the City of Overland Park, Kansas each does hereby make, constitute and appoint:

EDWARD MOONEY, ROBERT CARLETON WYNNE, and KATARZYNA GRIFFIN

JOINTLY OR SEVERALLY

Its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its act and deed, bonds or other writings obligatory in the nature of a bond on behalf of each of said Companies, as surety, on contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract or suretyship executed under this authority shall exceed the amount of:


ONE HUNDRED TWENTY FIVE MILLION (\$125,000,000.00) DOLLARS

This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of North American Specialty Insurance Company and Washington International Insurance Company at meetings duly called and held on March 24, 2000 and Westport Insurance Corporation by written consent of its Executive Committee dated July 18, 2011.

"RESOLVED, that any two of the President, any Senior Vice President, any Vice President, any Assistant Vice President, the Secretary or any Assistant Secretary be, and each or any of them hereby is authorized to execute a Power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings and all contracts of surety, and that each or any of them hereby is authorized to attest to the execution of any such Power of Attorney and to attach therein the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signatures or facsimile seal shall be binding upon the Company when so affixed and in the future with regard to any bond, undertaking or contract of surety to which it is attached."



By   
Steven P. Anderson, Senior Vice President of Washington International Insurance Company  
& Senior Vice President of North American Specialty Insurance Company  
& Senior Vice President of Westport Insurance Corporation

By   
Mike A. Ito, Senior Vice President of Washington International Insurance Company  
& Senior Vice President of North American Specialty Insurance Company  
& Senior Vice President of Westport Insurance Corporation



IN WITNESS WHEREOF, North American Specialty Insurance Company, Washington International Insurance Company and Westport Insurance Corporation have caused their official seals to be hereunto affixed, and these presents to be signed by their authorized officers this 08 day of JANUARY, 20 18.


North American Specialty Insurance Company  
Washington International Insurance Company  
Westport Insurance Corporation

State of Illinois  
County of Cook ss:

On this 08 day of JANUARY, 20 18, before me, a Notary Public personally appeared Steven P. Anderson, Senior Vice President of


Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and Senior Vice President of Westport Insurance Corporation and Michael A. Ito Senior Vice President of Washington International Insurance Company and Senior Vice President of North American Specialty Insurance Company and Senior Vice President of Westport Insurance Corporation, personally known to me, who being by me duly sworn, acknowledged that they signed the above Power of Attorney as officers of and acknowledged said instrument to be the voluntary act and deed of their respective companies.



  
M. Kenny, Notary Public

I, Jeffrey Goldberg, the duly elected Vice President and Assistant Secretary of North American Specialty Insurance Company, Washington International Insurance Company and Westport Insurance Corporation do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by said North American Specialty Insurance Company, Washington International Insurance Company and Westport Insurance Corporation which is still in full force and effect.

IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 18 day of May, 20 20

  
Jeffrey Goldberg, Vice President & Assistant Secretary of Washington International Insurance Company &  
North American Specialty Insurance Company & Vice President & Assistant Secretary of Westport Insurance Corporation





# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
5/18/2020

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

IMPORTANT: If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

<b>PRODUCER</b> Pritchard & Jerden, Inc. 950 East Paces Ferry Road, NE Suite 2000 Atlanta GA 30326-1384	<b>CONTACT NAME:</b> Jan Dawson		
	<b>PHONE (A/C, No, Ext):</b> 678-553-8278	<b>FAX (A/C, No):</b> 404-261-5440	
	<b>E-MAIL ADDRESS:</b> jdawson@pjins.com		
<b>INSURED</b> United Restoration & Preservation, Inc. 5575 Oakdale Rd SE Ste 1A Mableton GA 30126	<b>INSURER(S) AFFORDING COVERAGE</b>		<b>NAIC #</b>
	<b>INSURER A:</b> Travelers Indemnity Company		25658
	<b>INSURER B:</b> United Specialty Insurance Com		12537
	<b>INSURER C:</b> Westchester Surplus Lines		10172
	<b>INSURER D:</b> HUDSON INS CO		25054
	<b>INSURER E:</b> Bridgefield Casualty Insurance		10335
<b>INSURER F:</b>			

## COVERAGES

CERTIFICATE NUMBER: 2093708336

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL SUBR INSD WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS
B	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR  GEN'L AGGREGATE LIMIT APPLIES PER: <input checked="" type="checkbox"/> POLICY <input checked="" type="checkbox"/> PROJECT <input type="checkbox"/> LOC OTHER:	Y	ATN2025601	1/1/2020	1/1/2021	EACH OCCURRENCE \$ 1,000,000 DAMAGE TO RENTED PREMISES (Ea occurrence) \$ 300,000 MED EXP (Any one person) \$ 5,000 PERSONAL & ADV INJURY \$ 1,000,000 GENERAL AGGREGATE \$ 2,000,000 PRODUCTS - COMP/OP AGG \$ 2,000,000 \$
A	<input checked="" type="checkbox"/> AUTOMOBILE LIABILITY <input checked="" type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input checked="" type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS ONLY	Y	BA-0P004985-20-42-G	1/1/2020	1/1/2021	COMBINED SINGLE LIMIT (Ea accident) \$ 1,000,000 BODILY INJURY (Per person) \$ BODILY INJURY (Per accident) \$ PROPERTY DAMAGE (Per accident) \$ \$
B	<input type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR DED <input checked="" type="checkbox"/> RETENTION \$ 0		BTN2025987	1/1/2020	1/1/2021	EACH OCCURRENCE \$ 5,000,000 AGGREGATE \$ 5,000,000 \$
E	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below Y/N <input type="checkbox"/> N/A	N/A	0196-47769	1/1/2020	1/1/2021	<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER E.L. EACH ACCIDENT \$ 1,000,000 E.L. DISEASE - EA EMPLOYEE \$ 1,000,000 E.L. DISEASE - POLICY LIMIT \$ 1,000,000
D B C	Cyber Liability \$5M x \$5M Excess Liability Pollution Liability		CYB-1004635-00 BUN2020288 G71476170002	1/1/2020 1/1/2020 1/1/2020	1/1/2021 1/1/2021 1/1/2021	Limit of Liability \$2,000,000 Limit of Liability \$5,000,000 Limit of Liability \$2,000,000

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)

Pollution Liability  
01/01/2020-01/01/2021  
G71476170002 - Westchester Surplus Lines Insurance Company  
Applicable to Contractors Pollution Liability Coverage Parts Only:  
\$2,000,000 Damage Limit for Each Occurrence, Claim, or Pollution Condition Claims  
\$4,000,000 General Aggregate Limit  
Bid Number: 50-130712

See Attached...

## CERTIFICATE HOLDER

## CANCELLATION

Jefferson Parish Purchasing Department  
200 Derbigny Street  
General Governmental Building, Suite 400  
Gretna LA 70053

SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.

AUTHORIZED REPRESENTATIVE

Michael Mellars



**ADDITIONAL REMARKS SCHEDULE**Page 1 of 1

AGENCY Pritchard & Jerden, Inc.		NAMED INSURED United Restoration & Preservation, Inc. 5575 Oakdale Rd SE Ste 1A Mableton GA 30126
POLICY NUMBER		
CARRIER	NAIC CODE	
EFFECTIVE DATE:		

**ADDITIONAL REMARKS****THIS ADDITIONAL REMARKS FORM IS A SCHEDULE TO ACORD FORM,****FORM NUMBER:** 25 **FORM TITLE:** CERTIFICATE OF LIABILITY INSURANCE

Jefferson Parish Purchasing Department, Jefferson Parish, its Districts Departments and Agencies under the direction of the Parish President and the Parish Council are included as an additional insured on the General Liability and Auto Liability per attached forms CAT4740216, CG20100704, and CG20370704.

**THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.**

## **BLANKET ADDITIONAL INSURED – PRIMARY AND NON-CONTRIBUTORY WITH OTHER INSURANCE**

This endorsement modifies insurance provided under the following:

BUSINESS AUTO COVERAGE FORM

### **PROVISIONS**

1. The following is added to Paragraph **A.1.c., Who Is An Insured**, of **SECTION II – COVERED AUTOS LIABILITY COVERAGE**:

This includes any person or organization who you are required under a written contract or agreement between you and that person or organization, that is signed by you before the "bodily injury" or "property damage" occurs and that is in effect during the policy period, to name as an additional insured for Covered Autos Liability Coverage, but only for damages to which this insurance applies and only to the extent of that person's or organization's liability for the conduct of another "insured".

2. The following is added to Paragraph **B.5., Other Insurance** of **SECTION IV – BUSINESS AUTO CONDITIONS**:

Regardless of the provisions of paragraph a. and paragraph d. of this part **5. Other Insurance**, this insurance is primary to and non-contributory with applicable other insurance under which an additional insured person or organization is the first named insured when the written contract or agreement between you and that person or organization, that is signed by you before the "bodily injury" or "property damage" occurs and that is in effect during the policy period, requires this insurance to be primary and non-contributory.



**THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.**

## ADDITIONAL INSURED – OWNERS, LESSEES OR CONTRACTORS – SCHEDULED PERSON OR ORGANIZATION

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

### SCHEDULE

Name Of Additional Insured Person(s) Or Organization(s):	Location(s) Of Covered Operations
Blanket as required by written contract executed prior to work commencing	Any and All Locations
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

**A. Section II – Who Is An Insured** is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury", "property damage" or "personal and advertising injury" caused, in whole or in part, by:

1. Your acts or omissions; or
2. The acts or omissions of those acting on your behalf;

in the performance of your ongoing operations for the additional insured(s) at the location(s) designated above.

**B.** With respect to the insurance afforded to these additional insureds, the following additional exclusions apply:

This insurance does not apply to "bodily injury" or "property damage" occurring after:

1. All work, including materials, parts or equipment furnished in connection with such work, on the project (other than service, maintenance or repairs) to be performed by or on behalf of the additional insured(s) at the location of the covered operations has been completed; or
2. That portion of "your work" out of which the injury or damage arises has been put to its intended use by any person or organization other than another contractor or subcontractor engaged in performing operations for a principal as a part of the same project.

**THIS ENDORSEMENT CHANGES THE POLICY. PLEASE READ IT CAREFULLY.**

## **ADDITIONAL INSURED – OWNERS, LESSEES OR CONTRACTORS – COMPLETED OPERATIONS**

This endorsement modifies insurance provided under the following:

COMMERCIAL GENERAL LIABILITY COVERAGE PART

### **SCHEDULE**

<b>Name Of Additional Insured Person(s) Or Organization(s):</b>	<b>Location And Description Of Completed Operations</b>
Blanket as required by written contract executed prior to work commencing	Any and All Locations
Information required to complete this Schedule, if not shown above, will be shown in the Declarations.	

**Section II – Who Is An Insured** is amended to include as an additional insured the person(s) or organization(s) shown in the Schedule, but only with respect to liability for "bodily injury" or "property damage" caused, in whole or in part, by "your work" at the location designated and described in the schedule of this endorsement performed for that additional insured and included in the "products-completed operations hazard".



## BID REJECTION FORM

Bid number: 50-130712

Vendor Name: SOUTHEAST WATERPROOFING INC

Reasons for

Rejection: PERSON WHO SIGNED THE BID NOT ON CORPORATE  
RESOLUTION.

REVIEWED BY:

Buyer Name: Donna Reamey Date: 6/15/2020

Chief Buyer: Misty A. Cernadillo Date: 6/15/2020



## Louisiana State Licensing Board for Contractors

## Contractor Information

**Business Name** SOUTHEAST WATERPROOFING, INC  
**Mailing Address** 1028 Justin Road  
Metairie, LA 70001  
**Phone Number** (504) 822-1684  
**Fax Number** (504) 733-9144  
**Email Address** heid@cox.net  
**Website** http://

## Active Licenses

**License Number** 62659  
**Type** Commercial License  
**Status** LICENSED  
**Effective** 12/04/2018  
**Expiration** 12/03/2020  
**First Issued** 12/03/2015

## Classifications

Class	Qualifying Party	Parishes
BUILDING CONSTRUCTION	Scott Harold Heidingsfelder	ALL
BUSINESS AND LAW	Scott Harold Heidingsfelder	ALL
HEAVY CONSTRUCTION	Scott Harold Heidingsfelder	ALL
HIGHWAY, STREET AND BRIDGE CONSTRUCTION	Scott Harold Heidingsfelder	ALL
MECHANICAL WORK (STATEWIDE)	Scott Harold Heidingsfelder	ALL
SPECIALTY: WATERPROOFING, COATING, SEALING, CONCRETE/MASONRY REPAIR	Scott Harold Heidingsfelder	ALL



DATE: 5/12/2020

Page: 5

BID NO.: 50-00130712

**BID FORM**  
Non Public Works

All Public Work Projects are required to use the Louisiana Uniform Public Work Bid Form

All prices must be held firm unless an escalation provision is requested in this bid. Jefferson Parish will allow one escalation during the term of the contract, which may not exceed the U.S. Bureau of Labor Statistics National Index for all Urban Consumers, unadjusted 12 month figure. The most recently published figure issued at the time an adjustment is requested will be used. A request must be made in writing by the vendor, and the escalation will only be applied to purchases made after the request is made.

Are you requesting an escalation provision?

YES \_\_\_\_\_ NO ☒

MAXIMUM ESCALATION PERCENTAGE REQUESTED NA %

INITIAL BID PRICES WILL REMAIN FIRM THROUGH THE DATE OF 30 DAYS

For the purposes of comparison of bids when an escalation provision is requested, Jefferson Parish will apply the maximum escalation percentage quoted by the bidder to the period to which it is applied in the bid. The initial price and the escalation will be used to calculate the total bid price. It will be assumed, for comparison of prices only, that an equal amount of material or labor is purchased each month throughout the entire contract.

**DELIVERY: FOB JEFFERSON PARISH**

INDICATE DELIVERY DATE ON EQUIPMENT AND SUPPLIES

N/A

LOUISIANA CONTRACTOR'S LICENSE NO.: (if applicable)

62659

**THIS SECTION MUST BE COMPLETED BY BIDDER:**

FIRM NAME: SOUTHEAST WATERPROOFING INC

ADDRESS: 1028 JUSTIN PK

CITY, STATE: Metairie LA ZIP: 70001

TELEPHONE: (504) 822-1684 FAX: (504) 733-9141

EMAIL ADDRESS: heid@cox.net

In the event that addenda are issued with this bid, bidders MUST acknowledge all addenda on the bid form. Bidder must acknowledge receipt of an addendum on the bid form as indicated. Failure to acknowledge any addendum on the bid form will result in bid rejection.

Acknowledge Receipt of Addenda: NUMBER: \_\_\_\_\_

NUMBER: N/A

NUMBER: \_\_\_\_\_

NUMBER: \_\_\_\_\_

TOTAL PRICE OF ALL BID ITEMS: \$ 232,000

AUTHORIZED SIGNATURE: [Signature]

TITLE: President

Scott HEIDINGSFELDEN  
Printed Name

SIGNING INDICATES YOU HAVE READ AND COMPLY WITH THE INSTRUCTIONS AND CONDITIONS.

NOTE: All bids should be returned with the BID NUMBER and BID OPENING DATE indicated on the outside of the envelope submitted to the Purchasing Department.

DATE: 5/12/2020

Page 6

INVITATION TO BID FROM JEFFERSON PARISH - continued

BID NO.: 50-00130712

SEALED BID

ITEM NUMBER	QUANTITY	U/M	DESCRIPTION OF ARTICLES	UNIT PRICE QUOTED	TOTALS
1	1.00	JOB	<p>LABOR, MATERIALS &amp; EQUIPMENT NECESSARY TO CLEAN EXTERIOR OF THE BUILDING WET-GLAZE ALL EXXTERIOR WINDOWS &amp; WATERPROOF ALL EXTERIOR BRICK &amp; SANDSTONE WALLS ON DISTRICT ATTORNEY'S OFFICE BUILDING.</p> <p>0010 - WATERPROOFING &amp; PRESSURE WASHING DISTRICT ATTORNEY'S OFFICE BUILDING DEPARTMENT OF GENERAL SERVICES</p> <p>WE EXTEND THIS BID TO PROVIDE LABOR, MATERIALS, DELIVERY, EQUIPMENT AND ALL OTHER INCIDENTALS NECESSARY TO CLEAN EXTERIOR OF THE BUILDING, WET-GLAZE ALL EXTERIOR WINDOWS AND WATERPROOF ALL EXTERIOR BRICK AND SANDSTONE WALLS PER THE ATTACHED SPECIFICATIONS AT THE FOLLOWING LOCATION:</p> <p>DISTRICT ATTORNEY'S OFFICE BUILDING 100 DERBIGNY STREET GRETN, LA 70053</p>	232,000	\$ 232,000



## State Licensing Board for Contractors

This is to Certify that:

SOUTHEAST WATERPROOFING, INC  
1028 Justin Road  
Metairie, LA 70001

is duly licensed and entitled to practice the following classifications

BUILDING CONSTRUCTION; HEAVY CONSTRUCTION; HIGHWAY, STREET AND BRIDGE CONSTRUCTION;  
MECHANICAL WORK (STATEWIDE); SPECIALTY: WATERPROOFING, COATING, SEALING,  
CONCRETE/MASONRY REPAIR



Witness our hand and seal of the Board dated,  
Baton Rouge, LA 4th day of December 2018

*Will B. McCoy*

Director

*Lee M. Mallett*

Chairman

*Andy D. Dumas*

Treasurer

Expiration Date: December 3, 2020

License No: 62659

This License Is Not Transferrable





# AIA<sup>®</sup> Document A310<sup>™</sup> – 2010

## Bid Bond

### CONTRACTOR:

(Name, legal status and address)

Southeast Waterproofing, Inc  
1028 Justin Rd  
Metairie, La. 70001

### OWNER:

(Name, legal status and address)

Jefferson Parish  
Jefferson Parish Purchasing Department  
200 Derdigny Street, Government Building, Suite 400  
Gretna, La. 70053

### SURETY:

(Name, legal status and principal place of business)

The Gray Casualty & Surety Company  
1225 W. Causeway Approach  
Mandeville, La. 70471

### ADDITIONS AND DELETIONS:

The author of this document has added information needed for its completion. The author may also have revised the text of the original AIA standard form. An *Additions and Deletions Report* that notes added information as well as revisions to the standard form text is available from the author and should be reviewed. A vertical line in the left margin of this document indicates where the author has added necessary information and where the author has added to or deleted from the original AIA text.

This document has important legal consequences. Consultation with an attorney is encouraged with respect to its completion or modification.

Any singular reference to Contractor, Surety, Owner or other party shall be considered plural where applicable.

**BOND AMOUNT:** \$ 5% of Base Bid

### PROJECT:

(Name, location or address, and Project number, if any)

Bid # 50-130712  
Clean Exterior of Building, Wet Glaze Exterior Windows & Waterproof  
Exterior of Building - Jefferson Parish District Attorney Building

The Contractor and Surety are bound to the Owner in the amount set forth above, for the payment of which the Contractor and Surety bind themselves, their heirs, executors, administrators, successors and assigns, jointly and severally, as provided herein. The conditions of this Bond are such that if the Owner accepts the bid of the Contractor within the time specified in the bid documents, or within such time period as may be agreed to by the Owner and Contractor, and the Contractor either (1) enters into a contract with the Owner in accordance with the terms of such bid, and gives such bond or bonds as may be specified in the bidding or Contract Documents, with a surety admitted in the jurisdiction of the Project and otherwise acceptable to the Owner, for the faithful performance of such Contract and for the prompt payment of labor and material furnished in the prosecution thereof; or (2) pays to the Owner the difference, not to exceed the amount of this Bond, between the amount specified in said bid and such larger amount for which the Owner may in good faith contract with another party to perform the work covered by said bid, then this obligation shall be null and void, otherwise to remain in full force and effect. The Surety hereby waives any notice of an agreement between the Owner and Contractor to extend the time in which the Owner may accept the bid. Waiver of notice by the Surety shall not apply to any extension exceeding sixty (60) days in the aggregate beyond the time for acceptance of bids specified in the bid documents, and the Owner and Contractor shall obtain the Surety's consent for an extension beyond sixty (60) days.


If this Bond is issued in connection with a subcontractor's bid to a Contractor, the term Contractor in this Bond shall be deemed to be Subcontractor and the term Owner shall be deemed to be Contractor.

When this Bond has been furnished to comply with a statutory or other legal requirement in the location of the Project, any provision in this Bond conflicting with said statutory or legal requirement shall be deemed deleted herefrom and provisions conforming to such statutory or other legal requirement shall be deemed incorporated herein. When so

Init.

furnished, the intent is that this Bond shall be construed as a statutory bond and not as a common law bond.

Signed and sealed this 11 day of June 2020

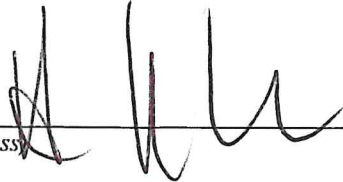  
(Witness)

  
(Witness)

Southeast Waterproofing, Inc

(Principal)

President

(Title)


(Seal)

Scott  
Henningsen

The Gray Casualty & Surety Company

(Surety)

(Seal)

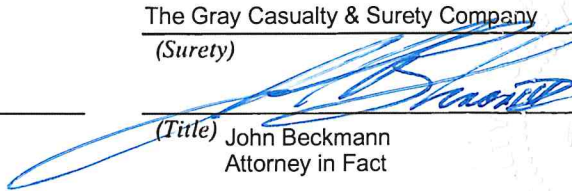  
(Title) John Beckmann  
Attorney in Fact

Init.



THE GRAY INSURANCE COMPANY

THE GRAY CASUALTY & SURETY COMPANY

212592

GENERAL POWER OF ATTORNEY

KNOW ALL BY THESE PRESENTS, THAT The Gray Insurance Company and The Gray Casualty & Surety Company, corporations duly organized and existing under the laws of Louisiana, and having their principal offices in Metairie, Louisiana, do hereby make, constitute, and appoint **Paul Beckmann, John Beckmann and Jacqueline E. Bergeron of New Orleans, Louisiana jointly and severally** on behalf of each of the Companies named above its true and lawful Attorney(s)-in-Fact, to make, execute, seal and deliver, for and on its behalf and as its deed, bonds, or other writings obligatory in the nature of a bond, as surety, contracts of suretyship as are or may be required or permitted by law, regulation, contract or otherwise, provided that no bond or undertaking or contract of suretyship executed under this authority shall exceed the amount of \$10,000,000.00

This Power of Attorney is granted and is signed by facsimile under and by the authority of the following Resolutions adopted by the Boards of Directors of both The Gray Insurance Company and The Gray Casualty & Surety Company at meetings duly called and held on the 26<sup>th</sup> day of June, 2003.

"RESOLV ED, that the President, Executive Vice President, any Vice President, or the Secretary be and each or any of them hereby is authorized to execute a power of Attorney qualifying the attorney named in the given Power of Attorney to execute on behalf of the Company bonds, undertakings, and all contracts of surety, and that each or any of them is hereby authorized to attest to the execution of such Power of Attorney, and to attach the seal of the Company; and it is

FURTHER RESOLVED, that the signature of such officers and the seal of the Company may be affixed to any such Power of Attorney or to any certificate relating thereto by facsimile, and any such Power of Attorney or certificate bearing such facsimile signature or facsimile seal shall be binding upon the Company now and in the future when so affixed with regard to any bond, undertaking or contract of surety to which it is attached.

IN WITNESS WHEREOF, The Gray Insurance Company and The Gray Casualty & Surety Company have caused their official seals to be hereinto affixed, and these presents to be signed by their authorized officers this 12<sup>th</sup> day of September, 2011.



By:

*Michael T. Gray*

Michael T. Gray  
President, The Gray Insurance Company  
and  
Vice President,  
The Gray Casualty & Surety Company

Attest:

*Mark S. Manguno*

Mark S. Manguno  
Secretary,  
The Gray Insurance Company,  
The Gray Casualty & Surety Company



State of Louisiana

ss:

Parish of Jefferson

On this 12<sup>th</sup> day of September, 2011, before me, a Notary Public, personally appeared Michael T. Gray, President of The Gray Insurance Company and Vice President of The Gray Casualty & Surety Company, and Mark S. Manguno, Secretary of The Gray Insurance Company and The Gray Casualty & Surety Company, personally known to me, being duly sworn, acknowledged that they signed the above Power of Attorney and affixed the seals of the companies as officers of, and acknowledged said instrument to be the voluntary act and deed, of their companies.



*Lisa S. Millar*

Lisa S. Millar, Notary Public, Parish of Orleans  
State of Louisiana  
My Commission is for Life

I, Mark S. Manguno, Secretary of The Gray Insurance Company and The Gray Casualty & Surety Company, do hereby certify that the above and foregoing is a true and correct copy of a Power of Attorney given by the companies, which is still in full force and effect.

IN WITNESS WHEREOF, I have set my hand and affixed the seals of the Companies this 11 day of June 2010



*Mark S. Manguno*

Mark S. Manguno, Secretary  
The Gray Insurance Company  
The Gray Casualty & Surety Company





# CERTIFICATE OF LIABILITY INSURANCE

DATE (MM/DD/YYYY)  
02/27/2020

THIS CERTIFICATE IS ISSUED AS A MATTER OF INFORMATION ONLY AND CONFERS NO RIGHTS UPON THE CERTIFICATE HOLDER. THIS CERTIFICATE DOES NOT AFFIRMATIVELY OR NEGATIVELY AMEND, EXTEND OR ALTER THE COVERAGE AFFORDED BY THE POLICIES BELOW. THIS CERTIFICATE OF INSURANCE DOES NOT CONSTITUTE A CONTRACT BETWEEN THE ISSUING INSURER(S), AUTHORIZED REPRESENTATIVE OR PRODUCER, AND THE CERTIFICATE HOLDER.

**IMPORTANT:** If the certificate holder is an ADDITIONAL INSURED, the policy(ies) must have ADDITIONAL INSURED provisions or be endorsed. If SUBROGATION IS WAIVED, subject to the terms and conditions of the policy, certain policies may require an endorsement. A statement on this certificate does not confer rights to the certificate holder in lieu of such endorsement(s).

<b>PRODUCER</b> AssuredPartners Gulf Coast Ins Agency LLC 650 Poydras Street Suite 1500 New Orleans LA 70130		<b>CONTACT NAME:</b> Suzette Bertucci <b>PHONE (A/C, No, Ext):</b> (504) 581-5353 <b>FAX (A/C, No):</b> (504) 588-2954 <b>E-MAIL ADDRESS:</b> suzette.bertucci@assuredpartners.com																									
<b>INSURED</b> Southeast Waterproofing Inc 1028 Justin Rd Metairie LA 70001		<b>INSURER(S) AFFORDING COVERAGE</b> <table border="1"><tr><td>INSURER A:</td><td>Colony Insurance Co</td><td>NAIC #</td><td>39993</td></tr><tr><td>INSURER B:</td><td>Houston Specialty Insurance Co</td><td></td><td>12936</td></tr><tr><td>INSURER C:</td><td>Kinsale Insurance Co</td><td></td><td>38920</td></tr><tr><td>INSURER D:</td><td>Bridgefield Casualty Insurance Company</td><td></td><td>10335</td></tr><tr><td>INSURER E:</td><td></td><td></td><td></td></tr><tr><td>INSURER F:</td><td></td><td></td><td></td></tr></table>		INSURER A:	Colony Insurance Co	NAIC #	39993	INSURER B:	Houston Specialty Insurance Co		12936	INSURER C:	Kinsale Insurance Co		38920	INSURER D:	Bridgefield Casualty Insurance Company		10335	INSURER E:				INSURER F:			
INSURER A:	Colony Insurance Co	NAIC #	39993																								
INSURER B:	Houston Specialty Insurance Co		12936																								
INSURER C:	Kinsale Insurance Co		38920																								
INSURER D:	Bridgefield Casualty Insurance Company		10335																								
INSURER E:																											
INSURER F:																											

## COVERAGES

CERTIFICATE NUMBER: 19/20

REVISION NUMBER:

THIS IS TO CERTIFY THAT THE POLICIES OF INSURANCE LISTED BELOW HAVE BEEN ISSUED TO THE INSURED NAMED ABOVE FOR THE POLICY PERIOD INDICATED. NOTWITHSTANDING ANY REQUIREMENT, TERM OR CONDITION OF ANY CONTRACT OR OTHER DOCUMENT WITH RESPECT TO WHICH THIS CERTIFICATE MAY BE ISSUED OR MAY PERTAIN, THE INSURANCE AFFORDED BY THE POLICIES DESCRIBED HEREIN IS SUBJECT TO ALL THE TERMS, EXCLUSIONS AND CONDITIONS OF SUCH POLICIES. LIMITS SHOWN MAY HAVE BEEN REDUCED BY PAID CLAIMS.

INSR LTR	TYPE OF INSURANCE	ADDL INSD	SUBR WVD	POLICY NUMBER	POLICY EFF (MM/DD/YYYY)	POLICY EXP (MM/DD/YYYY)	LIMITS														
A	<input checked="" type="checkbox"/> COMMERCIAL GENERAL LIABILITY <input type="checkbox"/> CLAIMS-MADE <input checked="" type="checkbox"/> OCCUR  GEN'L AGGREGATE LIMIT APPLIES PER: <input type="checkbox"/> POLICY <input checked="" type="checkbox"/> PRO-JECT <input type="checkbox"/> LOC OTHER:			103GL001900702	06/26/2019	06/26/2020	<table border="1"><tr><td>EACH OCCURRENCE</td><td>\$ 1,000,000</td></tr><tr><td>DAMAGE TO RENTED PREMISES (Ea occurrence)</td><td>\$ 100,000</td></tr><tr><td>MED EXP (Any one person)</td><td>\$ 5,000</td></tr><tr><td>PERSONAL &amp; ADV INJURY</td><td>\$ 1,000,000</td></tr><tr><td>GENERAL AGGREGATE</td><td>\$ 2,000,000</td></tr><tr><td>PRODUCTS - COMP/OP AGG</td><td>\$ 2,000,000</td></tr><tr><td></td><td>\$</td></tr></table>	EACH OCCURRENCE	\$ 1,000,000	DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 100,000	MED EXP (Any one person)	\$ 5,000	PERSONAL & ADV INJURY	\$ 1,000,000	GENERAL AGGREGATE	\$ 2,000,000	PRODUCTS - COMP/OP AGG	\$ 2,000,000		\$
EACH OCCURRENCE	\$ 1,000,000																				
DAMAGE TO RENTED PREMISES (Ea occurrence)	\$ 100,000																				
MED EXP (Any one person)	\$ 5,000																				
PERSONAL & ADV INJURY	\$ 1,000,000																				
GENERAL AGGREGATE	\$ 2,000,000																				
PRODUCTS - COMP/OP AGG	\$ 2,000,000																				
	\$																				
B	<input type="checkbox"/> AUTOMOBILE LIABILITY <input type="checkbox"/> ANY AUTO <input type="checkbox"/> OWNED AUTOS ONLY <input checked="" type="checkbox"/> HIRED AUTOS ONLY <input type="checkbox"/> SCHEDULED AUTOS <input checked="" type="checkbox"/> NON-OWNED AUTOS ONLY			HSLR180703900	06/26/2019	06/26/2020	<table border="1"><tr><td>COMBINED SINGLE LIMIT (Ea accident)</td><td>\$ 1,000,000</td></tr><tr><td>BODILY INJURY (Per person)</td><td>\$</td></tr><tr><td>BODILY INJURY (Per accident)</td><td>\$</td></tr><tr><td>PROPERTY DAMAGE (Per accident)</td><td>\$</td></tr><tr><td></td><td>\$</td></tr></table>	COMBINED SINGLE LIMIT (Ea accident)	\$ 1,000,000	BODILY INJURY (Per person)	\$	BODILY INJURY (Per accident)	\$	PROPERTY DAMAGE (Per accident)	\$		\$				
COMBINED SINGLE LIMIT (Ea accident)	\$ 1,000,000																				
BODILY INJURY (Per person)	\$																				
BODILY INJURY (Per accident)	\$																				
PROPERTY DAMAGE (Per accident)	\$																				
	\$																				
C	<input checked="" type="checkbox"/> UMBRELLA LIAB <input checked="" type="checkbox"/> OCCUR <input type="checkbox"/> EXCESS LIAB <input type="checkbox"/> CLAIMS-MADE DED RETENTION \$			01000314084	06/26/2019	06/26/2020	<table border="1"><tr><td>EACH OCCURRENCE</td><td>\$ 3,000,000</td></tr><tr><td>AGGREGATE</td><td>\$ 3,000,000</td></tr><tr><td></td><td>\$</td></tr></table>	EACH OCCURRENCE	\$ 3,000,000	AGGREGATE	\$ 3,000,000		\$								
EACH OCCURRENCE	\$ 3,000,000																				
AGGREGATE	\$ 3,000,000																				
	\$																				
D	WORKERS COMPENSATION AND EMPLOYERS' LIABILITY ANY PROPRIETOR/PARTNER/EXECUTIVE OFFICER/MEMBER EXCLUDED? (Mandatory in NH) If yes, describe under DESCRIPTION OF OPERATIONS below	Y/N N	N/A	019639232000	06/26/2019	06/26/2020	<table border="1"><tr><td><input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER</td><td></td></tr><tr><td>E.L. EACH ACCIDENT</td><td>\$ 1,000,000</td></tr><tr><td>E.L. DISEASE - EA EMPLOYEE</td><td>\$ 1,000,000</td></tr><tr><td>E.L. DISEASE - POLICY LIMIT</td><td>\$ 1,000,000</td></tr></table>	<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER		E.L. EACH ACCIDENT	\$ 1,000,000	E.L. DISEASE - EA EMPLOYEE	\$ 1,000,000	E.L. DISEASE - POLICY LIMIT	\$ 1,000,000						
<input checked="" type="checkbox"/> PER STATUTE <input type="checkbox"/> OTH-ER																					
E.L. EACH ACCIDENT	\$ 1,000,000																				
E.L. DISEASE - EA EMPLOYEE	\$ 1,000,000																				
E.L. DISEASE - POLICY LIMIT	\$ 1,000,000																				

DESCRIPTION OF OPERATIONS / LOCATIONS / VEHICLES (ACORD 101, Additional Remarks Schedule, may be attached if more space is required)


Bid# 50-130712

Location: 200 Derbigny st. Gretna LA. 70053

General Liability and Auto Liability policies includes Blanket Additional Insured Endorsement and Blanket Waiver of Subrogation Endorsement as required by written contract prior to loss. General Liability includes Primary Non Contributory status if required by written contract prior to a loss. Workers Comp includes blanket Waiver of Subrogation if required by written contract prior to loss.

## CERTIFICATE HOLDER

## CANCELLATION

Jefferson Purchasing Office P.O. Box 9  Gretna LA 70054-0009	SHOULD ANY OF THE ABOVE DESCRIBED POLICIES BE CANCELLED BEFORE THE EXPIRATION DATE THEREOF, NOTICE WILL BE DELIVERED IN ACCORDANCE WITH THE POLICY PROVISIONS.  AUTHORIZED REPRESENTATIVE 
---	---

© 1988-2015 ACORD CORPORATION. All rights reserved.

## CORPORATE RESOLUTION

EXCERPT FROM MINUTES OF MEETING OF THE BOARD OF DIRECTORS OF  
Southeast Water Purifying, Inc  
INCORPORATED.

AT THE MEETING OF DIRECTORS OF Southeast Water Purifying, Inc  
INCORPORATED, DULY NOTICED AND HELD ON 6/11/20,  
A QUORUM BEING THERE PRESENT, ON MOTION DULY MADE AND SECONDED. IT  
WAS:

RESOLVED THAT Margo R Asperion, BE AND IS HEREBY  
APPOINTED, CONSTITUTED AND DESIGNATED AS AGENT AND ATTORNEY-IN-  
FACT OF THE CORPORATION WITH FULL POWER AND AUTHORITY TO ACT ON  
BEHALF OF THIS CORPORATION IN ALL NEGOTIATIONS, BIDDING, CONCERNS  
AND TRANSACTIONS WITH THE PARISH OF JEFFERSON OR ANY OF ITS AGENCIES,  
DEPARTMENTS, EMPLOYEES OR AGENTS, INCLUDING BUT NOT LIMITED TO, THE  
EXECUTION OF ALL BIDS, PAPERS, DOCUMENTS, AFFIDAVITS, BONDS, SURETIES,  
CONTRACTS AND ACTS AND TO RECEIVE ALL PURCHASE ORDERS AND NOTICES  
ISSUED PURSUANT TO THE PROVISIONS OF ANY SUCH BID OR CONTRACT, THIS  
CORPORATION HEREBY RATIFYING, APPROVING, CONFIRMING, AND ACCEPTING  
EACH AND EVERY SUCH ACT PERFORMED BY SAID AGENT AND ATTORNEY-IN-  
FACT.

I HEREBY CERTIFY THE FOREGOING TO BE  
A TRUE AND CORRECT COPY OF AN  
EXCERPT OF THE MINUTES OF THE ABOVE  
DATED MEETING OF THE BOARD OF  
DIRECTORS OF SAID CORPORATION, AND  
THE SAME HAS NOT BEEN REVOKED OR  
RESCINDED.

  
\_\_\_\_\_  
SECRETARY-TREASURER

Scott WEIDENFELDER

6/11/20  
\_\_\_\_\_  
DATE

Non-Public Works Bid

AFFIDAVIT

STATE OF LOUISIANA

PARISH/COUNTY OF JEFFERSON

BEFORE ME, the undersigned authority, personally came and appeared: SCOTT

HEIDENSFELDER, (Affiant) who after being by me duly sworn, deposed and said that he/she is the fully authorized Representative of SOUTHEAST WATERWORKS INC (Entity), the party who submitted a bid in response to Bid Number 5000130712, to the Parish of Jefferson.

Affiant further said:

Campaign Contribution Disclosures

**(Choose A or B, if option A is indicated please include the required attachment):**

Choice A \_\_\_\_\_ Attached hereto is a list of all campaign contributions, including the date and amount of each contribution, made to current or former elected officials of the Parish of Jefferson by Entity, Affiant, and/or officers, directors and owners, including employees, owning 25% or more of the Entity during the two-year period immediately preceding the date of this affidavit or the current term of the elected official, whichever is greater. Further, Entity, Affiant, and/or Entity Owners have not made any contributions to or in support of current or former members of the Jefferson Parish Council or the Jefferson Parish President through or in the name of another person or legal entity, either directly or indirectly.

Choice B ☒ there are **NO** campaign contributions made which would require disclosure under Choice A of this section.



Debt Disclosures

**(Choose A or B, if option A is indicated please include the required attachment):**

**Choice A** \_\_\_\_\_ Attached hereto is a list of all debts owed by the affiant to any elected or appointed official of the Parish of Jefferson, and any and all debts owed by any elected or appointed official of the Parish to the Affiant.


**Choice B** ☒ There are **NO** debts which would require disclosure under Choice A of this section.

Affiant further said:

That Affiant has employed no person, corporation, firm, association, or other organization, either directly or indirectly, to secure the public contract under which he received payment, other than persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project or in securing the public contract were in the regular course of their duties for Affiant; and

*[The remainder of this page is intentionally left blank.]*


That no part of the contract price received by Affiant was paid or will be paid to any person, corporation, firm, association, or other organization for soliciting the contract, other than the payment of their normal compensation to persons regularly employed by the Affiant whose services in connection with the construction, alteration or demolition of the public building or project were in the regular course of their duties for Affiant.

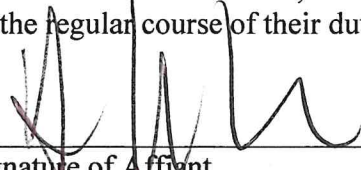  
Signature of Affiant

Scott HEDDINGS FEUDER  
Printed Name of Affiant

SWORN AND SUBSCRIBED TO BEFORE ME

ON THE 11<sup>th</sup> DAY OF June, 2020

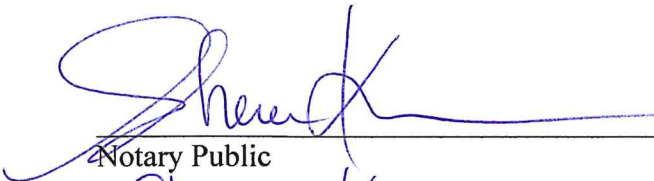  
Notary Public

Sheree Kerner  
Printed Name of Notary

144791  
Notary/Bar Roll Number

My commission expires with life.

Sheree L. Kerner  
Notary Public  
State of Louisiana, Parish of Jefferson  
Notary #144791  
My Commission Expires with Life

# Louisiana Secretary of State

## R. Kyle Ardoin

### SEARCH FOR LOUISIANA NOTARIES

A practicing notary in a parish may notarize in reciprocal parishes without additional bonding or examination.

You can also download information about all notaries on file. For more information, see Notary Bulk Data.

[Print](#)

#### Notary Search - Detail

**Name:** MS. SHEREE KERNER  
**Address:** 12 AZALEA CT.  
METAIRIE, LA 70005  
**Phone:** (504) 812-9076  
**Phone 2:** (504) 812-9076  
**Notary ID Number:** 144791  
**Parish:** JEFFERSON with STATEWIDE JURISDICTION  
**Agency:** N/A  
**Notary Type:** Non Attorney  
**Status:** Active  
**Commission Date:** 07/05/2016  
**Oath Date:** 06/30/2016  
**Surety Expiration Date:** 06/28/2021  
**Annual Report Current:** Yes

#### Notary Events

**Pre-Assessment Registration** Date: 03/21/2016 -

Deceased, Inactivated, Leave of Absence, Pre-Assessment Registration, Pre-Assessment Taken, Resigned, Retirement, and Revoked events are not available prior to February 11, 2012.

[Back to Search Results](#)[New Search](#)